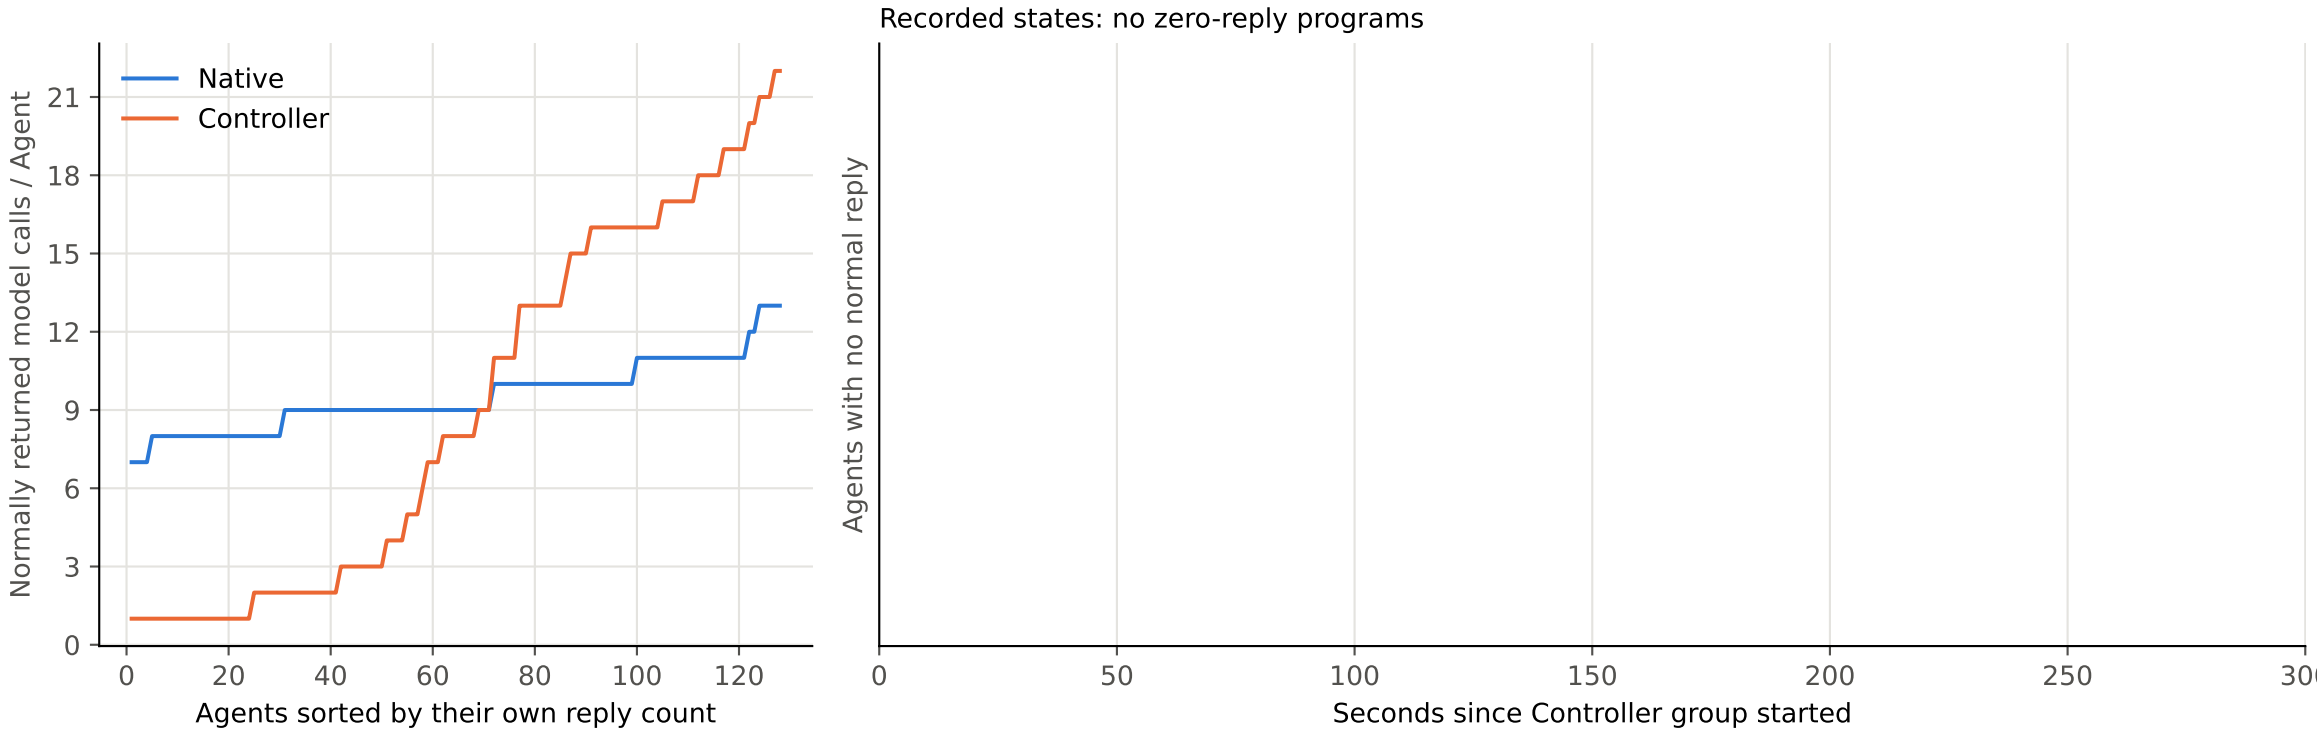

Bars span recorded queue observations; sequential HTTP snapshots are not atomic scheduler decisions. Missing initial time is not filled.