PyQt Day 3

로또 번호 조회 프로그램
ui 까지... 작동 사진과 코드 제출
1등 상품 !!!
(기 당첨자는 제외...양보)



```
# 로또 번호 조회 앱


import sys
from PyQt5.QtWidgets import *
from PyQt5 import uic
import requests
from bs4 import BeautifulSoup as bs

form_class = uic.loadUiType("lotto.ui")[0]

class MyWindow(QMainWindow, form_class):

    def __init__(self):
        super().__init__()
        self.setupUi(self)
    # 단추를 누르면
        self.pushButton.clicked.connect(self.btnclicked)
```

```
# 조회 후 칸에 출력
    def btnclicked(self):
        url = "<https://www.dhlottery.co.kr/gameResult.do?method=byWin>"
        txt = requests.get(url)
        html = bs(txt.text)
        lottery = html.select("span.ball_645")
        when = html.select("p.desc")[0].text
        self.date_label.setText(when)
        self.num1.setText(lottery[0].text)
        self.num2.setText(lottery[1].text)
        self.num3.setText(lottery[2].text)
        self.num4.setText(lottery[3].text)
        self.num5.setText(lottery[4].text)
        self.num6.setText(lottery[5].text)
        self.num7.setText(lottery[6].text)
app = QApplication(sys.argv)
window = MyWindow()
window.show()
app.exec_()
```





윈도우 앱으로 변환

Pyinstaller

```
(base) C:\Users\user>pip install pyinstaller
Collecting pyinstaller
  Downloading pyinstaller-5.8.0-py3-none-win_amd64.whl (1.3 MB)
                                              1.3/1.3 MB 1.1 MB/s eta 0:00:00
Collecting pyinstaller-hooks-contrib>=2021.4
  Downloading pyinstaller_hooks_contrib-2023.0-py2.py3-none-any.whl (255 kB)
                                             = 255.7/255.7 kB 2.3 MB/s eta 0:00:00
Collecting altgraph
  Downloading altgraph-0.17.3-py2.py3-none-any.whl (21 kB)
Requirement already satisfied: pywin32-ctypes>=0.2.0 in c:\users\user\anaconda3\lib\site-pad
ler) (0.2.0)
Requirement already satisfied: setuptools>=42.0.0 in c:\users\user\anaconda3\lib\site-packag
) (63.4.1)
Collecting pefile>=2022.5.30
  Downloading pefile-2023.2.7-py3-none-any.whl (71 kB)
                                              71.8/71.8 kB 3.8 MB/s eta 0:00:00
```

Pyinstaller 설치 후 해당 폴더로 이

```
(base) C:\Users\user>cd C:\develop\pythonadv202303\Crawling\lotto (base) C:\develop\pythonadv202303\Crawling\lotto>
```

```
(base) C:\develop\pythonadv202303\Crawling\lotto>dir
C 드라이브의 볼륨에는 이름이 없습니다.
볼륨 일련 번호: 5EA5-0099
C:\develop\pythonadv202303\Crawling\lotto 디렉터리
2023-03-08 오후 02:48
                       <DIR>
          오후 03:01
2023-03-08
                       <DIR>
2023-03-08 오후 03:02
                              1,235 lotto.py
2023-03-08 오후 02:46
                               6,091 lotto.ui
             2개 파일
                                 7,326 바이트
             2개 디렉터리 365,893,804,032 바이트 남음
(base) C:\develop\pythonadv202303\Crawling\lotto>]
```

기본 변

pyinstaller lotto.py

Customize install location

C:\Users\user\AppData\Local\Programs\Python\Python311

```
C:\Users\user>pip install pyinstaller
Collecting pyinstaller
Using cached pyinstaller-5.8.0-py3-none-win_amd64.whl (1.3 MB)
Requirement already satisfied: setuptools>=42.0.0 in c:\users\user\user\user_ite-packages (from pyinstaller) (65.5.0)
Collecting altgraph
Using cached altgraph-0.17.3-py2.py3-none-any.whl (21 kB)
Collecting pyinstaller-hooks-contrib>=2021.4
Using cached pyinstaller_hooks_contrib-2023.0-py2.py3-none-any.wh
Collecting pefile>=2022.5.30
Using cached pefile-2023.2.7-py3-none-any.whl (71 kB)
Collecting pywin32-ctypes>=0.2.0
Downloading pywin32_ctypes-0.2.0-py2.py3-none-any.whl (28 kB)
Installing collected packages: pywin32-ctypes, altgraph, pyinstalle
```

완료 후 실행 방법


PyQt Day 3 4

```
:19
       <DIR>
                      build
:19
      <DIR>
                      dist
:02
                1,235 lotto.py
                  938 lotto.spec
:19
: 46
                6,091 lotto.ui
파 일
                  8,264 바이트
         365,445,828,608 바이트 남음
디렉터리
v202303\Crawling\lotto1>cd dist
```

실행 파일 exe 찾

```
1,750,428 base_library.zip
      3,441,496 libcrypto-1_1.dll
         703,328 libssl-1_1.dll
      1,690,879 lotto.exe
      5,764,888 python311.dll
          30,488 select.pyd
      1,141,016 unicodedata.pyd
         109,392 VCRUNTIME140.dll
         84,760 _bz2.pyd
         253,712 _decimal.pyd
          65,296 _hashlib.pyd
        158,992 _lzma.pyd
         79,632 _socket.pyd
         161,048 _ssl.pyd
        15,435,355 바이트
    365,449,097,216 바이트 남음
: 리
03\Crawling\lotto1\dist\lotto>
```


PyQt Day 3 5




>pyinstaller -w -F lotto.py

- w 콘솔창 안뜨게
- F 파일 수를 최소

음원차트 3개사 조회 윈도우 앱 만들기

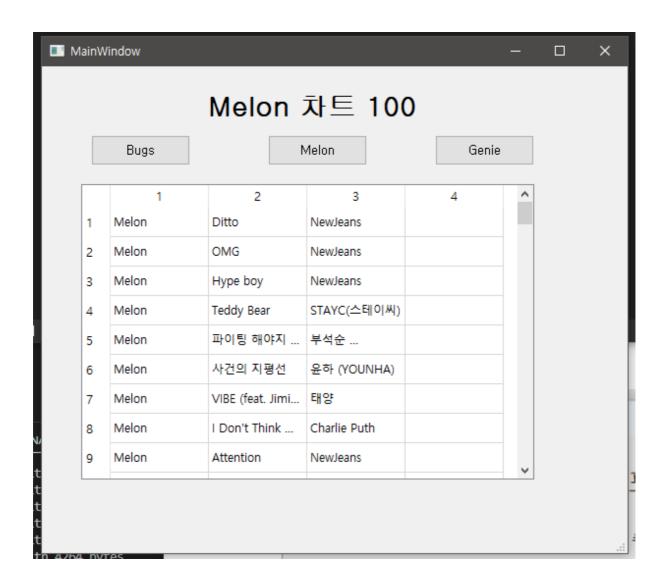

PyQt Day 3 7

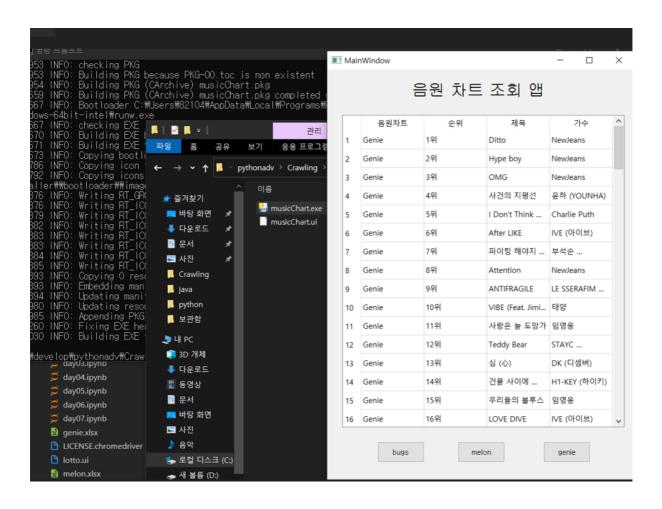

데이터베이스 테이블 조회 앱

```
import sys
from PyQt5.QtWidgets import *
from PyQt5 import uic
                                     # 파이썬으로 웹페이지 연결
import requests
from bs4 import BeautifulSoup as bs # 분석을 용이하게 정제
import time
import datetime
import pymysql
form_class = uic.loadUiType("sqltest.ui")[0]
class MyWindow(QMainWindow, form_class):
    def __init__(self):
       super().__init__()
        self.setupUi(self)
# 단추 인식 시키기
        self.pushButton.clicked.connect(self.btn_clicked)
    def btn_clicked(self):
       conn = pymysql.connect(host='yoonkeunsoo.cafe24.com', user='yoonkeunsoo', pass
word='guest0505', db='yoonkeunsoo', charset='utf8')
```

```
cur = conn.cursor()

cur.execute("SELECT * FROM user")
    result = cur.fetchall()

for i, data in enumerate(result):

    self.tableWidget.setItem(i, 0, QTableWidgetItem(str(data[0], 'utf-8')))
    self.tableWidget.setItem(i, 1, QTableWidgetItem(str(data[1], 'utf-8')))
    self.tableWidget.setItem(i, 2, QTableWidgetItem(str(data[2], 'utf-8')))
    self.tableWidget.setItem(i, 3, QTableWidgetItem(datetime.datetime.strftime
(data[3], '%Y-%m-%d-%H-%M-%S')))

app = QApplication(sys.argv)
window = MyWindow()
window.show()
app.exec_()
```