

# Scheduling with Uniform Tests: Information and Optimization

Václav Rozhoň

August 2026

## Abstract

A machine faces many jobs whose lengths are hidden. Spending one unit of time to inspect a job may reveal a short job that should be finished now, or it may reveal nothing useful while every other job waits. When should the machine keep looking, and when should it start working?

We study this question for one machine and total completion time. We consider four natural rules: every job must be tested; a unit-time revealing optimization can replace a raw time  $u$  by a shorter revealed length; an untested job can be run blindly for its true hidden length; or a unit-time optimization can shorten it without revealing the new length. Together these models separate the two possible benefits of spending one unit before execution: learning which job to do next and making the job faster.

We give exact asymptotic answers for these models, both as competitive ratios and as instance-optimal guarantees. The resulting algorithms are often quite simple, which may make them useful in practice.

## Contents

|          |                                                                         |           |
|----------|-------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>Introduction</b>                                                     | <b>3</b>  |
| 1.1      | Warmup: every job has to be tested . . . . .                            | 3         |
| 1.2      | One algorithm for every input . . . . .                                 | 5         |
| 1.3      | Generalizations of the model . . . . .                                  | 6         |
| 1.4      | Information without speedup: blind execution . . . . .                  | 6         |
| 1.5      | Blind optimization . . . . .                                            | 7         |
| 1.6      | Revealing optimization . . . . .                                        | 8         |
| 1.7      | Techniques . . . . .                                                    | 10        |
| 1.8      | Related work . . . . .                                                  | 11        |
| 1.9      | Roadmap . . . . .                                                       | 11        |
| <b>2</b> | <b>Models and common preliminaries</b>                                  | <b>12</b> |
| 2.1      | Models . . . . .                                                        | 12        |
| 2.2      | Input, information and adversaries . . . . .                            | 13        |
| 2.3      | Offline optima and pair accounting . . . . .                            | 14        |
| 2.4      | Competitive-ratio conventions . . . . .                                 | 15        |
| 2.5      | Maximum-density modules and fluid completion curves . . . . .           | 15        |
| 2.6      | Probabilistic tools . . . . .                                           | 20        |
| <b>3</b> | <b>Deterministic revealing optimization and its obligatory endpoint</b> | <b>22</b> |
| 3.1      | Upper bounds . . . . .                                                  | 24        |
| 3.1.1    | Raw execution . . . . .                                                 | 24        |
| 3.1.2    | Forced-prefix uniform thresholds . . . . .                              | 25        |

|          |                                                                         |           |
|----------|-------------------------------------------------------------------------|-----------|
| 3.1.3    | Adaptive thresholds for the final two parameter intervals . . . . .     | 31        |
| 3.2      | Lower bounds . . . . .                                                  | 39        |
| 3.2.1    | The binary stopping game and its piecewise lower bound . . . . .        | 40        |
| 3.2.2    | The harmonic construction for short jobs . . . . .                      | 43        |
| 3.2.3    | Combining jobs with $p = u$ and a harmonic block . . . . .              | 49        |
| 3.2.4    | Transferring the lower bound when raw execution is no shorter . . . . . | 53        |
| 3.3      | Assembly of the curve . . . . .                                         | 53        |
| 3.3.1    | Shape of the candidate curve . . . . .                                  | 53        |
| 3.3.2    | Exact joins and completion of the proof . . . . .                       | 54        |
| 3.4      | The obligatory endpoint . . . . .                                       | 55        |
| <b>4</b> | <b>Revealing-optimization instance optimality</b>                       | <b>55</b> |
| 4.1      | The fixed-fraction fluid benchmark . . . . .                            | 56        |
| 4.2      | Adaptive algorithms and the announced lower bound . . . . .             | 57        |
| 4.3      | Removing the announcement . . . . .                                     | 59        |
| <b>5</b> | <b>Randomized revealing optimization: the exact four-piece curve</b>    | <b>60</b> |
| 5.1      | Offline and stationary fluid coefficients . . . . .                     | 61        |
| 5.2      | Flattening the survival function . . . . .                              | 62        |
| 5.3      | The two scalar maximizations . . . . .                                  | 64        |
| 5.4      | Worst-case upper bound from instance optimality . . . . .               | 65        |
| 5.5      | Binary oblivious lower bounds . . . . .                                 | 65        |
| 5.6      | The randomized obligatory endpoint . . . . .                            | 67        |
| 5.6.1    | Normalization of the offline pair identity . . . . .                    | 68        |
| 5.6.2    | Stationary prefixes . . . . .                                           | 68        |
| 5.6.3    | Learning the prefix from a sublinear sample . . . . .                   | 70        |
| 5.6.4    | Analysis on good and bad samples . . . . .                              | 71        |
| 5.6.5    | Transfer of the zero-two lower bound . . . . .                          | 73        |
| <b>6</b> | <b>Obligatory-testing instance optimality</b>                           | <b>73</b> |
| 6.1      | The maximum-density benchmark . . . . .                                 | 75        |
| 6.2      | The announced upper bound . . . . .                                     | 76        |
| 6.3      | No adaptive announced algorithm has a better leading cost . . . . .     | 76        |
| 6.4      | Removing the announcement . . . . .                                     | 77        |
| <b>7</b> | <b>Blind execution: instance-optimal four-block algorithms</b>          | <b>78</b> |
| 7.1      | The distributional benchmark . . . . .                                  | 79        |
| 7.2      | The fixed-fraction completion envelope . . . . .                        | 81        |
| 7.3      | Sampling in the order jobs are first touched . . . . .                  | 82        |
| 7.4      | The announced lower bound . . . . .                                     | 82        |
| 7.5      | A growing grid and arbitrary bounded vectors . . . . .                  | 83        |
| 7.6      | Removing the announcement . . . . .                                     | 84        |
| 7.7      | Why some tested jobs must come before blind execution . . . . .         | 85        |
| <b>8</b> | <b>Blind optimization: speedup without revelation</b>                   | <b>85</b> |
| 8.1      | The deterministic worst-case curve . . . . .                            | 87        |
| 8.2      | Proof of randomized instance optimality . . . . .                       | 90        |
| 8.3      | The exact worst-case curve . . . . .                                    | 91        |
|          | <b>Acknowledgements</b>                                                 | <b>93</b> |

|          |                                                                             |            |
|----------|-----------------------------------------------------------------------------|------------|
| <b>A</b> | <b>Machine-checked verification</b>                                         | <b>94</b>  |
| <b>B</b> | <b>Finite rational checkpoint for the harmonic lower bound</b>              | <b>98</b>  |
| <b>C</b> | <b>Independent proof by moving jobs with <math>p = u</math> to a prefix</b> | <b>99</b>  |
| <b>D</b> | <b>Machine-checked deterministic theorem and its correspondence</b>         | <b>102</b> |
| D.1      | Objects on the two sides . . . . .                                          | 102        |
| D.2      | Expansion of the lower and upper fields . . . . .                           | 103        |
| D.3      | Correspondence with the two deterministic theorems . . . . .                | 104        |
| D.4      | Proof boundary . . . . .                                                    | 104        |

## 1 Introduction

Suppose that we have many jobs waiting for one machine. We want to minimize the sum of the times at which they finish. The length of each job is written on a folded piece of paper. If we knew all the lengths, the right schedule would be clear: we would simply run the jobs from shortest to longest. But the papers are folded, and opening one of them takes one unit of machine time. Should we open another paper, or should we start working?

Opening a paper may reveal a tiny job that we can finish immediately. It may also reveal a huge job that is best left for the end. On the other hand, looking has a cost. If one hundred jobs are still unfinished, one unit spent opening a paper adds one hundred units to the sum of completion times. The machine must therefore balance two uses of its time: learning which jobs are short and completing jobs that are already understood.

Variants of this question have appeared in both stochastic and adversarial scheduling with testing [LMS19, DEMM20, DEL24]. This work improves earlier results and studies new models. We start with the cleanest version, in which every paper has to be opened. We then allow a job to be run without opening its paper. Depending on what this means, we obtain three further variants. The same algorithmic ideas—random sampling, thresholding, and shortest-first execution—give exact asymptotic answers in all four models.

### 1.1 Warmup: every job has to be tested

Consider the following problem. There are  $n$  jobs. Testing job  $i$  takes one unit of time and reveals a number  $p_i \geq 0$ . The job then needs another  $p_i$  units of processing; if  $p_i = 0$ , it completes with the test. For now every job has to be tested: testing is *obligatory*. The formal model is given in Section 2.

We compare an online scheduler with the shortest-first schedule that knows all values  $p_i$  in advance. The *competitive ratio* is the online cost divided by this offline optimum. We care about its asymptotic value. Since every job must be tested, even the optimum has cost  $\Omega(n^2)$ , so we ignore additive terms of size  $o(n^2)$ .

The obligatory-testing model for total completion time was introduced by Dogeas, Erlebach, and Liang [DEL24]. Their work and a later lower bound of Liang and Liang [LL26] left a gap between the best deterministic upper and lower bounds. They also left the randomized case open. We close both gaps.

**Theorem 1.1** (Obligatory testing, informal version of Theorems 3.2 and 5.5). *In the obligatory-testing model, the best deterministic asymptotic competitive ratio is  $R_{\text{OT}}^{\text{det}} = 1.570574\dots$ . Against an adversary that fixes the input before the algorithm draws its random bits, the best randomized ratio is  $R_{\text{OT}}^{\text{rand}} = 4/3$ . The two optimal algorithms are sketched in algorithms 1 and 2.*

Here and below, *shortest first* means processing revealed jobs in nondecreasing order of  $p_i$ . The following pseudocode gives a little more detail about the two algorithms. The formulas are not meant to be memorable.

---

**Algorithm 1** Deterministic threshold

---

- 1: Put  $c = 0.570574\dots$  and  $R = 1 + c = R_{\text{OT}}^{\text{det}}$ .
- 2: Before test  $i + 1$ , where  $0 \leq i < n$ , let  $c_i$  be the number of positive jobs processed immediately and  $d_i$  the number deferred.
- 3: Put

$$y_i = \frac{d_i - R(c_i + d_i)}{n - i}.$$

- 4: Use threshold  $T_i = 1$  if  $y_i \leq -1$ ; otherwise use

$$T_i = 1 + \frac{1}{2} \ln \frac{c + 2}{c - 2y_i}.$$

- 5: Test the next job. Process it now if  $p \leq T_i$ ; otherwise defer it.
  - 6: After all tests, finish deferred jobs shortest first.
- 

---

**Algorithm 2** Learned randomized threshold  $\mathcal{A}_n^*$

---

- 1: Set  $B_n = O(n^{1/20})$  and test  $O(n^{3/4})$  random jobs to estimate the empirical job-length distribution  $\hat{D}$ .
- 2: For each candidate threshold  $0 \leq t \leq B_n$ , put

$$a(t) = \hat{D}([0, t]), \quad m(t) = \int_{[0, t]} p d\hat{D}(p),$$

and define

$$\hat{\tau} = \min_{\substack{0 \leq t \leq B_n \\ a(t) > 0}} \frac{1 + m(t)}{a(t)}.$$

- 3: If  $\hat{\tau} > B_n$ , test every remaining job and then finish all revealed jobs shortest first.
  - 4: Otherwise process the sampled jobs with  $p \leq \hat{\tau}$ . Keep testing jobs, processing them immediately when  $p \leq \hat{\tau}$  and deferring them otherwise.
  - 5: After all tests, finish deferred jobs shortest first.
- 

Both algorithms follow the same principle: process short jobs as soon as possible and leave long jobs for the end. The difficult part is choosing the threshold. A deterministic algorithm has no representative view of the unseen jobs. Its decisions are therefore more complicated: in fact, its threshold must change with the history. The exact update is given in steps 3 and 4 of algorithm 1. The matching lower bound in Section 3.2.2 uses an adversary that reveals jobs with decreasing positive values of  $p_i$  while hiding many zero jobs until the end.

Randomization gives the algorithm a global view of the input. It first tests a sublinear random sample and estimates the distribution of job lengths. Because the labels are privately shuffled, the remaining empirical distribution stays close to the sampled one throughout the run. The algorithm therefore faces essentially the same distribution at every step and can use one fixed threshold.

The choice of that threshold has a simple interpretation. For a candidate  $t$ , a full round of tests together with the immediate processing of outcomes at most  $t$  uses work

$1 + m(t)$  per original job and completes a fraction  $a(t)$  of the jobs. We call this repeated test-and-process action the *testing module* for  $t$ . Thus

$$\frac{1 + m(t)}{a(t)}$$

is the work per immediate completion of this testing module; the unit term includes the tests of *all* jobs, including those deferred to the tail. The algorithm minimizes this quantity and uses its optimum  $\hat{\tau}$  as the actual threshold. Equivalently, adding an outcome of length  $p$  improves the module exactly when  $p < \hat{\tau}$ .

The matching randomized lower bound is correspondingly simple: half of the jobs have length zero and half have length two, and their labels are shuffled. Until the shuffle is uncovered, one unit of work completes only about half a job. Counting the area under the number of unfinished jobs gives the lower bound  $4/3$ . The formal argument is in Section 5.6.

## 1.2 One algorithm for every input

Let us return to algorithm 2. The ratio  $4/3$  describes only the hardest input. It says much less on an easy one. Suppose, for example, that all processing times are very large compared with the unit test—a plausible regime in many applications. Then the straightforward strategy that first tests everything and subsequently runs the jobs shortest first is nearly optimal. The worst-case guarantee of algorithm 2 still tells us only that its cost is at most  $1.33 \dots$  times the optimum.

In fact, the same algorithm satisfies a much stronger per-input guarantee: it is *instance-optimal* on every class with a fixed upper bound on job lengths.

**Theorem 1.2** (Obligatory-testing instance optimality, informal version of Theorem 6.1). *Fix  $L < \infty$ . The algorithm  $\mathcal{A}^*$  in algorithm 2 has the following property: for every vector  $p \in [0, L]^n$  and every online algorithm  $\mathcal{A}'$ ,*

$$\mathbb{E} \text{ALG}_{\mathcal{A}^*} \leq \mathbb{E} \text{ALG}_{\mathcal{A}'} + o_L(n^2),$$

*where both costs are measured on  $p$  and include the private shuffle and the algorithms' remaining randomness. The competing algorithm  $\mathcal{A}'$  may even be designed specifically for  $p$  and told all its entries in advance, though not their shuffled assignment to the public labels.*

Here and in the instance-optimal statements below, randomized cost uses the input convention formalized in the model section: the displayed vector is privately shuffled before the algorithm starts.

Both assumptions in the theorem are necessary. Without a fixed bound  $L$  there is no randomized instance-optimal algorithm, and without randomization there is no deterministic one; see Theorem 6.2.

Two points about the theorem are worth emphasizing. First, the comparison is made separately on every input vector. We must therefore compete not only with one fixed online algorithm, but also with algorithms optimized for this particular  $p$ . Allowing  $\mathcal{A}'$  to know the entries of  $p$  makes this strongest possible online benchmark explicit.

Second, the existence of some instance-optimal algorithm is perhaps not surprising. One could imagine a meta-algorithm that samples the input to estimate the empirical distribution of the entries of  $p$  and then runs an optimal algorithm for that estimate. The substantive part of the theorem is that no complicated meta-algorithm is needed. The optimal leading-order algorithm for a known input is itself a simple threshold algorithm,

so  $\mathcal{A}^*$  has essentially the same form as algorithm 2: sample the input distribution, choose the threshold that completes the most job mass per unit of work, and use it for the rest of the schedule.

### 1.3 Generalizations of the model

We next weaken the obligatory model in two directions. First, we may allow a job to run without being tested. Second, the unit preliminary action may have two different benefits. It may reveal the true running time  $p_i$  before the job is run. It may also be an optimization procedure that replaces a common raw running time  $u$  by a shorter time  $p_i \leq u$ . For example, a generic piece of code solves every task within time  $u$ , but an AI agent can spend one unit of time adapting the code to a particular input and make it faster.

These two benefits are independent. An optimization may reveal its new running time  $p_i$ , giving the scheduler both a faster job and information about where the job belongs. Or it may leave  $p_i$  hidden until the optimized job finishes.

These choices give the following four models.

| model                  | without the unit action          | with the unit action                        | where discussed                          |
|------------------------|----------------------------------|---------------------------------------------|------------------------------------------|
| obligatory testing     | cannot be run                    | reveals $p_i$ and unlocks the job           | Intro 1.1;<br>Sections 3.4,<br>5.6 and 6 |
| blind execution        | runs for its hidden length $p_i$ | reveals $p_i$ before execution              | Intro 1.4;<br>Section 7                  |
| blind optimization     | runs for raw time $u$            | replaces $u$ by a still-hidden $p_i \leq u$ | Intro 1.5;<br>Section 8                  |
| revealing optimization | runs for raw time $u$            | reveals $p_i$ and replaces $u$ by $p_i$     | Intro 1.6;<br>Sections 3 to 5            |

The last three rows separate the two benefits of the unit preliminary action. Blind execution studies information without speedup and is related to the stochastic model of Levi, Magnanti, and Shaposhnik [LMS19]. Blind optimization studies speedup without advance information and is related to the model of Damerius et al. [DKL<sup>+</sup>23]. Revealing optimization, introduced by Dürr et al. [DEMM20], contains both benefits.

The three optional models have somewhat different optimal algorithms and input-specific benchmarks, so we state their results separately. Their randomized algorithms nevertheless share one design principle: privately shuffle the jobs, use a sublinear sample to estimate the input distribution, and optimize the rest of the schedule using that information.

### 1.4 Information without speedup: blind execution

Suppose an untested job can simply be run until it finishes. Its running time is its true hidden length  $p_i$ . Testing does not make the job shorter; it only tells us  $p_i$  before we decide when to run it. We call this *blind execution*.

Without an upper bound on the job lengths, no randomized algorithm has a finite competitive ratio, even if we ignore an additive  $o(n^2)$  term; see Theorem 7.2 for a simple counterexample. For every fixed bound  $L$ , however, sampling again gives one algorithm that is optimal on every bounded input vector.

**Theorem 1.3** (Blind-execution instance optimality, informal version of Theorem 7.1). *Fix  $L < \infty$ . There is one randomized algorithm  $\mathcal{A}^*$  such that, for every vector  $p \in [0, L]^n$  and every online algorithm  $\mathcal{A}'$ ,*

$$\mathbb{E} \text{ALG}_{\mathcal{A}^*} \leq \mathbb{E} \text{ALG}_{\mathcal{A}'} + o_L(n^2).$$

To describe the algorithm, let  $\hat{D}$  denote the estimated job-length distribution and put  $\hat{\mu} = \int p d\hat{D}(p)$ . As in algorithm 2, define

$$a(t) = \hat{D}([0, t]), \quad m(t) = \int_{[0, t]} p d\hat{D}(p), \quad \hat{\tau} = \min_{\substack{t \geq 0 \\ a(t) > 0}} \frac{1 + m(t)}{a(t)}.$$

The optimal algorithm is more subtle than algorithm 2, because running a job blindly can be better than testing it. Sometimes, after the initial sample, the best choice is to run every remaining job blindly. Even when further testing is useful, it need not be useful all the way to the end of the input.

For a simple illustration, suppose that jobs have only two possible lengths. The obligatory-testing algorithm would process short outcomes immediately and defer long ones. Now consider the last untouched job. If it is short, we want to run it next. If it is long, it can still be run next, as the first job in the arbitrarily ordered long tail. Thus in either case the useful action is to run the job; testing it first only adds one unit of work. This is why the value of testing can disappear before every job has been tested.

In general, the algorithm tests only a fraction  $q$  of the jobs and uses the threshold  $\hat{\tau}$  from algorithm 2 to decide which tested jobs to process immediately. After testing stops, deferred jobs with  $\hat{\tau} \leq p < \hat{\mu}$  are processed before the untouched jobs: their known lengths are smaller than the expected duration  $\hat{\mu}$  of a blind execution. The untouched jobs are then run blindly, and tested jobs with  $p \geq \hat{\mu}$  form the final tail. The optimal fraction  $q$  minimizes the explicit quadratic  $F_{\text{BE}, \hat{D}}$  from Equation (298).

---

**Algorithm 3** Instance-optimal blind execution

---

- 1: Shuffle the jobs and run  $o(n)$  of them blindly; use their observed lengths to estimate  $\hat{D}$  and  $\hat{\mu}$ .
  - 2: Compute  $\hat{\tau} = \min_{t \geq 0, a(t) > 0} (1 + m(t))/a(t)$ .
  - 3: If  $\hat{\tau} \geq \hat{\mu}$ , put  $q = 0$ . Otherwise choose  $q \in \arg \min_{0 \leq z \leq 1} F_{\text{BE}, \hat{D}}(z)$ .
  - 4: Test a random  $q$ -fraction of the remaining jobs. Whenever a test reveals  $p < \hat{\tau}$ , process that job immediately; defer all other outcomes.
  - 5: After the tests stop, process the deferred jobs with  $\hat{\tau} \leq p < \hat{\mu}$ , shortest first.
  - 6: Run every untouched job blindly.
  - 7: Finish the remaining tested jobs shortest first.
- 

## 1.5 Blind optimization

The two remaining models start from the same operation. Every job takes a known raw time  $u$ , and one unit of optimization reduces its running time to  $p_i \leq u$ . They differ only in whether optimization reveals  $p_i$ . We call  $u$  the *raw-execution cap*, or simply the *cap*. A clairvoyant scheduler completes a job by the shorter of raw execution in time  $u$  and optimization followed by processing in time  $1 + p_i$ ; thus  $u$  is also the *offline cap* on the resulting job length. We start with the case in which optimization does not reveal  $p_i$ . Before execution, all optimized jobs still look the same.

This is the simpler case. Let us first describe the hardest inputs for both deterministic and randomized algorithms. Roughly a  $1/\sqrt{u}$  fraction of the jobs cannot be shortened at all: they have  $p_i = u$ . The remaining jobs are optimized to length zero. Even if an online algorithm knows these proportions, it cannot distinguish the two types before committing to a job. An optimized job therefore has expected length of order  $(1/\sqrt{u})u = \sqrt{u}$ , giving

total completion cost  $\Theta(n^2\sqrt{u})$ . The clairvoyant optimum first optimizes the zero-length jobs and then runs the hard jobs raw, paying only  $\Theta(n^2)$ .

Randomization improves the asymptotic ratio by a factor of two, because a private shuffle prevents the hard jobs from being concentrated at the beginning of the schedule. The exact ratios are as follows.

**Theorem 1.4** (Blind-optimization worst-case curves, informal version of Theorems 8.3 and 8.6). *The exact deterministic and randomized asymptotic competitive ratios satisfy*

$$R_{\text{BO}}^{\text{det}}(u) = \sqrt{u} + o(1), \quad R_{\text{BO}}^{\text{rand}}(u) = \frac{\sqrt{u}}{2} + \frac{1}{2} + o(1).$$

*Their complete formulas are given in Theorems 8.3 and 8.6.*

This poor worst-case behavior is driven by a very specific family of inputs, which again raises the question of whether the worst-case ratio is the right way to evaluate this model. Instance optimality gives a more informative answer. For every fixed  $u$ , the simple algorithm in algorithm 4 is instance-optimal. The structure of the optimal algorithm is particularly simple: at the leading  $n^2$  scale, it always either optimizes every job or optimizes none. The algorithm therefore samples the input and chooses between these two options.

**Theorem 1.5** (Blind-optimization instance optimality, informal version of Theorem 8.5). *Consider the blind-optimization model with some  $u < \infty$ . There is one randomized algorithm  $\mathcal{A}^*$  such that, for every vector  $p \in [0, u]^n$  and every online algorithm  $\mathcal{A}'$ ,*

$$\mathbb{E} \text{ALG}_{\mathcal{A}^*} \leq \mathbb{E} \text{ALG}_{\mathcal{A}'} + o_u(n^2).$$

---

**Algorithm 4** Instance-optimal blind optimization

---

- 1: Shuffle the jobs, optimize and run  $o(n)$  of them, and let  $\hat{\mu}$  be the mean observed length.
  - 2: If  $1 + \hat{\mu} < u$ , optimize and then run every remaining job.
  - 3: Otherwise run every remaining job raw for time  $u$ .
- 

More precisely, if  $\mu_p$  is the mean optimized length in  $p$ , the best possible leading value is

$$\frac{n^2}{2} \min\{u, 1 + \mu_p\}.$$

The two terms correspond respectively to running every job raw and to optimizing every job. Thus the mean  $\mu_p$  is the only statistic that the algorithm needs to estimate.

## 1.6 Revealing optimization

Now assume that optimization also reveals  $p_i$ . Thus the unit action buys both information and speed. We call this *revealing optimization*.

The two extreme regimes are easy to understand. If  $u \leq 1$ , the test alone costs at least as much as raw execution, so we should never test. If  $u$  gets very large, raw execution is unattractive, so the problem approaches obligatory testing. The interesting question is what happens between these regimes.

This model was introduced by Dürr et al. [DEMM20]. Their results showed that intermediate values of  $u$  are the difficult ones. We determine the exact competitive ratio for every  $u$ , for both deterministic and randomized algorithms.



**Theorem 1.6** (Revealing-optimization curves, informal version of Theorems 3.1 and 5.1). *For every constant  $u > 0$ , the exact deterministic and randomized asymptotic competitive ratios  $R_{\text{RO}}^{\text{det}}(u)$  and  $R_{\text{RO}}^{\text{rand}}(u)$  are the six-piece and four-piece curves derived in Sections 3 and 5, respectively. The deterministic curve reaches  $1.87\dots$  and then falls to the obligatory value  $1.57\dots$ . The randomized curve reaches  $1.63\dots$  and eventually becomes  $4/3$ .*

To describe the deterministic curve, define the following five transition points:

$$u_1^{\text{det}} = 1, \quad u_2^{\text{det}} = 1.86\dots, \quad u_3^{\text{det}} = 3.14\dots, \quad u_4^{\text{det}} = 3.61\dots, \quad u_5^{\text{det}} = 4.50\dots$$

They delimit the six parameter intervals in the piecewise definition of  $R_{\text{RO}}^{\text{det}}(u)$ .

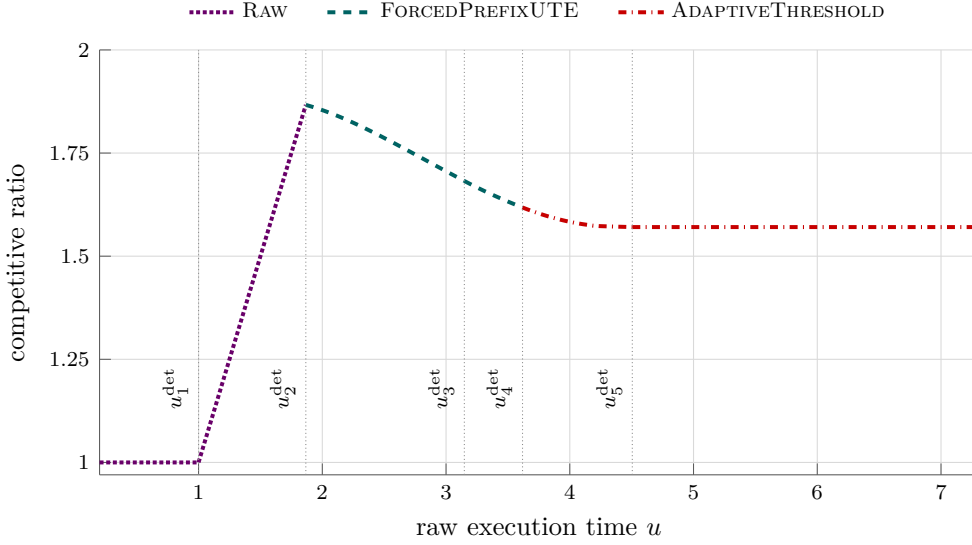


Figure 1: The three deterministic algorithms, each shown only on the range where it gives the best guarantee.

The deterministic curve is realized by three explicit algorithm families, used on consecutive ranges of  $u$ . We describe them here and defer the exact parameters to Section 3.

The first algorithm,  $\text{RAW}(u)$ , simply fixes an arbitrary job order and executes every job untested for the public raw time  $u$ . On its relevant range, its ratio is 1 for  $u \leq u_1^{\text{det}}$  and  $u$  for  $u_1^{\text{det}} \leq u \leq u_2^{\text{det}}$ ; see Figure 1.

The second algorithm is  $\text{FORCEDPREFIXUTE}$ , where UTE stands for *uniform-threshold execution*. As specified in algorithm 5, it tests every job and normally processes only outcomes below a fixed threshold. It makes one deliberate exception: every outcome in an initial  $b(u)$ -fraction of the test order is processed immediately. Intuitively, a deterministic adversary may reveal long jobs first and shorter jobs only later. Deferring all early long jobs would create a tail that waits through most of the later tests. The forced prefix limits this risk by testing and immediately processing a controlled initial fraction, at the cost of sometimes processing a long job too early. After the forced prefix, the same threshold is applied to every tested job.

The exact parameter  $b(u)$  is defined in Equation (46); it is nonnegative on  $[u_2^{\text{det}}, u_3^{\text{det}}]$  and vanishes at  $u_3^{\text{det}}$ . For  $u_3^{\text{det}} \leq u \leq u_4^{\text{det}}$ , the zero-prefix specialization gives the formula  $1 + 1/\sqrt{u - 1}$ .

Finally,  $\text{ADAPTIVETHRESHOLD}$  is the same history-dependent algorithm as algorithm 1. For finite  $u$ , only its parameter  $c$  changes: on  $u_4^{\text{det}} \leq u \leq u_5^{\text{det}}$  it is chosen by the equations

---

**Algorithm 5** FORCEDPREFIXUTE( $J, u$ )

---

**Range:**  $u_2^{\text{det}} \leq u \leq u_4^{\text{det}}$ .

- 1: Fix the test order  $1, \dots, n$  and set  $Q \leftarrow \emptyset$ .
  - 2: Set  $\theta_u \leftarrow \min\{1, u - 1\}$ . If  $u_2^{\text{det}} \leq u \leq u_3^{\text{det}}$ , set  $b \leftarrow b(u)$ ; for  $u_3^{\text{det}} \leq u \leq u_4^{\text{det}}$ , set  $b \leftarrow 0$ .
  - 3: For  $i = 1, \dots, n$ , test job  $i$  and observe  $p_i$ .
  - 4: If  $i \leq \lfloor bn \rfloor$  or  $p_i \leq \theta_u$ , process job  $i$  immediately; otherwise add it to  $Q$ .
  - 5: Process the jobs of  $Q$  in nondecreasing revealed processing time.
- 

in Equation (43), after which it equals the obligatory-testing value  $0.570574\dots$ . The three algorithms cover the deterministic curve in Figure 1 in that order: RAW first, FORCEDPREFIXUTE in the middle, and ADAPTIVETHRESHOLD for large  $u$ . The exact formulas and matching constructions are in Section 3.

For randomized algorithms, private sampling again gives instance optimality with an algorithm similar in shape to algorithm 3. Unlike blind execution, every tested processing time is at most the raw time  $u$ , so all tested jobs belong before the untouched raw block.

**Theorem 1.7** (Revealing-optimization instance optimality, informal version of Theorem 4.1). *Fix  $u < \infty$ . There is one randomized algorithm  $\mathcal{A}^*$  such that, for every vector  $p \in [0, u]^n$  and every online algorithm  $\mathcal{A}'$ ,*

$$\mathbb{E} \text{ALG}_{\mathcal{A}^*} \leq \mathbb{E} \text{ALG}_{\mathcal{A}'} + o_u(n^2).$$

For the randomized curve, write

$$u_1^{\text{rand}} = 1, \quad u_2^{\text{rand}} = 5.048917\dots, \quad u_3^{\text{rand}} = \frac{25}{4} = 6.25.$$

These three points delimit the four parameter intervals in the piecewise definition of  $R_{\text{RO}}^{\text{rand}}(u)$ . The exact formulas and matching constructions are in Section 5.

---

**Algorithm 6** Instance-optimal revealing-optimization algorithm

---

- 1: Shuffle the jobs, test  $O(\sqrt{n})$  of them, and use the observed lengths to estimate the input distribution.
  - 2: Choose a threshold  $t$  maximizing  $\hat{a}/(1 + \hat{\ell})$ , where  $\hat{a} = \hat{D}([0, t])$  and  $\hat{\ell} = \int_{[0, t]} p d\hat{D}(p)$ .
  - 3: Put  $\hat{\tau} = (1 + \hat{\ell})/\hat{a}$ . If  $\hat{\tau} \geq u$ , set  $q = 0$ ; otherwise choose  $q$  minimizing  $F_{\text{RO}, u, \hat{D}}(q)$  from Equation (177).
  - 4: Test a random  $q$ -fraction; finish outcomes below  $\hat{\tau}$  at once.
  - 5: Finish all other tested jobs, shortest first.
  - 6: Run every untouched job raw for time  $u$ .
- 

Notice that the two exact revealing-optimization curves are not monotone. This is not a contradiction. For very small  $u$ , testing is useless, while as  $u \rightarrow \infty$  the model converges to the obligatory-testing setting of Section 3.4. Both extreme cases are comparatively easy: the online cost can be charged directly to the optimum. Intermediate values are harder because raw execution gives the clairvoyant scheduler additional useful options.

## 1.7 Techniques

The proofs repeatedly use similar ideas. We summarize the main ones here.

**Completion density.** Our algorithms can typically be viewed as a sequence of a few *modules*. A module repeatedly performs the same action; for example, it may test a random job, process it below a threshold, and defer it otherwise. Each module spends some work and completes some mass of jobs. Its *completion density* is the completed mass per unit of work. Higher-density modules should come first. This viewpoint leads to our algorithms by identifying the relevant modules and ordering them by completion density.

**A private shuffle.** The randomized algorithms start by shuffling the labels and inspecting a small prefix. Its sublinear cost is negligible at the  $n^2$  scale, while concentration makes it a reliable estimate of the input distribution. Because the labels were shuffled privately, the distribution of the remaining jobs stays close to this estimate throughout most of the schedule. This stability makes the randomized setting substantially simpler.

## 1.8 Related work

The closest papers have already appeared next to the models they introduced. We give a broader comparison here.

Scheduling with tests belongs to optimization with *explorable uncertainty*, where uncertain data can be queried at a cost; the query viewpoint goes back at least to Kahan [Kah91]. Levi, Magnanti, and Shaposhnik study a stochastic scheduling model and derive prefix-testing algorithms followed by an order based on expected processing time per unit weight [LMS19, LMS24]. Our four-block blind-execution algorithm has a similar shape, but our inputs are adversarial, need not converge to a distribution, and are not announced to the universal algorithm.

Dürr et al. [DEMM20] introduced the adversarial revealing-optimization model and obtained deterministic bounds, including the  $1.87\dots$  guarantee for binary values. We close the deterministic gap for arbitrary values  $p_i \in [0, u]$  and give the exact randomized curve against an oblivious adversary. Related work allows nonuniform test times [AE21, LLWZ23, KLL<sup>+</sup>26], multiple machines [GCH24], or weights [BS26].

Dogeas, Erlebach, and Liang [DEL24] introduced obligatory testing for total completion time. For uniform tests they proved a deterministic upper bound of  $1.58\dots$  and the lower bound  $\sqrt{2}$ . Liang and Liang [LL26] later raised the lower bound to  $3/2$ . Our matching value is  $1.57\dots$ , and our randomized result gives the oblivious value  $4/3$ . More strongly, the resulting fixed-threshold algorithm is asymptotically optimal separately for every bounded input.

The processing-time oracle of Dufossé et al. [DDN<sup>+</sup>22] is close to blind execution, but allows only two possible hidden durations. If no tests are available and processing times are revealed only at completion, one obtains the classical nonclairvoyant model of Motwani, Phillips, and Torng [MPT94], in which the scheduler does not know a job’s length before it completes. These semantics differ from raw execution in revealing optimization, which always lasts the declared time  $u$ .

## 1.9 Roadmap

Section 2 formally defines the four models, their information structures and adversaries, the corresponding offline optima, and our asymptotic competitive-ratio convention.

Section 3 then proves the exact deterministic revealing-optimization curve. Its multilevel lower-bound instance, in which every job satisfies  $1 + p_i < u$  and raw execution is therefore never shorter, is reused both for  $u_4^{\text{det}} \leq u \leq u_5^{\text{det}}$  and for  $u \geq u_5^{\text{det}}$ , while a bookkeeping potential handles jobs with  $p_i = u$  in the matching upper bound. Only after the finite

curve is complete does Section 3.4 derive the deterministic obligatory ratio using bounds whose constants do not depend on the raw time  $u$ .

Section 4 identifies the optimal leading cost separately for every bounded revealing input and learns the associated threshold algorithm from a sublinear sample. Section 5 maximizes this benchmark against the clairvoyant optimum and proves the exact four-piece randomized curve. Its final subsection, Section 5.6, transfers the lower bound to the unbounded obligatory endpoint; for the upper bound it truncates very long observations and switches to a safe all-testing schedule when the sample is unreliable. Section 6 then strengthens the randomized obligatory-testing algorithm from Theorem 5.5 to a single algorithm that is asymptotically optimal on every bounded obligatory input.

Section 7 turns to blind execution. It first derives the benchmark when the multiset of job lengths is announced in advance, proves that arbitrary adaptive algorithms cannot beat it, and then removes that advance knowledge by sampling. It also explains why no finite worst-case ratio is possible without a bound on job lengths. Section 8 studies speedup without revelation, proves the deterministic lower bound using an adversary that hides when its first phase will stop, and obtains the matching two-algorithm curve. It then proves the randomized instance-optimal theorem and maximizes its mean-based benchmark to obtain the exact randomized worst-case curve.

The appendices document and independently audit the more delicate parts of the argument. Appendix A states precisely which results are machine checked and summarizes the corresponding Lean 4 development. Appendix B evaluates a large but finite rational instance of the lower bound whose jobs satisfy  $1 + p_i < u$ , while Appendix C independently checks the deterministic upper bound by repeatedly moving outcomes with  $p_i = u$  to the start of the reveal order. Finally, Appendix D records the exported Lean theorem and the detailed dictionary between its objects and the deterministic statements in the paper.

## 2 Models and common preliminaries

The four models differ in small but consequential ways. This section collects their common building blocks so that the later arguments need not repeat them. We first define the models and adversaries, then develop the offline pair identities and fluid completion curves, and finally record the probabilistic and finite-size tools used throughout the paper.

### 2.1 Models

There are  $n$  jobs, all available at time zero, and one machine. Operations are nonpreemptive: once an operation starts, it runs to completion. At most one operation can run at a time. Job  $j$  has a hidden value  $p_j \geq 0$ . The four models differ in what can be done before this value is known.

#### Obligatory testing OT.

The values  $p_j$  are arbitrary finite nonnegative numbers. Every job must first be tested for one unit. The test reveals  $p_j$ , after which its processing operation of length  $p_j$  may be performed immediately or delayed.

#### Blind execution BE.

The values  $p_j$  are arbitrary finite nonnegative numbers. A job may be run blindly for its actual duration  $p_j$ ; the value becomes known only when that execution finishes. Alternatively, the job may be tested for one unit, revealing  $p_j$ , and its processing

operation may then be delayed. Testing provides information but does not shorten the job.

**Blind optimization**  $\text{BO}(u)$ .

Here  $p_j \in [0, u]$ . A job may be run raw for the known time  $u$ . Alternatively, one unit of optimization changes its running time from  $u$  to  $p_j$  without revealing  $p_j$ ; the optimized job is subsequently run blindly, possibly after a delay. Its value becomes observable only when that execution finishes. Raw execution reveals no hidden value.

**Revealing optimization**  $\text{RO}(u)$ .

Again  $p_j \in [0, u]$ , and raw execution takes the known time  $u$ . The other option is a unit test that reveals  $p_j$ , followed, possibly after a delay, by processing for  $p_j$ . Thus the preliminary action provides both the speedup and information about its size.

The notation  $\text{BE}$  has no model parameter: blind execution permits arbitrary finite nonnegative processing times. For its bounded instance-optimal theorem we restrict the inputs to  $[0, L]$  and make  $L$  public. In the last two models, by contrast,  $u$  is itself an available running time and hence part of every scheduling decision. We call it the *raw-execution cap*, or simply the *cap*. Since the offline effective length in these models is  $\min\{u, 1 + p_j\}$ , we call it the *offline cap*  $u$  when discussing the clairvoyant benchmark. The number  $n$  and any theorem-specific bound  $L$  or model parameter  $u$  are known to the algorithm.

The completion time  $C_j$  is the time at which job  $j$  finishes. If a test reveals  $p_j = 0$ , the job completes at the end of that test. A blind zero job in  $\text{BE}$  completes as soon as it is selected, whereas an optimized zero job in  $\text{BO}(u)$  first pays its unit optimization cost. The objective is

$$\sum_{j=1}^n C_j.$$

Obligatory testing can be viewed as the limit of revealing optimization in which raw execution becomes unavailable. We use this only as intuition. The obligatory theorems and their algorithms are proved directly; deriving them from revealing optimization would require arguing about both  $u$  and  $n$  going to infinity, which we avoid.

We write  $\text{ALG}_{\mathcal{A}}(I)$  for the objective value of an online algorithm  $\mathcal{A}$  on an instance  $I$ , and  $\text{OPT}(I)$  for the value of an offline optimum that knows all processing times. We omit algorithm subscripts or instance arguments when they are clear. When a sequence of costs has the form  $cn^2 + o(n^2)$ , we call  $c$  its *leading coefficient*; terms contributed by individual jobs rather than pairs are typically only  $O(n)$ .

## 2.2 Input, information and adversaries

For a deterministic algorithm, the adversary may choose the processing-time vector and its assignment to labels with full knowledge of the algorithm. The randomized results use an *oblivious* adversary: the processing-time vector is fixed before the algorithm draws its private random seed.

An input is a vector  $p = (p_1, \dots, p_n)$  of job lengths chosen by the adversary. For a randomized algorithm, this vector is then relabeled by a uniform permutation. We abbreviate the expectation over this shuffle and all further private randomness by  $\mathbb{E} \text{ALG}_{\mathcal{A}}(p)$ . Thus randomized performance depends only on the entries of  $p$ , not on their displayed order. An *announced* algorithm is additionally given the multiset  $\{p_1, \dots, p_n\}$ , but not its shuffled assignment to labels. Every algorithm is *nonanticipating*: each action may depend on the

public parameters, its private randomness, and everything revealed so far, but not on a hidden value that the model has not yet exposed. The *transcript* of a run is the resulting ordered sequence of actions and observations.

We write

$$D[p] := \frac{1}{n} \sum_{i=1}^n \delta_{p_i} \quad (1)$$

for the empirical distribution of the input, where  $\delta_x$  denotes one unit of probability concentrated at  $x$ . It is unchanged by the shuffle.

Our instance-optimality results compare against all algorithms receiving this shuffled input. This is ordinary instance optimality when the input is viewed as a multiset, and order-oblivious instance optimality when it is viewed as an ordered vector; see [ABC17, NRTT24].

### 2.3 Offline optima and pair accounting

The offline optimum knows all values  $p_j$ . It therefore chooses the shorter available way to complete each job and orders the resulting job blocks shortest first. Associate with job  $j$  the model-dependent *effective length*

$$\lambda_j := \begin{cases} 1 + p_j, & \text{OT,} \\ p_j, & \text{BE,} \\ \min\{u, 1 + p_j\}, & \text{BO}(u) \text{ or RO}(u). \end{cases} \quad (2)$$

**Lemma 2.1** (Effective lengths and the offline pair identity). *Fix any one of the four models and let  $\lambda_{(1)} \leq \dots \leq \lambda_{(n)}$  be its effective lengths from Equation (2). A clairvoyant (fully informed) optimum completes the jobs in this order and has value*

$$\text{OPT} = \sum_{k=1}^n \sum_{i=1}^k \lambda_{(i)}, \quad (3)$$

$$= \sum_i \lambda_i + \sum_{i < j} \min\{\lambda_i, \lambda_j\}, \quad (4)$$

$$= \frac{1}{2} \left( \sum_i \lambda_i + \sum_{i,j} \min\{\lambda_i, \lambda_j\} \right). \quad (5)$$

In OT it tests every job. In BE it runs every job blindly. In BO( $u$ ) and RO( $u$ ) it uses raw mode when  $u \leq 1 + p_j$  and the unit preliminary action followed by processing otherwise.

*Proof.* Let  $C_{[1]} \leq \dots \leq C_{[n]}$  be the ordered completion times of any feasible schedule. Completing job  $j$  consumes at least  $\lambda_j$  units of work belonging to that job. Hence, by time  $C_{[k]}$ , the machine has performed the required work of some  $k$  jobs, and

$$C_{[k]} \geq \sum_{i=1}^k \lambda_{(i)}.$$

Choose the mode specified in the lemma, keep each resulting block contiguous, and execute the blocks in nondecreasing order of  $\lambda_j$ . This schedule is feasible in the relevant model and attains equality for every  $k$ . Summing over  $k$  and then collecting the contribution of each unordered pair gives the first two formulas. Separating the terms with  $i = j$  from the two orientations of every pair with  $i \neq j$  gives the symmetric form.  $\square$

For later pair calculations, if  $X \subseteq [n]$ , we write

$$\text{SPT}(X) := \sum_{i \in X} p_i + \sum_{\substack{i, j \in X \\ i < j}} \min\{p_i, p_j\} \quad (6)$$

be the exact cost of processing that block in shortest-processing-time (SPT) order. Thus  $\text{SPT}(X)$  is the processing-time part of the offline pair formula when the jobs in  $X$  are executed without preliminary actions.

## 2.4 Competitive-ratio conventions

Every asymptotic statement in this paper allows a uniform additive  $o(n^2)$  term. Formally, an algorithm family  $\mathcal{A}$  has asymptotic competitive ratio at most  $R$  if there is a deterministic sequence  $\varepsilon(n) \rightarrow 0$  such that every  $n$ -job instance satisfies

$$\mathbb{E} \text{ALG}_{\mathcal{A}}(I) \leq R \cdot \text{OPT}(I) + \varepsilon(n)n^2. \quad (7)$$

For a deterministic algorithm the expectation is omitted. The optimal ratio in a model is the infimum of such  $R$  over all admissible algorithm families. We also call this the *size-asymptotic* ratio to emphasize that the model parameters are fixed while the number of jobs  $n$  tends to infinity.

In obligatory testing every effective length is at least one, and in either optimization model it is at least  $\min\{u, 1\}$ . Hence Equation (3) gives  $\text{OPT} = \Omega(n^2)$  in these models, and the definition above is equivalent to the usual worst-case ratio after taking  $n \rightarrow \infty$ . This equivalence fails for blind execution, where  $\text{OPT}$  can be  $o(n^2)$  in the special case where most of the jobs have length zero. Accordingly, Theorem 7.1 makes the absolute statement  $\mathbb{E} \text{ALG} = n^2 \Phi_{\text{BE}}(D[p]) + o_L(n^2)$ , where the benchmark  $\Phi_{\text{BE}}$  is defined in Section 7.1. It does not claim a bounded ratio to the clairvoyant optimum when most jobs have length zero.

## 2.5 Maximum-density modules and fluid completion curves

Here *fluid* simply means that we work with fractions of the input rather than individual jobs. After dividing all job counts and all work by  $n$ , the  $n$  jobs have total mass one. Thus a class containing 30% of the jobs has mass 0.3, and processing that class for time  $p$  uses  $0.3p$  units of normalized work. This scaling captures the leading  $n^2$  term of total completion time; rounding individual jobs changes only lower-order terms.

Consider a concrete example in which half the jobs have  $p = 0$  and half have  $p = 1$ . Testing the whole unit mass costs one unit of work and completes the zero half. If we also process every revealed job of length one immediately, this uses another  $1/2$  unit of work and completes the entire mass. The combined operation therefore completes mass one using work  $3/2$ , for completion density  $2/3$ . Testing alone would have density only  $1/2$ . If the positive jobs were much longer, however, processing them immediately could decrease the density. The first question is therefore which revealed lengths should be included.

Let  $D$  be a distribution of job lengths with finite mean. We call one such combined operation a *test module*: test one unit mass of jobs and immediately process a chosen fraction of each positive length class. Write  $g(p) \in [0, 1]$  for the fraction of the length- $p$  class processed immediately. The module completes mass  $a_D(g)$  and uses work  $w_D(g)$ , where

$$a_D(g) := D(\{0\}) + \int_{(0, \infty)} g(p) dD(p), \quad w_D(g) := 1 + \int_{(0, \infty)} pg(p) dD(p). \quad (8)$$

The initial 1 in  $w_D(g)$  is the work of testing the whole mass. Zero jobs appear in  $a_D(g)$  automatically because they finish with their tests. The ratio  $a_D(g)/w_D(g)$  is the module's completion density, and its reciprocal is work per completion.

The optimal rule is a threshold. Intuitively, adding jobs of length  $p$  improves the current density exactly when  $p$  is smaller than the current work per completion. At the optimum these two quantities agree: the cutoff  $\tau_D$  is also the module's work per completion. The following lemma makes this self-consistency precise.

**Lemma 2.2** (Maximum-density test module). *There is a unique  $\tau_D \geq 1$  satisfying*

$$\int_{[0,\infty)} (\tau_D - p)^+ dD(p) = 1. \quad (9)$$

*Choose  $g_*$  to select every positive  $p < \tau_D$ , reject every  $p > \tau_D$ , and select any fraction of the jobs with  $p = \tau_D$ . Write  $a_* = a_D(g_*)$  and  $w_* = w_D(g_*)$ . Then*

$$\frac{a_*}{w_*} = \max_g \frac{a_D(g)}{w_D(g)} = \frac{1}{\tau_D}, \quad \tau_D a_D(g) \leq w_D(g) \quad \text{for every } g. \quad (10)$$

*Proof.* The function  $h(t) = \int (t - p)^+ dD(p)$  is continuous and nondecreasing, satisfies  $h(0) = 0$ , and tends to infinity because  $h(t) \geq t - \int p dD(p)$ . Once positive it is strictly increasing, so  $h(t) = 1$  has a unique solution;  $h(t) \leq t$  gives  $\tau_D \geq 1$ .

For an arbitrary rule  $g$ ,

$$\begin{aligned} \tau_D a_D(g) - \int_{(0,\infty)} pg(p) dD(p) &= \tau_D D(\{0\}) + \int_{(0,\infty)} (\tau_D - p)g(p) dD(p) \\ &\leq \int_{[0,\infty)} (\tau_D - p)^+ dD(p) = 1. \end{aligned}$$

This is the second inequality in Equation (10). The threshold rule  $g_*$  attains equality because it keeps exactly the terms with  $\tau_D - p > 0$ ; mass at  $p = \tau_D$  does not affect the equality. Hence  $\tau_D a_* = w_*$  and  $g_*$  has maximum density  $1/\tau_D$ .  $\square$

The test module completes mass  $a_*$ . We keep track of the positive jobs that it does not complete by writing

$$d\nu(p) = (1 - g_*(p))\mathbf{1}_{p>0} dD(p), \quad \nu(\{0\}) = 0. \quad (11)$$

The residual mass  $\nu$  is not normalized: its total mass  $1 - a_*$  is exactly the fraction of jobs left for later. Because  $g_*$  accepts everything below  $\tau_D$ , these residual jobs all have length at least  $\tau_D$ .

For an empirical input, this threshold rule has an elementary finite interpretation: sort the jobs by processing time and take a prefix.

**Corollary 2.3** (Empirical maximum-density prefix). *For an empirical distribution  $D[p]$  from Equation (1), the maximum of*

$$\frac{|E|/n}{1 + n^{-1} \sum_{i \in E} p_i} \quad (12)$$

*over processing-time prefixes  $E$  containing all zero jobs is  $1/\tau_{D[p]}$ . It is attained by taking every occurrence below  $\tau_{D[p]}$ , no occurrence above it, and any subset of occurrences equal to  $\tau_{D[p]}$ . Thus every selected value is at most  $\tau_{D[p]}$  and every unselected value is at least  $\tau_{D[p]}$ .*

*Proof.* Apply lemma 2.2 to  $D[p]$ . At the boundary  $p_i = \tau_{D[p]}$ , adding or removing an occurrence preserves the ratio  $1/\tau_{D[p]}$ , so the fractional boundary rule may be replaced by any subset of the tied occurrences.  $\square$



**Ordering modules.** After identifying one test module, we must decide where it belongs relative to the work performed later. At the fluid scale, every kind of work can be represented by two numbers: a completion capacity  $c_k$  and work  $v_k$  per completed job. A budget  $x$  can be divided among these kinds of work. As in shortest-processing-time scheduling, the cheapest work per completion should come first.

A *completion curve*  $C(x)$  records the largest job mass that can be finished using normalized work  $x$ . Write

$$\text{Area}(C) := \int_0^\infty (1 - C(x)) dx \quad (13)$$

for the area below its unfinished-mass curve. For any finite nonnegative measure  $\xi$  of block lengths, define its divisible SPT cost by

$$\text{SPT}(\xi) := \frac{1}{2} \iint \min\{v, w\} d\xi(v) d\xi(w). \quad (14)$$

Formally, let  $\mathcal{M} = \sum_k c_k \delta_{v_k}$  describe finitely many such blocks, where  $c_k \geq 0$  and  $\sum_k c_k = 1$ . Its completion curve is

$$K_{\mathcal{M}}(x) := \max \left\{ \sum_k z_k : 0 \leq z_k \leq c_k, \sum_k v_k z_k \leq x \right\}. \quad (15)$$

Thus  $K_{\mathcal{M}}(x)$  is the largest job mass that can be completed with work budget  $x$ . The variables  $z_k$  allow a fraction of a block to be used, which is the second place where the fluid viewpoint simplifies the finite schedule. Since  $1 - K_{\mathcal{M}}(x)$  is the unfinished mass after work  $x$ , its area is the normalized total completion cost.

**Lemma 2.4** (Divisible SPT area). *The curve  $K_{\mathcal{M}}$  processes the items in nondecreasing order of  $v_k$ , and its area is the divisible SPT cost:*

$$\text{Area}(K_{\mathcal{M}}) = \text{SPT}(\mathcal{M}). \quad (16)$$

*Proof.* Consider two consecutive blocks with masses  $c, c'$  and work per completion  $v \leq v'$ . Putting the  $v$ -block first changes the area, relative to the opposite order, by  $cc'(v - v') \leq 0$ . Repeating this neighboring swap orders all blocks by nondecreasing work per completion. In a block of completion mass  $c_k$  and work per completion  $v_k$ , unfinished mass decreases linearly. After sorting the blocks by  $v_k$ , its area contribution is

$$v_k c_k \left( 1 - \sum_{h < k} c_h - \frac{c_k}{2} \right).$$

Summing these terms and collecting each unordered pair gives Equation (16).  $\square$

**Combining testing with another mode.** We now combine the test module with the other way of completing a job. For revealing optimization this other mode is raw execution with cost  $v = u$ ; in other applications  $v$  may represent a different independent action. Suppose a total fraction  $q$  of the jobs will be tested, so the remaining  $1 - q$  fraction is available to the other mode.

To write the completion curve explicitly, assume that  $D$  has finite support and put  $d_p = D(\{p\})$ . At an intermediate point, let  $t$  be the mass tested so far,  $b$  the mass completed

by the other mode, and  $c_p$  the tested mass of positive class  $p$  that has also been processed. The maximum mass completed with work budget  $x$  is

$$C_{D,q}^v(x) := \max \left\{ d_0 t + b + \sum_{p>0} c_p : \begin{array}{l} 0 \leq t \leq q, \quad 0 \leq b \leq 1 - q, \\ 0 \leq c_p \leq d_p t, \\ t + vb + \sum_{p>0} p c_p \leq x \end{array} \right\}. \quad (17)$$

The objective counts tested zeros, jobs completed by the other mode, and processed positive outcomes. The last constraint charges respectively for tests, the other mode, and processing after a test.

The key simplification is that all tests together with their selected short outcomes can be replaced by copies of the single maximum-density module. What remains are just three kinds of blocks: the test module, the residual tested jobs, and the other completion mode.

**Lemma 2.5** (Test-module completion curve). *Let  $a_*$ ,  $\tau_D$ , and the residual mass  $\nu$  be defined above. Then*

$$C_{D,q}^v = K_{\mathcal{M}_{D,q,v}}, \quad \mathcal{M}_{D,q,v} := qa_*\delta_{\tau_D} + q\nu + (1-q)\delta_v. \quad (18)$$

Consequently,

$$\text{Area}(C_{D,q}^v) = \text{SPT}(\mathcal{M}_{D,q,v}), \quad (19)$$

*Proof.* Split every positive support class virtually into its  $g_*$ -selected and residual parts. For a feasible point in Equation (17), let  $y_L, x_L$  be the completion and work contributed by the tests, tested zeros, and processed selected outcomes. Applying Equation (10) to the processed fractions within the first  $t$  units of tests gives

$$\tau_D y_L \leq x_L, \quad y_L \leq a_* t.$$

With  $\lambda = y_L/a_*$ , replace this part by  $\lambda$  full test modules. The replacement preserves completed mass, weakly decreases work, and uses  $0 \leq \lambda \leq t \leq q$ . Residual class  $p$  has capacity at most  $q\nu(\{p\})$ , while the independent mode has capacity  $1 - q$ . Thus every feasible point maps to the fractional allocation problem in Equation (18).

Conversely, order these fractional items by work per completion, placing the test module before residual items at a tie. The independent item can be run whenever its position in this order requires. A partial test-module item is realized by the corresponding fraction of tests and selected outcomes. Once all  $q$  test modules have run, every residual capacity is available; this is early enough because lemma 2.2 says that every length carrying positive residual mass is at least  $\tau_D$ . Hence the curve obtained by processing the items in this order is feasible at every work budget, proving the curve identity. The area formula follows from lemma 2.4.  $\square$

**Lemma 2.6** (Zero-preserving transport). *Suppose there are joint random variables  $(P, P')$ , with respective laws  $D, D'$ , such that  $P = 0$  if and only if  $P' = 0$  and  $|P - P'| \leq h$  almost surely. Transporting the same fluid algorithm through this coupling preserves all completion events and changes accumulated processing work by at most  $h$ . Consequently, each model-specific fluid value  $\Phi$  defined below satisfies*

$$|\Phi(D) - \Phi(D')| \leq h. \quad (20)$$

*Proof.* Pair each infinitesimal job occurrence under the stated joint distribution and make the same decision for the two paired values, exposing them only when the model exposes the corresponding processing time. Zero preservation makes test completions coincide. At

every prefix, the total mass that has received processing is at most one, so replacing its processing times changes cumulative work by at most  $h$ . One unfinished-mass curve is therefore contained in a horizontal  $h$ -shift of the other, and its area changes by at most  $h$ . Taking the infimum over algorithms gives one inequality; exchanging  $D, D'$  gives the other.  $\square$

**Learning from a pilot sample.** For the instance-optimal upper bounds, a fluid algorithm is chosen from a small pilot sample and then run on the remaining jobs. A *template* means a fixed choice of its few fluid parameters, such as a threshold or a tested fraction. We first record the deterministic comparison that turns an accurate estimate of the input distribution into an almost optimal template.

**Lemma 2.7** (Lipschitz empirical minimization). *Let  $\Pi$  be a common family of templates and let  $F_D(\pi)$  be their objectives for distributions  $D$ . Suppose that, for some metric  $d$ ,*

$$\sup_{\pi \in \Pi} |F_D(\pi) - F_E(\pi)| \leq Ld(D, E). \quad (21)$$

*If  $\Phi(D) = \min_{\pi \in \Pi} F_D(\pi)$ , then*

$$|\Phi(D) - \Phi(E)| \leq Ld(D, E). \quad (22)$$

*Moreover, if  $\pi_E$  minimizes  $F_E$ , then*

$$F_D(\pi_E) \leq \Phi(D) + 2Ld(D, E). \quad (23)$$

*Proof.* Evaluating the  $E$ -objective at a minimizer for  $D$ , and conversely, proves Equation (22). For the second claim, insert  $F_E(\pi_E) = \Phi(E)$  between  $F_D(\pi_E)$  and  $\Phi(D)$  and apply Equations (21) and (22).  $\square$

Choosing a template from an estimate  $\hat{D}$  incurs the Lipschitz comparison twice—once for the chosen template and once for the optimal template. A third term accounts for the difference between the original input and the jobs left after sampling.

**Lemma 2.8** (Pilot-learning transfer). *Let  $\Pi$  be a common template family, suppose  $\Phi(D) = \inf_{\pi \in \Pi} F_D(\pi)$ , and assume*

$$\sup_{\pi \in \Pi} |F_D(\pi) - F_E(\pi)| \leq L_0 d(D, E). \quad (24)$$

*Let  $\hat{D}$  be a pilot estimate, let  $D^{\text{rem}}$  be the law of the remaining jobs, and let  $\hat{\pi}$  minimize  $F_{\hat{D}}$ . If the complete learned schedule, including its pilot, satisfies conditionally*

$$\mathbb{E}[\text{ALG}_{\mathcal{A}} \mid \hat{D}, D^{\text{rem}}] \leq n^2 F_{D^{\text{rem}}}(\hat{\pi}) + \varepsilon n^2, \quad (25)$$

*then*

$$\frac{\mathbb{E} \text{ALG}_{\mathcal{A}}}{n^2} \leq \Phi(D) + 2L_0 \mathbb{E}d(\hat{D}, D^{\text{rem}}) + L_0 \mathbb{E}d(D^{\text{rem}}, D) + \varepsilon. \quad (26)$$

*Proof.* By lemma 2.7,  $F_{D^{\text{rem}}}(\hat{\pi}) \leq \Phi(D^{\text{rem}}) + 2L_0 d(\hat{D}, D^{\text{rem}})$ . The value part of the same lemma gives  $\Phi(D^{\text{rem}}) \leq \Phi(D) + L_0 d(D^{\text{rem}}, D)$ . Substitute both estimates in Equation (25) and average.  $\square$

## 2.6 Probabilistic tools

We collect here the concentration estimates used in the randomized sections. All of them are finite-space statements. We use without further mention the union bound, Markov's inequality  $\mathbb{P}(Y \geq t) \leq \mathbb{E}Y/t$  for  $Y \geq 0$ , and the tail identity  $\mathbb{E}Y = \int_0^\infty \mathbb{P}(Y \geq t) dt$ .

**Deferred decisions.** Suppose the coordinates of a fixed vector  $p$  are assigned uniformly to the public job labels by the private shuffle. Even if an algorithm chooses the next untouched label from everything it has seen so far, the processing time behind that label is uniform among the remaining occurrences. Repeating this observation shows that the processing times encountered at first touch form a uniform random permutation of the coordinates of  $p$ . Equal values may be regarded as distinct copies when making this argument.

The action chosen at a first touch is determined before the processing time behind that label is exposed. We call any choice made from past observations but before the next value is seen *predictable*. Such an action can be used as a selector in the sampling bounds below. If the chosen action does not reveal the processing time to the algorithm, we may still expose it afterwards for the analysis; this does not change the algorithm's decisions.

We next record the concentration bounds applied to the resulting random orders. Chernoff bounds handle the few places where genuinely independent Bernoulli variables arise.

**Lemma 2.9** (Chernoff bounds). *Let  $X = \sum_{i=1}^m X_i$ , where the  $X_i$  are independent Bernoulli random variables, and write  $\mu = \mathbb{E}X$ . For every  $\delta > 0$ ,*

$$\mathbb{P}(X \geq (1 + \delta)\mu) \leq \left( \frac{e^\delta}{(1 + \delta)^{1+\delta}} \right)^\mu \leq \exp\left(-\frac{\delta^2\mu}{2 + \delta}\right). \quad (27)$$

For  $0 \leq \delta \leq 1$ ,

$$\mathbb{P}(X \leq (1 - \delta)\mu) \leq \exp\left(-\frac{\delta^2\mu}{2}\right). \quad (28)$$

These are the standard exponential-moment bounds of Chernoff [Che52].

Most of our samples are drawn from a fixed input without replacement. The next lemma gives both a tail bound and the finite-population variance used for such samples.

**Lemma 2.10** (Sampling without replacement). *Let  $x_1, \dots, x_N \in [0, 1]$ , let  $X_1, \dots, X_N$  be a uniformly random permutation of these numbers, and put  $\bar{x} = N^{-1} \sum_i x_i$ . For  $1 \leq k \leq N$  and  $t \geq 0$ ,*

$$\mathbb{P}\left(\left|\sum_{i=1}^k X_i - k\bar{x}\right| \geq t\right) \leq 2 \exp\left(-\frac{2t^2}{k}\right). \quad (29)$$

Moreover, if  $\hat{x}_k = k^{-1} \sum_{i=1}^k X_i$  and  $\sigma^2 = N^{-1} \sum_i (x_i - \bar{x})^2$ , then, for  $N > 1$ ,

$$\text{Var}(\hat{x}_k) = \frac{N - k}{k(N - 1)} \sigma^2 \leq \frac{1}{4k}. \quad (30)$$

*Proof.* The estimate Equation (29) is Hoeffding's sampling-without-replacement inequality [Hoe63, Section 6]. The variance identity is the elementary finite-population correction.  $\square$

Applying the scalar variance bound to class indicators gives a concise estimate for an empirical histogram.

**Lemma 2.11** (Histogram error without replacement). *Partition a population of  $N$  occurrences into  $d$  classes. Let  $p$  be the vector of class frequencies in the population and let  $\hat{p}$  be the corresponding frequency vector among the first  $k$  occurrences in a uniformly random permutation. Then*

$$\mathbb{E}\|\hat{p} - p\|_1 \leq \sqrt{\frac{d}{k}}. \quad (31)$$

*Proof.* For a class of mass  $p_j$ , Equation (30) and Cauchy–Schwarz give  $\mathbb{E}|\hat{p}_j - p_j| \leq \sqrt{p_j/k}$ . Summing over the classes and using  $\sum_j \sqrt{p_j} \leq \sqrt{d}$  proves the claim.  $\square$

An adaptive algorithm may stop at a data-dependent time. We therefore also need one event that controls every class at every possible prefix.

**Lemma 2.12** (Uniform prefix histogram bounds). *In the same population, let  $H_{k,j}$  count class  $j$  among the first  $k$  entries of a uniformly random permutation. Then*

$$\mathbb{P}\left(\max_{0 \leq k \leq N} \max_{1 \leq j \leq d} |H_{k,j} - kp_j| \geq t\right) \leq 2d(N+1) \exp\left(-\frac{2t^2}{N}\right), \quad (32)$$

$$\mathbb{E} \max_{0 \leq k \leq N} \max_{1 \leq j \leq d} |H_{k,j} - kp_j| \leq C\sqrt{N \ln(2d(N+1))} \quad (33)$$

for a universal constant  $C$ .

*Proof.* Apply Equation (29) to every binary class indicator and union-bound over  $k$  and  $j$  to obtain Equation (32). Integrating that tail bound proves Equation (33).  $\square$

Predictable sampling introduces dependent increments rather than a fixed prefix. The following maximal inequalities provide the needed uniform control.

**Lemma 2.13** (Martingale maximal inequalities). *Let  $(M_k, \mathcal{F}_k)_{k=0}^N$  be a real martingale with  $M_0 = 0$ ; that is,  $\mathcal{F}_k$  records the information available by time  $k$  and  $\mathbb{E}[M_k | \mathcal{F}_{k-1}] = M_{k-1}$ . If  $\mathbb{E}|M_N|^2 < \infty$ , then Doob’s inequality gives*

$$\mathbb{E} \max_{0 \leq k \leq N} |M_k|^2 \leq 4\mathbb{E}|M_N|^2. \quad (34)$$

*If instead  $|M_k - M_{k-1}| \leq b_k$  almost surely for deterministic  $b_k$ , then maximal Azuma–Hoeffding gives, for every  $t \geq 0$ ,*

$$\mathbb{P}\left(\max_{0 \leq k \leq N} |M_k| \geq t\right) \leq 2 \exp\left(-\frac{t^2}{2 \sum_{k=1}^N b_k^2}\right). \quad (35)$$

We use the classical forms due to Doob [Doo53] and Azuma [Azu67]; the maximal version of the latter follows by stopping the usual exponential bound when the displayed threshold is first crossed.

The next lemma models an adaptive algorithm reading a randomly permuted fixed input. The vector  $X_k$  records the statistics of the  $k$ th touched job, while the predictable weight  $A_k$  records whether the algorithm selects that job before seeing its value. The lemma says that such adaptive selection cannot systematically bias the sample: every selected prefix remains close to the corresponding population average, simultaneously over all possible stopping times. We stop before the final  $\delta N$  jobs because averages in the remaining population become unstable near the very end.

**Lemma 2.14** (Predictable sampling from a random permutation). *Let  $X_1, \dots, X_N$  be a uniform random permutation of fixed vectors  $x_1, \dots, x_N \in [0, B]^d$ , and let  $\bar{x} = N^{-1} \sum_i x_i$ . Suppose  $A_k \in [0, 1]$  is chosen using only the previous draws, before  $X_k$  is exposed. Then for  $\delta, \eta \in (0, 1)$ , with probability at least  $1 - \eta$ , simultaneously for every coordinate  $\ell$  and every  $m \leq (1 - \delta)N$ ,*

$$\left| \sum_{k \leq m} A_k (X_{k,\ell} - \bar{x}_\ell) \right| \leq (1 + \delta^{-1}) E_{N,d,B,\eta}, \quad E_{N,d,B,\eta} := B \sqrt{2N \ln \left( \frac{4d(N+1)}{\eta} \right)}. \quad (36)$$

*The statement remains valid after conditioning on independent private randomness used to choose the predictable sequence.*

*Proof.* For each coordinate, apply Equation (29) after scaling by  $B$ , and union-bound over coordinates and prefix lengths. Except with probability at most  $\eta/2$ , every centered prefix sum has absolute value at most  $E = E_{N,d,B,\eta}$ . Before draw  $k \leq (1 - \delta)N$ , the mean  $\tilde{x}_{k-1,\ell}$  of the remaining population therefore satisfies

$$|\tilde{x}_{k-1,\ell} - \bar{x}_\ell| \leq \frac{E}{\delta N}.$$

For each  $\ell$ ,

$$M_{m,\ell} = \sum_{k \leq m} A_k (X_{k,\ell} - \tilde{x}_{k-1,\ell})$$

is a martingale with increments bounded by  $B$ . The maximal Azuma–Hoeffding inequality Equation (35), followed by a union bound over  $\ell$ , puts all  $|M_{m,\ell}|$  below  $E$  except with probability at most  $\eta/2$ . The accumulated difference between the remaining-population mean and the original mean is at most  $E/\delta$ , which proves Equation (36). Conditioning and then averaging proves the final assertion.  $\square$

### 3 Deterministic revealing optimization and its obligatory endpoint

This section proves two exact deterministic results: the revealing-optimization curve in Theorem 3.1 and the obligatory-testing ratio in Theorem 3.2, obtained as its uniform unbounded endpoint. These are the rigorous deterministic parts of the informal statements in Theorems 1.1 and 1.6. We begin with revealing optimization at a finite common raw-execution time  $u$ . All jobs have this same known upper limit, and a test reveals  $p_j \in [0, u]$ . By Equation (2) and lemma 2.1, the offline effective length is  $\min\{u, 1 + p_j\}$ , and the offline optimum schedules these effective lengths in nondecreasing order. We write  $R_{\text{RO}}^{\text{det}}(u)$  for the optimal deterministic size-asymptotic ratio at this fixed common upper limit.

The exact ratio is given by six formulas on six intervals separated by five transition points. Put

$$\varphi = \frac{1 + \sqrt{5}}{2}, \quad u_1^{\text{det}} = 1, \quad u_2^{\text{det}} = \frac{1 + \sqrt{3 + 2\sqrt{5}}}{2} = 1.866760399173862 \dots \quad (37)$$

Let  $s_0 > 1$  be the root of

$$s_0^3 = (s_0 + 1)^2, \quad u_3^{\text{det}} = 1 + s_0 = 3.147899035704787 \dots \quad (38)$$

The fourth transition point is

$$u_4^{\text{det}} = \varphi + 2 = 3.618033988749895 \dots \quad (39)$$

For  $s = u - 1$ , define

$$T_s(z) = sz^2 + (s^3 + s^2 + 1)z - (s^2 + s + 1)(s + 2),$$

and let  $R_{\text{quad}}(u)$  be its positive root, so

$$T_s(R_{\text{quad}}(u)) = 0. \quad (40)$$

Equivalently,

$$R_{\text{quad}}(u) = \frac{-1 - u + 2u^2 - u^3 + \sqrt{u^6 - 4u^5 + 10u^4 - 6u^3 - 3u^2 + 6u - 3}}{2(u - 1)}. \quad (41)$$

At the other end, let  $u_5^{\text{det}} > 1$  solve  $u_5^{\text{det}} - 3 = \ln u_5^{\text{det}}$  and define

$$\begin{aligned} r &= \frac{2}{u_5^{\text{det}} - 1}, & R_{\text{OT}}^{\text{det}} &= 1 + r = 1.570574096649395\dots, \\ u_5^{\text{det}} &= 4.505241495792883\dots \end{aligned} \quad (42)$$

For each  $u_4^{\text{det}} \leq u \leq u_5^{\text{det}}$ , let  $c = c(u)$  and  $m = m(u)$  be the unique solution of

$$\text{artanh } m - m = 1 - \frac{1}{c} + \frac{1}{2} \ln \left( 1 + \frac{2}{c} \right), \quad u = 1 + \frac{2}{c} - m, \quad (43)$$

with  $r \leq c \leq 1/\varphi$  and  $0 \leq m \leq 1/\varphi$ .

**Theorem 3.1** (Exact revealing-optimization curve). *For every fixed  $0 < u < \infty$ , the optimal deterministic size-asymptotic ratio in the revealing-optimization model is*

$$R_{\text{RO}}^{\text{det}}(u) = \begin{cases} 1, & 0 < u \leq u_1^{\text{det}}, \\ u, & u_1^{\text{det}} \leq u \leq u_2^{\text{det}}, \\ R_{\text{quad}}(u), & u_2^{\text{det}} \leq u \leq u_3^{\text{det}}, \\ 1 + \frac{1}{\sqrt{u-1}}, & u_3^{\text{det}} \leq u \leq u_4^{\text{det}}, \\ 1 + c(u), & u_4^{\text{det}} \leq u \leq u_5^{\text{det}}, \\ R_{\text{OT}}^{\text{det}}, & u \geq u_5^{\text{det}}. \end{cases} \quad (44)$$

On every interval in Equation (44), there is an explicit deterministic algorithm satisfying

$$\text{ALG}_{\mathcal{A}}(I) \leq R_{\text{RO}}^{\text{det}}(u) \cdot \text{OPT}(I) + O_u(n).$$

On  $u \geq u_5^{\text{det}}$  the remainder is one absolute  $O(n)$  term, uniform over all finite  $u$ . Conversely, for every deterministic algorithm  $\mathcal{A}$  and every  $\varepsilon > 0$ , there are arbitrarily large fixed instances  $I$  such that

$$\text{ALG}_{\mathcal{A}}(I) \geq (R_{\text{RO}}^{\text{det}}(u) - \varepsilon) \cdot \text{OPT}(I).$$

For  $u \geq u_5^{\text{det}}$ , these lower-bound instances may be chosen with  $p_j < u - 1$  for every job, so the offline cap  $u$  is inactive. Thus both witnesses on the plateau are uniform in the sense needed to pass separately to the obligatory endpoint.

**Theorem 3.2** (Deterministic obligatory testing). *Let  $u_5^{\det} > 1$  be the unique solution of  $u_5^{\det} - 3 = \ln u_5^{\det}$ , and set*

$$R_{\text{OT}}^{\det} = 1 + \frac{2}{u_5^{\det} - 1} = 1.570574096649395 \dots$$

*For every deterministic online algorithm  $\mathcal{B}$  and every  $\varepsilon > 0$ , there are arbitrarily large obligatory-testing instances  $I$  such that*

$$\text{ALG}_{\mathcal{B}}(I) \geq (R_{\text{OT}}^{\det} - \varepsilon) \cdot \text{OPT}(I).$$

*Conversely, there are a deterministic algorithm  $\mathcal{A}$  and an absolute constant  $B$  such that every  $n$ -job obligatory instance satisfies*

$$\text{ALG}_{\mathcal{A}}(I) \leq R_{\text{OT}}^{\det} \cdot \text{OPT}(I) + Bn.$$

*Consequently the optimal deterministic size-asymptotic competitive ratio is exactly  $R_{\text{OT}}^{\det}$ .*

The proof of Theorem 3.1 combines two kinds of lower bounds. Binary hidden-stopping instances give the formulas on  $0 < u \leq u_4^{\det}$ , while a continuous version of the harmonic construction with an initial block of jobs satisfying  $p_j = u$  gives the lower bound on  $u_4^{\det} \leq u \leq u_5^{\det}$  and the constant value for  $u \geq u_5^{\det}$ . Three explicit algorithms match them: raw execution, a forced-prefix uniform threshold, and a history-dependent adaptive threshold. They are introduced informally in Section 1.6 and specified formally in algorithms 7 to 9. The matching lower bounds are developed in Section 3.2. The following table maps each interval to its upper-bound witness.

| range                            | algorithm         | parameter choice     |
|----------------------------------|-------------------|----------------------|
| $0 < u \leq u_2^{\det}$          | RAW               | none                 |
| $u_2^{\det} < u \leq u_3^{\det}$ | FORCEDPREFIXUTE   | $b = b(u)$ from (46) |
| $u_3^{\det} < u \leq u_4^{\det}$ | FORCEDPREFIXUTE   | $b = 0$              |
| $u_4^{\det} < u < u_5^{\det}$    | ADAPTIVETHRESHOLD | $c = c(u)$ from (43) |
| $u_5^{\det} \leq u < \infty$     | ADAPTIVETHRESHOLD | $c = r$              |

### 3.1 Upper bounds

We prove the six interval guarantees using three algorithms. Raw execution covers  $0 < u \leq u_2^{\det}$ , a forced-prefix uniform threshold covers  $u_2^{\det} \leq u \leq u_4^{\det}$ , and an adaptive threshold covers  $u \geq u_4^{\det}$ . Each of the following subsections treats one algorithm and ends with its complete guarantee on the relevant range of  $u$ .

#### 3.1.1 Raw execution

We first handle the range in which testing is unnecessary. Running every job raw is optimal for  $u \leq 1$  and gives the matching factor  $u$  until the first nontrivial transition point  $u_2^{\det}$ .

---

##### Algorithm 7 $\text{RAW}(J, u)$

---

**Input:** jobs  $J$  and a finite common upper limit  $u$ .

1: Fix the job order  $1, \dots, n$ .

2: **For**  $i = 1, \dots, n$ , execute job  $i$  untested for  $u$  time.

---



**Lemma 3.3** (Raw-execution guarantee). *For every  $0 < u \leq u_2^{\det}$ , RAW satisfies*

$$\text{ALG}_{\text{RAW}}(I) \leq \max\{1, u\} \cdot \text{OPT}(I). \quad (45)$$

*In particular, it is optimal for  $0 < u \leq u_1^{\det}$  and is  $u$ -competitive for  $u_1^{\det} \leq u \leq u_2^{\det}$ .*

*Proof.* The raw blocks all have length  $u$ , so  $\text{ALG}_{\text{RAW}} = un(n+1)/2$ . If  $u \leq 1$ , every offline effective length is  $\min\{u, 1 + p_j\} = u$ , and equality holds. If  $u > 1$ , every offline effective length is at least one, so  $\text{OPT} \geq n(n+1)/2$  and the ratio is at most  $u$ .  $\square$

### 3.1.2 Forced-prefix uniform thresholds

The next algorithm tests every job. It processes a forced prefix regardless of the observed values and thereafter processes only short outcomes immediately. We prove its complete guarantee on  $[u_2^{\det}, u_3^{\det}]$  and then analyze the zero-prefix specialization, namely  $b = 0$ , which is optimal up to  $u_4^{\det}$ .

Here UTE stands for *uniform-threshold execution*: outside the forced prefix, the algorithm uses the same threshold for every tested job.

---

**Algorithm 8** FORCEDPREFIXUTE( $J, u, b$ )

---

- Input:** jobs  $J$ , finite  $u > 1$ , and  $b \in [0, 1]$ .
- 1: Fix the test order  $1, \dots, n$ ; set  $k \leftarrow \lfloor bn \rfloor$ ,  $\theta_u \leftarrow \min\{1, u - 1\}$ , and  $Q \leftarrow \emptyset$ .
  - 2: **For**  $i = 1, \dots, n$  **do**:
  - 3:   Test job  $i$  for one unit and observe  $p_i$ .
  - 4:   **If**  $i \leq k$  or  $p_i \leq \theta_u$ , process job  $i$  immediately.
  - 5:   **Otherwise**, add job  $i$  to  $Q$ .
  - 6: Process the jobs of  $Q$  in nondecreasing revealed processing time.
- 

In this subsection, the first  $k = \lfloor bn \rfloor$  positions in the fixed test order are the *prefix*, and the remaining positions are the *suffix*. We call a tested job *immediate* if it is processed at once, and *deferred* if it is placed in  $Q$  for the final queue.

Recall from the beginning of Section 3 that  $R_{\text{quad}}(u)$  denotes the positive root specified by Equation (40).

**Lemma 3.4** (Forced-prefix UTE guarantee). *For every  $u_2^{\det} \leq u \leq u_3^{\det}$ , define the algorithm parameter*

$$b = b(u) := \frac{u^2 - u + 1 - (u - 1)^2 R_{\text{quad}}(u)}{u^2 - u + 1 + (u - 1) R_{\text{quad}}(u)}. \quad (46)$$

*Then FORCEDPREFIXUTE( $J, u, b$ ) satisfies*

$$\text{ALG} \leq R_{\text{quad}}(u) \cdot \text{OPT} + O_u(n). \quad (47)$$

We prove the lemma in three steps. The first claim verifies that the root  $R$  is well-defined and that the prefix parameter is admissible. The next two claims prove the guarantee below and above  $u = 2$  by reducing the possible processing times to boundary values in two different ways. Throughout these claims, put  $R = R_{\text{quad}}(u)$  and  $s = u - 1$ . In this notation, the parameter from Equation (46) is

$$b = \frac{s^2 + s + 1 - s^2 R}{s^2 + s + 1 + s R}.$$

**Claim 3.5** (Parameter admissibility). *The positive root  $R$  is well-defined. Moreover,  $0 \leq b < 1$ , with  $b = 0$  only at  $u = u_3^{\text{det}}$ , and  $R > 5/3$  and  $s^2 R > 16/15$  throughout the interval.*

*Proof.* Since  $s > 0$ , we have  $T_s(0) < 0$  and  $T_s(z) \rightarrow \infty$  as  $z \rightarrow \infty$ . Moreover,  $T_s$  is strictly increasing for  $z > 0$ , because

$$T'_s(z) = 2sz + s^3 + s^2 + 1 > 0.$$

It therefore has a unique positive root  $R$ .

Since  $T_s$  is increasing on positive arguments,

$$T_s\left(\frac{s^2 + s + 1}{s^2}\right) = \frac{s^2 + s + 1}{s^3}(-s^3 + s^2 + 2s + 1) \geq 0 \quad (s \leq s_0), \quad (48)$$

and hence  $s^2 + s + 1 - s^2 R \geq 0$ , with equality only at  $s = s_0$ . The denominator in  $b$  is positive and exceeds its numerator by  $sR(s + 1)$ , proving  $b < 1$ .

We will also use the following lower bound on  $R$ :

$$9T_s(5/3) = 6s^3 - 12s^2 - 2s - 3 < 0 \quad (49)$$

throughout the present interval. Indeed, on  $[4/5, 1]$  the polynomial is decreasing and has value  $-1151/125$  at  $4/5$ ; on  $[1, s_0]$  it has one interior minimum, while its value at 1 is  $-11$  and its value at  $s_0$  is smaller than its value  $-95/36$  at  $13/6$ . Here  $s_0 < 13/6$  follows by substituting  $13/6$  in  $s^3 - (s + 1)^2$ . Thus  $R > 5/3$ , while  $s > 4/5$ , and  $s^2 R > 16/15$ .  $\square$

**Claim 3.6** (The range  $u_2^{\text{det}} \leq u \leq 2$ ). *For every  $u_2^{\text{det}} \leq u \leq 2$ , FORCEDPREFIXUTE( $J, u, b$ ) satisfies*

$$\text{ALG} \leq R \cdot \text{OPT} + O_u(n).$$

*Proof.* We first consider a binary input in which every job is either zero ( $p_i = 0$ ) or long ( $p_i = u$ ). The first  $bn$  positions are the forced prefix. A long job in this prefix is processed immediately; a long job in the suffix is deferred; every zero job is processed immediately.

Fix the total number  $L$  of long jobs, and write  $k = bn$  for the moment; integer rounding will be restored at the end. Their positions do not affect OPT, which knows all values and sorts by effective length. We determine the worst positions for ALG directly.

Suppose exactly  $q$  long jobs lie in the prefix and put  $D = L - q$ . Within the prefix, moving a long job before a zero delays that zero and every later immediate completion by the long processing time  $u$ . Within the suffix, moving a deferred long job before a zero delays the zero by one unit of test time and does not change the final queue. Thus, for fixed  $q$ , the worst order is

$$\underbrace{u, \dots, u}_q \underbrace{0, \dots, 0}_{k-q} \mid \underbrace{u, \dots, u}_D \underbrace{0, \dots, 0}_{n-k-D},$$

where the vertical bar separates the forced prefix from the suffix. The completion cost of this order is

$$C(q) = \frac{n(n+1)}{2} + D \left( n - k - \frac{D+1}{2} \right) + u \left( qn - \frac{q(q-1)}{2} + \frac{D(D+1)}{2} \right). \quad (50)$$

The first term is the unit-test baseline. The second records the positions of the tests of the  $D$  long jobs in the suffix, and the last records all delays caused by long processing. Moving one long job from the suffix into the prefix changes  $q$  to  $q + 1$  and  $D$  to  $D - 1$ , and hence

$$C(q+1) - C(q) = (u-1)(n-L) + k - q \geq 0.$$

Consequently a worst input puts as many long jobs in the prefix as possible, then all remaining long jobs at the start of the suffix, and all zeros last.

Divide all job counts by  $n$ , and let  $x = L/n$  be the fraction of long jobs. The fraction of long jobs in the prefix is therefore  $a = \min\{b, x\}$ . If  $x > b$ , the remaining fraction  $d = x - b$  consists of deferred long jobs; if  $x \leq b$ , then  $d = 0$ . Ignore for the moment the  $O_u(n)$  one-job and rounding terms, and write  $A = \text{ALG}/n^2$  and  $O = \text{OPT}/n^2$  for the leading coefficients. Direct pair counting gives

$$\begin{aligned} O(x) &= \frac{1}{2} + \frac{s}{2}x^2, \\ A(x) &= \begin{cases} \frac{1}{2} + u \left( x - \frac{x^2}{2} \right), & 0 \leq x \leq b, \\ \frac{1}{2} + u \left( b - \frac{b^2}{2} \right) + (1-b)(x-b) + \frac{s}{2}(x-b)^2, & b \leq x \leq 1. \end{cases} \end{aligned} \quad (51)$$

The term  $1/2$  is the common unit-time baseline. In  $O(x)$ , the extra amount  $s = u - 1$  is paid only by pairs of long jobs. The two cases for  $A(x)$  distinguish whether all long jobs fit into the forced prefix.

Put  $G(x) = A(x) - R \cdot O(x)$ . We show that its maximum is zero. On  $b \leq x \leq 1$ , substituting the second formula for  $A(x)$  from Equation (51) makes  $G(x)$  a strictly concave quadratic. Its stationary point is

$$\alpha = \frac{s^2 + s + 1}{s^2 + s + 1 + sR}.$$

Moreover,  $b = (s+1)\alpha - s$ , and hence  $\alpha - b = s(1-\alpha) > 0$ . Substitution gives  $G(\alpha) = 0$ ; after cancelling the positive denominator, this is exactly Equation (40). Since  $b < \alpha$ , its right derivative at  $b$  is positive. The left derivative satisfies  $G'_-(b) = G'_+(b) + s(1-b) > 0$ , and the first quadratic is concave, so it is increasing on  $[0, b]$ . Thus  $G(x) \leq 0$  for every  $x \in [0, 1]$ , including the limiting case  $b = 0$ : the two pieces agree at  $b$ , the first increases up to that common value, and the second never exceeds its zero maximum.

We now reduce a general input to the binary case just analyzed. In the present range the threshold is  $u - 1 \leq 1$ . Thus a suffix job is immediate exactly when  $p \leq u - 1$  and deferred otherwise. First increase every deferred suffix value to  $u$ . This cannot decrease  $\text{ALG}$ , and it leaves  $\text{OPT}$  unchanged because such a job already has effective length  $\min\{u, 1+p\} = u$ .

For the remaining coordinates, construct a random binary vector as follows, independently from job to job. Replace a prefix value  $p$  by  $u$  with probability  $p/u$  and by zero otherwise. Replace an immediate suffix value  $p \leq u - 1$  by  $u$  with probability  $p$  and by zero otherwise. The latter probability is valid because  $p \leq u - 1 \leq 1$ . A suffix job rounded to  $u$  changes from immediate to deferred; the comparison below includes this change of action.

To compare online costs, consider a pair of positions  $i < j$  in the test order. Its leading contribution to  $\text{ALG}$  is

$$g_{ij} = \begin{cases} 1 + p_i, & i \text{ is immediate,} \\ 2 + p_j, & i \text{ is deferred and } j \text{ is immediate,} \\ 2 + \min\{p_i, p_j\}, & i, j \text{ are deferred.} \end{cases} \quad (52)$$

A prefix job remains immediate, and its rounding preserves its expected processing value. If  $i$  is an immediate suffix job, then after rounding its pair contribution is one when it becomes zero and at least two when it becomes  $u$ ; its expectation is therefore at least  $1 + p_i$ . If  $i$  is deferred and  $j$  is an immediate suffix job, then  $i$  has already been raised to  $u$ ,

and rounding  $j$  gives expected contribution  $2 + up_j \geq 2 + p_j$ . Finally, a pair of deferred jobs can only become more expensive. These cases show that the expected leading online cost does not decrease.

It remains to check that the same rounding does not increase OPT. If  $\lambda'$  denotes the effective length after rounding, then for a prefix job and an immediate suffix job, respectively,

$$\mathbb{E}\lambda' = 1 + \frac{u-1}{u}p \leq \min\{u, 1+p\}, \quad \mathbb{E}\lambda' = 1 + (u-1)p \leq 1+p. \quad (53)$$

A deferred suffix job has effective length  $u$  both before and after the first step. Since the minimum is jointly concave,

$$\mathbb{E} \min\{\lambda'_i, \lambda'_j\} \leq \min\{\mathbb{E}\lambda'_i, \mathbb{E}\lambda'_j\} \leq \min\{\lambda_i, \lambda_j\}.$$

The offline pair identity therefore shows that expected OPT does not increase. Consequently the expected value of  $\text{ALG} - R \cdot \text{OPT}$  for the binary vector is at least its value for the original input, up to  $O_u(n)$  one-job terms. Some binary realization is at least as bad as this expectation, and the binary bound proves the claim.  $\square$

**Claim 3.7** (The range  $2 \leq u \leq u_3^{\det}$ ). *For every  $2 \leq u \leq u_3^{\det}$ ,  $\text{FORCEDPREFIXUTE}(J, u, b)$  satisfies*

$$\text{ALG} \leq R \cdot \text{OPT} + O_u(n).$$

*Proof.* Here  $u \geq 2$ , so the algorithm uses threshold one. A prefix job is always immediate, a suffix job with  $p \leq 1$  is immediate, and a suffix job with  $p > 1$  is deferred. First keep this immediate/deferred pattern fixed and vary one processing time at a time in the leading excess  $\text{ALG} - R \cdot \text{OPT}$ . On each interval between the threshold and the offline cap  $u$ , the pair formula Equation (52) makes this excess convex in that coordinate. Hence a maximum occurs at an interval endpoint. This reduces

- a prefix value to 0 or  $u$ ;
- an immediate suffix value to 0 or 1; and
- a deferred suffix value to  $1^+$  or  $u$ .

Here  $1^+$  means a value tending to one from above, so the job remains deferred. For the last reduction, on  $1 < p < u-1$  the only nonlinear term is a concave minimum multiplied by  $1 - R < 0$ , hence it is convex; on  $[u-1, u]$  the offline effective length is already the constant  $u$ , while the online cost is nondecreasing in  $p$ . In the rest of this proof, we call a job with  $p = u$  *capped*.

We next choose the worst test order for fixed numbers of these endpoint types. OPT depends only on those numbers. In ALG, swapping two neighboring positions shows the following: capped jobs in the prefix may be moved before zero jobs in the prefix; deferred jobs in the suffix may be moved before immediate jobs in the suffix; and suffix jobs of value one may be moved before zero jobs in the suffix. These are three direct comparisons, not an additional scheduling principle: substitute the processing times of the two jobs being swapped in Equation (52); all unaffected pair terms cancel and the remaining difference is nonnegative. The order among two deferred jobs is irrelevant because the last line of Equation (52) is symmetric.

Divide each class size by  $n$ . Let  $a$  be the resulting fraction of prefix jobs with  $p = u$ ,  $d$  the fraction of suffix jobs with  $p = u$ ,  $t$  the fraction of deferred suffix jobs with  $p = 1^+$ , and

$m$  the fraction of immediate suffix jobs with  $p = 1$ . All other jobs have value zero. The constraints are

$$0 \leq a \leq b, \quad d, t, m \geq 0, \quad d + t + m \leq 1 - b. \quad (54)$$

As in the preceding claim, let  $A$  and  $O$  denote the leading coefficients of  $\text{ALG}/n^2$  and  $\text{OPT}/n^2$ . Summing Equation (52) over the ordered endpoint classes gives

$$A = \frac{1}{2} + (s+1) \left( a - \frac{a^2}{2} \right) + (1-b)(d+t+m) - \frac{m^2}{2} + \frac{s}{2}d^2, \quad (55)$$

$$O = \frac{1}{2} + \frac{(a+d+t+m)^2}{2} + \frac{s-1}{2}(a+d)^2. \quad (56)$$

The formula for  $O$  is especially transparent: every job contributes the unit baseline; all four nonzero classes have one additional unit of effective length; and the two capped classes  $a, d$  have another  $s-1 = u-2$  units. Replacing an immediate value-one suffix job by a deferred value-1<sup>+</sup> job does not change  $O$  in the limit and increases  $A$ . Thus a worst reduced instance has  $m = 0$ . Put  $x = a+d$ , the total fraction of capped jobs, and maximize  $A - R \cdot O$  over the remaining split between  $a, d, t$ . We retain the stationary point from the preceding claim,

$$\alpha = \frac{s^2 + s + 1}{s^2 + s + 1 + sR}.$$

For fixed  $x$ , the derivative with respect to the deferred  $p = 1^+$  fraction  $t$  is  $1 - b - R(x+t)$ . Thus the best choice is  $t = (\chi - x)_+$ , where

$$\chi = \frac{1-b}{R} = \frac{s(s+1)}{s^2 + s + 1 + sR}.$$

The identities

$$\alpha - \chi = \frac{1}{s^2 + s + 1 + sR}, \quad \chi - b = \frac{s^2 R - 1}{s^2 + s + 1 + sR}$$

show that  $b < \chi < \alpha$  on the present range. At fixed  $x, t$ , replacing a capped suffix job by a capped prefix job leaves  $O$  unchanged and changes  $A$  at rate  $s(1-x) + b - a \geq 0$ . We therefore fill the prefix with capped jobs as far as the constraints permit. Altogether,

$$t = (\chi - x)_+, \quad a = \min\{b, x\}, \quad d = (x - b)_+. \quad (57)$$

It remains to optimize the single variable  $x$ . If  $x \geq \chi$ , then  $t = 0$ , so only values zero and  $u$  remain. This is exactly the binary calculation from claim 3.6; its maximum gap is zero at  $x = \alpha$ . If  $x < \chi$ , then  $t = \chi - x > 0$ , and substitution gives

$$A - R \cdot O = -\frac{R-1}{2} + \frac{(1-b)^2}{2R} + a(s+b-sx) - \frac{a^2}{2} + \frac{s-R(s-1)}{2}x^2. \quad (58)$$

The coefficient  $s - R(s-1)$  is positive on  $1 \leq s \leq s_0$ . Indeed,  $T_s(2) = s(s^2 - s + 1) > 0$ , so for  $s \leq 2$  the equation  $T_s(R) = 0$  gives  $R < 2$ , and hence  $s - R(s-1) > 2 - s \geq 0$ . For  $2 \leq s \leq s_0 < 13/6$ ,

$$16T_s(7/4) = 12s^3 - 20s^2 + s - 4 > 0; \quad (59)$$

the polynomial is 14 at  $s = 2$  and has positive derivative thereafter. Thus  $R < 7/4$  and  $s - R(s-1) > 7/4 - 3s/4 > 1/8$ .

On  $0 \leq x \leq b$ , one has  $a = x$ , and

$$A - R \cdot O = -\frac{R-1}{2} + \frac{(1-b)^2}{2R} + (s+b)x - \frac{s+1+R(s-1)}{2}x^2. \quad (60)$$

Its derivative is decreasing, and the derivative at  $b$  multiplied by the positive denominator  $s^2 + s + 1 + sR$  is

$$R(1 + s^2 + Rs^2(s - 1)) > 0, \quad (61)$$

so the maximum is at  $b$ . On  $b \leq x \leq \chi$ , Equation (58) is convex and its maximum is at  $b$  or  $\chi$ . At  $x = \chi$  one has  $t = 0$ , so this endpoint is already covered by the binary calculation. It remains to compare the other endpoint  $x = b$  with it:

$$F(b) - F(\chi) = \frac{\chi - b}{2} [2sb - (s - R(s - 1))(b + \chi)], \quad (62)$$

and direct substitution of  $b$  and  $\chi$  gives

$$(s^2 + s + 1 + sR)[(s - R(s - 1))(b + \chi) - 2sb] = -s + (1 + s - s^3)R + s^2(s - 1)R^2 > 0. \quad (63)$$

To prove the remaining sign without numerical approximation, observe that  $T_s$  is increasing on positive arguments and

$$9T_s(5/3) = 6s^3 - 12s^2 - 2s - 3 < 0, \quad (64)$$

so  $R > 5/3$ . At  $R = 5/3$ , the derivative of the right-hand side of Equation (63) satisfies

$$3 \frac{\partial}{\partial R} [-s + (1 + s - s^3)R + s^2(s - 1)R^2] \Big|_{R=5/3} = 7s^3 - 10s^2 + 3s + 3 > 0. \quad (65)$$

The last polynomial is increasing for  $s \geq 1$ . Since the coefficient of  $R^2$  is nonnegative, the right-hand side of Equation (63) is therefore increasing for  $R \geq 5/3$ . At  $R = 5/3$  its value satisfies

$$9[-s + (1 + s - s^3)(5/3) + s^2(s - 1)(25/9)] = 10s^3 - 25s^2 + 6s + 15 > 0. \quad (66)$$

For the last sign, write  $s = 3/2 + z$ ; the expression becomes  $3/2 - 3z/2 + 20z^2 + 10z^3$ . It is at least  $3/2$  for  $-1/2 \leq z \leq 0$ , and for  $z \geq 0$  it is larger than  $3/2 - 9/320$ . Hence both possible maxima on  $[b, \chi]$  are nonpositive. Together with the binary case  $x \geq \chi$ , this proves  $A - R \cdot O \leq 0$  for every reduced configuration. Restoring the one-job terms and rounding  $\lfloor bn \rfloor$  contributes only  $O_u(n)$ .  $\square$

We can now prove the lemma.

*Proof of Lemma 3.4.* By Claim 3.5, the displayed value of  $b$  is a valid algorithm parameter throughout  $[u_2^{\det}, u_3^{\det}]$ . The guarantees in Claims 3.6 and 3.7 cover this interval and give Equation (47) with  $R = R_{\text{quad}}(u)$ .  $\square$

At  $u = u_3^{\det}$ ,  $b = 0$ . For  $u_3^{\det} \leq u \leq u_4^{\det}$ , the zero-prefix specialization gives the ratio  $1 + 1/\sqrt{u - 1}$ .

**Lemma 3.8** (Zero-prefix guarantee). *Fix  $u_3^{\det} \leq u \leq u_4^{\det}$  and set  $b = 0$  in algorithm 8. Then*

$$\text{ALG} \leq \left(1 + \frac{1}{\sqrt{u - 1}}\right) \cdot \text{OPT} + O_u(n). \quad (67)$$

*Proof.* Here  $b = 0$ , so there is no forced prefix, and the threshold is one. The coordinatewise argument from claim 3.7 reduces every input to four types: deferred jobs with  $p = u$ , deferred jobs with  $p = 1^+$ , immediate jobs with  $p = 1$ , and zero jobs. Divide their class sizes

by  $n$  and denote the first three resulting fractions by  $d, t, m$ , respectively; put  $s = u - 1$ . Thus  $d, t, m \geq 0$  and  $d + t + m \leq 1$ . The leading online and offline coefficients are

$$A = \frac{1}{2} + d + t + m - \frac{m^2}{2} + \frac{sd^2}{2}, \quad O = \frac{1}{2} + \frac{(d + t + m)^2}{2} + \frac{(s - 1)d^2}{2}. \quad (68)$$

As before, replacing an immediate value-one job by a deferred value-1<sup>+</sup> job preserves  $O$  in the limit and increases  $A$ . We may therefore take  $m = 0$  and write  $y = d + t$  for the total positive fraction. For fixed  $y$ , both  $A$  and  $O$  are affine functions of  $d^2$ , so their ratio is monotone in  $d^2$ . Its maximum is attained at one of the two extreme compositions:

$$\frac{1 + 2y}{1 + y^2} \quad (d = 0), \quad 1 + \frac{2y}{1 + sy^2} \quad (d = y). \quad (69)$$

The first case has only value-1<sup>+</sup> positive jobs; the second has only positive jobs with  $p = u$ . For  $d = y$ , the desired bound is equivalent to  $(\sqrt{sy} - 1)^2 \geq 0$ . For  $d = 0$ , put  $r = 1/\sqrt{s}$ . The desired inequality is

$$(1 + r)y^2 - 2y + r \geq 0.$$

On the range of the lemma,  $s = u - 1 \leq u_4^{\det} - 1 = \varphi^2$ , and hence  $r(1 + r) \geq 1$ . The quadratic on the left has nonpositive discriminant and is therefore nonnegative for every  $y$ . Thus both extreme compositions are bounded by  $1 + 1/\sqrt{u - 1}$ , as required. Binary instances attain this value.  $\square$

### 3.1.3 Adaptive thresholds for the final two parameter intervals

The final algorithm changes its threshold as work accumulates. We prove its guarantee on  $[u_4^{\det}, u_5^{\det}]$  and its uniform plateau guarantee for  $u \geq u_5^{\det}$ . In the proof, a revealed value  $p_i = u$  must be treated separately from a smaller value placed in the final queue, because the two have different pair contributions to the offline optimum. Throughout this subsection,  $R = 1 + c$ , and we retain  $\varphi$ ,  $u_5^{\det}$ , and  $r$  from Equations (37) and (42).

For every  $c > 0$  define the history-dependent threshold

$$a_c(y) = \begin{cases} 1, & y \leq -1, \\ 1 + \frac{1}{2} \ln\left(\frac{c + 2}{c - 2y}\right), & -1 \leq y \leq 0. \end{cases} \quad (70)$$

The following single algorithm covers both parameter regimes  $u_4^{\det} \leq u \leq u_5^{\det}$  and  $u \geq u_5^{\det}$ . It does not use raw execution, so its schedule does not depend on  $u$ .

---

#### Algorithm 9 ADAPTIVETHRESHOLD( $J, c$ )

---

**Input:** jobs  $J$  and parameter  $c > 0$ .

- 1: Fix the test order  $1, \dots, n$ .
  - 2: Set  $N \leftarrow 0$ ,  $N_{\text{def}} \leftarrow 0$ , and  $Q \leftarrow \emptyset$ .
  - 3: **For**  $i = 1, \dots, n$  **do**:
  - 4:   Set  $x \leftarrow n - i + 1$  and  $y \leftarrow (N_{\text{def}} - (1 + c)N)/x$ .
  - 5:   Set  $a \leftarrow a_c(y)$  according to Equation (70).
  - 6:   Test job  $i$  for one unit and observe  $p_i$ .
  - 7:   **If**  $p_i \leq a$ , process job  $i$  immediately.
  - 8:   **Otherwise**, add job  $i$  to  $Q$  and set  $N_{\text{def}} \leftarrow N_{\text{def}} + 1$ .
  - 9:   **If**  $p_i > 0$ , set  $N \leftarrow N + 1$ .
  - 10: Process the jobs of  $Q$  in nondecreasing order of their revealed processing times.
-

For  $c \in [r, 1/\varphi]$ , let  $m = m(c) \in [0, 1/\varphi]$  and  $u = u(c)$  be determined by the  $(c, m)$ -parametrization in Equation (43). The right-hand side of the first equation is strictly increasing in  $c$ , as is the left-hand side in  $m$ . Consequently  $m(c)$  is increasing and  $u(c)$  is decreasing. At the two boundary values of the parameter  $c$ , the parametrization gives

$$c = \frac{1}{\varphi} : (m, u) = \left(\frac{1}{\varphi}, u_4^{\det}\right), \quad c = r : (m, u) = (0, u_5^{\det}).$$

**Theorem 3.9** (Middle and high revealing upper bounds). *For every finite  $u \in [u_4^{\det}, \infty)$ , the formally specified algorithm ADAPTIVETHRESHOLD from algorithm 9 satisfies*

$$\text{ALG} \leq \begin{cases} (1+c) \cdot \text{OPT} + O_u(n), & u_4^{\det} \leq u \leq u_5^{\det}, \quad c \text{ given by (43)}, \\ (1+r) \cdot \text{OPT} + O(n), & u \geq u_5^{\det}. \end{cases}$$

The constant in the last  $O(n)$  is absolute and uniform over  $u \in [u_5^{\det}, \infty)$ . In particular these are upper bounds on the deterministic size-asymptotic competitive ratio.

We prove the theorem through six claims. The first two rewrite  $\text{ALG} - R \cdot \text{OPT}$  as a sum of contributions from ordered pairs of jobs plus  $O_u(n)$  one-job terms, reduce the processing times to five boundary values, and assign the resulting pair contributions to local charges  $\ell_i$ . The next three claims construct and calibrate a nonnegative potential  $W$  such that, for every endpoint type  $T$  with state-update direction  $v_T$ ,

$$\ell_T + \nabla W \cdot v_T \leq 0.$$

Here  $\nabla W \cdot v_T$  is the first-order change obtained by differentiating  $W$  in the direction of that state update. The sixth claim uses a Taylor estimate to compare this directional derivative with the actual potential change caused by one job, and then telescopes the resulting finite inequalities.

**Common setup.** Fix a finite raw-execution cap  $u \geq u_4^{\det}$  and put  $R = 1 + c$ . Use ADAPTIVETHRESHOLD( $J, c$ ) from algorithm 9. When  $u \geq u_5^{\det}$ , set  $c = r$ . For the analysis, immediately before a test let  $x$  be the number of jobs not yet tested,  $N$  the number of earlier tests that revealed a positive value, and  $N_{\text{def}}$  the number of those jobs placed in the final queue. Thus

$$y = \frac{N_{\text{def}} - RN}{x} \leq 0 \tag{71}$$

and the threshold is given by Equation (70). When  $u_4^{\det} \leq u \leq u_5^{\det}$ , the parametrization Equation (43) gives  $c \geq r$ , and hence

$$a_c(y) \leq a_c(0) \leq a_r(0) = \frac{1}{r} < u - 1. \tag{72}$$

When  $u \geq u_5^{\det}$ , we set  $c = r$ , so Equation (72) holds there as well. Thus every revealed value  $p_i \in [u - 1, u]$ , for which the offline effective length has reached the offline cap  $u$ , is placed in the final queue.

The state  $y$  never increases. Indeed, the numerator in (71) changes by 0,  $-R$ , or  $-c$  after a zero, a positive job processed immediately after its test, or a positive job placed in the final queue, respectively, while  $x$  decreases. This monotonicity will allow us to allocate every pair cost when its relevant endpoint becomes known.



**Claim 3.10** (Reduction to five endpoint types). *Fix a decision transcript of ADAPTIVETHRESHOLD: for each tested job, fix whether its revealed value is zero or positive and whether the job is processed immediately or placed in the final queue. This also fixes the state and threshold before every subsequent test. Among all processing-time vectors consistent with this transcript, the supremum of the pairwise term  $\Gamma_n$  from Equation (76) is unchanged if every job is restricted to one of the five endpoint types in Equation (78). The symbols  $0^+$  and  $a_c(y)^+$  denote one-sided limits at which the fixed transcript is preserved.*

*Proof.* Write

$$\bar{p}_i = \min\{p_i, u - 1\}.$$

By Equation (2) and lemma 2.1, the clairvoyant revealing optimum is SPT on jobs of effective lengths  $1 + \bar{p}_i = \min\{1 + p_i, u\}$ . For two jobs tested in the order  $i < j$ , let

$$e_{ij} = \begin{cases} (p_i - p_j)_+, & i \text{ is processed immediately,} \\ 1 + (p_j - p_i)_+, & i \text{ is placed in the final queue and } j \text{ is processed immediately,} \\ 1, & i \text{ and } j \text{ are placed in the final queue.} \end{cases} \quad (73)$$

The first line applies whenever  $i$  is processed after its test, regardless of the action taken on  $j$ . Pairwise completion-time accounting for the online schedule gives

$$\text{ALG} = \sum_i (1 + p_i) + \sum_{i < j} (1 + \min\{p_i, p_j\} + e_{ij}), \quad (74)$$

whereas the common offline pair identity Equation (4) gives

$$\text{OPT} = \sum_i (1 + \bar{p}_i) + \sum_{i < j} (1 + \min\{\bar{p}_i, \bar{p}_j\}). \quad (75)$$

Collecting the pair contributions in  $\text{ALG} - R \cdot \text{OPT}$ , define

$$\Gamma_n = \sum_{i < j} (e_{ij} + \min\{p_i, p_j\} - R \min\{\bar{p}_i, \bar{p}_j\}). \quad (76)$$

Equations (74)–(76) yield the exact identity

$$\text{ALG} - R \cdot \text{OPT} = \Gamma_n - c \binom{n}{2} + \sum_i [(1 + p_i) - R(1 + \bar{p}_i)]. \quad (77)$$

The final sum contains one term per job, rather than one per pair, and is nonpositive. If  $p_i < u - 1$ , so that the offline cap  $u$  is inactive, its  $i$ -th summand is  $-c(1 + p_i)$ . If  $p_i \geq u - 1$ , its offline effective length is  $u$  and the summand is at most  $1 - cu \leq 0$ . Thus it is enough to control  $\Gamma_n$ .

Now fix the decision transcript described in the claim. It determines all later threshold states because these states depend only on whether each earlier value was zero or positive and whether it was processed immediately or placed in the final queue. Varying a processing value inside an interval that preserves this transcript therefore does not change any later threshold. On each such interval, (76) is convex in that value, so its maximum occurs at a boundary. The resulting five endpoint types are

| type | value      | action                    |
|------|------------|---------------------------|
| $Z$  | 0          | process after the test    |
| $E$  | $0^+$      | process after the test    |
| $M$  | $a_c(y)$   | process after the test    |
| $Q$  | $a_c(y)^+$ | place in the final queue  |
| $U$  | $u$        | place in the final queue. |

(78)

Here  $0^+$  means a positive value tending to zero, and  $a_c(y)^+$  means a value tending to the current threshold from above. The types  $E$  and  $Q$  are kept distinct from  $Z$  and  $M$ , respectively, because approaching either boundary from the other side produces a different state update or action. For a job processed after its test, the positive interval has endpoints  $0^+$  and  $a_c(y)$ . If a value  $p_i < u - 1$  is placed in the final queue, its interval has endpoints  $a_c(y)^+$  and  $u - 1$ . On  $[u - 1, u]$  the offline contribution is constant and the online contribution is nondecreasing, so  $u$  is worst. Thus the intermediate value  $u - 1$  can be moved further to  $u$ . This proves the claimed reduction without changing any later threshold decision.  $\square$

**Claim 3.11** (Local pair allocation). *Assign every term of  $\Gamma_n$  for a pair  $i < j$  to the later endpoint  $j$ . The resulting total charge is at most the sum of the local quantities  $\ell_i$  defined below. To express them, distinguish earlier endpoints of type  $E$  from the positive endpoint types  $M, Q, U$ . Let*

$$P = \#\{\text{earlier } M, Q, U\}, \quad E = \#\{\text{earlier } E\}, \quad N_{\text{def}} = \#\{\text{earlier } Q, U\},$$

and let  $K$  be the number of earlier endpoints of type  $U$ . Let  $I, d$  be the numbers of earlier endpoints of types  $M, Q$ , respectively, and let  $A_I, A_D$  be the corresponding sums of their processing values. Thus  $P = I + d + K$  and  $N_{\text{def}} = d + K$ .

For a current endpoint of type  $Z, E, M$ , or  $Q$ , with  $a = a_c(y)$ , the allocated charges are bounded by

$$\ell_Z = \ell_E = N_{\text{def}}, \quad \ell_M = N_{\text{def}} + a(x + N_{\text{def}} - RP), \quad \ell_Q = N_{\text{def}} + a(N_{\text{def}} - RP). \quad (79)$$

For a current endpoint  $U$ , representing  $p = u$ , direct pair counting gives the exact charge

$$\begin{aligned} \ell_U &= N_{\text{def}} + A_D + uK - R(A_I + A_D + (u - 1)K) \\ &= d - RA_I - cA_D + Kh_U, \quad h_U = 1 + u - R(u - 1). \end{aligned} \quad (80)$$

*Proof.* To verify these formulas, pair the current job once with each earlier endpoint type and use Equation (76). An earlier job processed after its test was already charged for the delay that its processing causes when it appeared. Hence a current endpoint  $U$ , whose value is  $u$ , contributes only  $-Rp$  against such an earlier job. Against an earlier endpoint  $Q$  of value  $p$  it contributes  $p - Rp = -cp$ , and against an earlier endpoint  $U$  it contributes  $h_U$ . Summing over the five endpoint types gives

$$\Gamma_n \leq \sum_i \ell_i; \quad (81)$$

the difference is exactly the sum of nonnegative extra delays by which the displayed  $M$  charges overestimate the true pair contributions. Formula (80), rather than a substitution  $p = u$  into  $\ell_Q$ , is essential before the  $U$ -endpoints have been put into a prefix.

Threshold monotonicity gives  $A_I \geq aI$  and  $A_D \geq ad$ . Comparing (80) with the hypothetical  $Q$ -charge at the same state gives the exact identity

$$\begin{aligned} \ell_U - \ell_Q &= R(aI - A_I) + c(ad - A_D) + K[1 - c(u - 1 - a)] \\ &\leq K[1 - c(u - 1 - a)]. \end{aligned} \quad (82)$$

$\square$

**Claim 3.12** (Base potential for types  $Z, E, M, Q$ ). *There is a nonnegative potential  $W_{\text{base}}$  for which the directional-derivative bound*

$$\ell_T + \nabla W_{\text{base}} \cdot v_T \leq 0$$

*holds for every  $T \in \{Z, E, M, Q\}$ . The type  $U$ , representing  $p = u$ , is handled separately in claim 3.13.*

*Proof.* Define

$$\eta = \frac{N_{\text{def}} - RP}{x}, \quad b = \frac{E}{x}, \quad y = \eta - Rb. \quad (83)$$

Call  $-1 \leq y \leq 0$  Region I, and in this region put

$$f_c(y) = \frac{c+2}{4} + \frac{c-2y}{4} \left( \ln \frac{c-2y}{c+2} - 1 \right), \quad (84)$$

$$h_c(y) = a_c(y)(1+y),$$

$$G_c(y, b) = f_c(y) + bh_c(y) + \frac{R}{2}b^2. \quad (85)$$

Call  $y \leq -1$  Region II, and in this region set instead

$$G_c(y, b) = g_c(\eta), \quad g_c(\eta) = \frac{(1+\eta)_+^2}{2R}. \quad (86)$$

The two definitions are  $C^1$  across  $y = -1$ . Indeed, feasibility implies  $0 \leq b \leq 1/R$  there, and both sides have value  $Rb^2/2$  and derivatives

$$(G_y, G_b) = (b, Rb).$$

They are also nonnegative:  $f_c(-1) = 0$ ,  $f'_c = a_c - 1 \geq 0$ , and  $h_c, b, g_c \geq 0$ .

Define the base potential

$$W_{\text{base}}(x, P, E, N_{\text{def}}) = xN_{\text{def}} + x^2G_c(y, b). \quad (87)$$

In the unnormalized state vector  $(x, P, E, N_{\text{def}}, K)$ , revealing one endpoint of type  $T$  changes the coordinates in the direction  $v_T$  shown below:

|       | $x$ | $P$ | $E$ | $N_{\text{def}}$ | $K$ |
|-------|-----|-----|-----|------------------|-----|
| $v_Z$ | -1  | 0   | 0   | 0                | 0   |
| $v_E$ | -1  | 0   | 1   | 0                | 0   |
| $v_M$ | -1  | 1   | 0   | 0                | 0   |
| $v_Q$ | -1  | 1   | 0   | 1                | 0   |
| $v_U$ | -1  | 1   | 0   | 1                | 1.  |

(88)

Let  $J_T = \ell_T + \nabla W_{\text{base}} \cdot v_T$ . This is the local charge plus the directional derivative of the potential; we must show  $J_T \leq 0$ . For the moment  $T \in \{Z, E, M, Q\}$ . In Region I, direct differentiation and the identities

$$\begin{aligned} -2f_c + (y-R)f'_c + a_c(1+y) &= 0, \\ 1 - 2f_c + (y-c)f'_c + a_c y &= 0 \end{aligned} \quad (89)$$

give

$$\frac{J_Z}{x} = (-2f_c + yf'_c) + b(-h_c + yh'_c),$$

$$\begin{aligned}
\frac{J_E}{x} &= b[-h_c + (y - R)h'_c + R], \\
\frac{J_M}{x} &= b[-h_c + (y - R)h'_c + a_c R], \\
\frac{J_Q}{x} &= b[-h_c + (y - c)h'_c + a_c R].
\end{aligned} \tag{90}$$

All four quantities are nonpositive. For the first one,

$$-2f_c + yf'_c = a_c(c - y) - R \leq 0; \tag{91}$$

the right-hand side is zero at  $y = -1$  and is nonincreasing because  $a'_c(c - y) - a_c \leq 1 - a_c \leq 0$ . Also  $h_c, h'_c \geq 0$ . For the remaining three drifts, observe that

$$h_c + (c - y)h'_c = a_c R + (c - y)(1 + y)a'_c \geq a_c R. \tag{92}$$

The  $Q$ -bracket in (90) is therefore nonpositive; the  $M$ -bracket is the  $Q$ -bracket minus  $h'_c$ , and the  $E$ -bracket is the  $M$ -bracket minus  $R(a_c - 1)$ .

In Region II, substituting  $W = x^2 g_c(\eta)$  into the definitions of the four drifts gives

$$\begin{aligned}
J_Z/x &= J_E/x = -2g_c + \eta g'_c, \\
J_M/x &= -2g_c + (\eta - R)g'_c + 1 + \eta, \\
J_Q/x &= 1 - 2g_c + (\eta - c)g'_c + \eta.
\end{aligned} \tag{93}$$

For  $-1 \leq \eta \leq 0$ , substitution of  $g'_c = (1 + \eta)/R$  makes these values  $-(1 + \eta)/R$ ,  $-(1 + \eta)/R$ , and 0, respectively. For  $\eta \leq -1$  their signs are immediate from  $g_c = g'_c = 0$ . Hence  $J_T \leq 0$  for  $T \in \{Z, E, M, Q\}$ , as claimed.  $\square$

**Claim 3.13** (Reserve potential for jobs with  $p = u$ ). *There is a nonnegative reserve term  $W_{\text{cap}}$ , depending on the number  $K$  of earlier  $U$  endpoints, such that the full potential  $W = W_{\text{base}} + W_{\text{cap}}$  satisfies*

$$\ell_T + \nabla W \cdot v_T \leq 0 \quad (T \in \{Z, E, M, Q, U\}).$$

*Proof.* Define

$$Z(c) = 2 + \frac{1}{c} + \frac{1}{2} \ln\left(1 + \frac{2}{c}\right), \quad \delta = Z(c) - u. \tag{94}$$

For  $u_4^{\text{det}} \leq u \leq u_5^{\text{det}}$ , with  $(c, m)$  chosen by Equation (43), the definition of  $\delta$  gives

$$\delta = \text{artanh } m. \tag{95}$$

For  $0 \leq t \leq m$ , set

$$\beta(t) = ct[\delta - \text{artanh } t], \quad \mathcal{V}(t) = \int_t^m \beta(s) ds, \tag{96}$$

and extend  $\mathcal{V}$  by zero for  $t \geq m$ . Since  $\beta(m) = 0$ , this extension is  $C^1$ . With

$$q = \frac{K}{x}, \quad \mu = \frac{q}{1 + q}, \quad \mathcal{H}(q) = (1 + q)^2 \mathcal{V}(\mu), \tag{97}$$

define the full potential

$$W = xN_{\text{def}} + x^2(G_c(y, b) + \mathcal{H}(q)). \tag{98}$$

Thus  $W_{\text{cap}} = x^2 \mathcal{H}(q)$ . Both terms in  $W$  are nonnegative.

For an endpoint of type  $Z, E, M$ , or  $Q$ , the value of  $K$  is fixed while  $x$  decreases, so the reserve term contributes, after division by  $x$ ,

$$L_0(q) = -2\mathcal{H}(q) + q\mathcal{H}'(q). \quad (99)$$

An endpoint  $U$  also increments  $K$ , and its contribution is  $L_0 + \mathcal{H}'$ . On the range  $\mu \leq m$ , where  $\mathcal{V}$  may be nonzero, differentiation of (97) gives

$$\mathcal{H}' = 2(1+q)\mathcal{V} - \beta(\mu), \quad L_0 = -2(1+q)\mathcal{V} - q\beta(\mu) \leq 0. \quad (100)$$

Thus the reserve term can only decrease the left-hand side of the directional-derivative bound for each of  $Z, E, M, Q$ .

For a current endpoint  $U$ , feasibility  $N_{\text{def}} \leq P$  and  $P \geq K$  gives

$$y = \frac{N_{\text{def}} - R(P + E)}{x} \leq -\frac{cK}{x} = -cq. \quad (101)$$

While  $\mu \leq m$ , we have  $q \leq m/(1-m) \leq \varphi$  and hence  $cq \leq 1$ . Monotonicity of  $a_c$ , together with (82), yields

$$\frac{\ell_U - \ell_Q}{x} \leq cq \left[ \delta - \frac{1}{2} \ln(1+2q) \right] =: B(q). \quad (102)$$

The change of variables in (97) satisfies

$$\text{artanh } \mu = \frac{1}{2} \ln(1+2q), \quad (1+q)\beta(\mu) = B(q). \quad (103)$$

Consequently the extra positive charge of an endpoint of type  $U$  is cancelled exactly by the directional derivative of the reserve term:

$$L_0 + \mathcal{H}' + B(q) = 0 \quad (\mu \leq m). \quad (104)$$

When  $\mu \geq m$ , the reserve term vanishes. At  $q_* = m/(1-m)$ , the bracket in (82), evaluated at the largest possible threshold  $a_c(-cq_*)$ , is zero by (95) and (103). For  $q \geq q_*$ , (101) only decreases the threshold, so that bracket is nonpositive. The directional-derivative bound for type  $U$  therefore holds for every state and for arbitrary interleavings of type  $U$  with the other four types.  $\square$

**Claim 3.14** (Initial calibration). *The full potential starts with exactly the amount needed to cancel the constant pairwise term:  $W_{\text{initial}} = cn^2/2$ .*

*Proof.* Initially  $y = b = q = 0$ , and

$$f_c(0) = \frac{1}{2} - \frac{c}{4} \ln\left(1 + \frac{2}{c}\right). \quad (105)$$

Elementary integration in (96) gives

$$\mathcal{V}(0) = \frac{c}{2}(\delta - m). \quad (106)$$

Indeed,

$$\int_0^m t \text{artanh } t \, dt = \frac{(m^2 - 1) \text{artanh } m + m}{2}.$$

Using (43) and (95), we obtain the exact calibration

$$f_c(0) + \mathcal{H}(0) = f_c(0) + \mathcal{V}(0) = \frac{c}{2}. \quad (107)$$

Thus  $W_{\text{initial}} = cn^2/2$ .  $\square$

**Claim 3.15** (Finite transitions and telescoping). *Let  $z_i$  be the state before job  $i$  is revealed, write  $W_i = W(z_i)$ , and let  $T_i$  be its endpoint type. For  $u_4^{\text{det}} \leq u \leq u_5^{\text{det}}$ , each actual transition satisfies*

$$W_{i+1} - W_i = \nabla W(z_i) \cdot v_{T_i} + O_u(1).$$

Together with claims 3.12 and 3.13, this gives

$$\text{ALG} \leq (1 + c) \cdot \text{OPT} + O_u(n). \quad (108)$$

For every finite  $u \geq u_5^{\text{det}}$ , there is an absolute constant  $B$ , independent of  $u$ , such that

$$\text{ALG} \leq (1 + r) \cdot \text{OPT} + Bn. \quad (109)$$

*Proof.* We first verify the needed regularity on feasible states. In Region I,  $y \geq -1$  implies

$$-xy = R(P + E) - N_{\text{def}} = cP + (P - N_{\text{def}}) + RE \leq x. \quad (110)$$

All terms in the middle expression are nonnegative. Hence  $P/x, N_{\text{def}}/x, q \leq 1/c$  and  $b \leq 1/R$ . The normalized arguments of  $G_c$  in (87) therefore stay in a bounded set, and all derivatives needed for the Taylor estimate of one transition are bounded. In Region II the unnormalized base potential is simply

$$xN_{\text{def}} + \frac{(x + N_{\text{def}} - RP)_+^2}{2R}, \quad (111)$$

which has bounded one-sided second derivatives. The calculation following Equation (86) shows that the two pieces are  $C^1$  at  $y = -1$ , and the positive-part square is  $C^1$  at  $\eta = -1$ .

For the additional term  $\mathcal{R}(x, K) = x^2 \mathcal{H}(K/x)$ , whenever  $0 \leq q \leq q_*$  one has bounded  $\mathcal{H}''$ , and

$$\mathcal{R}_{xx} = 2\mathcal{H} - 2q\mathcal{H}' + q^2\mathcal{H}'', \quad \mathcal{R}_{xK} = \mathcal{H}' - q\mathcal{H}'', \quad \mathcal{R}_{KK} = \mathcal{H}''. \quad (112)$$

For  $q \geq q_*$ ,  $\mathcal{R} = 0$ ; moreover  $\mathcal{H}(q_*) = \mathcal{H}'(q_*) = 0$ . Thus the join is  $C^1$  with bounded one-sided Hessians. At  $x = 0$ , set  $\mathcal{R} = 0$ : for  $K > 0$  it is already locally zero, while  $\mathcal{R}(\theta x, \theta K) = \theta^2 \mathcal{R}(x, K)$  gives zero gradient at  $(x, K) = (0, 0)$ . Altogether  $W$  is continuously differentiable with a Lipschitz gradient on all states that the algorithm can reach. For  $u_4^{\text{det}} \leq u \leq u_5^{\text{det}}$ , its regularity constant may depend on the fixed value of  $u$ . When  $c = r$  and  $m = 0$ , however, the additional term is identically zero and the base potential depends only on the absolute constant  $r$ ; its regularity constant is therefore uniform over all  $u \geq u_5^{\text{det}}$ . This includes the last transition from  $x = 1$  to  $x = 0$ .

It follows that each transition caused by one job has Taylor remainder

$$\ell_i + W_{i+1} - W_i \leq O_u(1). \quad (113)$$

The endpoint  $E = 0^+$  is interpreted one-sidedly. For a fixed sequence of endpoint types, replace all  $E$  coordinates by positive values  $\varepsilon$ . Its state trajectory is unchanged, and the exact finite pair objective, being a finite sum of affine and minimum terms, converges as  $\varepsilon \downarrow 0$ . Equivalently, retain an  $O(\varepsilon n^2)$  error and take this limit for each fixed  $n$ . Therefore the directional-derivative bound for the formal type  $E$  transfers to actual input vectors without an asymptotic loss.

Summing (113), using  $W \geq 0$ , and applying (107) gives

$$\sum_i \ell_i \leq \frac{c}{2} n^2 + O_u(n). \quad (114)$$

Together with (77) and (81), this yields

$$\text{ALG} - R \cdot \text{OPT} \leq -c \binom{n}{2} + \frac{c}{2} n^2 + O_u(n) = O_u(n). \quad (115)$$

At  $u = u_5^{\det}$ , one has  $c = r$ ,  $m = 0$ , and  $Z(r) = u_5^{\det}$ . The reserve term for type  $U$  is identically zero, while (107) remains valid. If  $u$  is increased above  $u_5^{\det}$ , the bracket controlling an endpoint of type  $U$ ,  $1 - r(u - 1 - a_r(y))$  decreases, and the contribution of an individual job of type  $U$  in (77) also decreases.

Here is the promised uniform finite calculation. The base potential and the set of states reachable by the algorithm contain no  $u$ , so there is one constant  $C_{\text{step}}$ , depending only on  $r$ , for which, whenever  $u \geq u_5^{\det}$ , every transition, whether its endpoint is  $U$  or not, satisfies

$$\ell_i + W_{i+1} - W_i \leq C_{\text{step}}.$$

Because  $W_0 = rn^2/2$  and  $W_n = 0$ , telescoping gives

$$\sum_i \ell_i \leq \frac{r}{2} n^2 + C_{\text{step}} n. \quad (116)$$

In the final sum over individual jobs in Equation (77), every endpoint other than  $U$  has  $p_i < u - 1$  and contributes  $-r(1 + p_i)$ . The endpoint  $U$  has  $p_i = u$  and contributes at most  $1 - ru \leq 0$ . Hence this sum is nonpositive uniformly on  $[u_5^{\det}, \infty)$ . Combining Equations (77), (81) and (116) now yields

$$\text{ALG} - (1 + r) \cdot \text{OPT} \leq -r \binom{n}{2} + \frac{r}{2} n^2 + C_{\text{step}} n = \left( C_{\text{step}} + \frac{r}{2} \right) n. \quad (117)$$

Thus, with  $B = C_{\text{step}} + r/2$ ,

$$\text{ALG} \leq (1 + r) \cdot \text{OPT} + Bn \quad \text{for every finite } u \in [u_5^{\det}, \infty), \quad (118)$$

and  $B$  is independent of  $u$ . The estimate is genuinely uniform rather than the result of sending a parameter-dependent remainder to infinity. This proves the claim.  $\square$

We can now prove the theorem.

*Proof of Theorem 3.9.* Claims 3.10 and 3.11 reduce the competitive excess to the local charges. The potentials in claims 3.12 and 3.13 satisfy the required directional-derivative bounds, and claim 3.14 gives their initial value. Claim 3.15 then yields both displayed finite bounds.

Finally,  $u \geq u_4^{\det} > 1$ , so every effective offline length is at least one and  $\text{OPT} \geq n(n+1)/2$ . Hence the additive terms vanish in the size-asymptotic ratios, proving the final assertion.  $\square$

### 3.2 Lower bounds

The lower bounds use three adversarial constructions. A hidden binary stopping game covers  $0 < u \leq u_4^{\det}$ . For  $u_4^{\det} \leq u \leq u_5^{\det}$ , we prepend a block of jobs with  $p_j = u$  to a scaled harmonic construction. Finally, for  $u \geq u_5^{\det}$ , we use the obligatory-testing harmonic instances with  $1 + p_j < u$  for every job. On these instances the offline cap  $u$  is inactive, and the transfer lemma preserves the obligatory-testing lower bound.

### 3.2.1 The binary stopping game and its piecewise lower bound

Binary instances  $p_j \in \{0, u\}$  give the lower bounds 1 for  $0 < u \leq u_1^{\det}$ ,  $u$  for  $u_1^{\det} \leq u \leq u_2^{\det}$ ,  $R_{\text{quad}}(u)$  for  $u_2^{\det} \leq u \leq u_3^{\det}$ , and  $1 + 1/\sqrt{u-1}$  for  $u_3^{\det} \leq u \leq u_4^{\det}$ . The stopping point must be hidden from the algorithm; announcing it in advance gives a strictly weaker lower bound. In this subsection, a job with  $p_j = 0$  is a *zero job*, and one with  $p_j = u$  is a *long job*.

**Lemma 3.16** (Hidden binary stopping with raw execution). *Fix  $u > 1$ , a target  $R \leq u$ , and a stopping fraction  $\alpha \in (0, 1)$ . Against a deterministic algorithm, there is a legal binary adversary whose leading normalized excess  $2(\text{ALG} - R \cdot \text{OPT})/n^2$  at its stopping time is, up to  $O_u(1/n)$ ,*

$$(u - R)(1 - \sigma^2) + \sigma^2 f_{u,R}(y, b), \quad (119)$$

where  $0 \leq b \leq y \leq 1$  and

$$0 \leq y - \alpha < \frac{1}{n - v}. \quad (120)$$

Moreover,

$$f_{u,R}(y, b) = 1 - R + 2y + (u - 1)(1 - R)y^2 + b^2 + 2b(u - 1 - uy). \quad (121)$$

Here  $\sigma \in [0, 1]$  is the fraction of jobs not already executed raw,  $y$  is the fraction of those jobs revealed to be long, and  $b$  is the fraction both revealed long and already completed. Consequently, if

$$\min_{0 \leq b \leq \alpha} f_{u,R}(\alpha, b) \geq 0,$$

then the adversary gives ratio at least  $R - O_u(1/n)$ .

*Proof.* Until the stopping time, answer every test of a fresh job with  $p = u$ ; if the algorithm instead runs a fresh job raw, assign that job the hidden value zero. Let  $v$  be the number of raw first touches and  $L$  the number of tests, all of which have revealed long jobs. Stop immediately after the first touch for which

$$L \geq \alpha(n - v). \quad (122)$$

All untouched jobs are then assigned value zero. Only for the purpose of lower-bounding the remaining cost, we grant the algorithm this future information and allow an optimal continuation; in the actual interaction, values are still revealed only by tests. If the line is never crossed, every job was run raw: if even one job had been tested, then after the last first touch the tested fraction would be one. On the all-zero hidden instance the ratio is  $u \geq R$ .

At a crossing, let  $e$  of the  $L$  revealed long jobs already be complete, let  $d = L - e$  be tested but still pending, and let  $x = n - v - e - d$  jobs remain untouched. To obtain a lower bound on the algorithm's cost, we give it the benefit of rearranging its work into the following cheaper schedule: first the  $v$  raw completions, then the tests and processing of the  $e$  completed long jobs, then the  $d$  tests whose long jobs remain pending, then the  $x$  zero test-completions, and finally the processing of the  $d$  pending long jobs.

Here is why the rearrangement can only decrease total completion time. If a noncompleting unit test is immediately before an available length- $u$  completion while  $h$  jobs remain, the two orders contribute  $h + hu$  and  $hu + (h - 1)$ , respectively; moving the completion left saves one. Raw completions are available from time zero, and identical long jobs may be relabeled so that the  $e$  completed ones are tested first. After the switch, a zero



test-completion has length one and therefore precedes a pending operation of length  $u$ . Repeating only these explicit neighboring swaps produces the displayed relaxed schedule and respects every test-before-processing precedence constraint.

The exact costs of this relaxed schedule and of OPT are

$$A_{\text{ex}} = u \left( vn - \frac{v(v-1)}{2} \right) + (1+u) \left( e(n-v) - \frac{e(e-1)}{2} \right) + d(n-v-e) + x(d+x) - \frac{x(x-1)}{2} + u \frac{d(d+1)}{2}, \quad (123)$$

$$O_{\text{ex}} = \frac{n(n+1)}{2} + (u-1) \frac{(e+d)(e+d+1)}{2}. \quad (124)$$

Put  $\nu = v/n$ ,  $\delta = (v+e+d)/n$ , and  $\lambda = e/n$ . Twice the quadratic coefficients in Equations (123) and (124) are

$$\begin{aligned} \mathcal{A} &= 1 + 2\delta(1 - u\nu) + (u-1)\delta^2 + 2\nu(\nu + u - 2) \\ &\quad + \lambda^2 + 2\lambda(\nu + u - 1 - u\delta), \\ \mathcal{O} &= 1 + (u-1)(\delta - \nu)^2. \end{aligned}$$

Now put  $\sigma = 1 - \nu$ ,  $y = (e+d)/(n-v)$ , and  $b = e/(n-v)$ . Thus  $\sigma$  is the nonraw fraction of the original instance, while  $y$  and  $b$  are the long and already-completed fractions within those nonraw jobs. Direct expansion gives exactly Equation (119) after normalizing by  $n^2/2$ . The first-crossing overshoot in Equation (122) is less than one: a test increases  $e+d-\alpha(n-v)$  by one and a raw first touch increases it by  $\alpha$ . This proves Equation (120), and in particular  $\sigma(y - \alpha) < 1/n$ . The minimization in the lemma uses  $b \leq \alpha$ , whereas the actual value only satisfies  $b \leq y$  and may exceed  $\alpha$  by the one-job overshoot. Put  $\bar{b} = \min\{b, \alpha\}$ . Then  $0 \leq b - \bar{b} \leq y - \alpha$ . Since  $f_{u,R}$  is Lipschitz on the unit square,

$$\sigma^2 f_{u,R}(y, b) \geq \sigma^2 f_{u,R}(\alpha, \bar{b}) - O_u(1/n). \quad (125)$$

Thus the stated minimum over  $0 \leq \bar{b} \leq \alpha$  suffices uniformly even when  $n-v$  is small. The omitted one-job terms are  $O_u(n)$  in the unnormalized costs. Finally, freeze every revealed or hidden answer on its job label. Because the algorithm is deterministic and a raw action never reveals its assigned zero, rerunning it on this fixed vector reproduces the same transcript. The adaptive description therefore yields a legal fixed hard instance.  $\square$

**Proposition 3.17** (Binary lower curve). *Every deterministic algorithm has size-asymptotic ratio at least*

$$B(u) = \begin{cases} 1, & 0 < u \leq 1, \\ u, & u_1^{\text{det}} \leq u \leq u_2^{\text{det}}, \\ R_{\text{quad}}(u), & u_2^{\text{det}} \leq u \leq u_3^{\text{det}}, \\ 1 + \frac{1}{\sqrt{u-1}}, & u \geq u_3^{\text{det}}. \end{cases} \quad (126)$$

The lower bound uses only  $p_j \in \{0, u\}$ .

We optimize the stopping lemma in three steps. First we minimize over the fraction  $b$  of revealed long jobs that the algorithm has already completed. This produces two quadratic formulas, according to whether the minimizing  $b$  is positive or zero. We then locate their transition points and choose the stopping fraction  $\alpha$  at which the relevant quadratic is largest.

**Claim 3.18** (Minimization over completed long jobs). *For fixed revealed-long fraction  $y$ , minimizing Equation (121) over the completed-long fraction  $b$  gives*

$$b_*(y) = \max\{0, uy - (u - 1)\}. \quad (127)$$

*The upper constraint  $b \leq y$  never binds, because  $uy - (u - 1) \leq y$  for  $y \leq 1$ . When  $uy - (u - 1) > 0$ , the minimum equals*

$$\min_b f_{u,R}(y, b) = 1 - R - (u - 1)^2 + 2(u^2 - u + 1)y - (u^2 - u + 1 + (u - 1)R)y^2. \quad (128)$$

*and its unconstrained maximum over  $y$  occurs at*

$$\alpha = \frac{u^2 - u + 1}{u^2 - u + 1 + (u - 1)R}.$$

*This maximum is zero exactly when*

$$(1 - R - (u - 1)^2)(u^2 - u + 1 + (u - 1)R) + (u^2 - u + 1)^2 = 0. \quad (129)$$

*which is equivalent to Equation (40). When  $uy - (u - 1) \leq 0$ , the minimum equals*

$$\min_b f_{u,R}(y, b) = 1 - R + 2y + (u - 1)(1 - R)y^2. \quad (130)$$

*and its unconstrained maximum is zero for*

$$R = 1 + \frac{1}{\sqrt{u - 1}}, \quad \alpha = \frac{1}{\sqrt{u - 1}}. \quad (131)$$

*This maximizing point indeed lies in the region where  $b = 0$  if and only if  $(u - 1)^3 \geq u^2$ , with equality at  $u = u_3^{\det}$ .*

*Proof.* The part of  $f_{u,R}(y, b)$  that depends on  $b$  is  $b^2 + 2b(u - 1 - uy)$ , whose unconstrained minimizer is  $uy - (u - 1)$ . Taking the maximum with zero gives Equation (127); its upper bound follows from  $uy - (u - 1) \leq y$ . Substitution gives the two displayed quadratics. Differentiating each concave quadratic in  $y$  gives the stated maximizing value of  $\alpha$ . Substitution of that value gives Equation (129) in the positive- $b$  case and Equation (131) in the zero- $b$  case. Expanding the former gives Equation (40); substituting the latter value of  $\alpha$  into  $u\alpha - (u - 1) \leq 0$  gives  $(u - 1)^3 \geq u^2$ .  $\square$

**Claim 3.19** (The transition from the ratio  $u$ ). *For  $R = u$ , the maximum in Equation (128) is nonnegative exactly while*

$$[u(u - 1)]^2 - u(u - 1) - 1 \leq 0, \quad (132)$$

*whose positive equality is  $u = u_2^{\det}$ .*

*Proof.* Substitute  $R = u$  and the maximizing value of  $\alpha$  from claim 3.18 into Equation (128). After multiplication by its positive denominator, nonnegativity is equivalent to the displayed inequality. With  $x = u(u - 1)$ , its equality is  $x^2 - x - 1 = 0$ , so  $x = \varphi$ . Since  $u(u - 1)$  is strictly increasing for  $u > 1$ , the unique positive solution is

$$u = \frac{1 + \sqrt{1 + 4\varphi}}{2} = \frac{1 + \sqrt{3 + 2\sqrt{5}}}{2} = u_2^{\det}.$$

$\square$

**Claim 3.20** (Stopping fractions for the three nontrivial intervals). *For  $u_1^{\det} < u \leq u_2^{\det}$ , use  $R = u$  and the maximizing point of Equation (128). For  $u_2^{\det} \leq u \leq u_3^{\det}$ , use the positive root  $R_{\text{quad}}(u)$  and  $\alpha = (u^2 - u + 1)/(u^2 - u + 1 + (u - 1)R_{\text{quad}}(u))$ ; the zero-maximum identity makes the maximum zero. The minimizing completed-long fraction  $b$  is positive in the interior and becomes zero at  $u = u_3^{\det}$ . For  $u \geq u_3^{\det}$ , use the zero- $b$  maximizing point from Equation (131). Each choice satisfies*

$$\min_{0 \leq b \leq \alpha} f_{u,R}(\alpha, b) \geq 0.$$

*Proof.* For  $u_1^{\det} < u \leq u_2^{\det}$ , the assertion follows from claim 3.19. For  $u_2^{\det} \leq u \leq u_3^{\det}$ , the defining equation for  $R_{\text{quad}}(u)$  is the zero-maximum identity in claim 3.18; the minimizing completed-long fraction is positive in the interior and becomes zero at  $u = u_3^{\det}$ . For  $u \geq u_3^{\det}$ , the zero- $b$  formula and its feasibility are exactly Equation (131) and the final assertion of claim 3.18.  $\square$

We can now prove the proposition.

*Proof of Proposition 3.17.* For  $u \leq 1$ , the lower bound  $R_{\text{RO}}^{\det}(u) \geq 1$  is immediate. For  $u > 1$ , use the target ratio and stopping fraction from claim 3.20 in lemma 3.16, and let the number of jobs tend to infinity. The recording step in that lemma converts every adaptive interaction into a fixed binary instance. This proves all four formulas in Equation (126).  $\square$

### 3.2.2 The harmonic construction for short jobs

This subsection develops the harmonic construction used for the lower bounds on  $u_4^{\det} \leq u \leq u_5^{\det}$  and on  $u \geq u_5^{\det}$ . Its largest processing time will be below two. Consequently, whenever the construction is later used with a raw-execution cap  $u > 3$ , every job satisfies  $1 + p_j < u$ , so the offline cap  $u$  is inactive. Its notation is local to this subsection. We first record its extremal specialization and then extract the scaled form used when  $u_4^{\det} \leq u \leq u_5^{\det}$ . The construction has many equally large groups of positive jobs, revealed from longest to shortest, followed by one large group of zero jobs. The only design choice is the gap between two consecutive positive processing times. Choosing these gaps harmonically will make all decisions of the online algorithm disappear from the leading term.

**Theorem 3.21** (Extremal harmonic core). *For every deterministic online algorithm  $\mathcal{B}$  and every  $\varepsilon > 0$ , there are arbitrarily large fixed instances  $I$  with unit tests and rational processing times such that*

$$\text{ALG}_{\mathcal{B}}(I) \geq (R_{\text{OT}}^{\det} - \varepsilon) \cdot \text{OPT}(I).$$

We prove the theorem through five claims. They establish, in order, that the adaptive reveal order defines a fixed input, that a shortest-first relaxation lower-bounds every phase, that this relaxation gives an explicit finite accounting formula, that harmonic processing-time gaps remove all algorithm-dependent terms, and that the resulting one-variable limit is maximized at  $R_{\text{OT}}^{\det}$ .

**Common construction.** Fix an integer  $K$ , a rational number  $\xi > 0$ , and a rational parameter  $\gamma \in (0, 1)$ ; one may keep  $\gamma = 1/2$  throughout. For a large scaling integer  $H$ , the instance will contain  $H$  jobs of each of  $K$  positive types  $0, 1, \dots, K - 1$  and  $\xi H$  zero jobs. We choose  $H$  to clear all denominators.

The adversary assigns processing times according to the order in which tests are started. The first  $H$  tested jobs receive processing time  $p_0$ , the next  $H$  receive  $p_1$ , and so on; after the  $K$  positive blocks, every remaining job receives processing time zero. Thus

$$p_0 > p_1 > \cdots > p_{K-1} > 1,$$

so the algorithm sees the positive types from longest to shortest and learns about the zero jobs only at the end.

**Claim 3.22** (The reveal order defines a fixed input). *For every deterministic algorithm, assigning each answer produced by this reveal order to the label of the tested job gives a fixed input on which the algorithm repeats the same tests, answers, and completion decisions.*

*Proof.* This adaptive description is only a convenient way to construct the input. After running the interaction against a fixed deterministic algorithm, assign to every job label the value revealed when that label was tested. Rerunning the algorithm on this fixed assignment produces exactly the same transcript. If the algorithm never tests or completes some job, its cost is infinite and the lower bound is immediate; otherwise every job label is recorded. Hence it is enough to lower-bound the cost under this adaptive reveal order.  $\square$

**Claim 3.23** (A shortest-first lower bound in each phase). *Let  $T_\ell$  be the start of the first test in positive block  $\ell$ , and let  $T_K$  be the start of the first test in the zero block. Phase  $\ell$  contains the completions in  $(T_\ell, T_{\ell+1}]$ ; a completion exactly at  $T_\ell$  belongs to the preceding phase. In this construction, the mass of a group is its number of jobs divided by  $H$ . For group masses  $q_1, \dots, q_m$  and remaining lengths  $v_1 \leq \dots \leq v_m$ , define*

$$\mathcal{S}((q_g, v_g)_{g=1}^m) = \sum_{g=1}^m \left( \frac{v_g q_g^2}{2} + q_g \sum_{h < g} v_h q_h \right). \quad (133)$$

*If groups of size  $q_g H$  finish within one phase, their relative completion cost is at least  $H^2 \mathcal{S} + O(H)$ . If*

$$p_0 - p_{K-1} < 1. \quad (134)$$

*then the nondecreasing remaining lengths in a positive phase are*

$$p_{\ell-1} < p_{\ell-2} < \cdots < p_0 < 1 + p_\ell.$$

*In the final phase, the order starts with the zero jobs of remaining length one and continues with the positive types from shortest to longest.*

*Proof.* Each  $T_\ell$  is the boundary between two nonpreemptive operations. Consequently, a previously tested job that is unfinished at  $T_\ell$  has not started processing and still needs its entire processing time.

Suppose jobs with remaining work  $v_1, \dots, v_m$  complete after some time  $T$ . If their completion order is  $\pi_1, \dots, \pi_m$ , then the  $g$ th relative completion time is at least  $\sum_{h \leq g} v_{\pi_h}$ . Summing these prefix inequalities shows that their total relative completion time is minimized by arranging the  $v_i$  in nondecreasing order. For groups of size  $q_g H$ , the within-group sums give  $v_g q_g^2 H^2 / 2 + O(H)$ , and the waiting caused by shorter groups gives the cross term in Equation (133).

In phase  $\ell$ , an unfinished job of an older type  $j < \ell$  has remaining length  $p_j$ , whereas a type- $\ell$  job completed in its own phase needs its test and processing, of total length  $1 + p_\ell$ . The inequalities in the claim follow from  $p_0 - p_{K-1} < 1$ . At  $T_K$ , each untested zero job has remaining length one, which proves the asserted final-phase order.  $\square$

**Claim 3.24** (Finite phase accounting). *For each positive type  $j$ , let*

- $s_j \in [0, 1]$  *be the mass of type- $j$  jobs completed in their own phase;*
- $d_{j,\ell} \geq 0$  *be the mass of type- $j$  jobs completed in the later phase  $\ell > j$ ; and*
- 

$$X_{j,\ell} = s_j + \sum_{h=j+1}^{\ell-1} d_{j,h} \leq 1 \quad (\ell > j)$$

*be the mass of type  $j$  completed before phase  $\ell$ . Thus  $X_{j,\ell+1}$  is the mass completed by the end of phase  $\ell$ .*

*Then the start of phase  $\ell$  satisfies*

$$\frac{T_\ell}{H} \geq \ell + \sum_{j < \ell} p_j X_{j,\ell}. \quad (135)$$

*For each phase, charge its completions their common start time from Equation (135), and charge their relative completion times using Equation (133). Do the same at  $T_K$  for the remaining positive jobs and the  $\xi H$  zero jobs. Expanding and collecting equal variables gives*

$$\begin{aligned} \frac{\text{ALG}}{H^2} &\geq C_K + \sum_{j=0}^{K-1} \left( \frac{s_j^2}{2} - \theta_j s_j \right) \\ &\quad + \sum_{j < \ell} d_{j,\ell} \left[ \ell - j - \theta_j - \sum_{j < k < \ell} (p_j - p_k) X_{k,\ell+1} \right] - O(1/H), \end{aligned} \quad (136)$$

*where  $K, \xi, \gamma$  are fixed while  $H \rightarrow \infty$ , and*

$$\theta_j = 1 - \xi(p_j - 1) - \sum_{k > j} (p_j - p_k - 1), \quad (137)$$

$$C_K = \frac{\xi^2}{2} + 2\xi K + K^2 + P_K, \quad P_K = \sum_{j=0}^{K-1} \left( j + \frac{1}{2} \right) p_j. \quad (138)$$

*Proof.* At time  $T_\ell$ , the machine has already performed the tests of the  $\ell H$  jobs in earlier positive blocks and has processed every earlier job that has completed. This gives Equation (135).

For each phase, charge its completions their common start time from Equation (135), and charge their relative completion times using claim 3.23. In phase  $\ell$ , the masses in the shortest-first relaxation are

$$d_{\ell-1,\ell}, d_{\ell-2,\ell}, \dots, d_{0,\ell}, s_\ell$$

with respective lengths

$$p_{\ell-1}, p_{\ell-2}, \dots, p_0, 1 + p_\ell.$$

Multiply their total mass by the right-hand side of Equation (135) and add the functional Equation (133). In the final phase use masses

$$\xi, 1 - X_{K-1,K}, \dots, 1 - X_{0,K}$$

and lengths  $1, p_{K-1}, \dots, p_0$ . The constant terms sum to  $C_K$ . The terms containing only  $s_j$  are  $s_j^2/2 - \theta_j s_j$ ; the coefficient of each  $d_{j,\ell}$  is precisely the bracket in Equation (136). Thus the displayed identity is just the phasewise shortest-first bound with the phase start times retained. No optimality assumption about the online schedule is hidden in it.  $\square$

The meaning of the expression is useful. Completing an  $s_j$  fraction of a type in its own phase creates a quadratic completion cost but saves later waiting cost, producing  $s_j^2/2 - \theta_j s_j$ . A completion postponed to a later positive phase is represented by  $d_{j,\ell}$  and its bracket. We next choose the processing times so that every such bracket is nonnegative and all  $\theta_j$  are equal.

**Claim 3.25** (Harmonic gaps remove the algorithm-dependent terms). *Assume Equation (134) and choose the processing times by*

$$p_{K-1} = 1 + \frac{\gamma}{\xi}, \quad p_i = p_{i+1} + \frac{1}{\xi + K - 1 - i} \quad (0 \leq i < K - 1). \quad (139)$$

Then every  $\theta_j$  in Equation (137) equals

$$\theta_j = 1 - \gamma, \quad (140)$$

every coefficient of  $d_{j,\ell}$  in Equation (136) is nonnegative, and

$$\liminf_{H \rightarrow \infty} \frac{\text{ALG}}{H^2} \geq Q_K := C_K - \frac{K}{2}(1 - \gamma)^2. \quad (141)$$

The corresponding offline coefficient is

$$D_K = \frac{\xi^2}{2} + \xi K + \frac{K^2}{2} + P_K, \quad \lim_{H \rightarrow \infty} \frac{\text{OPT}}{H^2} = D_K. \quad (142)$$

Thus  $Q_K/D_K$  is a lower bound for the limiting ratio of the finite- $K$  construction.

*Proof.* Measured upward from the shortest type, the consecutive gaps in Equation (139) are

$$\frac{1}{\xi + 1}, \frac{1}{\xi + 2}, \dots, \frac{1}{\xi + K - 1}.$$

If  $m = K - 1 - j$ , then

$$p_j - 1 = \frac{\gamma}{\xi} + \sum_{h=1}^m \frac{1}{\xi + h},$$

$$\sum_{k>j} (p_j - p_k) = \sum_{h=1}^m \frac{h}{\xi + h}.$$

Adding the first line multiplied by  $\xi$  to the second line makes each denominator cancel:

$$\xi(p_j - 1) + \sum_{k>j} (p_j - p_k) = \gamma + \sum_{h=1}^m \frac{\xi + h}{\xi + h} = \gamma + m. \quad (143)$$

Substitution in Equation (137) gives Equation (140). This cancellation explains the harmonic increments: the factor  $\xi$  from the zero block and the multiplicity  $h$  from the  $h$  shorter positive types add up to the denominator  $\xi + h$ .

The delayed-completion terms are now harmless as well. Since  $X_{k,\ell+1} \leq 1$ , their brackets are at least

$$\ell - j - (1 - \gamma) - \sum_{j < k < \ell} (p_j - p_k)$$

$$= \gamma + \sum_{j < k < \ell} (1 - (p_j - p_k)) > 0,$$

where the final inequality follows from Equation (134). We may therefore drop every term containing  $d_{j,\ell}$ . The remaining minimization is not a multivariable optimization problem: complete one square for each  $j$ ,

$$\frac{s_j^2}{2} - (1 - \gamma)s_j = \frac{1}{2}(s_j - (1 - \gamma))^2 - \frac{1}{2}(1 - \gamma)^2.$$

Because  $1 - \gamma \in (0, 1)$ , this minimum is feasible for  $s_j \in [0, 1]$ , which proves Equation (141).

Knowing all processing times, the optimum runs the zero jobs first and the positive types from shortest to longest. Equivalently, the pairwise contribution of two jobs is  $1 + \min\{p_i, p_j\}$ . The four terms respectively account for zero-zero pairs, zero-positive pairs, the unit-test part of positive-positive pairs, and the processing part of positive-positive pairs. This gives Equation (142) and completes the proof.  $\square$

**Claim 3.26** (Limit and one-variable maximization). *Fix  $0 < \alpha < e - 1$  and set  $\xi = K/\alpha$ . As  $K \rightarrow \infty$ , the processing times in Equation (139) satisfy Equation (134), and*

$$\lim_{K \rightarrow \infty} \frac{Q_K}{D_K} = R(\alpha) := 1 + \frac{\alpha + \alpha^2/2}{\frac{1}{2} + \frac{\alpha}{2} + \frac{\alpha^2}{4} + \frac{1}{2}(1 + \alpha)^2 \ln(1 + \alpha)}. \quad (144)$$

The function  $R(\alpha)$  has a unique maximum at

$$\alpha_\star = \sqrt{u_5^{\det}} - 1 < e - 1, \quad R(\alpha_\star) = R_{\text{OT}}^{\det}. \quad (145)$$

*Proof.* The total span is

$$p_0 - p_{K-1} = \sum_{h=1}^{K-1} \frac{1}{\xi + h} < \ln\left(1 + \frac{K}{\xi}\right) = \ln(1 + \alpha) < 1,$$

which verifies Equation (134).

The processing contribution  $P_K$  has the exact form

$$P_K = \frac{K^2}{2} \left(1 + \frac{\gamma}{\xi}\right) + \frac{1}{2} \sum_{h=1}^{K-1} \frac{(K - h)^2}{\xi + h}. \quad (146)$$

Indeed, the common baseline  $1 + \gamma/\xi$  contributes the first term, and swapping the order of summation shows that the increment  $1/(\xi + h)$  receives total weight  $(K - h)^2/2$ . After division by  $\xi^2$ , the sum becomes a Riemann integral:

$$\begin{aligned} \frac{P_K}{\xi^2} &\rightarrow I(\alpha) = \frac{\alpha^2}{2} + \frac{1}{2} \int_0^\alpha \frac{(\alpha - t)^2}{1 + t} dt \\ &= \int_0^\alpha (\alpha - t)(1 + \ln(1 + t)) dt \\ &= \frac{1}{2}(1 + \alpha)^2 \ln(1 + \alpha) - \frac{\alpha}{2} - \frac{\alpha^2}{4}. \end{aligned} \quad (147)$$

The second integral form follows either by integration by parts or by summing the limiting processing-time curve  $1 + \ln(1 + t)$  against the remaining positive mass  $\alpha - t$ . The subtraction in Equation (141) is only  $O(K)$ , whereas  $C_K, D_K = \Theta(K^2)$ . Since  $C_K - D_K = \xi K + K^2/2$ , we obtain Equation (144).

Put  $z = (1 + \alpha)^2$ . In terms of  $z$ , the limiting ratio is

$$\widehat{R}(z) = 1 + \frac{2(z - 1)}{1 + z + z \ln z}. \quad (148)$$

The derivative of the fraction has the sign of

$$3 - z + \ln z.$$

For  $z > 1$  this expression is strictly decreasing, is positive at  $z = 1$ , and tends to  $-\infty$ . Hence it has one zero  $u_5^{\det}$ , characterized by

$$u_5^{\det} - 3 = \ln u_5^{\det}.$$

The derivative is positive before  $u_5^{\det}$  and negative afterward, so this is the global maximum. At the root,

$$1 + u_5^{\det} + u_5^{\det} \ln u_5^{\det} = (u_5^{\det} - 1)^2,$$

and therefore

$$\widehat{R}(u_5^{\det}) = 1 + \frac{2}{u_5^{\det} - 1} = R_{\text{OT}}^{\det}.$$

Moreover,  $\sqrt{u_5^{\det}} - 1 = 1.12255\dots < e - 1$ , so the condition  $\alpha < e - 1$  holds at the maximizer. This proves Equation (145).  $\square$

We can now prove the theorem.

*Proof of Theorem 3.21.* By claim 3.26, choose a rational  $\alpha$  sufficiently close to  $\alpha_\star = \sqrt{u_5^{\det}} - 1$ , and choose any rational  $\gamma \in (0, 1)$ . For a sufficiently large  $K$ , set  $\xi = K/\alpha$  and use Equation (139); then  $Q_K/D_K > R_{\text{OT}}^{\det} - \varepsilon/2$ . All parameters are rational. Let  $H$  tend to infinity through multiples of their common denominators. Claims 3.24 and 3.25 make the actual ratio exceed  $R_{\text{OT}}^{\det} - \varepsilon$  for all sufficiently large  $H$ . Finally, freeze the adaptively revealed answers on their job labels as in claim 3.22. The resulting fixed input produces the same transcript for the given deterministic algorithm.  $\square$

The lower bound for  $u_4^{\det} \leq u \leq u_5^{\det}$  needs the same construction at an arbitrary total scale and at a prescribed point of its limiting curve. The next lemma packages this rescaled form so that no phase accounting has to be repeated later.

**Lemma 3.27** (Scaled harmonic core). *Fix  $s > 0$  and a parameter  $t \in [1, e)$ . Against every deterministic obligatory-testing algorithm, there are scales  $M_\nu \rightarrow \infty$  and finite rational multilevel instances with  $sM_\nu + o(M_\nu)$  jobs such that*

$$\frac{\text{OPT}}{M_\nu^2} \longrightarrow O_0 = \frac{s^2}{4}(1 + t^{-2} + 2 \ln t), \quad \liminf_{\nu \rightarrow \infty} \frac{\text{ALG}}{M_\nu^2} \geq A_0^{\text{lb}} := O_0 + \frac{s^2}{2}(1 - t^{-2}). \quad (149)$$

*Their total positive processing time, divided by  $M_\nu$ , converges to*

$$\frac{1}{M_\nu} \sum_{j: p_j > 0} p_j \longrightarrow L = s \ln t, \quad (150)$$

*and their largest processing time converges to  $1 + \ln t < 2$ . Freezing each revealed answer on its job label, as in claim 3.22, converts the adaptive description into a fixed instance.*

*Proof.* The case  $t = 1$  is obtained by continuity from instances with vanishing positive mass, so suppose  $1 < t < e$ . In the construction from the proof of Theorem 3.21, set  $\alpha = t - 1 = K/\xi$ . Before rescaling, the number of jobs divided by  $H$  is  $K + \xi = \xi t$ . Multiply every normalized group size by the common factor  $s/(\xi t)$ .



If every normalized group size is multiplied by a common factor, each term in the phase accounting, harmonic cancellation, and completion of squares in Equations (136), (141) and (143) is multiplied by the square of that factor. The Riemann-sum limit Equation (147) substituted into Equation (142) therefore gives

$$O_0 = \frac{s^2}{4}(1 + t^{-2} + 2 \ln t).$$

Likewise  $C_K - D_K = \xi K + K^2/2$ , while the  $O(K)$  loss from completing the square in Equation (141) disappears after division by the quadratic scale. After the same rescaling this gives the guaranteed lower benchmark

$$A_0^{\text{lb}} - O_0 = \frac{s^2}{2}(1 - t^{-2}).$$

Finally, summing the limiting processing-time curve  $1 + \ln(1 + x)$  over the positive mass gives  $L = s \ln t$ , and Equation (139) gives  $p_0 \rightarrow 1 + \ln t$ . Choose successively finer rational approximations, clear their denominators, and apply the recording argument from claim 3.22: assign each revealed answer to its job label and rerun the deterministic algorithm on the resulting fixed vector. This produces arbitrarily large fixed rational instances with the stated limit and liminf bounds.  $\square$

### 3.2.3 Combining jobs with $p = u$ and a harmonic block

For  $u_4^{\text{det}} < u < u_5^{\text{det}}$ , neither the binary family nor the pure harmonic family is tight. The adversary first reveals a prescribed fraction of jobs with  $p = u$ . It then reveals the scaled harmonic instance from lemma 3.27, chosen so that every later job satisfies  $1 + p \leq u$ . Two lemmas show that neither raw execution nor processing one of the initial jobs early can avoid the resulting lower bound. The later part is exactly the construction from lemma 3.27, so its accounting need not be repeated here.

**Lemma 3.28** (Deferring jobs with  $p = u$ ). *Prepend a fraction  $m$  of jobs with  $p = u$  to a later block occupying the remaining fraction  $s = 1 - m$  and having total normalized processing time  $L$ . Suppose every job in the later block satisfies  $1 + p \leq u$  and*

$$s(u - 1) - L - m \geq 0. \tag{151}$$

*Then processing any initial job with  $p = u$  before all later jobs are complete cannot decrease the leading online cost.*

*Proof.* Consider an initial job with  $p = u$  that is completed after all initial jobs have been tested but before a later job of value  $p$ . The pair contributes  $1 + u$  to the online cost. If we postpone the initial job until after the later job, the same pair contributes  $2 + p$ . The postponement lowers the cost by  $u - 1 - p \geq 0$ , so the postponed schedule is a valid lower bound on the algorithm's actual cost.

It remains to consider jobs completed while the initial group of  $p = u$  jobs is still being tested. Let  $q$  be the fraction of the full instance formed by these completed jobs. Their pairs with all later jobs add  $q[s(u - 1) - L]$ . Their largest possible saving against not-yet-tested jobs with  $p = u$  is  $qm - q^2/2$ . Relative to leaving every such job pending, the change is therefore at least

$$q[s(u - 1) - L - m] + \frac{q^2}{2} \geq 0. \tag{152}$$

The omitted one-job terms are lower order.  $\square$

**Lemma 3.29** (Accounting for the initial  $p = u$  jobs). *Let  $O_0$ ,  $A_0^{\text{lb}}$ , and  $L$  be the offline coefficient, guaranteed online coefficient, and total normalized positive processing time of the later block, where every job satisfies  $1 + p \leq u$ . After postponing all initial jobs with  $p = u$ , the corresponding coefficients  $O$  and  $A^{\text{lb}}$  of the combined instance satisfy*

$$A^{\text{lb}} = A_0^{\text{lb}} + m(1 - m) + m(1 + L) + \frac{u}{2}m^2, \quad (153)$$

$$O = O_0 + m(1 - m + L) + \frac{u}{2}m^2. \quad (154)$$

In particular,  $A^{\text{lb}} - O = (A_0^{\text{lb}} - O_0) + m$ .

*Proof.* A pair consisting of one initial job with  $p = u$  and one later job of value  $p$  contributes  $2 + p$  online and  $1 + p$  offline. Summed over the initial fraction  $m$  and later fraction  $1 - m$ , these give the cross terms involving  $m(1 - m)$  and  $mL$ . A pair of initial jobs with  $p = u$  contributes  $2 + u$  online and  $u$  offline, which gives the terms proportional to  $m^2$ . Adding the coefficients of the later block yields the two displayed formulas. Subtracting the two identities gives the final assertion.  $\square$

**Lemma 3.30** (Quota adversary allowing raw execution). *Fix  $m \in (0, 1)$  and a later block satisfying the hypotheses of lemma 3.28, in particular  $1 + p \leq u$  for each of its jobs. Against every deterministic revealing algorithm there are fixed instances whose asymptotic excess is at least the combined coefficient  $A^{\text{lb}} - R \cdot O$  obtained from the initial  $p = u$  jobs and the later block in Equations (153) and (154) for every target  $R \leq u$ .*

*Proof.* In the initial phase, a tested fresh job receives  $p = u$ , while a job run raw is assigned hidden value zero. If  $v$  raw jobs and  $\ell$  tested jobs with  $p = u$  have been touched, stop at the first crossing

$$\frac{\ell}{n - v} \geq m. \quad (155)$$

With  $S = n - v$ , the overshoot is less than one, so  $\ell = mS + O(1)$ . If no crossing occurs, no test can have occurred: after all first touches, any positive  $\ell$  would make the ratio in Equation (155) equal one. Thus every job was run raw and the all-zero hidden instance has ratio  $u \geq R$ .

At a crossing, scale the prescribed later instance to the remaining  $S - \ell$  first touches. The crossing exceeds the target by fewer than one job; absorb this error and integer rounding into the zero group. Fix an order of the job types in this later block. A test reveals the next value in that order; a raw action assigns the next value to the touched job but does not reveal it to the algorithm.

Move every initial raw-zero completion to the start. It has the same length  $u$  as processing a known job with  $p = u$ , and crossing a unit test only lowers completion cost. With

$$Z_v = vn - \frac{v(v - 1)}{2}, \quad (156)$$

this prefix contributes  $uZ_v$  online and  $Z_v$  offline. Subtract these known contributions from the comparison. The remaining  $S$  labels consist, up to one-job rounding, of a fraction  $m$  of jobs with  $p = u$  and the prescribed later block satisfying  $1 + p \leq u$ .

To compare with the harmonic lower-bound construction, run a virtual copy of the revealing algorithm. If this virtual algorithm later runs a fresh job of assigned value  $p$  raw, the obligatory-testing simulation instead tests and immediately processes that job in time  $1 + p \leq u$ , hides the answer from the virtual copy, and idles until the virtual raw block of length  $u$  ends. Inductively every simulated obligatory completion is no later than the

corresponding virtual revealing completion. Since  $1 + p \leq u$  on the later block, its offline lengths are  $1 + p$  in both the revealing and obligatory models. Write  $\text{ALG}_{\text{hyb}}$  and  $\text{OPT}_{\text{hyb}}$  for the online and offline costs of this physical obligatory-testing simulation. Then

$$\text{ALG}_{\text{RO}} - R \cdot \text{OPT}_{\text{RO}} \geq (u - R)Z_v + (\text{ALG}_{\text{hyb}} - R \cdot \text{OPT}_{\text{hyb}}) - O_u(n). \quad (157)$$

The first term is nonnegative. Finally, record every assigned value on its job label. Replaying this fixed vector produces the same transcript because the values learned only by the physical simulation were hidden from the virtual algorithm. This proves legality.  $\square$

**Proposition 3.31** (Lower bound for  $u_4^{\text{det}} \leq u \leq u_5^{\text{det}}$ ). *For every  $u_4^{\text{det}} \leq u \leq u_5^{\text{det}}$ , every deterministic revealing algorithm has size-asymptotic competitive ratio at least  $1 + c(u)$ . Equivalently,*

$$R_{\text{RO}}^{\text{det}}(u) \geq 1 + c(u). \quad (158)$$

The construction has two continuous parameters:  $m$  is the fraction of initial jobs with  $p = u$ , and  $t$  selects the scaled harmonic block that follows. We first write its online/offline ratio, then solve the first-order conditions for a worst parameter pair. The remaining two claims verify that the pair is feasible and can be approximated by fixed finite instances.

**Claim 3.32** (Ratio of the combined construction). *For  $m \in [0, 1)$  and  $t \in [1, e)$ , apply lemma 3.27 with  $s = 1 - m$  and prepend a fraction  $m$  of jobs with  $p = u$ . The resulting guaranteed lower ratio is*

$$\mathcal{R}_u(m, t) = 1 + \frac{m + \frac{(1-m)^2}{2}(1 - t^{-2})}{\frac{(1-m)^2}{4}(1 + t^{-2} + 2 \ln t) + m(1 - m)(1 + \ln t) + \frac{u}{2}m^2}. \quad (159)$$

*Proof.* Substitute  $s = 1 - m$ ,  $L = (1 - m) \ln t$ , and the coefficients from Equation (149) into Equations (153) and (154), and divide the online coefficient by the offline coefficient. Collecting the excess over one gives exactly Equation (159).  $\square$

**Claim 3.33** ( $(c, m)$ -parametrization of a stationary point). *Suppose the ratio in Equation (159) has an interior stationary point with value  $1 + c$ . Combining this value equation with the two vanishing partial derivatives gives*

$$\ln t = u - 2 - \frac{1}{c}, \quad t^2 = \frac{1 - m}{1 + m} \left(1 + \frac{2}{c}\right). \quad (160)$$

*Eliminating  $t$  gives precisely Equation (43). Conversely, those equations make  $\mathcal{R}_u(m, t) = 1 + c$ .*

*Proof.* Write Equation (159) as  $1 + N/D$ . At a stationary point of value  $1 + c$ , the three equations are

$$N = cD, \quad \partial_m N = c \partial_m D, \quad \partial_t N = c \partial_t D.$$

The  $t$ -derivative equation is

$$(1 - m)^2 t^{-3} = c \left[ \frac{(1 - m)^2}{2} (t^{-1} - t^{-3}) + \frac{m(1 - m)}{t} \right],$$

which rearranges to the second identity in Equation (160). Substituting it into the remaining two equations and simplifying gives the first identity. Eliminating  $t$  from these identities gives Equation (43). Reversing the substitutions verifies both the value and the two vanishing derivatives.  $\square$

**Claim 3.34** (Feasibility and uniqueness of the parameters). *For each  $u \in [u_4^{\det}, u_5^{\det}]$ , the equations in Equations (43) and (160) determine a unique triple  $(c, m, t)$ . As  $c$  decreases from  $1/\varphi$  to  $r$ , this triple runs continuously from*

$$(u, m, t) = \left(u_4^{\det}, \frac{1}{\varphi}, 1\right) \quad \text{to} \quad (u, m, t) = (u_5^{\det}, 0, \sqrt{u_5^{\det}}). \quad (161)$$

*It satisfies the deferral condition Equation (151); moreover, the finite harmonic block can be chosen with  $1 + p < u$  for every one of its jobs.*

*Proof.* The parameter relations give  $u \geq u_4^{\det}$ ,  $\ln t < 1$ , and  $m \leq 1/\varphi$ . Therefore

$$(1 - m)(u - 1 - \ln t) > (1 - m)\varphi \geq \frac{1}{\varphi} \geq m, \quad (162)$$

so Equation (151) holds; also  $1 + p < 3 < u$  for every later positive value in a sufficiently fine finite construction.

In the first equation of Equation (43), the left-hand side  $\operatorname{artanh} m - m$  has derivative  $m^2/(1 - m^2) > 0$ , while the right-hand side has derivative  $2/[c^2(c + 2)] > 0$ . Hence it determines a unique  $m = m(c)$ , which is strictly increasing. Consequently

$$u(c) = 1 + \frac{2}{c} - m(c) \quad (163)$$

is strictly decreasing. At  $c = r$  both sides of the first equation vanish, so  $m = 0$ ; at  $c = 1/\varphi$ , direct substitution gives  $m = 1/\varphi$ . Together with  $t$  from Equation (160), the boundary value  $c = r$  gives  $(u, m, t) = (u_5^{\det}, 0, \sqrt{u_5^{\det}})$ , while  $c = 1/\varphi$  gives  $(u, m, t) = (u_4^{\det}, 1/\varphi, 1)$ , as recorded in Equation (161). Consequently every  $u \in [u_4^{\det}, u_5^{\det}]$  has exactly one parameter pair.  $\square$

**Claim 3.35** (Approximation by fixed finite instances). *Fix  $u_4^{\det} < u < u_5^{\det}$  and the associated parameters  $(c, m, t)$  from claim 3.34. Against every deterministic revealing algorithm there is a sequence of fixed finite instances  $I_H$  such that*

$$\liminf_{H \rightarrow \infty} \frac{\operatorname{ALG}(I_H) - (1 + c) \cdot \operatorname{OPT}(I_H)}{|I_H|^2} \geq 0. \quad (164)$$

*Proof.* To pass to fixed finite instances, first approximate  $(m, t)$  rationally while retaining the strict inequalities  $1 + p < u$ , then choose a sufficiently fine harmonic family, and finally multiply all rational block sizes by a common integer  $H$ . For a fixed number of positive levels, the error of fewer than one job at the quota crossing, the terms contributed by individual jobs, and rounding are  $O_u(H)$ , whereas the displayed pair costs are  $\Theta(H^2)$ . Let  $H \rightarrow \infty$  first, then increase the harmonic depth, and finally let the rational approximation converge to  $(m, t)$ . Together with lemma 3.30, this proves Equation (164).  $\square$

We can now prove the proposition.

*Proof of Proposition 3.31.* For  $u_4^{\det} < u < u_5^{\det}$ , claims 3.32 and 3.33 identify the target ratio as  $1 + c(u)$ , claim 3.34 verifies the hypotheses of the construction, and claim 3.35 supplies fixed instances approaching that ratio. The bounds at  $u = u_4^{\det}$  and  $u = u_5^{\det}$  follow by taking limits from the open interval.  $\square$

### 3.2.4 Transferring the lower bound when raw execution is no shorter

The harmonic construction uses only values with  $1 + p_j \leq u$ , for which the offline cap  $u$  is inactive. The next lemma shows that any revealing algorithm with raw-execution cap  $u$  induces an obligatory-testing algorithm on these inputs without changing either the transcript comparison or the offline optimum.

**Lemma 3.36** (Transfer from jobs with  $1 + p \leq u$ ). *Let  $u \geq 1$ , and let  $L_{\text{OT}}(P)$  denote the deterministic size-asymptotic value in obligatory testing, restricted to  $0 \leq p_j \leq P$ . Then*

$$R_{\text{RO}}^{\text{det}}(u) \geq L_{\text{OT}}(u - 1). \quad (165)$$

*In particular,*

$$R_{\text{RO}}^{\text{det}}(u) \geq R_{\text{OT}}^{\text{det}} \left( u \geq 1 + \frac{1}{r} = 2.752620747896442 \dots \right). \quad (166)$$

*Proof.* Given a revealing algorithm with raw-execution cap  $u$ , construct an obligatory-testing algorithm on instances with  $p_j \leq u - 1$  by running a virtual copy of the revealing algorithm. Copy each test and processing action. When the virtual algorithm runs an untouched job raw for  $u$  time, physically test and immediately process it in  $1 + p_j \leq u$  time, hide the answer from the virtual copy, and wait for the virtual clock. Every physical completion is no later than its virtual completion. Moreover,  $\min\{u, 1 + p_j\} = 1 + p_j$ , so the revealing and obligatory optima coincide. Thus we obtain the following direct comparison. For every revealing algorithm  $\mathcal{A}$  with raw-execution cap  $u$ , the simulation produces an obligatory-testing algorithm  $\mathcal{B}$  and, pointwise on every instance with  $p_j \leq u - 1$ ,

$$\text{ALG}_{\mathcal{A}} \geq \text{ALG}_{\mathcal{B}}, \quad \text{OPT}_u = \text{OPT}_{\infty}.$$

Consequently the size-asymptotic worst-case ratio of  $\mathcal{A}$  is at least the corresponding ratio of  $\mathcal{B}$  restricted to  $p_j \leq u - 1$ , which is at least  $L_{\text{OT}}(u - 1)$  by its definition. Taking the infimum over  $\mathcal{A}$  proves Equation (165).

The harmonic family attaining  $R_{\text{OT}}^{\text{det}}$  has limiting largest processing time

$$1 + \ln(1 + y_*) = 1 + \frac{1}{2} \ln u_5^{\text{det}} = \frac{u_5^{\text{det}} - 1}{2} = \frac{1}{r}, \quad y_* = \sqrt{u_5^{\text{det}}} - 1. \quad (167)$$

Choosing finite constructions whose largest processing time approaches  $1/r$  from below includes the equality case  $u = 1 + 1/r$  and proves Equation (166).  $\square$

## 3.3 Assembly of the curve

It remains to verify the shape and joins of the six formulas in Equation (44) and to pair each upper bound with its matching lower bound. We do this explicitly before transferring the uniform plateau witnesses to obligatory testing.

### 3.3.1 Shape of the candidate curve

Before matching the bounds, we verify the shape of the six formulas in Equation (44). The only nontransparent monotonicity is that of  $R_{\text{quad}}(u)$  on  $[u_2^{\text{det}}, u_3^{\text{det}}]$ ; the formulas on  $[u_3^{\text{det}}, u_4^{\text{det}}]$  and  $[u_4^{\text{det}}, u_5^{\text{det}}]$  follow directly from the reciprocal formula and the  $(c, m)$ -parametrization in Equation (43).

**Lemma 3.37** (Monotonicity of the deterministic curve). *The function  $R_{\text{quad}}(u)$  is strictly decreasing on  $[u_2^{\text{det}}, u_3^{\text{det}}]$ . The function  $1 + 1/\sqrt{u-1}$  is strictly decreasing on  $[u_3^{\text{det}}, u_4^{\text{det}}]$ , and  $1 + c(u)$  is strictly decreasing on  $[u_4^{\text{det}}, u_5^{\text{det}}]$ . Consequently  $R_{\text{RO}}^{\text{det}}(u)$  from Equation (44) attains its global maximum only at  $u = u_2^{\text{det}}$ .*

*Proof.* Implicit differentiation of  $T_s(R_{\text{quad}}(u)) = 0$ , with  $s = u - 1$ , gives

$$R'_{\text{quad}}(u) = -\frac{R^2 + (3s^2 + 2s)R - 3(s+1)^2}{2sR + s^3 + s^2 + 1}. \quad (168)$$

Using  $T_s(R) = 0$ , its numerator factors as

$$\frac{2s^3 + s^2 - 1}{s} \left( R - \frac{2s^3 + 3s^2 - 2}{2s^3 + s^2 - 1} \right).$$

On the relevant interval  $s \geq u_2^{\text{det}} - 1 > 2/3$ , the prefactor is positive, while the fraction in parentheses is at most  $5/3$  because  $4s^3 - 4s^2 + 1 > 0$ . The explicit inequality (49) gives  $R > 5/3$ , and hence  $R'_{\text{quad}}(u) < 0$ . The function  $1 + 1/\sqrt{u-1}$  is visibly decreasing. In the  $(c, m)$ -parametrization on  $[u_4^{\text{det}}, u_5^{\text{det}}]$ ,  $m(c)$  is increasing and  $u(c) = 1 + 2/c - m(c)$  is decreasing, so  $1 + c$  decreases with  $u$ . Thus the formula  $R_{\text{RO}}^{\text{det}}(u) = u$  increases up to  $u = u_2^{\text{det}}$ ; the formulas  $R_{\text{quad}}(u)$ ,  $1 + 1/\sqrt{u-1}$ , and  $1 + c(u)$  then decrease until  $u = u_5^{\text{det}}$ ; and  $R_{\text{RO}}^{\text{det}}(u) = R_{\text{OT}}^{\text{det}}$  is constant for  $u \geq u_5^{\text{det}}$ . This proves the global-maximum assertion.  $\square$

### 3.3.2 Exact joins and completion of the proof

We next check that adjacent formulas agree at every transition point. Once this consistency is recorded, the theorem follows by pairing the upper and lower result already proved for each interval.

**Lemma 3.38** (Exact joins). *The six formulas in Equation (44) agree at all five transition points. More explicitly, the formulas 1 and  $u$  agree at  $u_1^{\text{det}} = 1$ , and*

$$\begin{aligned} R_{\text{quad}}(u_2^{\text{det}}) &= u_2^{\text{det}}, \\ R_{\text{quad}}(u_3^{\text{det}}) &= 1 + \frac{1}{\sqrt{s_0}} = 1.682327803828019\dots, \\ 1 + \frac{1}{\sqrt{u_4^{\text{det}} - 1}} &= \varphi = 1 + c(u_4^{\text{det}}), \\ 1 + c(u_5^{\text{det}}) &= 1 + r = R_{\text{OT}}^{\text{det}}. \end{aligned} \quad (169)$$

*Proof.* The equality at  $u_1^{\text{det}} = 1$  is immediate. Substitution of the defining equations for  $u_2^{\text{det}}$  and  $s_0 = u_3^{\text{det}} - 1$  into  $T_s$  gives the first two displayed identities; uniqueness of the positive root identifies the values with  $R_{\text{quad}}$ . Since  $u_4^{\text{det}} - 1 = \varphi + 1 = \varphi^2$ , the formula  $1 + 1/\sqrt{u-1}$  equals  $1 + 1/\varphi = \varphi$  at  $u = u_4^{\text{det}}$ . The identities  $1 + c(u_4^{\text{det}}) = \varphi$  and  $1 + c(u_5^{\text{det}}) = 1 + r$  follow from the parameter triples at  $u = u_4^{\text{det}}$  and  $u = u_5^{\text{det}}$  in Equation (161).  $\square$

*Proof of Theorem 3.1.* For the upper bounds, lemma 3.3 covers  $0 < u \leq u_2^{\text{det}}$ , lemma 3.4 covers  $u_2^{\text{det}} \leq u \leq u_3^{\text{det}}$ , and lemma 3.8 covers  $u_3^{\text{det}} \leq u \leq u_4^{\text{det}}$ . The guarantees on  $u_4^{\text{det}} \leq u \leq u_5^{\text{det}}$  and  $u \geq u_5^{\text{det}}$  follow from Theorem 3.9.

For the matching lower bounds, proposition 3.17 covers  $0 < u \leq u_4^{\text{det}}$ , proposition 3.31 covers  $u_4^{\text{det}} \leq u \leq u_5^{\text{det}}$ , and lemma 3.36 and Theorem 3.21 cover  $u \geq u_5^{\text{det}}$  with instances satisfying  $1 + p_j < u$ , so the offline cap  $u$  is inactive. The exact joins are given by lemma 3.38,

and the claimed shape follows from lemma 3.37. The finite upper bounds have the stated  $O_u(n)$  remainders, while Theorem 3.9 gives one absolute  $O(n)$  remainder on the plateau. This proves every assertion of the theorem.  $\square$

*Remark 3.39* (Representative values for  $u_4^{\text{det}} \leq u \leq u_5^{\text{det}}$ ). For orientation, some values for  $u \in [u_4^{\text{det}}, u_5^{\text{det}}]$  are

| $u$         | $R_{\text{RO}}^{\text{det}}(u)$ | $m$         | $t$         |
|-------------|---------------------------------|-------------|-------------|
| 3.800000    | 1.598851588                     | 0.539725635 | 1.138984621 |
| 4.000000    | 1.583283633                     | 0.428863572 | 1.330517832 |
| 4.071679486 | 1.579204806                     | 0.381330539 | 1.412236296 |
| 4.300000    | 1.571692026                     | 0.198387083 | 1.734651379 |

*Remark 3.40* (Asymptotic scope). All statements above concern the fixed- $u$  size-asymptotic ratio. For  $0 < u < u_5^{\text{det}}$ , the upper bounds have additive error  $O_u(n)$ . For  $u \in [u_5^{\text{det}}, \infty)$  the same algorithm has one uniform  $O(n)$  error. The unbounded obligatory endpoint is not included in the statement of the curve; it is derived in Section 3.4.

### 3.4 The obligatory endpoint

The obligatory model is the unbounded endpoint of revealing optimization, but the passage to that endpoint is not a formal substitution  $u = \infty$ : both the algorithm and the additive error must be uniform in  $u$ . The finite curve has just established exactly those two properties, so the endpoint now follows by a short transfer.

*Proof of Theorem 3.2.* For the upper bound, use `ADAPTIVETHRESHOLD` with  $c = r$ . This algorithm never runs a job raw and is independent of  $u$ . Given a finite obligatory instance, choose any finite

$$u > \max\{u_5^{\text{det}}, 1 + \max_j p_j\}.$$

Its execution is identical in the revealing model with raw-execution cap  $u$ , and every offline effective length is  $\min\{u, 1 + p_j\} = 1 + p_j$ . Thus the revealing and obligatory optima coincide. The constant  $B$  in Equation (118) is independent of  $u$ , so that inequality also bounds the obligatory instance by  $\text{ALG} \leq R_{\text{OT}}^{\text{det}} \cdot \text{OPT} + Bn$ .

For the lower bound, regard an arbitrary obligatory algorithm  $\mathcal{B}$  as a revealing algorithm with the fixed raw-execution cap  $u = u_5^{\text{det}}$  that simply never uses raw execution. The plateau lower bound in Theorem 3.1 may be witnessed by instances with  $p_j < u_5^{\text{det}} - 1$ , so the offline cap  $u = u_5^{\text{det}}$  is inactive. On those instances the online transcript is unchanged and  $\min\{u_5^{\text{det}}, 1 + p_j\} = 1 + p_j$ , so again the two offline optima coincide. The revealing lower inequality at  $u = u_5^{\text{det}}$  therefore gives the claimed obligatory lower bound for arbitrarily large instances.  $\square$

## 4 Revealing-optimization instance optimality

Fix  $u < \infty$ . An untouched job may be run raw for the public time  $u$ , or tested for one unit; a test reveals  $p_i \in [0, u]$ , after which the processing operation of length  $p_i$  may be delayed. The goal of this section is to prove Theorem 4.1, the rigorous version of the informal revealing-optimization theorem Theorem 1.7.

For a distribution  $D$  on  $[0, u]$ , we define an explicit value  $\Phi_{\text{RO},u}(D)$  in Equation (178). It is obtained by choosing one threshold and minimizing a quadratic over the tested fraction  $q$ . For an input vector  $p$ , use the empirical distribution  $D[p]$  from Equation (1).

**Theorem 4.1** (Revealing-optimization instance optimality). *For every fixed  $u > 0$  there exist randomized nonanticipating algorithms  $\mathcal{A}_{n,u}^*$ , depending only on  $n, u$ , and a deterministic sequence  $\varepsilon_u(n) \rightarrow 0$  such that every vector  $p \in [0, u]^n$  has the following properties.*

$$\mathbb{E} \text{ALG}_{\mathcal{A}_{n,u}^*}(p) \leq n^2 \Phi_{\text{RO},u}(D[p]) + \varepsilon_u(n)n^2. \quad (170)$$

*Conversely, every  $p \in [0, u]^n$  and every randomized nonanticipating algorithm  $\mathcal{A}$ , even an announced algorithm, satisfy*

$$\mathbb{E} \text{ALG}_{\mathcal{A}}(p) \geq n^2 \Phi_{\text{RO},u}(D[p]) - \varepsilon_u(n)n^2. \quad (171)$$

*One may take*

$$\varepsilon_u(n) = O_u\left(n^{-1/6} \sqrt{\ln(n+2)}\right). \quad (172)$$

The proof has three steps. First, for a fixed final tested fraction  $q$ , we represent the work completed by a large population of jobs as divisible blocks and order these blocks by work per completed job. Second, we expose the hidden values in the order in which the algorithm first touches their labels. A single sampling-without-replacement event controls every prefix of this sequence, including a prefix whose endpoint the algorithm chooses from its observations. Finally, we discretize  $[0, u]$  into increasingly many cells and use a sublinear initial sample to choose the schedule without being told the input vector.

#### 4.1 The fixed-fraction fluid benchmark

Let  $D$  initially have finite support and put  $\mu = \int p dD(p)$ . A test automatically completes a job when it reveals  $p_i = 0$ . Apply lemma 2.2 and choose its threshold selector  $g_*$ . Write

$$a = a_D(g_*), \quad \ell = \int_{(0,u]} p g_*(p) dD(p), \quad \tau_D = \frac{1+\ell}{a}. \quad (173)$$

Write the positive support as  $p_1, \dots, p_s$ , and let  $\nu_i = \nu(\{p_i\})$  be the residual masses from lemma 2.2. Thus

$$\sum_i \nu_i = 1 - a, \quad p_i \geq \tau_D \text{ whenever } \nu_i > 0. \quad (174)$$

For a fixed final tested fraction  $q \in [0, 1]$ , define the model envelope

$$\mathcal{C}_{\text{RO},D,q} := \mathcal{C}_{D,q}^u, \quad (175)$$

where the right-hand side is the common envelope Equation (17), with  $v = u$  representing raw execution.

**Lemma 4.2** (Fixed- $q$  completion envelope). *The envelope  $\mathcal{C}_{\text{RO},D,q}$  is the fractional completion curve obtained from the following divisible blocks:*

| item                                | completion capacity | work per completion |
|-------------------------------------|---------------------|---------------------|
| tests and selected outcomes         | $aq$                | $\tau_D$            |
| tested jobs of residual value $p_i$ | $q\nu_i$            | $p_i$               |
| jobs run raw                        | $1 - q$             | $u$                 |

*If  $\tau_D < u$ , first perform the tests and process the selected outcomes, then process the residual classes in nondecreasing order of  $p_i$ , and finally run the remaining jobs raw. If  $\tau_D \geq u$ , the all-raw curve pointwise dominates every choice with  $q > 0$ .*



*Proof.* Apply lemma 2.5 with  $v = u$ . It gives exactly the three displayed kinds of items. If  $\tau_D < u$ , their work-per-completion values obey  $\tau_D \leq p_i \leq u$ . If  $\tau_D \geq u$ , every test and residual item costs at least  $u$  per completion, while the  $q = 0$  envelope consists of one raw item of capacity one and cost  $u$ .  $\square$

Put

$$\ell_\nu = \sum_i p_i \nu_i = \mu - \ell, \quad \text{SPT}(\nu) = \frac{1}{2} \sum_{i,j} \min\{p_i, p_j\} \nu_i \nu_j. \quad (176)$$

The common area identity Equation (19), specialized through lemma 4.2, gives

$$F_{\text{RO},u,D}(q) = (1 + \ell) \left( q - \frac{aq^2}{2} \right) + q\ell_\nu(1 - q) + q^2 \text{SPT}(\nu) + \frac{u(1 - q)^2}{2}. \quad (177)$$

Indeed, the four terms are respectively the contribution of the tests and the selected outcomes processed after them, the work of positive tested jobs delaying raw jobs, the pair contribution among the positive tested jobs, and the contribution of the equal-length raw jobs. Define

$$\Phi_{\text{RO},u}(D) = \begin{cases} \min_{0 \leq q \leq 1} F_{\text{RO},u,D}(q), & \tau_D < u, \\ u/2, & \tau_D \geq u. \end{cases} \quad (178)$$

This is an explicit one-dimensional optimization. In fact

$$F_{\text{RO},u,D}(q) = \frac{u}{2} + Aq + Bq^2, \quad A = 1 + \mu - u, \quad B = -\frac{a(1 + \ell)}{2} - \ell_\nu + \text{SPT}(\nu) + \frac{u}{2}. \quad (179)$$

For each work budget, convexly combining feasible points for  $q_1, q_2$  gives a feasible point for the corresponding convex combination of the two fractions. Hence  $\mathcal{C}_{\text{RO},D,q}(x)$  is concave in  $q$ , its remaining-mass area is convex, and  $B \geq 0$ . Moreover,

$$\tau_D < u \iff \int (u - p) dD(p) > 1 \iff A < 0.$$

Thus the minimizer is

$$q^* = 1 \quad (B = 0), \quad q^* = \min\{1, -A/(2B)\} \quad (B > 0). \quad (180)$$

Thus, for every divisible schedule whose final tested fraction is  $q$ , the area under its remaining-job curve is at least  $F_{\text{RO},u,D}(q) \geq \Phi_{\text{RO},u}(D)$ .

## 4.2 Adaptive algorithms and the announced lower bound

We now transfer the divisible-job bound to a finite algorithm which may choose labels and decide when to stop testing from the values seen so far. Treat equal-valued jobs as distinct jobs, and first fix the private random seed of an algorithm that eventually completes every job. For the present finite-support distribution, let  $C_0 = \{0\}$  and  $C_j = \{p_j\}$  for  $1 \leq j \leq K = s$ , and put  $d_j = D(C_j)$ . Let  $X_k$  be the value encountered at the  $k$ th first touch, and let  $A_k$  indicate that this touch tests the job. By deferred decisions, the  $X_k$  form a uniform permutation, while  $A_k$  is chosen before  $X_k$  is exposed. Apply lemma 2.14 to the vector  $(\mathbf{1}_{X_k \in C_j})_{j=0}^K$  with failure probability  $n^{-2}$ , and put

$$\Gamma_n = (1 + \delta^{-1})E_{n,K+1,1,n^{-2}}.$$

With that probability, simultaneously for every cell  $j$  and every prefix of length  $m \leq (1-\delta)n$  in the first-touch order,

$$\left| \sum_{k \leq m} A_k \mathbf{1}_{X_k \in C_j} - d_j \sum_{k \leq m} A_k \right| \leq \Gamma_n. \quad (181)$$

Stop after the algorithm has first touched all but  $\delta n + O(1)$  labels. For each remaining untouched job, replace any future test by raw execution at its first scheduled operation and delete its later known processing. At most  $\delta n + O(1)$  jobs and three operations per affected job change. Write completion cost as the sum, over all operations, of the operation length times the number of unfinished jobs. Changed operations contribute  $O_u(\delta n^2 + n)$ , and during every unchanged operation the two unfinished-job counts differ by at most  $\delta n + O(1)$ . Since either schedule performs at most  $(u+1)n$  work, we obtain

$$C_{\text{original}} \geq C_{\text{edited}} - O_u(\delta n^2 + n). \quad (182)$$

The edited schedule has a fixed final tested fraction  $q$ , but we do not condition on its value.

On the single sampling event Equation (181), consider any point in the schedule and normalize counts and work by  $n$ . Let  $t, b, z, c_j$  denote the tested fraction, the fraction run raw, the fraction of tests that complete zero jobs, and the processed fraction whose revealed value lies in the positive cell  $C_j$ , respectively, and put  $\gamma_n = \Gamma_n/n$ . The sampling event gives

$$t \leq q, \quad b \leq 1 - q, \quad z \leq d_0 t + \gamma_n, \quad c_j \leq d_j t + \gamma_n.$$

Set  $c'_j = (c_j - \gamma_n)^+$ . Raw work is exactly  $ub$ , so the variables  $t, b, c'_j$  satisfy every constraint in Equation (17) at the work  $x$  already performed. Passing from  $z, c_j$  to  $d_0 t, c'_j$  removes at most  $(K+1)\gamma_n$  completed mass. Therefore, simultaneously throughout the edited schedule,

$$\text{completed fraction at work } x \leq C_{\text{RO},D,q}(x) + (K+1)\gamma_n. \quad (183)$$

The normalized completion cost is the area under the unfinished fraction. The curve in Equation (183) reaches one by normalized work  $H = 1 + u$ , so integrating that equation loses at most  $H(K+1)\gamma_n$  relative to  $F_{\text{RO},u,D}(q) \geq \Phi_{\text{RO},u}(D)$ . The sampling event fails with probability at most  $n^{-2}$ , and  $0 \leq \Phi_{\text{RO},u}(D) \leq u/2$ ; hence averaging over the shuffle and using Equation (182) gives

$$\frac{\mathbb{E}C_{\text{original}}}{n^2} \geq \Phi_{\text{RO},u}(D) - O_{u,K}(\gamma_n + \delta + 1/n). \quad (184)$$

For an arbitrary input vector, take

$$K_n = \lfloor n^{1/6} \rfloor, \quad h_n = u/K_n, \quad \delta_n = n^{-1/6}, \quad (185)$$

keep zero separate, and round every positive value upward; write  $D[p]^{\text{grid}}$  for the resulting empirical distribution. If two distributions admit a zero-preserving coupling with pointwise displacement at most  $h$ , the transport lemma lemma 2.6 gives

$$|\Phi_{\text{RO},u}(D) - \Phi_{\text{RO},u}(D')| \leq h. \quad (186)$$

Thus the grid consists of  $0, h_n, 2h_n, \dots, K_n h_n = u$ , and a value in  $((j-1)h_n, jh_n]$  is rounded to  $jh_n$ . Apply the same first-touch sampling bound to these  $K_n + 1$  classes and again put  $\gamma_n = \Gamma_n/n$ . At any schedule prefix, subtracting  $\gamma_n$  from the completed mass in each positive class makes the class capacities exact, at a loss of at most  $(K_n + 1)\gamma_n$  completed

mass. Raising processing times to their right endpoints adds at most  $h_n$  to normalized prefix work. Consequently the completed fraction is at most

$$\mathcal{C}_{\text{RO},D[p]^{\text{grid}},q}(x + h_n) + (K_n + 1)\gamma_n.$$

With the parameters from Equation (185),

$$(K_n + 1)\frac{\Gamma_n}{n} = O\left(n^{-1/6}\sqrt{\ln(n+2)}\right). \quad (187)$$

Integrating this inequality up to  $H = 1 + u$  loses at most  $h_n + H(K_n + 1)\gamma_n$  from the rounded fluid area. The suffix edit costs  $O_u(\delta_n n^2 + n)$ , the sampling event fails with probability  $n^{-2}$ , and the corresponding lost fluid value is at most  $u/2$ . Together with Equations (186) and (187), this proves that every announced algorithm has private-shuffle cost at least

$$n^2\Phi_{\text{RO},u}(D[p]) - O_u\left(n^{11/6}\sqrt{\ln(n+2)}\right). \quad (188)$$

The argument was uniform in the fixed algorithm seed. Averaging over that seed proves Equation (171) under the input convention.

### 4.3 Removing the announcement

It remains to attain the benchmark without first revealing the input vector to the algorithm. Consider the following family of schedules. Select  $N_{\text{test}}$  labels uniformly, test them in random order, and immediately process precisely the outcomes belonging to a fixed initial segment of the ordered grid values. Next process the remaining positive tested jobs in SPT order and finally run the other  $n - N_{\text{test}}$  jobs raw. Call the choice of the initial grid segment and  $q = N_{\text{test}}/n$  a template  $\pi$ . Direct one-job and pair accounting gives, uniformly over the frequencies of the grid values and the chosen initial segment,

$$\mathbb{E}C_n(\pi) = n^2F_{\text{RO},u,D}(\pi) + O_u(n), \quad (189)$$

where  $F_{\text{RO},u,D}(\pi)$  is the right-hand side of Equation (177). To verify this, expand the testing phase into the contribution of each job and each pair of tested jobs; expand the remaining tested positive jobs into their contribution against raw jobs and their internal SPT cost; and add the exact cost of running all untested jobs raw,  $u(n - N_{\text{test}})(n - N_{\text{test}} + 1)/2$ . For distinct occurrences the finite coefficients

$$\frac{N_{\text{test}}(N_{\text{test}} - 1)}{n(n - 1)}, \quad \frac{N_{\text{test}}(n - N_{\text{test}})}{n(n - 1)}, \quad \frac{(n - N_{\text{test}})(n - N_{\text{test}} - 1)}{n(n - 1)}$$

differ from  $q^2, q(1 - q), (1 - q)^2$  by  $O(1/n)$ . Every pair contribution is bounded in terms of  $u$ , so fewer than  $n^2$  such terms create only  $O_u(n)$  error.

Use the grid from Equation (185) and take a private random permutation. Test its first

$$k_n = \lceil n^{1/2} \rceil \quad (190)$$

labels, keep positive sample jobs pending, and form their rounded histogram  $\widehat{D}_n$ . Among all grid prefixes containing zero and all  $q \in [0, 1]$ , minimize the quadratic Equation (177). Apply the selected template to the remaining labels in their unused random order, then finish the positive sample jobs.

Let  $D_n$  and  $D_n^{\text{rem}}$  be the full and remaining rounded histograms. The sampling-without-replacement histogram estimate Equation (31) gives

$$\mathbb{E}\|\hat{D}_n - D_n\|_1 \leq \sqrt{\frac{K_n + 1}{k_n}}, \quad \|D_n^{\text{rem}} - D_n\|_1 \leq \frac{2k_n}{n - k_n}. \quad (191)$$

For a fixed template, the quantities  $a, \ell, \ell_\nu$  in Equation (177) are bounded single integrals and  $\text{SPT}(\nu)$  is a bounded double integral. For the  $\text{SPT}(\nu)$  term, add and subtract the same double integral with only one copy of the distribution replaced. This gives

$$|F_{\text{RO},u,D}(\pi) - F_{\text{RO},u,E}(\pi)| \leq 4(u+1)\|D - E\|_1, \quad (192)$$

uniformly over the grid and template. Minimizing over templates preserves this Lipschitz bound. The maximum-density and completion-envelope results lemmas 2.2 and 4.2 show that the minimum over this common template family is exactly  $\Phi_{\text{RO},u}(D)$ .

Condition on the sample. The learned template is fixed and the unused labels are uniformly ordered, so Equation (189) applies. Including the sample and its final tail, whose cost is  $O_u(nk_n)$ , gives the conditional hypothesis of lemma 2.8 with  $\varepsilon = O_u(k_n/n + 1/n)$ . Apply that lemma with  $d(D, E) = \|D - E\|_1$ ,  $L_0 = 4(u+1)$ , and Equation (191). Finally use Equation (186). Since

$$h_n = O_u(n^{-1/6}), \quad \sqrt{(K_n + 1)/k_n} = O(n^{-1/6}), \quad k_n/n = O(n^{-1/2}),$$

the resulting bound is

$$\mathbb{E} \text{ALG}_{\mathcal{A}_{n,u}^*}(p) \leq n^2 \Phi_{\text{RO},u}(D[p]) + O_u(n^{11/6}) \quad (193)$$

for every  $p \in [0, u]^n$ . Together with the announced lower bound Equation (188), this proves Theorem 4.1. The larger logarithmic lower-bound error gives the common sequence in Equation (172).

## 5 Randomized revealing optimization: the exact four-piece curve

Theorem 4.1 identified the optimal leading online cost for every fixed input in the revealing-optimization model. We now compare that cost with the clairvoyant optimum and maximize over all inputs. The raw-execution cap  $u$  is fixed, but the algorithm is not told the entries of the input vector. This section proves Theorem 5.1, the rigorous randomized half of the informal curve theorem Theorem 1.6. Its three transition points are

$$u_1^{\text{rand}} = 1, \quad u_2^{\text{rand}} = 5.048917339522306\dots, \quad u_3^{\text{rand}} = \frac{25}{4}. \quad (194)$$

Here  $u_2^{\text{rand}} > 1$  is the unique root of  $u^3 - 6u^2 + 5u - 1 = 0$  above one.

**Theorem 5.1** (Randomized revealing-optimization curve). *For every fixed  $u > 0$ , the optimal randomized size-asymptotic competitive ratio against an oblivious adversary is*

$$R_{\text{RO}}^{\text{rand}}(u) = \begin{cases} 1, & 0 < u \leq u_1^{\text{rand}}, \\ \frac{u^3}{u^2 + (u-1)^3}, & u_1^{\text{rand}} \leq u \leq u_2^{\text{rand}}, \\ 1 + \frac{1}{2(\sqrt{u}-1)}, & u_2^{\text{rand}} \leq u \leq u_3^{\text{rand}}, \\ \frac{4}{3}, & u \geq u_3^{\text{rand}}. \end{cases} \quad (195)$$

More precisely, there are randomized nonanticipating algorithms  $\mathcal{A}_{n,u}$  and numbers  $\varepsilon_u(n) \rightarrow 0$  such that every vector  $p \in [0, u]^n$  satisfies

$$\mathbb{E} \text{ALG}_{\mathcal{A}_{n,u}}(p) \leq R_{\text{RO}}^{\text{rand}}(u) \cdot \text{OPT}_u(p) + \varepsilon_u(n)n^2. \quad (196)$$

Conversely, for every randomized online algorithm  $\mathcal{A}$  and every  $\varepsilon > 0$ , there are arbitrarily large  $n$  and a fixed vector  $p \in [0, u]^n$  for which

$$\mathbb{E} \text{ALG}_{\mathcal{A}}(p) \geq (R_{\text{RO}}^{\text{rand}}(u) - \varepsilon) \cdot \text{OPT}_u(p). \quad (197)$$

The curve is continuous and has global maximum

$$\max_{u>0} R_{\text{RO}}^{\text{rand}}(u) = \frac{27 + 6\sqrt{3}}{23} = 1.625752384583185\dots, \quad (198)$$

attained at  $u = (3 + \sqrt{3})/2$ .

Theorem 4.1 identifies the best asymptotic online cost on each input. Here we compare that value with the clairvoyant SPT cost and maximize over all empirical distributions. Replacing an initial part of the survival function by its average reduces this optimization to distributions supported on two values. Two one-variable maximizations give the four formulas in Equation (195). A sublinear sample removes advance knowledge of the input, and shuffled binary vectors give matching lower bounds.

## 5.1 Offline and stationary fluid coefficients

Assume initially that  $u > 1$  and write

$$s = u - 1. \quad (199)$$

Let  $D$  be a finite distribution on  $[0, u]$  and use the survival function

$$S_D(t) = D((t, u]), \quad S_D(t) = 0 \quad (t > u). \quad (200)$$

The convention at point masses does not affect any integral below. Since a clairvoyant job of length  $p$  has effective length  $1 + \min\{s, p\}$ , write a nonnegative value  $x$  as  $\int_0^\infty \mathbf{1}_{t < x} dt$  in the symmetric pair identity Equation (5). This gives

$$\begin{aligned} \Omega_{\text{RO},u}(D) &:= \frac{1}{2} \iint \min\{u, 1 + p, 1 + q\} dD(p)dD(q) \\ &= \frac{1}{2} \left( 1 + \int_0^s S_D(t)^2 dt \right), \end{aligned} \quad (201)$$

$$\text{OPT}_u(p) = n^2 \Omega_{\text{RO},u}(D[p]) + \frac{1}{2} \sum_i \min\{u, 1 + p_i\} \quad (202)$$

for every empirical distribution  $D[p]$ .

We next specialize the maximum-density module lemma 2.2 to a form suited to the offline cap  $u$ . If its threshold prefix has mass  $a$  and first moment  $\ell$ , put

$$\tau_D = \frac{1 + \ell}{a}. \quad (203)$$

The common threshold equation and the layer-cake identity give

$$\int (\tau_D - p)^+ dD(p) = 1, \quad \int_0^{\tau_D} S_D(t) dt = \tau_D - 1. \quad (204)$$

The stationary algorithm tests all jobs in a uniform random order. It immediately processes a positive job if its revealed value lies in the selected threshold prefix, and after the last test it processes all remaining jobs in SPT order. The following formula is the stationary pair identity specialized to the finite offline cap  $u$ .

**Lemma 5.2** (Stationary survival formula). *The doubled leading coefficient of the stationary algorithm is*

$$\mathcal{T}_u(D) = \begin{cases} \tau_D + \int_{\tau_D}^u S_D(t)^2 dt, & \tau_D \leq u, \\ \tau_D, & \tau_D > u. \end{cases} \quad (205)$$

Consequently the better of the raw and stationary algorithms has leading ratio

$$\frac{\min\{u, \mathcal{T}_u(D)\}}{1 + \int_0^s S_D(t)^2 dt}. \quad (206)$$

*Proof.* Let  $h = 1 - a$  be the residual mass. Direct pair accounting gives the leading coefficient

$$(1 + \ell) \left(1 - \frac{a}{2}\right) + \text{SPT}(\nu). \quad (207)$$

If  $\tau_D \leq u$ , the threshold property gives

$$\text{SPT}(\nu) = \frac{\tau_D h^2}{2} + \frac{1}{2} \int_{\tau_D}^u S_D(t)^2 dt, \quad (1 + \ell) \left(1 - \frac{a}{2}\right) = \frac{\tau_D}{2} (1 - h^2).$$

Their sum is one half of the first line of (205). If  $\tau_D > u$ , the whole distribution is in the prefix and (207) equals  $\tau_D/2$ . Raw execution has leading coefficient  $u/2$ , and division by (201) proves (206).  $\square$

This is where the instance-optimal theorem enters the curve calculation. In Equation (177),  $q = 0$  is the raw algorithm and  $q = 1$  is precisely the stationary algorithm using the selected threshold prefix. Hence

$$2\Phi_{\text{RO},u}(D) \leq \min\{u, \mathcal{T}_u(D)\}, \quad (208)$$

and Equation (206) is an upper bound on the instance-specific ratio  $\Phi_{\text{RO},u}(D)/\Omega_{\text{RO},u}(D)$ . Interior values of  $q$  can strictly improve individual inputs; the point of the next two subsections is that the two choices  $q = 0$  and  $q = 1$  already give the sharp value after maximizing over all  $D$ . The binary lower bounds at the end apply to every algorithm, not only to algorithms restricted to  $q \in \{0, 1\}$ .

## 5.2 Flattening the survival function

We now maximize (206) over arbitrary  $D$ . Suppose first that  $1 \leq \tau_D \leq u$  and put

$$y = \frac{\tau_D - 1}{\tau_D}. \quad (209)$$

By (204),  $y$  is the average of  $S_D$  on  $[0, \tau_D]$ . Since  $S_D$  is nonincreasing, its average on every initial subinterval is at least  $y$ . Thus Cauchy–Schwarz gives

$$\int_0^a S_D(t)^2 dt \geq ay^2 \quad (0 \leq a \leq \tau_D), \quad (210)$$

and  $S_D(t) \leq y$  almost everywhere for  $t > \tau_D$ .

Replace  $S_D$  on  $(0, \tau_D)$  by the constant  $y$  and leave its tail unchanged. This remains a nonincreasing survival function, preserves (204) and  $\mathcal{T}_u(D)$ , and by (210) can only decrease the offline coefficient. Hence it can only increase the ratio. We may therefore assume

$$S_D(t) = y \quad (0 < t < \tau_D). \quad (211)$$

If  $u - 1 \leq \tau_D \leq u$ , the offline integral lies entirely in the flat part, and  $S_D(t)^2 \leq y^2$  on the remaining tail. It follows that

$$\frac{\min\{u, \mathcal{T}_u(D)\}}{1 + \int_0^s S_D(t)^2 dt} \leq B_u(\tau_D) := \frac{\tau_D + (u - \tau_D)y^2}{1 + (u - 1)y^2}. \quad (212)$$

The numerator displayed on the right is at most  $u$ , so the raw minimum is inactive.

Now suppose  $\tau_D < u - 1$ . Put

$$L = u - 1 - \tau_D, \quad E = \int_{\tau_D}^{u-1} S_D(t)^2 dt, \quad G = \int_{u-1}^u S_D(t)^2 dt. \quad (213)$$

Monotonicity gives

$$0 \leq E \leq Ly^2, \quad G \leq E/L. \quad (214)$$

Consequently

$$\frac{\min\{u, \mathcal{T}_u(D)\}}{1 + \int_0^s S_D(t)^2 dt} \leq \frac{\tau_D + \frac{u - \tau_D}{u - 1 - \tau_D} E}{1 + \tau_D y^2 + E}. \quad (215)$$

For fixed  $\tau_D$  this is linear-fractional in  $E$ , so its derivative has a constant sign. Its maximum on  $[0, Ly^2]$  therefore occurs at  $E = 0$  or  $E = Ly^2$ . Substitution of these two values gives, respectively,

$$A(\tau_D) := \frac{\tau_D}{1 + \tau_D y^2} = \frac{\tau_D^2}{\tau_D^2 - \tau_D + 1}, \quad (216)$$

$$B_u(\tau_D) = \frac{\tau_D + (u - \tau_D)y^2}{1 + (u - 1)y^2}. \quad (217)$$

They are attained by rectangular survival functions: respectively a binary distribution on  $\{0, \tau_D\}$  and one on  $\{0, u\}$ .

It remains to cover  $\tau_D > u$ . Equation (204) and the zero extension of  $S_D$  give  $\int_0^u S_D(t) dt = \tau_D - 1 \geq u - 1$ . The average of a nonincreasing function on  $[0, u - 1]$  is no smaller than its average on  $[0, u]$ , and hence

$$\int_0^{u-1} S_D(t)^2 dt \geq (u - 1) \left( \frac{\tau_D - 1}{u} \right)^2 \geq \frac{(u - 1)^3}{u^2}. \quad (218)$$

Here the raw algorithm is chosen, and its ratio is at most  $B_u(u)$ . We have proved the reduction

$$\sup_D \frac{\min\{u, \mathcal{T}_u(D)\}}{1 + \int_0^s S_D(t)^2 dt} \leq \max \left\{ \sup_{1 \leq \tau \leq u-1} A(\tau), \sup_{1 \leq \tau \leq u} B_u(\tau) \right\}, \quad (219)$$

where the first supremum is omitted for  $u < 2$ . In fact equality holds in (219), because the binary distributions on  $\{0, \tau_D\}$  and  $\{0, u\}$  identified before the reduction attain the  $A$  and  $B_u$  families, respectively.

### 5.3 The two scalar maximizations

The first family satisfies

$$A'(\tau) = \frac{\tau(2-\tau)}{(\tau^2 - \tau + 1)^2}. \quad (220)$$

Thus its maximum is attained at  $\tau = \min\{2, u-1\}$  and equals  $4/3$  as soon as  $u \geq 3$ .

For the second family, substitution of (209) gives

$$B_u(\tau) = \frac{\tau^2 u + 2\tau^2 - 2\tau u - \tau + u}{\tau^2 u - 2\tau u + 2\tau + u - 1}. \quad (221)$$

The sign of its derivative is the sign of

$$g_u(\tau) = (2\tau - 1)^2 - u(\tau - 1)^2. \quad (222)$$

For  $u \leq 4$  this is positive on  $[1, \infty)$ . For  $u > 4$ , its unique root above one is

$$\tau_*(u) = \frac{u-2+\sqrt{u}}{u-4} = \frac{\sqrt{u}-1}{\sqrt{u}-2}, \quad (223)$$

and  $B_u$  increases before this point and decreases afterwards. The identity  $\tau_*(u) = u$  is equivalent to

$$u^3 - 6u^2 + 5u - 1 = 0. \quad (224)$$

The cubic is strictly increasing beyond its last critical point and changes sign there exactly once; its unique root above one is  $u_2^{\text{rand}}$  from (194). Hence

$$\max_{1 \leq \tau \leq u} B_u(\tau) = B_u(u) = \frac{u^3}{u^3 - 2u^2 + 3u - 1} = \frac{u^3}{u^2 + (u-1)^3}, \quad u \leq u_2^{\text{rand}}, \quad (225)$$

$$= B_u(\tau_*(u)) = 1 + \frac{1}{2(\sqrt{u}-1)}, \quad u \geq u_2^{\text{rand}}. \quad (226)$$

It remains to compare the candidate  $A$  with the values obtained from  $B_u$ . On  $2 \leq u \leq 3$ , clearing the positive denominators in  $B_u(u) - A(u-1)$  and putting  $v = u-2$  leaves

$$v^4 + 3v^3 + 3v^2 + 3v + 3 > 0.$$

On  $3 \leq u \leq u_2^{\text{rand}}$ , one has  $B_u(u) > 4/3$ . On  $u_2^{\text{rand}} \leq u \leq u_3^{\text{rand}}$ , (226) is at least  $4/3$ , with equality exactly at  $u = u_3^{\text{rand}}$ ; afterwards  $A(2) = 4/3$  is larger. Combining these observations with (219) proves the announced upper bound

$$\frac{\min\{u, \mathcal{T}_u(D)\}}{1 + \int_0^s S_D(t)^2 dt} \leq R_{\text{RO}}^{\text{rand}}(u) \quad (227)$$

for every finite distribution  $D$ .

The junction statements now follow directly. Equations (224) to (226) give continuity at  $u_2^{\text{rand}}$ , and the formula  $1+1/[2(\sqrt{u}-1)]$  equals  $4/3$  at  $u = u_3^{\text{rand}}$ . Differentiating (225) shows that its only interior maximum above one occurs at  $u = (3+\sqrt{3})/2$ ; substitution gives (198).



## 5.4 Worst-case upper bound from instance optimality

No second learning argument is needed. Apply the universal unannounced algorithm of Theorem 4.1 to  $D = D[p]$ . The endpoint comparison Equation (208) and the scalar bound Equation (227) give

$$\Phi_{\text{RO},u}(D[p]) \leq R_{\text{RO}}^{\text{rand}}(u) \cdot \Omega_{\text{RO},u}(D[p]).$$

The exact empirical identity Equation (202) has a nonnegative linear correction. Therefore the instance-optimal upper bound immediately yields

$$\mathbb{E} \text{ALG}_{\mathcal{A}_{n,u}} \leq R_{\text{RO}}^{\text{rand}}(u) \cdot \text{OPT}_u + o_u(n^2), \quad (228)$$

which is (196). For  $0 < u \leq 1$ , raw execution is exactly clairvoyantly optimal, so no learning is required.

## 5.5 Binary oblivious lower bounds

It remains to show that no adaptive algorithm improves the resulting worst-case upper bound. We first record an envelope for shuffled binary vectors.

**Lemma 5.3** (Binary-input envelope at the offline cap  $u$ ). *Fix  $u > 1$ ,  $x \in [0, 1]$ , and put  $z = 1 - x$ . Let  $p^{(n)}$  have  $xn + O(1)$  coordinates of value  $u$  and  $zn + O(1)$  zero coordinates. For every randomized nonanticipating algorithm, even an announced one,*

$$\frac{\mathbb{E} \text{ALG}}{n^2} \geq \begin{cases} \frac{u}{2} - o_u(1), & x \geq (u-1)/u, \\ \frac{1+x+ux^2}{2} - o_u(1), & x \leq (u-1)/u. \end{cases} \quad (229)$$

Every labeling has

$$\frac{\text{OPT}_u}{n^2} = \frac{1+(u-1)x^2}{2} + O_u(1/n). \quad (230)$$

*Proof.* First fix a deterministic algorithm. If it does not complete all jobs, the claim is immediate. Otherwise place the individual jobs uniformly on the public labels, treating jobs of the same value as distinct. Reveal a job's value in the analysis only when the algorithm first touches its label. Conditional on all earlier reveals, the unrevealed jobs remain uniformly permuted, and the algorithm has already made its test/raw choice before the next value is revealed.

Take  $\delta_n = n^{-1/4}$ . The predictable-permutation bound lemma 2.14, applied to the zero indicator and the test selector, gives one event of probability  $1 - o(1)$  on which every prefix of the order in which labels are first touched that ends with at least  $\delta_n n$  untouched labels and contains  $t$  tests satisfies

$$|N_0(t) - zt| \leq \Delta_n, \quad \Delta_n = O(\delta_n^{-1} \sqrt{n \ln n}) = o(n). \quad (231)$$

Here  $N_0(t)$  is the number of tested zeros. The event is simultaneous, so we do not condition on the algorithm's adaptive stopping time.

Edit the suffix by running raw every still-untouched job that the original schedule would later test, deleting its later known-processing operation. Only  $\delta_n n + O(1)$  jobs change, so the edit changes total completion cost by  $o_u(n^2)$ . Let  $q$  be the final tested fraction of the edited schedule. On (231), every prefix of its completion curve is dominated, up to  $o(1)$  vertical error, by the divisible items

| item                              | completion capacity | work per completion |
|-----------------------------------|---------------------|---------------------|
| tests that reveal zero jobs       | $zq$                | $1/z$               |
| processing of tested $p = u$ jobs | $xq$                | $u$                 |
| raw jobs                          | $1 - q$             | $u$                 |

When  $z = 0$ , the first row is simply omitted. Indeed,  $t$  tests complete at most  $zt + \Delta_n$  zeros and expose at most  $xt + \Delta_n$  jobs with  $p = u$ ; raw execution and processing of a known  $p = u$  job both use  $u$  work per completion. Ordering these three divisible blocks by work per completion, as in lemma 2.4, therefore upper-bounds completed mass at every work value. Integrating the remaining mass gives a lower bound on total completion time.

If  $z \leq 1/u$ , every displayed item costs at least  $u$  per completion, so the normalized area is at least  $u/2 - o_u(1)$ . If  $z \geq 1/u$ , the tests that reveal zero jobs come first. For fixed  $q$  the resulting remaining-mass area is

$$F_z(q) = q - \frac{zq^2}{2} + \frac{u}{2}(1 - zq)^2, \quad F'_z(q) = (1 - zq)(1 - uz). \quad (232)$$

It is minimized at  $q = 1$ , giving  $F_z(1) = (1 + x + ux^2)/2$ . Restoring the edited final  $\delta_n n + O(1)$  jobs, the  $o(1)$  error in completed mass, and the sampling event's failure probability together contribute only  $o_u(n^2)$ .

The argument holds for each deterministic algorithm. For a randomized algorithm, fix its seed and then average over the seed. The private shuffle is already part of the input convention. Finally, the effective lengths of the two job types are 1 and  $u$ , so (230) follows from lemma 2.1.  $\square$

We now select the binary masses. If  $u_1^{\text{rand}} < u \leq u_2^{\text{rand}}$ , take

$$x = \frac{u - 1}{u}. \quad (233)$$

This is the boundary  $z = 1/u$  in lemma 5.3, and its online and offline coefficients have ratio

$$\frac{u}{1 + (u - 1)((u - 1)/u)^2} = \frac{u^3}{u^2 + (u - 1)^3}. \quad (234)$$

If  $u_2^{\text{rand}} \leq u \leq u_3^{\text{rand}}$ , take

$$x = \frac{1}{\sqrt{u} - 1}. \quad (235)$$

The definition of  $u_2^{\text{rand}}$  is precisely the point from which  $x \leq (u - 1)/u$ . Since  $(u - 1)x^2 = 1 + 2x$ , the second line of (229) divided by (230) becomes

$$1 + \frac{x}{2} = 1 + \frac{1}{2(\sqrt{u} - 1)}. \quad (236)$$

Irrational masses are approximated by integer job counts divided by  $n$ ; the rounding error and the one-job terms omitted from the leading pair coefficient are  $O_u(n)$ .

For  $u \geq u_3^{\text{rand}}$ , the lower bound  $4/3$  uses a fixed bounded distribution supported on  $\{0, 2\}$  instead of the binary distribution on  $\{0, u\}$  used for smaller  $u$ .

**Lemma 5.4** (Balanced zero-two lower bound). *For every  $u \geq u_3^{\text{rand}}$  and every randomized algorithm, arbitrarily large even  $n$  admit a vector with  $n/2$  zero coordinates and  $n/2$  coordinates of value two such that*

$$\mathbb{E} \text{ALG} \geq n^2 - o_u(n^2), \quad \text{OPT}_u = \frac{3}{4}n^2 + O(n). \quad (237)$$

*Proof.* Expose values when their labels are first touched, apply the predictable-permutation event Equation (231) simultaneously to every prefix of that order, and replace tests among the final  $o(n)$  untouched jobs by raw execution as in the proof of lemma 5.3. For a realized tested fraction  $q$ , the three divisible blocks now have capacities and costs

| item                                   | completion capacity | work per completion |
|----------------------------------------|---------------------|---------------------|
| tests that reveal zero jobs            | $q/2$               | 2                   |
| processing of tested jobs with $p = 2$ | $q/2$               | 2                   |
| raw jobs                               | $1 - q$             | $u$                 |

Every item costs at least two per completion. Thus the completion envelope lies below  $\min\{1, t/2\}$  independently of  $q$ , whose remaining-mass area is one. This proves the online estimate after the  $o_u(n^2)$  repairs and averaging over the algorithm seed. Since  $u > 3$ , the two effective lengths are one and three; their equally weighted divisible SPT cost gives offline coefficient  $3/4$ .  $\square$

Equations (234) and (236), together with lemma 5.4, match (228) on  $1 < u \leq u_2^{\text{rand}}$ ,  $u_2^{\text{rand}} \leq u \leq u_3^{\text{rand}}$ , and  $u \geq u_3^{\text{rand}}$ , respectively. For  $0 < u \leq 1$ , raw execution is both an online and a clairvoyant optimum. This completes the proof of the exact curve in Theorem 5.1.

## 5.6 The randomized obligatory endpoint

We now pass from the randomized curve with a finite raw-execution cap  $u$  to the unbounded obligatory endpoint. The adversary fixes a vector  $p \in [0, \infty)^n$  before the algorithm draws its random bits; the input convention then privately shuffles its coordinates. The entries are not announced, and no upper bound on the processing times is assumed. The zero–two lower bound at the finite raw-execution cap  $u = u_3^{\text{rand}}$  transfers directly. The upper bound needs one additional safeguard: the algorithm groups every sampled value above a threshold into one category and switches to a safe test-all schedule when the sample does not identify a dense enough early group. Letting this threshold grow slowly also makes the same algorithm instance-optimal on every bounded class. This subsection proves Theorem 5.5, the rigorous randomized part of the informal obligatory-testing result Theorem 1.1 from the introduction.

**Theorem 5.5** (Randomized obligatory testing). *There are a universal constant  $C$  and a randomized nonanticipating algorithm  $\mathcal{A}_n^*$ , depending only on  $n$ , such that every fixed vector  $p \in [0, \infty)^n$  satisfies*

$$\mathbb{E} \text{ALG}_{\mathcal{A}_n^*}(p) \leq \frac{4}{3} \cdot \text{OPT}(p) + Cn^{19/10} \leq \left( \frac{4}{3} + 2Cn^{-1/10} \right) \cdot \text{OPT}(p). \quad (238)$$

*A fixed-cutoff companion  $\mathcal{A}_n^{(32)}$ , using  $B = 32$  and the more conservative fallback criterion  $\hat{\kappa} < 2/B$ , satisfies the sharper explicit estimate*

$$\mathbb{E} \text{ALG}_{\mathcal{A}_n^{(32)}}(p) \leq \frac{4}{3} \cdot \text{OPT}(p) + 20378n^{7/4}. \quad (239)$$

*Conversely, for every randomized algorithm  $\mathcal{A}$  and every  $\varepsilon > 0$ , arbitrarily large even  $n$  admit a vector with  $n/2$  zero coordinates and  $n/2$  coordinates of value two such that*

$$\mathbb{E} \text{ALG}_{\mathcal{A}}(p) \geq \left( \frac{4}{3} - \varepsilon \right) \cdot \text{OPT}(p), \quad \text{OPT}(p) = \frac{3}{4}n^2 + n. \quad (240)$$

Hence the exact randomized size-asymptotic competitive ratio against an oblivious adversary is  $R_{\text{OT}}^{\text{rand}} = 4/3$ .

When the multiset of values is revealed in advance, the algorithmic core is the prefix of the shortest processing times that maximizes completions per unit of testing and processing work. Testing jobs in a uniformly random order gives an exact pair identity whose nonnegative terms prove the factor  $4/3$ . The universal algorithm learns an approximately separated prefix from a sublinear sample; the threshold and the safe test-all schedule described below protect it from unbounded values missed by the sample. The matching lower bound is inherited from the zero-two lower bound at the finite raw-execution cap  $u = u_3^{\text{rand}}$ . We first prove the uniform upper bound and then give the short transfer.

### 5.6.1 Normalization of the offline pair identity

For a distribution  $D$  on  $[0, \infty)$ , define the leading offline coefficient

$$\Omega_{\text{OT}}(D) := \frac{1}{2} + \text{SPT}(D). \quad (241)$$

For a fixed vector  $p$ , the finite SPT identity gives

$$\Omega_{\text{OT}}(D[p]) = \frac{1}{2} + \frac{\text{SPT}([n])}{n^2} - \frac{1}{2n^2} \sum_i p_i, \quad \Delta_{\text{OT}}(p) = \frac{n + \sum_i p_i}{2}. \quad (242)$$

Combining Equation (5) with the finite SPT identity, with  $\lambda_i = 1 + p_i$ , gives

$$\text{OPT}(p) = n^2 \Omega_{\text{OT}}(D[p]) + \Delta_{\text{OT}}(p). \quad (243)$$

The linear correction  $\Delta_{\text{OT}}(p)$  will be kept rather than hidden: this makes the analysis valid for unbounded processing times.

### 5.6.2 Stationary prefixes

For a fixed input  $p$ , let  $E \subseteq [n]$  contain every zero job and suppose that every processing time in  $E$  is at most every processing time outside  $E$ . Put  $T = [n] \setminus E$  and

$$e = |E|, \quad a = \frac{e}{n}, \quad h = 1 - a, \quad \ell_X = \frac{1}{n} \sum_{i \in X} p_i \quad (X \subseteq [n]). \quad (244)$$

We call  $E$  a *processing-time prefix*. Since every job in  $E$  is no longer than every job in  $T$ , the SPT pair formula gives

$$\text{SPT}([n]) = \text{SPT}(E) + n^2 h \ell_E + \text{SPT}(T). \quad (245)$$

Consider the stationary algorithm that tests the jobs in a uniformly random order, processes each positive  $E$ -job immediately, and after the last test processes  $T$  in SPT order. Here *stationary* means that  $E$  and this immediate-or-deferred rule are fixed before the random order is exposed. We write its leading coefficient as

$$\text{STAT}(E) := (1 + \ell_E) \left(1 - \frac{a}{2}\right) + \frac{\text{SPT}(T)}{n^2} - \frac{\ell_T}{2n}. \quad (246)$$

This notation has a direct exact interpretation. Let  $W = n + \sum_{i \in E} p_i$  and  $W_E = e + \sum_{i \in E} p_i$ . Every test or immediate processing block precedes a fixed  $E$ -job with probability  $1/2$ , so

the  $E$ -jobs contribute  $(eW + W_E)/2$  in expectation. Every  $T$ -job then sees the common offset  $W$ , and the final phase contributes  $(n - e)W + \text{SPT}(T)$ . Adding these quantities gives

$$\mathbb{E} \text{ALG}_{\text{stat}}(p, E) = n^2 \text{STAT}(E) + \frac{e + \sum_i p_i}{2}. \quad (247)$$

For a nonempty prefix define its completion density by

$$\kappa(E) = \frac{a}{1 + \ell_E}. \quad (248)$$

Choose a maximum-density prefix and put

$$\tau = \frac{1 + \ell_E}{a} = \frac{1}{\kappa(E)}. \quad (249)$$

All zeros belong to every maximizer: adding a zero increases the numerator without increasing the denominator. The empirical prefix corollary 2.3 lets us choose a maximizer with

$$\tau = \tau_{D[p]}, \quad p_i \leq \tau \ (i \in E), \quad p_i \geq \tau \ (i \notin E), \quad (250)$$

where tied occurrences may be assigned to either side.

The next identity is the algebraic source of the constant  $4/3$ .

**Lemma 5.6** (Exact identity and robust bound). *For every ordered prefix split with  $a > 0$  and  $\tau = (1 + \ell_E)/a$ ,*

$$\begin{aligned} & 2\tau(4\Omega_{\text{OT}}(D[p]) - 3\text{STAT}(E)) \\ &= (\tau - 2)^2 + 4 \left[ \tau \left( \frac{2\text{SPT}(E)}{n^2} - \frac{\ell_E}{n} \right) - \ell_E^2 \right] \\ &+ \tau \left( \frac{2\text{SPT}(T)}{n^2} - \frac{\ell_T}{n} - \tau h^2 \right). \end{aligned} \quad (251)$$

Consequently:

- (i) *if values in  $E$  are at most  $\tau$  and values in  $T$  are at least  $\tau$ , then  $\text{STAT}(E) \leq 4\Omega_{\text{OT}}(D[p])/3$ ;*
- (ii) *if values in  $E$  are at most  $\tau + s$  and values in  $T$  are at least  $\tau - s$ , where  $s \geq 0$ , then*

$$\text{STAT}(E) \leq \frac{4}{3}\Omega_{\text{OT}}(D[p]) + \frac{2}{3}s. \quad (252)$$

*Proof.* Expansion using  $\ell_E = a\tau - 1$ ,  $h = 1 - a$ , and Equation (245) gives Equation (251). Under exact separation,  $xy \leq \tau \min\{x, y\}$  for  $x, y \in E$ , hence

$$\ell_E^2 \leq \tau \left( \frac{2\text{SPT}(E)}{n^2} - \frac{\ell_E}{n} \right).$$

For  $x, y \in T$ , one has  $\min\{x, y\} \geq \tau$ , hence

$$\frac{2\text{SPT}(T)}{n^2} - \frac{\ell_T}{n} \geq \tau h^2.$$

This proves (i).

Under the relaxed inequalities,

$$\tau \left( \frac{2\text{SPT}(E)}{n^2} - \frac{\ell_E}{n} \right) - \ell_E^2 \geq -s \left( \frac{2\text{SPT}(E)}{n^2} - \frac{\ell_E}{n} \right),$$

and

$$\frac{2 \text{SPT}(T)}{n^2} - \frac{\ell_T}{n} - \tau h^2 \geq -sh^2.$$

Moreover  $2 \text{SPT}(E)/n^2 - \ell_E/n \leq a\ell_E \leq a^2\tau$ . Substitution into Equation (251) yields

$$\text{STAT}(E) \leq \frac{4}{3}\Omega_{\text{OT}}(D[p]) + \frac{2}{3}sa^2 + \frac{1}{6}sh^2 \leq \frac{4}{3}\Omega_{\text{OT}}(D[p]) + \frac{2}{3}s,$$

because  $(2/3)a^2 + (1/6)(1-a)^2 \leq 2/3$  on  $[0, 1]$ .  $\square$

Combining the exact identity with Equations (243) and (247) already gives a finite statement useful below.

**Corollary 5.7** (Announced multiset). *If the multiset is announced, the stationary algorithm for a maximum-density prefix satisfies*

$$\mathbb{E} \text{ALG}_{\text{stat}}(p, E) \leq \frac{4}{3} \cdot \text{OPT}(p).$$

Indeed, the correction in Equation (247) is at most  $\Delta_{\text{OT}}(p)$ . Equality in the quadratic coefficient of Equation (251) forces  $\tau = 2$ , zero mass  $1/2$ , and all positive mass at two. This predicts the lower-bound instance before any probabilistic argument is used.

We also need an estimate whose error is independent of the values outside the early set. Direct expansion gives

$$\text{STAT}(E) - \Omega_{\text{OT}}(D[p]) = \frac{1}{2} \left( h + a\ell_E - \frac{2 \text{SPT}(E)}{n^2} + \frac{\ell_E}{n} \right). \quad (253)$$

If all values in  $E$  are at most  $L \geq 1$ , then  $\ell_E \leq aL$  and therefore

$$\text{STAT}(E) \leq \Omega_{\text{OT}}(D[p]) + \frac{L}{2}. \quad (254)$$

### 5.6.3 Learning the prefix from a sublinear sample

For the main algorithm, set the slowly growing cutoff

$$B = B_n = 32 + n^{1/20}. \quad (255)$$

For an integer  $d$ , let  $\eta = B/d$ . Keep zero as a separate category, partition  $(0, B]$  into the consecutive bins  $((b-1)\eta, b\eta]$ , and add one overflow category for values above  $B$ . A finite positive value is rounded upward to the endpoint  $q_b = b\eta$ .

Let  $S$  be a uniformly random subset of  $k$  labels. If  $\mu_b$  and  $\hat{\mu}_b$  are the population and sample fractions of category  $b$ , put

$$\Delta = \sum_b |\hat{\mu}_b - \mu_b|. \quad (256)$$

**Lemma 5.8** (Histogram error). *For  $1 \leq k < n$ ,*

$$\mathbb{E}\Delta \leq \sqrt{\frac{d+2}{k}}.$$

*Proof.* This is Equation (31), with the zero bin and the overflow bin included among the  $d+2$  categories.  $\square$

For a finite category prefix  $J$ , define

$$\hat{a}(J) = \sum_{b \in J} \hat{\mu}_b, \quad \hat{\ell}(J) = \sum_{b \in J} q_b \hat{\mu}_b, \quad \hat{\kappa}(J) = \frac{\hat{a}(J)}{1 + \hat{\ell}(J)}.$$

Let  $\hat{\kappa}$  be the maximum and  $\hat{\tau} = 1/\hat{\kappa}$ . Starting with a maximizing category prefix, also include every finite category whose endpoint is at most  $\hat{\tau}$ . Thus the algorithm uses

$$\hat{J} = \{\text{finite categories } b : q_b \leq \hat{\tau}\}. \quad (257)$$

**Lemma 5.9** (Closing a maximum-density prefix at its threshold). *The prefix  $\hat{J}$  from Equation (257) has the same maximum sample density. Every category in it has endpoint at most  $\hat{\tau}$ , and every finite category outside it has endpoint greater than  $\hat{\tau}$ , including categories with zero sample count.*

*Proof.* The removal/addition calculation in corollary 2.3 applies to every positive-mass sample category. Empty categories do not change the sample statistics, and adding mass at equality preserves the identity  $1 + \hat{\ell} = \hat{a}\hat{\tau}$ . Adding all categories up to the threshold therefore preserves optimality and makes the two pointwise assertions tautological.  $\square$

For large  $n$ , set

$$k = \lfloor n^{3/4} \rfloor, \quad d = \lfloor n^{1/4} \rfloor, \quad \eta = B/d. \quad (258)$$

The algorithm draws a uniform permutation and first tests its first  $k$  jobs, leaving positive sample jobs pending. It computes  $\hat{J}$  according to Equation (257). If

$$\hat{\kappa} < \frac{1}{B}, \quad (259)$$

it enters *fallback mode*: test every remaining job and then process all positive jobs in SPT order. Otherwise it enters *learned mode*: first process the positive sampled jobs whose categories lie in  $\hat{J}$ ; then test the remaining jobs in random order and immediately process each positive job whose category lies in  $\hat{J}$ ; finally process all other positive tested jobs in SPT order. The overflow category never belongs to  $\hat{J}$ .

#### 5.6.4 Analysis on good and bad samples

Put

$$\gamma = \frac{1}{B(B+1)}, \quad G = \{\Delta \leq \gamma\}. \quad (260)$$

Markov's inequality, recalled in Section 2.6, and lemma 5.8 give

$$\mathbb{P}(G^c) \leq B(B+1) \sqrt{\frac{d+2}{k}}. \quad (261)$$

Assume that  $G$  holds and the algorithm uses the learned schedule. Let  $E$  contain all jobs whose categories belong to  $\hat{J}$ , and let  $a, \ell_E, \tau = (1 + \ell_E)/a$  be its true statistics. Since  $\hat{\tau} \leq B$  and  $\hat{a} = (1 + \hat{\ell})/\hat{\tau} \geq 1/B$ , we have  $a \geq 1/(B+1)$ . For this fixed category set,

$$|a - \hat{a}| \leq \Delta, \quad |\ell_E - \hat{\ell}| \leq B\Delta + \eta.$$

Consequently

$$|\tau - \hat{\tau}| \leq 2B(B+1)\Delta + (B+1)\eta. \quad (262)$$

Every value in  $E$  is at most  $\hat{\tau}$ , while every value outside  $E$  is greater than  $\hat{\tau} - \eta$ . Thus the robust bound applies with

$$s = 2B(B+1)\Delta + (B+2)\eta. \quad (263)$$

The algorithm tests the sample before all other jobs, so its order is not exactly the stationary schedule in which all jobs share one uniform order. The difference is only lower order. Conditional on the unordered sample, put  $e_S = |E \cap S|$ ,  $e_T = |E \setminus S|$ , and

$$W_S = k + \sum_{i \in E \cap S} p_i, \quad W_T = n - k + \sum_{i \in E \setminus S} p_i.$$

Comparing the two independent random internal orders with one fully random order, the difference in the cost contributed by jobs in  $E$  is

$$\frac{e_T W_S - e_S W_T}{2} \leq \frac{1}{2} n k (1 + B).$$

Postponing the positive jobs in  $E \cap S$  until all sample tests finish adds at most  $k^2(1+B)$ . Jobs outside  $E$  are processed identically at the end because every zero belongs to  $E$ . Therefore, on event  $G$  when the learned schedule is used,

$$\mathbb{E}[\text{ALG} \mid S] \leq \frac{4}{3} \cdot \text{OPT} + n^2 \left[ \frac{4}{3} B(B+1)\Delta + \frac{2}{3} (B+2)\eta \right] + (1+B)(nk/2 + k^2). \quad (264)$$

On event  $G$  when the fallback schedule is used, comparison of sample and population densities shows that the reciprocal of the true maximum density satisfies  $\tau_{D[p]} \geq B/4 \geq 8$ . The exact threshold inequalities imply

$$\frac{2 \text{SPT}([n])}{n^2} - \frac{1}{n^2} \sum_i p_i \geq \frac{(\tau_{D[p]} - 1)^2}{\tau_{D[p]}}, \quad \Omega_{\text{OT}}(D[p]) \geq \frac{\tau_{D[p]} - 1 + 1/\tau_{D[p]}}{2} \geq \frac{57}{16}. \quad (265)$$

For every test order, test-all-then-SPT satisfies

$$\text{ALG}_{\text{fb}} \leq \text{OPT} + \frac{n(n-1)}{2}. \quad (266)$$

Indeed, if there are  $z$  zeros, moving their completions from the first  $z$  SPT positions to their test positions increases their sum of completion times by at most  $zn - z(z+1)/2$ . Delaying the remaining  $n-z$  positive jobs until all tests are finished adds at most  $(n-z)(n-z-1)/2$ ; the two bounds sum to  $n(n-1)/2$ . Combining Equations (265) and (266) gives  $\text{ALG}_{\text{fb}} < \frac{4}{3} \cdot \text{OPT}$ .

Because processing times are unbounded, the estimate on  $G^c$  must control excess over  $\frac{4}{3} \cdot \text{OPT}$ , not raw cost. Under the learned schedule every value in  $E$  is at most  $B$ , so Equation (254) bounds the stationary excess by  $(B/2)n^2$ ; under the fallback schedule Equation (266) bounds it by  $n^2/2$ . Averaging Equation (264) and these bounds on  $G^c$ , and using Equation (261), yields the uniform estimate

$$\mathbb{E} \text{ALG} \leq \frac{4}{3} \cdot \text{OPT} + n^2 \left[ \frac{B(B+1)(3B+8)}{6} \sqrt{\frac{d+2}{k}} + \frac{2B(B+2)}{3d} \right] + (1+B)(nk/2 + k^2). \quad (267)$$

For  $n \geq 12^4$ , the floors in Equation (258) give  $\sqrt{(d+2)/k} \leq 2n^{-1/4}$ ,  $1/d \leq 2n^{-1/4}$ , and  $k \leq n^{3/4}$ . Since  $B_n = O(n^{1/20})$ , the three error terms in Equation (267) are respectively



$O(n^{19/10})$ ,  $O(n^{37/20})$ , and  $O(n^{9/5})$ . Enlarging one universal constant covers smaller  $n$  and proves the first inequality in Equation (238). The bound  $\text{OPT} \geq n^2/2$  gives its multiplicative form.

For completeness, the fixed-cutoff companion uses  $B = 32$  and the more conservative fallback criterion  $\hat{\kappa} < 2/B$ . Substituting these fixed-cutoff choices into the error calculation gives

$$\mathbb{E} \text{ALG} \leq \frac{4}{3} \cdot \text{OPT} + n^2 \left[ 9472 \sqrt{\frac{d+2}{k}} + \frac{704}{d} \right] + 17(nk/2 + k^2).$$

The estimates  $k \leq n^{3/4}$ ,  $1/d \leq 2n^{-1/4}$ , and  $\sqrt{(d+2)/k} \leq 2n^{-1/4}$  give  $\mathbb{E} \text{ALG} \leq \frac{4}{3} \cdot \text{OPT} + 20378n^{7/4}$ , with the same deliberately loose constant covering smaller  $n$ . This proves Equation (239).

### 5.6.5 Transfer of the zero–two lower bound

Fix the finite raw-execution cap  $u = u_3^{\text{rand}}$ . Any randomized obligatory algorithm can be viewed as a revealing-optimization algorithm at this value of  $u$  that simply never uses raw execution. Apply lemma 5.4. Its fixed hard input has only values zero and two, so every revealing effective length is

$$\min\{u_3^{\text{rand}}, 1 + p_j\} = 1 + p_j.$$

The online transcript and the offline optimum are therefore exactly the same in the revealing model with raw-execution cap  $u = u_3^{\text{rand}}$  and in the obligatory model. For even  $n$ , the common offline value is

$$\text{OPT} = \frac{3}{4}n^2 + n,$$

whereas the selected labeling has expected online cost  $n^2 - o(n^2)$ . Its ratio tends to  $4/3$ , which proves Equation (240). Together with Equation (238), this completes the proof of Theorem 5.5.

## 6 Obligatory-testing instance optimality

The goal of this section is to prove Theorem 6.1, the rigorous version of the “one algorithm for every input” statement Theorem 1.2. The algorithm is exactly the growing-cutoff algorithm  $\mathcal{A}_n^*$  from Section 5.6. The new point is that, on every bounded input, the algorithm attains the best leading cost available even to an announced algorithm.

For a vector  $p = (p_1, \dots, p_n)$ , we define below an explicit number  $\Phi_{\text{OT}}(D[p])$ , using the common empirical notation Equation (1). It is obtained by scanning the processing times in increasing order, choosing the prefix with the largest number of completions per unit of test-and-process work, and evaluating the stationary algorithm for that prefix.

**Theorem 6.1** (Obligatory-testing instance optimality). *There is a single randomized nonanticipating algorithm  $\mathcal{A}^*$ , depending only on  $n$  and not on the input vector, with the following property. For every fixed  $L < \infty$  there is a deterministic sequence  $\varepsilon_L(n) \rightarrow 0$  such that every vector  $p \in [0, L]^n$  satisfies*

$$\mathbb{E} \text{ALG}_{\mathcal{A}^*}(p) \leq n^2 \Phi_{\text{OT}}(D[p]) + \varepsilon_L(n)n^2. \quad (268)$$

*Conversely, every  $p \in [0, L]^n$  and every randomized algorithm  $\mathcal{A}$ , even an announced algorithm, satisfy*

$$\mathbb{E} \text{ALG}_{\mathcal{A}}(p) \geq n^2 \Phi_{\text{OT}}(D[p]) - \varepsilon_L(n)n^2. \quad (269)$$

One may take  $\varepsilon_L(n) = O_L(n^{-1/5})$ . Thus  $\mathcal{A}^*$  is asymptotically instance-optimal, uniformly over all bounded inputs.

Both estimates below are stated with the common order  $O_L(n^{-1/5})$ .

**Theorem 6.2** (When instance optimality is impossible). (i) *There is no deterministic instance-optimal algorithm, even when all job lengths lie in  $[0, 2]$ . More precisely, for every deterministic algorithm  $\mathcal{A}$ , even an announced one, and every even  $n$ , there is a fixed labeling of the input with  $n/2$  zero jobs and  $n/2$  length-two jobs for which*

$$\text{ALG}_{\mathcal{A}} \geq \frac{9}{8}n^2. \quad (270)$$

*On the same input, an announced randomized algorithm  $\mathcal{A}'$  has*

$$\text{ALG}_{\mathcal{A}'} = n^2 + \frac{3}{4}n.$$

*Thus  $\text{ALG}_{\mathcal{A}} > \text{ALG}_{\mathcal{A}'} + n^2/8 - O(n)$ .*

(ii) *If job lengths are not bounded by a fixed constant, there is no randomized instance-optimal algorithm with one uniform additive  $o(n^2)$  term. More precisely, for every randomized algorithm  $\mathcal{A}$  independent of the input and every sufficiently large  $n$ , there is an input with lengths in  $[0, n^2]$  and an announced randomized algorithm  $\mathcal{A}'$  such that*

$$\text{ALG}_{\mathcal{A}} \geq \text{ALG}_{\mathcal{A}'} + \frac{1}{8}n^2. \quad (271)$$

*Proof.* As in the introduction,  $\text{ALG}_{\mathcal{A}}$  includes the expectation over the private randomness of  $\mathcal{A}$ . For part (i), write  $n = 2m$ . Against the fixed deterministic algorithm, reveal length two on the first  $m$  labels it tests and zero on the remaining  $m$ . After the interaction, record every answer on the label where it was given. Rerunning the deterministic algorithm on this fixed labeling reproduces the same actions and observations. If the algorithm does not finish, the claim is immediate. Otherwise, let  $h$  be the number of length-two jobs completed before the first zero is tested. By that time all  $m$  positive jobs have been tested, so at least  $m + 2h$  work has elapsed. The first  $h$  completed positive jobs contribute at least  $3h(h+1)/2$ . At that point the remaining jobs consist of  $m$  unit tests of zero jobs and  $m - h$  processing operations of length two. Even SPT order for this remaining work gives

$$\begin{aligned} \text{ALG}_{\mathcal{A}}(p) &\geq \frac{3h(h+1)}{2} + (2m-h)(m+2h) + \frac{m(m+1)}{2} \\ &\quad + m(m-h) + (m-h)(m-h+1) \\ &= \frac{9}{2}m^2 + \frac{1}{2}h^2 + \frac{3}{2}m + \frac{1}{2}h \geq \frac{9}{8}n^2. \end{aligned}$$

The comparison algorithm  $\mathcal{A}'$  tests in a uniformly random order, completes zeros at their tests, defers every length-two job, and finally processes the deferred jobs. This is the stationary algorithm with the zero jobs early. Its exact cost identity Equation (247) gives

$$\text{ALG}_{\mathcal{A}'} = n^2 + \frac{3}{4}n.$$

This proves the first claim.

For part (ii), put  $H = n^2$  and first run  $\mathcal{A}$  on the input  $p^0$  in which every job has length  $H$ . For a fixed private seed, let  $X_k$  be the number of completed jobs immediately before the

$k$ th test. Every processing operation contributes the same  $Hn(n+1)/2$  in total, regardless of its position. The  $k$ th test delays  $n - X_k$  unfinished jobs. Hence the excess over the algorithm  $\mathcal{A}'$  that tests and processes each job immediately satisfies

$$\text{ALG}_{\mathcal{A}} - \text{ALG}_{\mathcal{A}'} = \mathbb{E} \sum_{k=1}^n (k - 1 - X_k). \quad (272)$$

If this sum has expectation at least  $n^2/8$ , we are done.

Otherwise, replace one uniformly random label by a zero and leave every other length equal to  $H$ ; call the resulting input  $p^1$ . Conditional on the seed, the rank  $K$  at which the zero label is tested is uniform on  $\{1, \dots, n\}$ . Until that test, the run agrees with the all- $H$  run, and therefore  $X_K$  length- $H$  jobs complete before the zero. From Equation (272),

$$\mathbb{E}X_K = \frac{1}{n} \mathbb{E} \sum_{k=1}^n X_k > \frac{n-1}{2} - \frac{n}{8} = \frac{3n}{8} - \frac{1}{2}. \quad (273)$$

Forcing the zero job behind  $X_K$  length- $H$  jobs adds  $HX_K$  to the clairvoyant SPT lower bound. On the other hand, an announced algorithm can test in a private random order, defer positive jobs until it finds the zero, and then finish the positive jobs. Its completion order is SPT, and moving its unit tests away from the corresponding processing operations costs at most  $n^2$ . Thus

$$\text{ALG}_{\mathcal{A}} - \text{ALG}_{\mathcal{A}'} \geq H \left( \frac{3n}{8} - \frac{1}{2} \right) - n^2.$$

For  $H = n^2$  this exceeds  $n^2/8$  for all sufficiently large  $n$ . Averaging over the possible zero labels is exactly the private-shuffle expectation from the input convention. This proves part (ii).  $\square$

## 6.1 The maximum-density benchmark

We first define the benchmark for an arbitrary finitely supported probability distribution  $D$  on  $[0, \infty)$ . Apply the maximum-density module lemma 2.2, choose its threshold selector  $g_*$ , and put

$$a_* = a_D(g_*), \quad w_* = w_D(g_*) = a_* \tau_D. \quad (274)$$

The residual measure  $\nu$  from Equation (11) has mass  $1 - a_*$  and support in  $[\tau_D, \infty)$ . For an empirical measure one may equivalently sort the occurrences and maximize Equation (12) over processing-time prefixes  $E$  containing all zeros. A tied boundary class may be placed on either side, by corollary 2.3.

Define

$$\Phi_{\text{OT}}(D) = w_* \left( 1 - \frac{a_*}{2} \right) + \text{SPT}(\nu). \quad (275)$$

For  $D = D[p]$  and a maximizing prefix  $E$  made of whole job occurrences rather than fractional mass, this is precisely  $\text{STAT}(E)$  from Equation (246). The next lemma proves both that the value is independent of how probability mass at the threshold is split and that it lower-bounds every fluid algorithm.

**Lemma 6.3** (Pointwise completion envelope). *For scaled time  $s \geq 0$ , let*

$$\mathcal{C}_{\text{OT},D}(s) = \max \left\{ D(\{0\})T + \sum_{p>0} c_p : \begin{array}{l} 0 \leq T \leq 1, \quad 0 \leq c_p \leq D(\{p\})T, \\ T + \sum_{p>0} p c_p \leq s \end{array} \right\}. \quad (276)$$

Then  $\mathcal{C}_{\text{OT},D}$  is attained simultaneously at all times by the following stationary schedule: repeatedly test an infinitesimal fraction and immediately process the outcomes selected by  $g_*$  until all jobs have been tested, then process the residual measure  $\nu$  in SPT order. Moreover,

$$\Phi_{\text{OT}}(D) = \text{Area}(\mathcal{C}_{\text{OT},D}). \quad (277)$$

*Proof.* The envelope in Equation (276) is  $\mathcal{C}_{D,1}^v$  from Equation (17); the part representing jobs handled without testing has zero capacity, so  $v$  is immaterial. By lemma 2.5, its item measure is

$$a_*\delta_{\tau_D} + \nu.$$

The optimal realization first performs the tests and selected processing specified in the statement of the lemma and then processes  $\nu$  in SPT order, proving the pointwise assertion. Since  $\nu$  has mass  $1 - a_*$  and is supported above  $\tau_D$ , the common area formula Equation (19) expands to

$$\begin{aligned} \text{Area}(\mathcal{C}_{\text{OT},D}) &= \tau_D \left( \frac{a_*^2}{2} + a_*(1 - a_*) \right) + \text{SPT}(\nu) \\ &= w_* \left( 1 - \frac{a_*}{2} \right) + \text{SPT}(\nu), \end{aligned}$$

because  $w_* = a_*\tau_D$ . This is Equation (275) and is unaffected by how probability mass at the boundary is split.  $\square$

## 6.2 The announced upper bound

Suppose the input is announced but its labeling is not. Choose a maximizing prefix  $E$  made of whole job occurrences, test labels in a uniformly random order, process a job immediately when it belongs to  $E$ , and finish the remaining jobs in SPT order. The exact identity Equation (247) and Equation (275) give

$$\mathbb{E} \text{ALG}_{\text{stat}}(p) = n^2 \Phi_{\text{OT}}(D[p]) + \frac{1}{2} \left( |E| + \sum_i p_i \right). \quad (278)$$

In particular, if  $p \in [0, L]^n$ , the remainder is at most  $(1 + L)n/2$ . The announced optimum is therefore at most the claimed fluid value plus  $O_L(n)$ .

## 6.3 No adaptive announced algorithm has a better leading cost

Uniformly shuffle the coordinates of  $p$  and fix a deterministic nonanticipating algorithm. We may assume that it completes every job, since otherwise the lower bound is immediate. In the adaptive order in which it tests new labels, the revealed occurrences form a uniform random permutation  $P_1, \dots, P_n$  of the coordinates of  $p$  by deferred decisions. When values are equal, we still treat the corresponding jobs as distinct. Because the algorithm first touches every job by testing it, no final part of the schedule needs to be modified, and we may directly use the sampling bound that holds simultaneously for every prefix.

Keep zero separate, partition  $(0, L]$  into

$$K_n = \lfloor n^{1/5} \rfloor \quad (279)$$

cells, and round every positive value upward to its cell endpoint. Let  $D^+$  be the resulting empirical law and  $h_n = L/K_n$  the mesh. For each cell  $j$ , let  $H_{k,j}$  count its occurrences

among the first  $k$  tests and let  $d_j$  be its mass in  $D^+$ . The uniform-prefix bound Equation (32) gives, except on an event of probability at most  $n^{-2}$ ,

$$|H_{k,j} - kd_j| \leq \Gamma_n \quad \text{for all } k, j, \quad \Gamma_n = O\left(\sqrt{n \ln(n+2)}\right). \quad (280)$$

Put  $\gamma_n = \Gamma_n/n$ . At any point in the schedule, let  $t = k/n$ , let  $z$  be the normalized number of completed zero jobs, and let  $c_j$  be the completed positive mass from cell  $j$ . Equation (280) gives

$$z \leq d_0 t + \gamma_n, \quad c_j \leq d_j t + \gamma_n.$$

Set  $c'_j = (c_j - \gamma_n)^+$ . Rounding upward adds at most  $h_n$  to the normalized processing work accumulated in any prefix, so  $t, c'_j$  satisfy the constraints defining  $\mathcal{C}_{\text{OT}, D^+}$  at work  $x + h_n$ . Replacing  $z, c_j$  by  $d_0 t, c'_j$  removes at most  $(K_n + 1)\gamma_n$  completed mass. Hence, simultaneously at every prefix,

$$\frac{N_{\mathcal{A}}(nx)}{n} \leq \mathcal{C}_{\text{OT}, D^+}(x + h_n) + (K_n + 1)\gamma_n. \quad (281)$$

The normalized completion cost is the area under the unfinished fraction. The completion curve reaches one by normalized work  $H = L + 2$ , so integrating Equation (281) loses at most  $h_n + H(K_n + 1)\gamma_n$  from  $\Phi_{\text{OT}}(D^+)$ . The good event fails with probability at most  $n^{-2}$ , and the immediate test-process algorithm gives  $0 \leq \Phi_{\text{OT}}(D^+) \leq (L + 1)/2$ . Finally, zero-preserving transport lemma 2.6 changes the fluid value by at most  $h_n$ . Because  $(K_n + 1)\gamma_n = O(n^{-3/10} \sqrt{\ln(n+2)})$ , every deterministic announced algorithm has private-shuffle expected cost at least

$$n^2 \Phi_{\text{OT}}(D[p]) - O_L(n^{9/5}). \quad (282)$$

The argument was uniform after fixing the algorithm seed. Averaging over that seed gives precisely the randomized cost under the input convention.

## 6.4 Removing the announcement

It remains to prove Equation (268). Use the same sampling, threshold, and fallback rules as  $\mathcal{A}_n^*$  in Section 5.6. Its full parameter choice is

$$k = \lfloor n^{3/4} \rfloor, \quad d = \lfloor n^{1/4} \rfloor, \quad B_n = 32 + n^{1/20}, \quad \eta = B_n/d. \quad (283)$$

The algorithm privately permutes the labels, tests the first  $k$ , and rounds positive values upward to the  $B_n$ -grid. It starts with a sample prefix that maximizes density and then includes every finite grid category up to the resulting threshold.

Fix  $L$ . For all sufficiently large  $n$ ,  $B_n > L$  and the grid has no value in its overflow category. Moreover, the prefix containing the entire sample has density at least  $1/(1 + L + \eta) > 1/B_n$ , so fallback never occurs. Let  $D^+$  be the rounded population histogram,  $D^{\text{rem}}$  the rounded histogram of the remaining jobs,  $\widehat{D}$  the sample histogram, and  $\Delta = \|D^+ - \widehat{D}\|_1$ . By lemma 5.8 and deletion of the  $k$  sample occurrences,

$$\mathbb{E}\Delta \leq \sqrt{\frac{d+2}{k}}, \quad \|D^{\text{rem}} - D^+\|_1 \leq \frac{2k}{n-k}. \quad (284)$$

For a fixed grid prefix  $J$ , let  $F_{\text{OT}, D}(J)$  be the right-hand side of Equation (275) when  $J$  is used as the early set, whether or not it is optimal for  $D$ . If  $D, E$  are grid histograms supported on  $[0, L + \eta]$ , then

$$|F_{\text{OT}, D}(J) - F_{\text{OT}, E}(J)| \leq 3(L + 2)\|D - E\|_1. \quad (285)$$

Indeed, early mass changes by at most the  $\ell_1$  distance, early first moment by at most  $(L + \eta)$  times that distance. In the remaining double sum of  $\min\{p, q\}$ , change the first distribution and then the second; the total change is at most twice the same amount. The displayed loose constant covers the three terms.

By lemma 6.3, a maximum-density prefix minimizes  $F_{\text{OT},D}(J)$  over grid prefixes. Let  $\hat{J}$  be the prefix learned from the sample. Rounding each processing time upward by at most  $\eta$  preserves zeros, so lemma 2.6 gives

$$\Phi_{\text{OT}}(D^+) \leq \Phi_{\text{OT}}(D[p]) + \eta. \quad (286)$$

Conditional on the unordered sample, compare the actual schedule, which tests the sample before the other jobs, with the fully stationary algorithm for  $\hat{J}$ . The calculation in Section 5.6 bounds the extra cost by  $O_L(nk + k^2)$ . The one-job contribution in the exact stationary identity is  $O_L(n)$ , and using the rounded values can only increase the processing delays in that stationary schedule. Therefore

$$\mathbb{E}[\text{ALG}_{\mathcal{A}^*}(p) \mid S] \leq n^2 F_{\text{OT},D^{\text{rem}}}(\hat{J}) + O_L(nk + k^2 + n). \quad (287)$$

This is the conditional hypothesis of lemma 2.8. Apply that lemma with metric  $d(D, E) = \|D - E\|_1$ ,  $L_0 = 3(L + 2)$ , and Equation (284); then use Equation (286). Since

$$\sqrt{d/k} = O(n^{-1/4}), \quad \eta = O(n^{-1/5}), \quad k/n = O(n^{-1/4}),$$

we obtain

$$\mathbb{E} \text{ALG}_{\mathcal{A}^*}(p) \leq n^2 \Phi_{\text{OT}}(D[p]) + O_L(n^{9/5}) \quad (288)$$

for every  $p \in [0, L]^n$ . Together with Equation (282), this proves Theorem 6.1.

Finally, the exact identity Equation (251) says that  $\Phi_{\text{OT}}(D)$  is at most  $4/3$  times the leading clairvoyant SPT value for every  $D$ . Equality is attained by  $D = \frac{1}{2}\delta_0 + \frac{1}{2}\delta_2$ . Thus the sharp  $4/3$  theorem follows from the stronger instance-optimal description by maximizing over inputs.

## 7 Blind execution: instance-optimal four-block algorithms

We now turn to BE. Running an untouched job blindly consumes its actual processing time and completes it; testing consumes one unit, reveals the value, and permits the processing operation to be delayed. The adversary fixes a vector  $p \in [0, L]^n$  before the private seed is drawn; the private shuffle from the input convention then assigns its entries to labels. The goal of this section is to prove Theorem 7.1, the rigorous version of the informal blind-execution theorem Theorem 1.3.

**Theorem 7.1** (Blind-execution instance optimality). *Fix  $L < \infty$ . There exist a randomized nonanticipating algorithm  $\mathcal{A}^*$ , which knows  $n, L$  but not the entries of the input vector, and a deterministic sequence  $\varepsilon_L(n) \rightarrow 0$  with the following properties. Every  $p \in [0, L]^n$  satisfies*

$$\mathbb{E} \text{ALG}_{\mathcal{A}^*}(p) \leq n^2 \Phi_{\text{BE}}(D[p]) + \varepsilon_L(n)n^2. \quad (289)$$

*Every  $p \in [0, L]^n$  and every randomized algorithm  $\mathcal{A}$ , even an announced algorithm, satisfy*

$$\mathbb{E} \text{ALG}_{\mathcal{A}}(p) \geq n^2 \Phi_{\text{BE}}(D[p]) - \varepsilon_L(n)n^2. \quad (290)$$

*The benchmark  $\Phi_{\text{BE}}$  is defined explicitly in Section 7.1; it is the minimum of a one-variable quadratic. One may take  $\varepsilon_L(n) = O_L(n^{-1/6} \sqrt{\ln(n+2)})$ .*

The boundedness assumption in Theorem 7.1 cannot be removed. In fact, without it even the much weaker worst-case guarantee is impossible.

**Theorem 7.2** (No finite ratio for unbounded blind execution). *There are no randomized algorithms  $\mathcal{A}_n$ , constant  $R < \infty$ , and sequence  $\eta(n) \rightarrow 0$  such that every vector  $p \in [0, \infty)^n$  satisfies*

$$\mathbb{E} \text{ALG}_{\mathcal{A}_n}(p) \leq R \cdot \text{OPT}(p) + \eta(n)n^2. \quad (291)$$

*Proof.* Suppose that such a guarantee exists, and run  $\mathcal{A}_n$  on the all-zero instance. Its offline cost is zero, so if  $Z_n$  denotes the expected online cost, then  $Z_n \leq \eta(n)n^2 = o(n^2)$ . We may assume that the algorithm finishes every job, since otherwise its cost is infinite.

Fix its private seed and order the labels by their first touch on this zero instance. Every first touch completes its job: a blind zero takes no time, while a tested zero completes with its unit test. If the job at rank  $h$  is tested, that test is performed while  $n - h + 1$  jobs are unfinished and hence contributes  $n - h + 1$  to the objective. Consequently

$$Z_n \geq \mathbb{E} \sum_{h: \text{rank } h \text{ is tested}} (n - h + 1). \quad (292)$$

Now choose one label uniformly and change only its length from zero to  $H = n^2$ . Until this exceptional label is first touched, the algorithm sees exactly the zero-instance history. If its rank  $h$  is touched blindly, its nonpreemptive execution occupies the machine for  $H$  time units while  $n - h + 1$  jobs are unfinished. Averaging over the exceptional label and the private seed therefore gives

$$\begin{aligned} \mathbb{E} \text{ALG}_{\mathcal{A}_n}(p) &\geq \frac{H}{n} \mathbb{E} \sum_{h: \text{rank } h \text{ is blind}} (n - h + 1) \\ &\geq \frac{H}{n} \left( \frac{n(n+1)}{2} - Z_n \right) = H \left( \frac{n}{2} - o(n) \right). \end{aligned} \quad (293)$$

Some fixed choice of the exceptional label has at least this expected cost. For every such labeling, the clairvoyant schedule runs all zero jobs first and the long job last, so  $\text{OPT}(p) = H$ . With  $H = n^2$ , Equation (293) contradicts Equation (291) for all sufficiently large  $n$ .  $\square$

The proof first groups a round of tests and the short outcomes processed immediately after them into one divisible completion block. For a fixed tested fraction  $q$ , ordering all available blocks by work per completion forces the four-block order from the introduction and gives its exact quadratic cost. For an adaptive algorithm, values exposed at first touch still form a uniform permutation of the input, so one sampling event controls all prefixes at once. Discretizing  $[0, L]$  extends the bound to arbitrary bounded vectors, and an initial blind sample removes advance knowledge of the input.

## 7.1 The distributional benchmark

Let  $D$  be a probability distribution on  $[0, L]$ . Write

$$\mu = \int p dD(p). \quad (294)$$

Blind execution completes one unit of job mass using work  $\mu$ . Apply lemma 2.2 to  $D$ , choose its threshold selector  $g_*$ , and let  $\nu$  be the resulting residual measure. The best possible test-module density and its reciprocal are

$$\kappa_D := \max_g \frac{a_D(g)}{w_D(g)} = \frac{1}{\tau_D}. \quad (295)$$

The selector processes all positive values below  $\tau_D$  immediately after their tests, rejects all values above it, and may split probability mass located exactly at the boundary. With that boundary convention, put

$$a = a_D(g_*), \quad \ell = \int_{(0,L]} pg_*(p) dD(p).$$

The identities in lemma 2.2 give

$$a\tau_D - \ell = 1, \quad \tau_D = \frac{1 + \ell}{a}. \quad (296)$$

Thus a full unit of tests together with all selected low outcomes is a divisible module of completion mass  $a$ , work  $1 + \ell$ , and work per completion  $\tau_D$ .

If  $\tau_D \geq \mu$ , blind work has at least the completion density of any test module, and pure blind execution is optimal at the fluid scale. Suppose now that  $\tau_D < \mu$ . After testing a fraction  $q$ , the resulting four-block schedule is

$$\begin{aligned} \underbrace{\text{tests with immediate } p < \tau_D}_{\text{test module}} &\longrightarrow \underbrace{\text{known } \tau_D < p < \mu \text{ in SPT}}_{\text{medium}} \\ &\longrightarrow \underbrace{\text{untouched jobs blind}}_{\text{blind block}} \longrightarrow \underbrace{\text{known } p > \mu \text{ in SPT}}_{\text{high tail}}. \end{aligned} \quad (297)$$

For the explicit cost, first assume no probability mass lies exactly at  $\tau_D$  or  $\mu$ , and put

$$\begin{aligned} \mathcal{L} &= \{p < \tau_D\}, & \mathcal{M} &= \{\tau_D < p < \mu\}, & \mathcal{H} &= \{p > \mu\}, \\ a &= D(\mathcal{L}), & \ell &= \int_{\mathcal{L}} p dD(p), & \ell_M &= \int_{\mathcal{M}} p dD(p), \\ d &= D(\mathcal{H}), & D_M &= D|_{\mathcal{M}}, & D_H &= D|_{\mathcal{H}}, \end{aligned}$$

where  $D|_A$  denotes the restriction of  $D$  to a set  $A$ . Put  $\bar{q} = 1 - q$ . Remaining-mass accounting gives

$$\begin{aligned} F_{\text{BE},D}(q) &= (1 + \ell) \left( q - \frac{aq^2}{2} \right) + q\ell_M(\bar{q} + qd) + q^2 \text{SPT}(D_M) \\ &\quad + \mu \left( \bar{q}qd + \frac{\bar{q}^2}{2} \right) + q^2 \text{SPT}(D_H). \end{aligned} \quad (298)$$

Probability mass at  $\tau_D$  is split between outcomes processed immediately after their tests and the remaining tested jobs; mass at  $\mu$  may be placed on either side of the jobs run blindly. The same formula then holds after treating the two portions as separate classes.

Each term in Equation (298) has a direct area interpretation. During the test module, work  $(1 + \ell)dq$  reduces unfinished mass from 1 to  $1 - aq$ . The medium work  $q\ell_M$  delays the untouched mass  $\bar{q}$  and high mass  $qd$ , while  $\text{SPT}(D_M)$  is its internal divisible SPT cost. The blind block delays all high jobs and itself loses mass linearly. Finally  $\text{SPT}(D_H)$  is the high-tail SPT cost. Expansion gives the quadratic

$$F_{\text{BE},D}(q) = \frac{\mu}{2} + Aq + Bq^2, \quad (299)$$

where

$$A = 1 + \ell + \ell_M + \mu(d - 1) = 1 - \int (\mu - p)^+ dD(p), \quad (300)$$



$$B = -\frac{a(1+\ell)}{2} + \ell_M(d-1) + \text{SPT}(D_M) + \mu \left( \frac{1}{2} - d \right) + \text{SPT}(D_H). \quad (301)$$

The envelope proof below implies  $B \geq 0$ . When testing has lower work per completion than blind execution, namely  $\tau_D < \mu$ , monotonicity in Equation (9) gives  $A < 0$ , and the optimal tested fraction is therefore

$$q^* = \begin{cases} 1, & B = 0, \\ \min\{1, -A/(2B)\}, & B > 0. \end{cases} \quad (302)$$

We define

$$\Phi_{\text{BE}}(D) = \min_{0 \leq q \leq 1} F_{\text{BE},D}(q), \quad (303)$$

with  $\Phi_{\text{BE}}(D) = \mu/2$  in the regime  $\tau_D \geq \mu$ .

## 7.2 The fixed-fraction completion envelope

We first prove that Equation (297) is globally optimal in a fluid relaxation. Let  $D$  have finite support  $0 = p_0 < p_1 < \dots < p_s \leq L$ , with masses  $d_i$ . Fix a final tested fraction  $q$ . At an arbitrary schedule prefix, let

$$\begin{aligned} t &= \text{tested mass}, & b &= \text{blindly completed mass}, \\ c_i &= \text{processed tested mass of class } i > 0. \end{aligned}$$

The completed mass and idealized work are

$$y = d_0 t + b + \sum_{i>0} c_i, \quad x = t + \mu b + \sum_{i>0} p_i c_i, \quad (304)$$

subject to

$$0 \leq t \leq q, \quad 0 \leq b \leq 1 - q, \quad 0 \leq c_i \leq d_i t. \quad (305)$$

Define the model envelope

$$\mathcal{C}_{\text{BE},D,q} := \mathcal{C}_{D,q}^\mu, \quad (306)$$

using the common envelope Equation (17). Every fluid schedule that ultimately tests mass  $q$  obeys this envelope, hence

$$\text{ALG} \geq \text{Area}(\mathcal{C}_{\text{BE},D,q}). \quad (307)$$

**Lemma 7.3** (Fixed- $q$  envelope). *If  $\tau_D < \mu$ , then for every  $q \in [0, 1]$  the right side of Equation (307) equals  $F_{\text{BE},D}(q)$  and is attained by the four-block fluid algorithm. If  $\tau_D \geq \mu$ , that right side is at least  $\mu/2$  for every  $q$ , with equality at  $q = 0$ .*

*Proof.* Apply lemma 2.5 with work  $v = \mu$  for jobs run blindly. The resulting item measure is

$$qa\delta_{\tau_D} + q\nu + (1-q)\delta_\mu.$$

When  $\tau_D < \mu$ , sorting these items by work per completion gives exactly the tests followed by selected low values, the remaining tested values below  $\mu$ , the jobs run blindly, and the tested values above  $\mu$ . This is the four-block order Equation (297). Expanding the common area formula Equation (19) across these four blocks gives Equation (298).

When  $\tau_D \geq \mu$ , every test and residual item costs at least  $\mu$  per completion. The  $q = 0$  envelope, one blind item of capacity one and cost  $\mu$ , therefore pointwise dominates every  $q > 0$  envelope and has area  $\mu/2$ . Finally, feasibility in Equations (304) and (305) is affine in  $q$ , so  $\mathcal{C}_{\text{BE},D,q}(x)$  is concave in  $q$  for each  $x$ . When  $\tau_D < \mu$ , its area complement  $F_{\text{BE},D}(q)$  is convex, proving  $B \geq 0$ .  $\square$

### 7.3 Sampling in the order jobs are first touched

The fluid proof fixed  $q$ , but an announced finite algorithm may choose whom to touch next and when to stop testing as arbitrary functions of its history. The next argument uses the fact that, conditional on the history, the values on untouched labels remain uniformly permuted.

For a size- $n$  vector whose coordinates lie among  $0 = p_0 < p_1 < \dots < p_s \leq L$ , write  $D_n$  for its empirical distribution,  $D_{n,i} = D_n(\{p_i\})$ , and  $\mu_n = \sum_i p_i D_{n,i}$ .

Treat jobs as distinct even when their processing times coincide and fix a deterministic algorithm that completes every job, equivalently fix the private seed of a randomized algorithm. Let  $X_k$  be the value encountered at first touch  $k$ , and let  $A_k$  indicate that the algorithm tests that job. Deferred decisions make the  $X_k$  a uniform permutation, and  $A_k$  is chosen before  $X_k$  is exposed. Apply lemma 2.14 first to the vector of class indicators with selector  $A_k$ , and then to the scalar  $X_k$  with selector  $1 - A_k$ , assigning failure probability  $1/(2n^2)$  to each application. Put

$$\begin{aligned}\Gamma_{\text{cell}} &= (1 + \delta^{-1})E_{n,s+1,1,1/(2n^2)}, \\ \Gamma_{\text{work}} &= (1 + \delta^{-1})E_{n,1,L,1/(2n^2)}, \\ \Gamma_n &= \max\{\Gamma_{\text{cell}}, \Gamma_{\text{work}}\}.\end{aligned}$$

On the common event, which has probability at least  $1 - n^{-2}$ , every prefix of the first-touch order that leaves at least  $\delta n$  labels untouched satisfies, for every class  $i$ ,

$$|\#\text{tested class } i - D_{n,i}\#\text{tests}| \leq \Gamma_n, \quad (308)$$

$$|\text{blind work} - \mu_n\#\text{blind jobs}| \leq \Gamma_n. \quad (309)$$

Importantly, the common event does not condition on the eventual tested fraction.

### 7.4 The announced lower bound

Fix an algorithm seed. Stop after  $\lfloor (1 - \delta)n \rfloor$  first touches and let  $Q_{n,\delta}$  be the number of tests completed by then, divided by  $n$ . Edit the suffix: every still-untouched job that would later be tested is instead executed blindly at its first original operation, and its later processing record is deleted. At most  $\delta n + O(1)$  jobs and three operations per affected job change. Write completion cost as operation length times the number of unfinished jobs. The changed operations affect the cost by  $O((L + 1)(\delta n^2 + n))$ ; during every unchanged operation the two unfinished-job counts differ by at most  $\delta n + O(1)$ , and the total work is at most  $(L + 1)n$ . Thus

$$\text{ALG}_{\text{original}} \geq \text{ALG}_{\text{edited}} - O((L + 1)(\delta n^2 + n)). \quad (310)$$

The edited schedule performs exactly  $Q_{n,\delta}n$  tests.

Work on the single event Equations (308) and (309) and only now set  $q = Q_{n,\delta}$ . Normalize mass and work by  $n$ , and let  $\gamma_n = \Gamma_n/n$ . At any operation boundary, let  $t, b, z, c_i$  denote tested mass, blindly completed mass, zero mass completed by tests, and the processed mass of jobs whose revealed positive value belongs to class  $i$ , respectively. The event gives

$$z \leq D_{n,0}t + \gamma_n, \quad c_i \leq D_{n,i}t + \gamma_n.$$

If  $x$  is the normalized work performed so far, the bound Equation (309) and the modification of the final  $\delta n + O(1)$  jobs give

$$t + \mu_n b + \sum_i p_i (c_i - \gamma_n)^+ \leq x + (L + 1)(\gamma_n + \delta). \quad (311)$$

Set  $c'_i = (c_i - \gamma_n)^+$ . We also have  $t \leq q$  and  $b \leq 1 - q$ , so  $t, b, c'_i$  satisfy the constraints defining  $\mathcal{C}_{\text{BE}, D_n, q}$  at work  $x + (L + 1)(\gamma_n + \delta)$ . Replacing  $z, c_i$  by  $D_{n,0}t, c'_i$  removes at most  $(s + 1)\gamma_n$  completed mass. Therefore

$$\text{completed fraction by } x \leq \mathcal{C}_{\text{BE}, D_n, q}(x + (L + 1)(\gamma_n + \delta)) + (s + 1)\gamma_n. \quad (312)$$

The envelope reaches completed mass one by normalized work at most  $H = L + 1$ , so integrating Equation (312) loses at most  $(L + 1)(\gamma_n + \delta) + H(s + 1)\gamma_n$  from its fluid area. By lemma 7.3, this area is  $F_{\text{BE}, D_n}(q)$  when  $\tau_{D_n} < \mu_n$  and is at least  $\mu_n/2$  otherwise; in either case it is at least  $\Phi_{\text{BE}}(D_n)$ . The sampling event fails with probability at most  $n^{-2}$ , and pure blind execution gives  $0 \leq \Phi_{\text{BE}}(D_n) \leq L/2$ . Averaging and using Equation (310) now gives

$$\frac{\mathbb{E} \text{ALG}_{\mathcal{A}}(p)}{n^2} \geq \Phi_{\text{BE}}(D_n) - O_{L,s}(\gamma_n + \delta + 1/n). \quad (313)$$

The estimate is uniform in the fixed seed and therefore remains valid after averaging over a randomized announced algorithm.

Write  $\text{VAL}_{\text{ann}}(p)$  for the minimum expected cost of an announced algorithm under the private-shuffle convention.

## 7.5 A growing grid and arbitrary bounded vectors

The number of distinct values may grow with  $n$ . Keep zero as a separate cell, partition  $(0, L]$  into

$$K_n = \lfloor n^{1/6} \rfloor \quad (314)$$

bins, and round every positive value upward; let  $h_n = L/K_n$  be the mesh. Zero preservation matters because a tested zero completes at its test. Write  $D[p]^{\text{grid}}$  for the rounded empirical distribution and  $\mu_p^{\text{grid}} = \int p dD[p]^{\text{grid}}(p)$ .

Coupling each value with its rounded value and applying lemma 2.6 gives

$$|\Phi_{\text{BE}}(D) - \Phi_{\text{BE}}(D^{\text{grid}})| \leq h_n. \quad (315)$$

This avoids any assumption that the numerical optimizer or threshold is stable under rounding.

Take  $\delta_n = n^{-1/6}$  and repeat the two predictable-sampling applications above for the  $K_n + 1$  grid cells, defining  $\Gamma_n$  as the larger of their two bounds. At any prefix of the edited schedule, subtracting  $\Gamma_n/n$  from the completed mass in each positive class makes all class capacities exact. The blind-work discrepancy, the edited suffix, and upward rounding shift normalized work by at most the same order. Hence both the horizontal work error and the total removed completion mass are bounded by

$$\zeta_n = O_L\left(\frac{(K_n + 1)\Gamma_n}{n} + h_n + \delta_n\right) = O_L(n^{-1/6}\sqrt{\ln(n + 2)}). \quad (316)$$

Consequently the rounded completion curve is bounded by  $\mathcal{C}_{\text{BE}, D[p]^{\text{grid}}, q}(x + \zeta_n) + \zeta_n$ . Integrating this inequality up to normalized work  $H = L + 1$  loses at most  $(H + 1)\zeta_n$  from the rounded fluid area. The first-touch event fails with probability  $n^{-2}$ , whose contribution is at most  $n^{-2}L/2$ , and the suffix edit has the cost established in Equation (310). Together with Equation (315), this yields the announced lower bound

$$\frac{\text{VAL}_{\text{ann}}(p)}{n^2} \geq \Phi_{\text{BE}}(D[p]) - O_L(n^{-1/6}\sqrt{\ln(n + 2)}). \quad (317)$$

For the matching upper bound, choose the optimal split of boundary classes and tested fraction for the rounded empirical vector; denote these choices by  $\pi$ . Select  $\lfloor q^*n \rfloor$  labels uniformly to test and execute the four blocks. Expanding every delay into contributions of individual jobs and unordered pairs expresses its expectation as a sum of bounded terms. For distinct jobs, the probability that zero, one, or two members of a pair are tested differs from the corresponding independent probability by  $O(1/n)$ , uniformly in the tested count. Hence

$$\mathbb{E}C_n(\pi) = n^2 F_{\text{BE}, D[p]^{\text{grid}}}(\pi) + O_L(n) \quad (318)$$

uniformly over choices  $\pi$ . Together with Equation (315), this proves

$$\left| \frac{\text{VAL}_{\text{ann}}(p)}{n^2} - \Phi_{\text{BE}}(D[p]) \right| \leq O_L(n^{-1/6} \sqrt{\ln(n+2)}). \quad (319)$$

## 7.6 Removing the announcement

The universal algorithm first draws a uniform random permutation and blindly executes

$$k_n = \lceil n^{1/2} \rceil \quad (320)$$

sample jobs. Their observed durations give a grid histogram  $\hat{D}_n$ . The algorithm minimizes the quadratic Equation (299) over every grid threshold, position at which the jobs run blindly are inserted, and  $q \in [0, 1]$ , then runs the selected four-block template on the remaining jobs in the unused random order.

Let  $D_n$  and  $D_n^{\text{rem}}$  be the full and remaining grid histograms. Applying Equation (31) to the grid classes gives

$$\begin{aligned} \mathbb{E}\|\hat{D}_n - D_n\|_1 &\leq \sqrt{\frac{K_n + 1}{k_n}}, & \mathbb{E}\|\hat{D}_n - D_n^{\text{rem}}\|_1 &\leq \frac{n}{n - k_n} \sqrt{\frac{K_n + 1}{k_n}}, \\ \|D_n^{\text{rem}} - D_n\|_1 &\leq \frac{2k_n}{n - k_n}. \end{aligned} \quad (321)$$

For fixed scheduling choices  $\pi$ , formula Equation (298) consists only of bounded single and double integrals. Therefore, uniformly in the grid and in  $\pi$ ,

$$|F_{\text{BE}, D}(\pi) - F_{\text{BE}, E}(\pi)| \leq C_L \|D - E\|_1, \quad (322)$$

for example with  $C_L = 20(L+1)$ . Let  $\hat{\pi}$  minimize the sampled objective. Conditional on the sample, the remaining order is uniform and the learned template is fixed, so Equation (318) applies. The sample itself has work at most  $Lk_n$  and delays at most  $n$  jobs, adding at most  $Lnk_n = O_L(n^{3/2})$ . Hence

$$\mathbb{E}[\text{ALG}_{\mathcal{A}^*}(p) \mid \hat{D}_n, D_n^{\text{rem}}] \leq n^2 F_{\text{BE}, D_n^{\text{rem}}}(\hat{\pi}) + O_L(nk_n + n).$$

Apply lemma 2.8 with  $d(D, E) = \|D - E\|_1$ ,  $L_0 = C_L$ , and Equation (321); then use Equation (315). This gives

$$\frac{\mathbb{E} \text{ALG}_{\mathcal{A}^*}(p)}{n^2} \leq \Phi_{\text{BE}}(D[p]) + O_L\left(n^{-1/6} \sqrt{\ln(n+2)}\right) \quad (323)$$

uniformly over every vector  $p \in [0, L]^n$ .

For the converse, reveal the entries of  $p$  to an arbitrary algorithm for free. The announced lower bound Equation (317) applies seedwise and, after averaging over the seed, proves Equation (290). This completes the proof of Theorem 7.1.

## 7.7 Why some tested jobs must come before blind execution

Let

$$D(\{0\}) = \frac{1}{5}, \quad D(\{9\}) = \frac{1}{5}, \quad D(\{16\}) = \frac{3}{5}.$$

Then  $\mu = 57/5$  and  $\tau_D = 5$ . Thus tested zeros complete during their tests, tested jobs with  $p = 9$  precede the jobs run blindly, and tested jobs with  $p = 16$  follow them. Formula Equation (298) becomes

$$F_{\text{BE},D}(q) = \frac{57}{10} - \frac{44}{25}q + \frac{11}{10}q^2.$$

Its minimizer is  $q^* = 4/5$  and its value is 4.996. If all tested nonzero jobs are instead deferred until after the blind block, the best value is 5.04. The gap is a positive constant times  $n^2$ : processing the tested jobs with  $\tau_D < p < \mu$  before the jobs run blindly is necessary. An algorithm of the simpler form “threshold, then blind, then all tested residuals” is not instance optimal.

## 8 Blind optimization: speedup without revelation

We finally separate the two benefits that were bundled together in the revealing-optimization model. Raw execution still takes the known time  $u$ , and one unit of optimization still reduces the processing time to  $p_i \in [0, u]$ . The difference is that optimization does not reveal  $p_i$ . An optimized job must be started blindly and its duration becomes known only when it finishes. We call this the *blind-optimization* model  $\text{BO}(u)$ .

We study deterministic worst-case algorithms, and randomized algorithms against an oblivious adversary. The deterministic optimum has a particularly simple form: run everything raw up to  $u = 2$ , and optimize everything after that point. To prove that no adaptive mixture improves these two algorithms, the adversary assigns value zero to a raw job and value  $u$  to an optimized job, and stops after a prescribed fraction has been optimized. Randomization is still essential for learning the input: a private random sample is representative after the initial shuffle, whereas an adversary can make a deterministic exploration history atypical.

This small change removes the threshold decision entirely. It also shows that the bounded randomized ratio in the revealing model is genuinely an information effect.

The section first proves that deterministic instance optimality is impossible and determines the exact deterministic worst-case curve. It then proves two closely related randomized statements. The first, Theorem 8.5, is the rigorous version of the informal instance-optimality theorem Theorem 1.5. The second, Theorem 8.6, is the rigorous version of Theorem 1.4 and maximizes that instance-specific value relative to the clairvoyant optimum. Keeping the results together avoids repeating the same reduction to contiguous optimization-and-processing blocks.

For a vector  $p$ , put

$$\mu_p = \frac{1}{n} \sum_{i=1}^n p_i$$

and define

$$\Phi_{\text{BO},u}(p) = \frac{1}{2} \min\{u, 1 + \mu_p\}. \quad (324)$$

The two terms have an immediate meaning. Running every job raw uses  $u$  units per completion. Optimizing and then blindly processing every job uses  $1 + \mu_p$  units per completion on average.

Randomization is necessary for attaining this benchmark on every input.

**Theorem 8.1** (No deterministic instance-optimal algorithm). *For every unannounced deterministic nonanticipating algorithm  $\mathcal{A}$  and every even  $n$ , there are a fixed labeled input  $I \in \{0, 2\}^n$  and an announced randomized algorithm  $\mathcal{A}'$  such that*

$$\text{ALG}_{\mathcal{A}}(I) \geq \mathbb{E} \text{ALG}_{\mathcal{A}'}(I) + \frac{1}{8}n^2. \quad (325)$$

*Consequently no deterministic algorithm is asymptotically instance-optimal in  $\text{BO}(2)$ .*

*Proof.* Run  $\mathcal{A}$  against the following deterministic revelation rule. Give a job value zero if  $\mathcal{A}$  runs it raw, and value two if  $\mathcal{A}$  optimizes it. Optimization reveals nothing, and the value two is seen only when the optimized job is subsequently processed. Since  $\mathcal{A}$  is deterministic, recording the resulting value of every label produces a fixed labeled input with the same transcript.

Let  $m$  be the number of optimized jobs on this input. Every raw job consumes two units before completion, whereas every optimized job consumes three. Irrespective of interleaving, the completion times are therefore bounded below by the shortest-first schedule of  $n - m$  blocks of length two and  $m$  blocks of length three. Hence

$$\text{ALG}_{\mathcal{A}}(I) \geq n^2 + n + \frac{m^2 + m}{2}. \quad (326)$$

The multiset has  $n - m$  zeros and  $m$  twos. If  $m \leq n/2$ , let  $\mathcal{A}'$  privately permute the jobs and optimize and process them one at a time in that order. Every position sees the average block length  $(n + 2m)/n$ , so

$$\mathbb{E} \text{ALG}_{\mathcal{A}'}(I) = \frac{(n + 1)(n + 2m)}{2}. \quad (327)$$

Subtracting this from Equation (326) gives  $(n - m)(n - m + 1)/2 \geq n^2/8$ .

If  $m > n/2$ , let  $\mathcal{A}'$  run every job raw. Its cost is  $n(n + 1)$ , and the difference in Equation (326) is  $(m^2 + m)/2 > n^2/8$ . This proves Equation (325).  $\square$

An optimization operation reveals no information. We will repeatedly use the following normal form.

**Lemma 8.2** (Contiguous-block normal form for optimized jobs). *For every nonanticipating algorithm  $\mathcal{A}$  in  $\text{BO}(u)$  there is a nonanticipating algorithm  $\mathcal{A}^{\text{nf}}$  which completes every optimized job as one contiguous block of length  $1 + p_i$  and satisfies*

$$\text{ALG}_{\mathcal{A}^{\text{nf}}}(I) \leq \text{ALG}_{\mathcal{A}}(I) \quad (328)$$

*on every input  $I$ . If  $\mathcal{A}$  is deterministic, then so is  $\mathcal{A}^{\text{nf}}$ .*

*Proof.* Maintain a virtual execution of  $\mathcal{A}$ . When the virtual algorithm optimizes a job, record that fact and advance the virtual clock by one unit, but perform no physical work. Immediately before the virtual algorithm later processes that job, perform its postponed optimization physically and then process it. Observations that occur earlier in physical time are buffered until the corresponding virtual completion. Thus the virtual algorithm sees exactly its original history and makes the same decisions. Moving a unit of optimization to the right leaves the optimized job and every later job no later than before, while jobs completed in between move one unit earlier. Applying this to every separated optimization proves (328).  $\square$

### 8.1 The deterministic worst-case curve

For  $u > 1$  define

$$G_{\text{BO}}(u) := \frac{\sqrt{4u^3 - 4u + 1} - 1}{2(u - 1)}. \quad (329)$$

The two deterministic algorithms needed below are RAW, which runs every job for time  $u$ , and OPTIMIZEALL, which fixes an arbitrary label order and completes every job by one contiguous optimization-and-processing block of length  $1 + p_i$ .

**Theorem 8.3** (Exact deterministic blind-optimization curve). *The optimal deterministic size-asymptotic competitive ratio in  $\text{BO}(u)$  is*

$$R_{\text{BO}}^{\text{det}}(u) = \begin{cases} 1, & 0 < u \leq 1, \\ u, & 1 \leq u \leq 2, \\ G_{\text{BO}}(u), & u \geq 2. \end{cases} \quad (330)$$

The algorithm RAW is optimal for  $u \leq 2$ , and OPTIMIZEALL is optimal for  $u \geq 2$ ; both are optimal at  $u = 2$ . In particular,

$$R_{\text{BO}}^{\text{det}}(u) = \sqrt{u} + o(1) \quad (u \rightarrow \infty). \quad (331)$$

We first prove the adaptive lower bound. Its stopping rule is the direct analogue of lemma 3.16 for optimization without revelation.

**Lemma 8.4** (Hidden binary stopping for optimized jobs). *Fix  $u > 1$ , a target  $R \leq u$ , and  $\alpha \in (0, 1)$ . Against every deterministic algorithm there is a fixed binary input with  $p_j \in \{0, u\}$  on which*

$$\text{ALG} - R \cdot \text{OPT} \geq \frac{n^2}{2} \left( (u - R)(1 - \sigma^2) + \sigma^2 f_{u,R}^{\text{BO}}(y) \right) - O_u(n), \quad (332)$$

where  $\sigma \in [0, 1]$ ,  $0 \leq y - \alpha < 1/(\sigma n)$  when  $\sigma > 0$ , and

$$f_{u,R}^{\text{BO}}(y) = 1 - R + 2uy - (u + R(u - 1))y^2. \quad (333)$$

Consequently, if  $f_{u,R}^{\text{BO}}(\alpha) \geq 0$ , then every deterministic algorithm has size-asymptotic ratio at least  $R$ .

*Proof.* By lemma 8.2, it is enough to lower-bound an algorithm that optimizes and processes each such job in one contiguous block. Until the stopping condition below is met, give value zero to every job completed raw and value  $u$  to every optimized job. If  $v$  raw jobs and  $L$  optimized jobs with  $p = u$  have been completed, stop at the first completion for which  $L > 0$  and

$$L \geq \alpha(n - v). \quad (334)$$

Give value zero to all remaining jobs. The answers are deterministic functions of the transcript and therefore define one fixed labeled binary input that reproduces the same execution.

If the algorithm fails to complete all jobs, its ratio is infinite. Otherwise, if the line is never crossed, then  $L = 0$  after all jobs are completed: otherwise  $n - v = L$  at the end and  $L \geq \alpha L$ . Thus the algorithm ran every job raw on the all-zero input and has ratio  $u \geq R$ .

Suppose the line is crossed. Put  $x = n - v - L$ . For a lower bound, discard idle time, put the already completed raw jobs before the already completed optimized jobs with

$p = u$ , reveal the future, and let all  $x$  remaining zero jobs be optimized. These exchanges only favor the algorithm: among the operations already completed, shortest first is optimal, while no untouched future job could have completed before the crossing. The resulting exact cost and the clairvoyant optimum are

$$A_{\text{ex}} = u \left( vn - \frac{v(v-1)}{2} \right) + (u+1) \left( L(n-v) - \frac{L(L-1)}{2} \right) + \frac{x(x+1)}{2}, \quad (335)$$

$$O_{\text{ex}} = \frac{n(n+1)}{2} + (u-1) \frac{L(L+1)}{2}. \quad (336)$$

Here the offline optimum first optimizes and processes the  $n - L$  zero jobs, using one unit per job, and then runs the  $L$  jobs with  $p = u$  raw.

Set

$$\sigma = \frac{n-v}{n}, \quad y = \frac{L}{n-v}. \quad (337)$$

Twice the quadratic coefficients of Equations (335) and (336) are

$$\begin{aligned} \mathcal{A} &= u(1 - \sigma^2) + \sigma^2(1 + 2uy - uy^2), \\ \mathcal{O} &= (1 - \sigma^2) + \sigma^2(1 + (u-1)y^2). \end{aligned}$$

Subtracting  $R \cdot \mathcal{O}$  from  $\mathcal{A}$  gives exactly the bracket in (332). Immediately before the crossing,  $L - \alpha(n-v) < 0$ . An optimized completion increases this expression by one and a raw completion by  $\alpha$ , so

$$0 \leq y - \alpha < \frac{1}{n-v} = \frac{1}{\sigma n}. \quad (338)$$

The quadratic  $f_{u,R}^{\text{BO}}$  is uniformly Lipschitz on  $[0, 1]$  for fixed  $u$  and  $R \leq u$ . Hence  $\sigma^2 f_{u,R}^{\text{BO}}(y) \geq \sigma^2 f_{u,R}^{\text{BO}}(\alpha) - O_u(1/n)$ . The exact terms contributed by individual jobs add another  $O_u(n)$  before normalization. If  $u - R$  and  $f_{u,R}^{\text{BO}}(\alpha)$  are nonnegative, this proves the claimed lower bound.  $\square$

*Proof of Theorem 8.3.* If  $u \leq 1$ , raw execution is an offline-optimal action for every job, so the ratio is one. If  $1 < u \leq 2$ , use

$$R = u, \quad \alpha = \frac{1}{u}. \quad (339)$$

Then  $f_{u,u}^{\text{BO}}(1/u) = 2 - u \geq 0$ , and lemma 8.4 gives the lower bound  $u$ . Conversely, every offline effective length is at least one, whereas RAW has cost  $un(n+1)/2$ , so its ratio is at most  $u$ .

Now let  $u \geq 2$  and put  $R = G_{\text{BO}}(u)$ . The definition (329) is equivalently the positive solution of

$$(R-1)(u+R(u-1)) = u^2. \quad (340)$$

Moreover  $R \leq u$ , with equality only at  $u = 2$ . Choose

$$\alpha = \frac{u}{u+R(u-1)}. \quad (341)$$

This is the maximizer of Equation (333), and (340) gives

$$f_{u,R}^{\text{BO}}(\alpha) = 1 - R + \frac{u^2}{u+R(u-1)} = 0. \quad (342)$$

Thus lemma 8.4 proves the lower bound  $R$ .



It remains to analyze OPTIMIZEALL. Put  $a(p) = 1 + p$ . For a fixed multiset, its worst label order has the  $a(p_i)$  in nonincreasing order. Direct pair accounting gives

$$\text{ALG}_{\text{OPTIMIZEALL}} \leq \frac{1}{2} \sum_{i,j} \max\{a(p_i), a(p_j)\} + \frac{1}{2} \sum_i a(p_i), \quad (343)$$

$$\text{OPT} = \frac{1}{2} \sum_{i,j} \min\{u, 1 + p_i, 1 + p_j\} + \frac{1}{2} \sum_i \min\{u, 1 + p_i\}. \quad (344)$$

Write  $S_D(t) = D((t, u])$  for  $0 \leq t \leq u$ . Expressing a nonnegative value  $x$  as  $\int_0^\infty \mathbf{1}_{t < x} dt$  yields

$$\iint \max\{a(p), a(q)\} dD(p)dD(q) = 1 + \int_0^u (2S_D(t) - S_D(t)^2) dt, \quad (345)$$

$$\iint \min\{u, 1 + p, 1 + q\} dD(p)dD(q) = 1 + \int_0^{u-1} S_D(t)^2 dt. \quad (346)$$

Set

$$b = \frac{1}{u-1} \int_0^{u-1} S_D(t) dt. \quad (347)$$

Cauchy–Schwarz bounds the square integral on  $[0, u-1]$  from below by  $(u-1)b^2$ . Since  $S_D$  is nonincreasing,

$$T := \int_{u-1}^u S_D(t) dt \leq S_D(u-1) \leq b. \quad (348)$$

The function  $h \mapsto 2h - h^2$  is increasing and concave on  $[0, 1]$ . Cauchy–Schwarz on the prefix and Jensen’s inequality on the unit tail therefore give

$$\iint \max\{a(p), a(q)\} dD(p)dD(q) \leq 1 + 2ub - ub^2, \quad (349)$$

$$\iint \min\{u, 1 + p, 1 + q\} dD(p)dD(q) \geq 1 + (u-1)b^2. \quad (350)$$

Consequently their ratio is at most

$$g_u(b) = \frac{1 + 2ub - ub^2}{1 + (u-1)b^2}. \quad (351)$$

The derivative of  $g_u$  changes sign exactly once on  $[0, 1]$ . At its maximum, if  $R = g_u(b)$ , the stationary equation  $g'_u(b) = 0$  says

$$u(1-b) = R(u-1)b, \quad b = \frac{u}{u + R(u-1)}. \quad (352)$$

Substitution into  $g_u(b) = R$  gives (340). That equation has the unique positive solution  $G_{\text{BO}}(u)$ ; hence

$$\max_{0 \leq b \leq 1} g_u(b) = G_{\text{BO}}(u). \quad (353)$$

All survival-function inequalities above are tight for a binary multiset with a  $b$ -fraction of values  $u$  and the remaining values zero, labeled so that the optimized jobs with  $p = u$  occur first. Equations (343)–(351) prove  $\text{ALG}_{\text{OPTIMIZEALL}} \leq R \cdot \text{OPT} + O_u(n)$ . This matches the lower bound and proves (330). The asymptotic formula (331) follows directly from (329).  $\square$

**Theorem 8.5** (Blind-optimization instance optimality). *For every fixed  $u < \infty$  there exist a randomized nonanticipating algorithm  $\mathcal{A}_{\text{BO}}$ , depending only on  $n, u$ , and a sequence  $\varepsilon_u(n) \rightarrow 0$  such that every vector  $p \in [0, u]^n$  satisfies*

$$\mathbb{E} \text{ALG}_{\mathcal{A}_{\text{BO}}}(p) \leq n^2 \Phi_{\text{BO},u}(p) + \varepsilon_u(n)n^2. \quad (354)$$

*Conversely, every  $p \in [0, u]^n$  and every randomized nonanticipating algorithm  $\mathcal{A}$ , even an announced one, satisfy*

$$\mathbb{E} \text{ALG}_{\mathcal{A}}(p) \geq n^2 \Phi_{\text{BO},u}(p) - \varepsilon_u(n)n^2. \quad (355)$$

*Thus one algorithm is asymptotically optimal, at the  $n^2$  scale, for every input vector simultaneously. Unlike  $\Phi_{\text{RO},u}$  and  $\Phi_{\text{BE}}$ ,  $\Phi_{\text{BO},u}$  depends only on the empirical mean.*

The proof is simpler than in the revealing models. Because optimization reveals nothing, it can be moved next to the processing of its job. Every job is then completed either by raw execution of known length  $u$  or by one contiguous optimization-and-processing operation whose average length is  $1 + \mu_p$ . A sampling bound that holds for every adaptive prefix rules out an adaptive advantage, while a sample estimates the one number  $\mu_p$ . We first prove this instance-optimal statement and then maximize its value relative to the clairvoyant optimum.

## 8.2 Proof of randomized instance optimality

By the input convention, the coordinates of  $p$  are shuffled uniformly before the algorithm starts. The lower half simply says that no announced algorithm beats  $n^2 \Phi_{\text{BO},u}(p) - o_u(n^2)$  in expectation.

By lemma 8.2, we may regard every optimized job as one indivisible operation of hidden length  $1 + p_i$ . Raw execution has the known length  $u$ . Either action completes exactly one job.

**The announced lower bound.** Fix the private seed of an algorithm and place the announced occurrences uniformly behind the labels. We may assume that the algorithm completes every job. Treat equal-valued jobs as distinct and reveal their values in the analysis in first-touch order. By deferred decisions this order is a uniform permutation, and the decision whether to optimize the next job uses only the values revealed by earlier optimized jobs. Running a job raw does not reveal its value to the algorithm; exposing it afterwards only for the analysis does not affect the algorithm's decisions.

Fix  $\delta > 0$  and ignore the last  $\delta n$  first touches for the moment. The predictable-permutation estimate lemma 2.14, applied to the processing times and the indicator of the decision to optimize, gives one event of probability  $1 - o(1)$  on which every earlier prefix containing  $tn$  completed optimized jobs has total hidden processing work

$$\sum_{i \text{ optimized in the prefix}} p_i = \mu_p tn + o_\delta(n). \quad (356)$$

The event is simultaneous over all prefixes, so a stopping fraction chosen adaptively by the algorithm may be substituted only after the event has been fixed. Editing the last  $\delta n$  jobs to either mode changes total completion cost by  $O_u(\delta n^2)$ .

For one error bound that applies directly at every  $n$ , take  $\delta_n = n^{-1/4}$ . The bounded selected-work estimate used in Section 7.3 has deviation

$$O_u\left((1 + \delta_n^{-1})\sqrt{n \ln(n+2)}\right) = O_u\left(n^{3/4}\sqrt{\ln(n+2)}\right)$$

and failure probability  $o(1)$ , simultaneously over all relevant prefixes. After division by  $n$ , both this deviation and the modification of the last  $\delta_n n$  jobs contribute  $O_u(n^{-1/4}\sqrt{\ln(n+2)})$  to the normalized completion-area bound.

Put  $a = 1 + \mu_p$ . If the final optimized fraction is  $q$ , the best possible order of the two divisible block types puts the smaller work per completion first. When  $a \leq u$  its area is

$$F_{a,u}(q) = a \left( q - \frac{q^2}{2} \right) + \frac{u(1-q)^2}{2}, \quad F'_{a,u}(q) = (a-u)(1-q). \quad (357)$$

It is minimized at  $q = 1$ , with value  $a/2$ . When  $a \geq u$ , jobs run raw go first and the area is

$$F_{a,u}(q) = \frac{u(1-q^2)}{2} + \frac{aq^2}{2} = \frac{u}{2} + \frac{a-u}{2}q^2, \quad (358)$$

which is minimized at  $q = 0$ , with value  $u/2$ . The shortest-first argument of lemma 2.4 proves that no interleaving has smaller area. Equations (356)–(358), with the uniform choice  $\delta = \delta_n$ , give

$$\frac{1}{n^2} \mathbb{E} \text{ALG}_{\mathcal{A}}(p) \geq \frac{1}{2} \min\{u, 1 + \mu_p\} - o_u(1).$$

The estimate is uniform in the deterministic algorithm. Averaging it over the algorithm seed proves (355). Together with the upper bound below, one may take  $\varepsilon_u(n) = O_u(n^{-1/4}\sqrt{\ln(n+2)})$  after enlarging its constant.

**One algorithm for all input vectors.** Take  $k = \lceil n^{2/3} \rceil$  uniformly random sample jobs. Optimize each sample job and process it immediately, thereby observing its duration, and let  $\hat{\mu}$  be their sample mean. If  $1 + \hat{\mu} < u$ , optimize and immediately process every remaining job in fresh random order. Otherwise run every remaining job raw.

The sample contributes at most  $O_u(nk) = o_u(n^2)$  beyond the main schedule. The variance estimate Equation (30), after scaling from  $[0, 1]$  to  $[0, u]$ , gives

$$\mathbb{E}|\hat{\mu} - \mu_p| = O_u(k^{-1/2} + k/n) = o_u(1).$$

Choosing the wrong mode can cost at most  $O(n^2)|\hat{\mu} - \mu_p|$ , while choosing the correct mode has leading cost  $n^2\Phi_{\text{BO},u}(p)$ . This proves (354). In particular, the universal algorithm needs to learn only one number, not a histogram or a threshold.

### 8.3 The exact worst-case curve

The clairvoyant scheduler knows  $p_i$ , uses the effective length  $\min\{u, 1+p_i\}$  from Equation (2), and orders these blocks shortest first. For a distribution  $D$  on  $[0, u]$ , define its leading offline coefficient by

$$\Omega_{\text{BO},u}(D) := \frac{1}{2} \iint \min\{u, 1+p, 1+q\} dD(p)dD(q). \quad (359)$$

Consequently the instance-specific ratio from Theorem 8.5 is

$$\alpha_{\text{BO},u}(D) = \frac{\min\{u, 1 + \int p dD(p)\}}{\iint \min\{u, 1+p, 1+q\} dD(p)dD(q)}. \quad (360)$$

Let  $u_{\text{BO}} > 1$  denote the unique root greater than one of

$$u^3 - 2u^2 - u + 1 = 0, \quad u_{\text{BO}} = 2.2469796037\dots \quad (361)$$

**Theorem 8.6** (Exact blind-optimization curve). *The optimal randomized size-asymptotic competitive ratio in  $\text{BO}(u)$  against an oblivious adversary is*

$$R_{\text{BO}}^{\text{rand}}(u) = \begin{cases} 1, & 0 < u \leq 1, \\ \frac{u^3}{u^2 + (u-1)^3}, & 1 \leq u \leq u_{\text{BO}}, \\ \frac{1}{2} \left( 1 + \sqrt{\frac{u^2 + u - 1}{u - 1}} \right), & u \geq u_{\text{BO}}. \end{cases} \quad (362)$$

The formulas  $u^3/[u^2 + (u-1)^3]$  and  $\frac{1}{2}(1 + \sqrt{(u^2 + u - 1)/(u - 1)})$  agree at  $u_{\text{BO}}$ . Moreover,

$$R_{\text{BO}}^{\text{rand}}(u) = \frac{\sqrt{u}}{2} + \frac{1}{2} + o(1) \quad (u \rightarrow \infty). \quad (363)$$

*Proof.* The claim is trivial for  $u \leq 1$ , because raw execution is no longer than the unit optimization operation. Assume  $u > 1$  and let

$$S_D(t) = D((t, u]), \quad 0 \leq t \leq u.$$

Writing each nonnegative minimum as an integral of its level indicators in (359) gives

$$2\Omega_{\text{BO},u}(D) = 1 + \int_0^{u-1} S_D(t)^2 dt. \quad (364)$$

Put  $S = \int_0^{u-1} S_D(t) dt$ . Since  $S_D$  is nonincreasing,

$$\int_{u-1}^u S_D(t) dt \leq S_D(u-1) \leq \frac{S}{u-1}.$$

Therefore, writing  $\mu = \int p dD(p) = \int_0^u S_D(t) dt$ ,

$$S \geq \frac{u-1}{u} \mu. \quad (365)$$

Cauchy–Schwarz now yields

$$\int_0^{u-1} S_D(t)^2 dt \geq \frac{S^2}{u-1} \geq (u-1) \left( \frac{\mu}{u} \right)^2. \quad (366)$$

Set  $b = \mu/u$ . Equations (360)–(366) imply

$$\alpha_{\text{BO},u}(D) \leq f_u(b) := \frac{\min\{u, 1 + ub\}}{1 + (u-1)b^2}. \quad (367)$$

Equality is attained by the binary distribution

$$D(\{u\}) = b, \quad D(\{0\}) = 1 - b. \quad (368)$$

Indeed, its survival function is constant  $b$  on  $[0, u)$ , so both inequalities in (366) are equalities.

It remains to maximize the scalar function  $f_u$ . Put

$$b_0 = \frac{u-1}{u}.$$

For  $b \geq b_0$  the numerator is  $u$  and  $f_u$  decreases, so this region is maximized at  $b_0$ . For  $b \leq b_0$ , differentiation gives the unique unconstrained maximizer

$$b_*(u) = \frac{u}{u-1 + \sqrt{(u-1)(u^2+u-1)}}. \quad (369)$$

The equality  $b_*(u) = b_0$  is equivalent to  $u^3 - 2u^2 - u + 1 = 0$ . Hence  $b_0$  is optimal up to  $u_{\text{BO}}$  and  $b_*(u)$  is optimal afterwards. Substitution gives

$$f_u(b_0) = \frac{u^3}{u^2 + (u-1)^3}, \quad f_u(b_*) = \frac{1}{2} \left( 1 + \sqrt{\frac{u^2 + u - 1}{u-1}} \right).$$

This proves (362). The shuffled binary vectors from (368) give the lower bounds under the input convention. Together with the universal upper algorithm of Theorem 8.5, they prove both sides of the competitive-ratio claim. If the maximizing mass  $b$  is irrational, finite vectors use  $\lfloor bn \rfloor$  copies of  $u$ ; continuity gives the same asymptotic ratio. Finally,  $(u^2 + u - 1)/(u - 1) = u + 2 + 1/(u - 1)$  gives (363).  $\square$

The hard distribution explains the separation. Most jobs have optimized length zero, while a carefully chosen small fraction have length  $u$ . Blind optimization is attractive on average, so the online algorithm optimizes the jobs. It cannot recognize a job with  $p = u$  before committing to it, and processing such a job early delays many zeros. The clairvoyant optimum optimizes the zeros, runs the jobs with  $p = u$  raw, and places them last. In the revealing model, by contrast, the same jobs can be deferred after their tests. The gap between the two curves therefore measures the scheduling value of the revealed information itself.

## Acknowledgements

An initial improvement over the then-current deterministic lower bound for obligatory testing was obtained with the Bolzano open-source multi-agent research system [GHK<sup>+</sup>26]. That preliminary result motivated the present project. Most of the subsequent conjecture generation, proof development, counterexample search, exposition, and Lean formalization was carried out with substantial assistance from OpenAI's GPT-5.6 through interactive Codex sessions. In particular, the randomized revealing-optimization curve was developed in a separate model run and then integrated with the instance-optimal framework. The author selected the research directions, reviewed and revised the arguments, and takes responsibility for the claims in this paper.

## A Machine-checked verification

The accompanying Lean 4 development [dMU21] uses mathlib [The20] and is pinned to version 4.30.0. Its root module imports every development listed below. The following table states the proof boundary; Appendix D gives the detailed paper–Lean dictionary for the deterministic theorem.

The coverage column states directly whether Lean constructs the schedule action by action, proves that each decision uses only the public transcript, and derives the advertised cost bound. We use *one-job correction* for the linear terms in a double sum that pair a job with itself. The word **fuel** in some Lean names denotes a finite upper bound on the number of internal steps used to run a formal strategy.

| paper result                                                                      | Lean export                                                                                                    | coverage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Deterministic revealing optimization and obligatory testing, Theorems 3.1 and 3.2 | <code>SchedulingPaper.exact_ratio_main</code>                                                                  | Lean proves both bounds from complete strategies on fixed inputs. The result includes the linear remainders, all joins of the curve, and the obligatory endpoint.                                                                                                                                                                                                                                                                                                                                                                                                         |
| Randomized obligatory testing, Theorem 5.5                                        | <code>unknownMultiset_operational_expectedCost_le_20378; oblivious_iid_binary_lower_online_actualOPT</code>    | Lean proves the sharp worst-case value $4/3$ for the fixed-cutoff algorithm in Equation (239), including its finite error and a fixed binary input for the lower bound. The growing-cutoff algorithm that learns from a sample is covered in the row for Theorem 6.1.                                                                                                                                                                                                                                                                                                     |
| Obligatory-testing impossibility, Theorem 6.2                                     | <code>ObligatoryInstance.deterministic_balanced_cost_lower; finiteSeed_exists_operational_quadratic_gap</code> | For the deterministic part, Lean models adaptive revelation, records the answers on one balanced labeled input, proves termination, and derives the sharp $9n^2/8$ bound. For the unbounded randomized part and finitely many private seeds, it compares the run in which all jobs are long with the run in which one fixed label is zero. The runs agree until that label is tested; their actual completion costs are then charged, and averaging selects one zero label before the seed. The comparison schedules are checked through their closed-form cost formulas. |

| paper result                                        | Lean export                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | coverage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Obligatory-testing instance optimality, Theorem 6.1 | RandomizedAnnounced.<br>threshold_maximizes_<br>discovery_density;<br>ObligatoryInstance.<br>empiricalMaximumDensity_<br>completion_le_line;<br>ObligatoryInstance.<br>empiricalPartialCompletion_<br>le_thresholdPrefix;<br>ObligatoryInstance.exists_<br>empiricalObligatoryBenchmark;<br>ObligatoryInstance.<br>uniformAverage_<br>normalizedCost_ge_<br>roundedObligatoryValue;<br>ObligatoryInstance.exists_<br>fixedPlacement_<br>randomizedCost_ge_<br>roundedObligatoryValue;<br>ObligatoryInstance.exists_<br>boundedUniformBenchmark_<br>fixedPlacement_randomized_<br>lower; Online.run_<br>growingObligatoryStrategy_<br>completed;<br>Online.boundedPilot_uses_<br>learnedBranch; Online.run_<br>growingObligatoryStrategy_<br>completionLabels_perm;<br>ObligatoryInstance.<br>obligatoryTemplateValue_<br>lipschitz; ObligatoryInstance.<br>minimumObligatoryTemplateValue_<br>lipschitz; ObligatoryInstance.<br>uniformSample_<br>minimizingObligatoryTemplate_<br>le_minimum;<br>ObligatoryInstance.<br>uniformAverage_<br>physicalGrowingRunCost_le_<br>minimum;<br>ObligatoryInstance.exists_<br>fixedPlacement_growingPolicy_<br>le_randomizedCompetitor;<br>ObligatoryInstance.exists_<br>fixedPlacement_<br>universalGrowingPolicy_<br>concrete_rate;<br>ObligatoryInstance.<br>concreteUniversalGrowingError_<br>tendsto_zero; FluidToFinite.<br>completion_transfer_uniform;<br>FluidToFinite.pilot_learning_<br>transfer | For every nonempty finite input, Lean constructs the threshold that maximizes completion density. It proves the resulting bound on completed mass at every time and the exact expected cost of the announced stationary schedule, including its linear one-job remainder. For the lower bound, Lean orders jobs by the time their labels are first touched, bounds every prefix by the rounded completion curve, integrates this bound into the actual completion cost, and uses finite Yao to select one labeling before any of the finitely many private seeds. It also proves the two general lemmas that transfer a completion-curve bound to cost and transfer a learned schedule from a sample to the remaining jobs.<br>The growing-cutoff algorithm is modeled action by action and chooses each action from the public transcript. Lean proves that bounded inputs never trigger fallback, that every job completes exactly once, and that changing the input histogram changes the objective by at most $3(L+2)$ times its $\ell_1$ distance. It minimizes exactly over the finite family of grid prefixes and bounds the loss from a uniform sample by $6(L+2)\sqrt{K/k}$ . Both zero-mean and positive-mean inputs are covered. One parameter family works for every $L$ and has checked normalized error $800(L+3)^2/\lfloor n^{1/32} \rfloor = o_L(1)$ , a slower rate than the one proved in the paper. |

| paper result                                     | Lean export                                                                                                                                                                                  | coverage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Blind-execution results,<br>Theorems 7.1 and 7.2 | <code>boundedUniform_blindPilot_</code><br><code>concrete_rate;</code><br><code>UnboundedOperational.no_</code><br><code>finite_ratio_at_quadratic_</code><br><code>scale_operational</code> | Lean compares the constructed algorithm with every complete announced algorithm up to $o_L(n^2)$ ; its checked rate is slower than the paper's. For the unbounded impossibility result, Lean extracts from each run on the all-zero input the order in which labels are first touched. A second run, with one exceptional long job, is identical until its label is touched. The proof then charges the actual completion cost and averages over the finitely many seeds to select one fixed exceptional label. |



| paper result                                                               | Lean export                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | coverage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Revealing-optimization instance and randomized curve, Theorems 4.1 and 5.1 | RevealingOptimization.<br>binaryFamilies_le_curve;<br>binaryFamilies_attain_curve;<br>randomizedCurve_attains_<br>globalMaximum;<br>RevealingOptimization.<br>announcedTemplate_curve_<br>upper; RevealingOptimization.<br>OperationalUpper.exists_<br>announced_operational_curve_<br>upper; RevealingOptimization.<br>InstanceLearning.<br>uniformSample_<br>minimizingTemplate_le;<br>RevealingOptimization.<br>QuotaStrategy.quotaStrategy_<br>completionLabels_perm;<br>RevealingOptimization.<br>QuotaKernel.quotaKernelCost_<br>product_normalized;<br>RevealingOptimization.<br>RandomizedLower.adaptive_<br>binary_families_attain_curve;<br>RevealingOptimization.<br>RandomizedYao.finiteSeed_<br>binary_families_attain_curve;<br>RevealingOptimization.<br>OperationalCompiler.exists_<br>operational_binary_family_<br>ratio_tendsto_curve;<br>RevealingOptimization.<br>CompiledRun.<br>compiledLearnedStrategy_<br>expectedCost_le;<br>RevealingOptimization.<br>RawObserved.settled_<br>rawElapsed_eq_<br>compiledTestWork;<br>RevealingOptimization.<br>ObservedAreaLower.exists_<br>fixedPlacement_<br>randomizedRawCost_ge_<br>rawBenchmarkValue;<br>RevealingOptimization.<br>BenchmarkBridge.<br>compiledLearnedStrategy_<br>expectedCost_le_rawBenchmark;<br>RevealingOptimization.<br>InstanceOptimal.exists_<br>fixedPlacement_compiled_le_<br>randomizedCompetitor_<br>concrete_rate;<br>RevealingOptimization.<br>InstanceOptimal.<br>concreteRevealingComparisonError_<br>tendsto_zero; FluidToFinite.<br>completion_transfer_uniform;<br>FluidToFinite.pilot_learning_<br>transfer | Lean checks the four formulas in Equation (195), their transition root and plateau, attainment by explicit inputs, and the global maximum. Starting from a concrete nonempty input, it constructs the threshold that maximizes completion density, derives the exact empirical survival formulas, and proves the required integral bounds for every admissible threshold $\tau_D$ . The announced algorithm then chooses between the stationary schedule and raw execution. For every private seed it terminates, its action-by-action run has the analyzed pair cost, and the finite estimate retains the linear one-job correction. Lean also identifies the denominator with the exact finite clairvoyant SPT cost. For the universal upper bound, Lean defines the finite-grid objective, proves its stability under histogram error, minimizes it on the observed sample, and runs the resulting mixture of tests, processing, and raw execution. It proves that every job completes exactly once and justifies replacing pair probabilities from sampling without replacement by their leading products. For the lower bound, induction over a finite decision tree covers every adaptive choice among testing, raw execution, and processing, including the immediate completion of a tested zero. The recursive cost equals the timed execution cost, and finite weighted Yao selects one labeled input before the private seed. This action-level analysis also proves the instance-optimal theorem: every completing adaptive algorithm is bounded below by the integrated completion curve, while the algorithm learned from a sample meets that value. With $m = \lfloor n^{1/16} \rfloor$ , Lean obtains normalized error at most $1000(u+1)^2/m = o_u(1)$ , slower than the rate in the main proof. |

| paper result                                               | Lean export                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | coverage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Blind-optimization results, Theorems 8.1, 8.3, 8.5 and 8.6 | <pre> BlindOptimization.Adversary. no_deterministic_instance_ optimal; deterministicCurve_ operational_exact; operationalPilot_ expectedCost_le_curve_ normalized; pilotNormalizedError_tendsto_ zero; RandomizedLower.exists_ binary_mass_adaptive_curve_ lower; RandomizedLower. exists_binary_mass_finite_ ratio_tendsto_curve; randomizedBinaryEnvelope_ attains_curve; Randomized. finite_yao_select_weighted; RandomizedCompiler.exists_ binary_mass_operational_ ratio_tendsto_curve </pre> | <p>Lean proves the deterministic counterexample and exact deterministic curve from completing strategies on fixed replayed inputs, including the adaptive stopping rule and finite linear remainders. For the randomized upper bound, it models independent sample and main orders, proves the sampling-without-replacement error, and compares the actual finite cost with the exact offline optimum. Every seed gives a completing strategy whose actions depend only on the observations made so far.</p> <p>Lean also proves the reduction to binary distributions, the scalar maximization, attainment, both large-<math>u</math> asymptotics, and the adaptive binary lower bound. Any strategy is unfolded into a labeled decision tree, and its expected tree cost is identified with the weighted average of its timed runs. The exact finite offline expectation includes the one-job correction. Finite weighted Yao then selects one fixed labeled input before the private seed, even when the optimal Bernoulli mass is irrational.</p> |

The development contains no `sorry`, `admit`, or project-defined axiom. Formal randomized statements use finite uniform averages for private seeds and explicit nonnegative finite weights for Yao input laws; these cover permutations, sample choices, tie-breaking coins, and the exact Bernoulli masses used here. Classical real analysis and noncomputable exact minimizers occur only inside proofs; no floating-point program is extracted.

## B Finite rational checkpoint for the harmonic lower bound

The lower bound at  $u = \infty$  takes two limits: first the scaling  $H \rightarrow \infty$ , and then the number  $K$  of positive levels tends to infinity. This appendix is not needed for that proof. It gives one exact finite instance showing that the leading-term calculation already predicts the true ratio accurately.

Take

$$K = 1000, \quad \alpha = \frac{9}{8}, \quad \gamma = \frac{679}{1000}, \quad \xi = \frac{K}{\alpha} = \frac{8000}{9}, \quad H = 9000.$$

There are  $H$  jobs at each positive level and  $\xi H$  zero jobs. All multiplicities are integral, and all processing times defined by Equation (139) are rational.

Using exact rational arithmetic in Equations (138), (141), (142) and (146) gives the

leading-coefficient comparison

$$\frac{Q_K}{D_K} = 1.5705287442294085 \dots > 1.5705.$$

The displayed decimal is only for orientation; all comparisons below are between integers or rational numbers.

For the offline schedule, retaining the terms that are linear in  $H$  gives

$$\text{OPT}_H = H^2 D_K + H L_{\text{off}}, \quad (370)$$

where

$$\begin{aligned} L_{\text{off}} &= \frac{1}{2} \left( \xi + \sum_{i=0}^{K-1} (1 + p_i) \right) \\ &= \frac{1}{2} \left( \xi + 2K + \frac{K\gamma}{\xi} + \sum_{s=1}^{K-1} \frac{K-s}{\xi+s} \right) = 1656.440800628232 \dots \end{aligned} \quad (371)$$

Again, the middle expression is the exact rational value used in the comparison.

The phasewise shortest-first calculation behind Equation (136) also retains favorable contributions from individual jobs, which vanish after division by  $H^2$ . Before dropping them it gives

$$\text{ALG}_H \geq H^2 Q_K + \frac{H}{2} \left( \xi + \sum_{i=0}^{K-1} p_i + \sum_{i=0}^{K-1} s_i \right) \geq H^2 Q_K.$$

Here the  $s_i$ 's are the nonnegative completion fractions from the lower proof. Exact rational arithmetic verifies

$$2000H^2 Q_K > 3141(H^2 D_K + H L_{\text{off}}). \quad (372)$$

Consequently, after recording every adaptively revealed answer on its job label as in Section 3.2.2, the resulting fixed instance satisfies

$$\frac{\text{ALG}_H}{\text{OPT}_H} \geq \frac{H^2 Q_K}{H^2 D_K + H L_{\text{off}}} = 1.5705286254871234 \dots > \frac{3141}{2000} = 1.5705.$$

Thus the checkpoint includes the finite- $H$  correction; it is not merely a comparison of the two leading coefficients.

## C Independent proof by moving jobs with $p = u$ to a prefix

For completeness, we give a second proof of the pairwise estimate behind Theorem 3.9. This argument is also a useful audit of the endpoint type  $U$ , which represents  $p = u$ , in the five-endpoint reduction Equation (78). In particular, it never substitutes  $p = u$  into the formula for type  $Q$ , whose value is just above the current threshold and strictly below  $u$ , before the  $U$  endpoints have actually been moved.

Recall the endpoint symbols from Equation (78):  $Z$  has value zero;  $E$  is a positive value tending to zero;  $M$  equals the current threshold and is processed after its test;  $Q$  lies just above that threshold and is placed in the final queue; and  $U$  has value  $p = u$ . A word in these symbols records their reveal order. For neighboring symbols  $X, U$ , the expression  $UX - XU$  denotes the change in the pair objective when  $U$  is moved one position to the left.

Work first with class sizes divided by the total number of jobs; we call these normalized sizes their fluid masses. Immediately before neighboring symbols  $XU$ , let  $E_0$  be the preceding  $E$ -mass,  $P$  the preceding mass of types  $M, Q, U$ ,  $N_{\text{def}}$  its deferred mass of types  $Q, U$ ,  $x$  the remaining mass, and  $w$  the mass of  $U$ -endpoints strictly after the pair. Put

$$y = \frac{N_{\text{def}} - R(P + E_0)}{x}, \quad \eta = \frac{N_{\text{def}} - RP}{x} = y + R\frac{E_0}{x} \leq 0. \quad (373)$$

Direct differentiation of the exact pair objective (76), including the mutual pair and all future  $U$ -endpoints, gives the two nontrivial swap differences

$$UM - MU = 1 + \left(1 + \eta - \frac{Rw}{x}\right) (y - c)a'_c(y), \quad (374)$$

$$UQ - QU = \left(\eta - \frac{cw}{x}\right) (y - c)a'_c(y). \quad (375)$$

The second quantity is nonnegative. For the first, if  $B = 1 + \eta - Rw/x \leq 0$ , its second term is nonnegative. If  $B > 0$ , then  $B \leq 1$ , and on  $-1 < y \leq 0$

$$\frac{(c - y)B}{c - 2y} \leq 1.$$

Thus (374) is nonnegative as well. Below  $y = -1$ , the threshold is flat. Direct evaluation also gives

$$UZ - ZU = UE - EU = 1. \quad (376)$$

The terms involving the later  $U$ -mass  $w$  are crucial: they make every neighboring swap valid even while other  $U$ -endpoints remain to the right. Repeatedly moving  $U$  left in this way—the “bubbling” in the section title—puts all  $U$ -endpoints into one prefix.

After that prefix there is no future  $U$ -endpoint. Let  $e$  be the preceding  $E$ -mass,  $b$  the preceding mass of types  $M, Q$ , and  $d$  the preceding deferred  $Q$ -mass, and define

$$y = \frac{d - R(e + b)}{x}, \quad v = \frac{e}{x}, \quad h = d - Rb, \quad k = x + d - Rb.$$

The four swap differences involving only the types  $Z, E, M, Q$  are

$$\begin{aligned} ME - EM &= a_c + a'_c(R - y)\frac{k}{x}, & QE - EQ &= 1 - a'_c(R - y)(-y - Rv), \\ MZ - ZM &= a_c - a'_cy\frac{k}{x}, & QZ - ZQ &= 1 - a'_cy\frac{h}{x}. \end{aligned} \quad (377)$$

They are nonnegative. Indeed, in the varying-threshold region  $-1 \leq y \leq 0$ ,  $h/x = y + Rv \in [y, 0]$  and  $k/x \in [0, 1]$ . With  $t = -y \in [0, 1]$ ,

$$a'_c(R - y)t = \frac{t(R + t)}{c + 2t} \leq 1, \quad a'_ct^2 = \frac{t^2}{c + 2t} \leq 1; \quad (378)$$

the first inequality is equivalent to  $(t - 1)(t + c) \leq 0$ . In the constant-threshold region  $y \leq -1$ , one has  $a'_c = 0$ . Hence  $Z, E$  can be moved to the end, and a worst word has the form

$$U^\mu \{M, Q\}^* \{Z, E\}^*. \quad (379)$$

Here  $U^\mu$  denotes a block of  $U$ -mass  $\mu$ , and the star denotes an arbitrary finite sequence of symbols from the set inside the braces.

On the segment containing the types  $M, Q$ , use the simpler potential

$$\widehat{W}(x, N, N_{\text{def}}) = xN_{\text{def}} + x^2 f_c \left( \frac{N_{\text{def}} - RN}{x} \right).$$

The identity

$$2f_c - yf'_c = \max\{0, -Rf'_c, -Rf'_c + a_c(1 + y), 1 - cf'_c + a_c y\} \quad (380)$$

is a direct rewriting of (89); it bounds the entire continuation containing only the types  $Z, E, M, Q$ . If the prefix of  $U$ -endpoints has mass  $\mu$ , then after it  $x = 1 - \mu$ ,  $N = N_{\text{def}} = \mu$ , and  $y = -c\mu/(1 - \mu)$ . Its contribution from pairs of  $U$ -endpoints plus its worst continuation is therefore

$$F_{c,u}(\mu) = \frac{2 - c(u - 1)}{2} \mu^2 + \mu(1 - \mu) + (1 - \mu)^2 f_c \left( -\frac{c\mu}{1 - \mu} \right). \quad (381)$$

For  $0 < \mu < 1/R$ , differentiation gives

$$F'_{c,u}(\mu) = c\mu [Z(c) - u - \text{artanh } \mu]. \quad (382)$$

For parameters  $(c, m, u)$  satisfying Equation (43), the unique maximizer on  $0 < \mu < 1/R$  is therefore  $\mu = m$ , and

$$F_{c,u}(m) = f_c(0) + \frac{c}{2} (\text{artanh } m - m) = \frac{c}{2}. \quad (383)$$

Here  $m \leq 1/R$ , since  $c, m \leq 1/\varphi$ . On the flat part  $\mu \geq 1/R$ ,

$$F_{c,u}(\mu) = \mu - \frac{c(u - 1)}{2} \mu^2. \quad (384)$$

Its derivative at  $1/R$  is

$$\frac{c(1 + m) - 1}{R} \leq 0,$$

and only decreases thereafter. Thus  $F_{c,u}(\mu) \leq c/2$  on the whole unit interval. At  $c = r, m = 0, u = u_5^{\text{det}}$ , Equations (382) and (384) show that the maximum is at  $\mu = 0$ , and increasing  $u$  only lowers (381).

To make this independent exchange proof finite, fix  $\varepsilon > 0$  and first replace the last  $\varepsilon n + O(1)$  values by actual zeros. Earlier states and actions are unchanged, and only  $O(\varepsilon n^2 + n)$  pair terms are affected. All swaps between  $U$  and non- $U$  endpoints among the retained jobs then occur with  $x \geq \varepsilon$ ; their displayed normalized swap differences have uniform Taylor remainders there. More precisely, after assigning mass  $1/n$  to every job, a normalized neighboring swap has remainder  $O_{u,\varepsilon}(n^{-3})$ ; there are at most  $n^2$  exchanges. At the boundary  $y = -1$ , split a swap at the boundary and use the two one-sided formulae, whose values agree. The artificial zeros already form the last block, so no  $U$ -endpoint remaining later in the word invalidates (377). The normalized one-job remainder in the change of the potential for the final  $M, Q, Z, E$  segment is  $O_{u,\varepsilon}(n^{-2})$ . For fixed  $\varepsilon$ , first let  $n \rightarrow \infty$ , and then let  $\varepsilon \downarrow 0$ . Equations (380)–(383) give

$$\Gamma_n \leq c \binom{n}{2} + o(n^2),$$

which independently proves the required size-asymptotic inequalities in Theorem 3.9, both for  $u_4^{\text{det}} \leq u \leq u_5^{\text{det}}$  and for  $u \geq u_5^{\text{det}}$ .

## D Machine-checked deterministic theorem and its correspondence

This appendix records the public theorem exported by the Lean 4 development [dMU21] associated with this manuscript and explains how its formal predicates correspond to the deterministic statements in Theorems 3.1 and 3.2. The development uses the mathlib library [The20] and is pinned to Lean and mathlib version 4.30.0. Its root module imports `SchedulingPaper.MainTheorems`, whose final theorem is reproduced below. Apart from the typographic rendering of Unicode symbols, this is a verbatim excerpt.

```
theorem exact_ratio_main
  : (∀ {u : ℝ}, 0 < u →
    FiniteExactRatioConclusion u (exactCurve u)) ∧
    ObligatoryExactRatioConclusion RStar := by
  constructor
  · intro u hu
    exact finite_exact_ratio hu
  · exact obligatory_exact_ratio
```

The two conclusion records occurring in the theorem are:

```
structure FiniteExactRatioConclusion (u ratio : ℝ) : Prop where
  lower : LowerBound.FixedSizeLowerBound (.finite u) ratio
  upper :
    ∃ strategy : ∀ n, Online.Strategy n,
      UpperBound.CompletesByAnalysisFuel (.finite u) strategy ∧
      SizeAsymptoticUpper
        (UpperBound.strategyCost (.finite u) strategy)
        (UpperBound.fixedOfflineCost (.finite u)) ratio

structure ObligatoryExactRatioConclusion (ratio : ℝ) : Prop where
  lower : LowerBound.FixedSizeLowerBound .infinite ratio
  upper :
    ∃ strategy : ∀ n, Online.Strategy n,
      UpperBound.CompletesByAnalysisFuel .infinite strategy ∧
      SizeAsymptoticUpper
        (UpperBound.strategyCost .infinite strategy)
        (UpperBound.fixedOfflineCost .infinite) ratio
```

### D.1 Objects on the two sides

The following table gives the direct dictionary between the formal objects and the notation of the manuscript.

| Lean object                   | Manuscript object               | Meaning                                                                                                                           |
|-------------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <code>Cap.finite u</code>     | finite common upper limit $u$   | processing times lie in $[0, u]$ ; testing and raw execution are available                                                        |
| <code>Cap.infinite</code>     | obligatory testing              | processing times are nonnegative and raw execution is unavailable                                                                 |
| <code>exactCurve u</code>     | $R_{\text{RO}}^{\text{det}}(u)$ | the six interval formulas in Equation (44), including all five verified joins                                                     |
| <code>RStar</code>            | $R_{\text{OT}}^{\text{det}}$    | $1+2/(u_5^{\text{det}}-1)$ , where $u_5^{\text{det}} > 1$ is the unique solution of $u_5^{\text{det}} - 3 = \ln u_5^{\text{det}}$ |
| <code>fixedOfflineCost</code> | OPT                             | the clairvoyant shortest-first cost of the model-dependent effective lengths in Equation (2)                                      |
| <code>strategyCost</code>     | ALG                             | the total completion cost of the operational online transcript                                                                    |

A formal strategy on  $n$  jobs is a deterministic function from the public transcript to its next action. A test publishes the revealed processing time; raw execution publishes no hidden value. Thus the strategy has exactly the information available to an online algorithm in the manuscript. The formal action type uses the standard no-idling normalization appropriate when all jobs are released at time zero: a strategy does not idle while a legal operation is available. Processing times and comparisons are exact real numbers.

## D.2 Expansion of the lower and upper fields

For either formal model parameter `Cap.finite u` or `Cap.infinite`, and a candidate value  $R$ , `FixedSizeLowerBound` expands to the following statement. For every sequence of deterministic strategies  $\mathcal{B}_n$ , every  $\varepsilon > 0$ , and every  $N$ , there exist  $n \geq N$ , a genuine fixed admissible  $n$ -job input  $I$ , and a finite execution in which all internal bookkeeping transitions have finished (the Lean predicate `settled`), such that either the execution leaves a job incomplete or

$$(R - \varepsilon) \cdot \text{OPT}(I) \leq \text{ALG}_{\mathcal{B}_n}(I). \quad (385)$$

An incomplete settled run represents infinite cost. In particular, for algorithms that complete all inputs, (385) is the usual lower-bound sequence on arbitrarily large fixed instances. The lower constructions are first described by adaptive revelation oracles; the formal statement above already produces a fixed input.

The predicate `SizeAsymptoticUpper` is the epsilon formulation

$$\forall \varepsilon > 0 \exists N \forall n \geq N \forall I, \quad \text{ALG}_{\mathcal{A}_n}(I) \leq (R + \varepsilon) \cdot \text{OPT}(I). \quad (386)$$

The accompanying completion field proves that every job is done after at most  $2n + 1$  choices of the next action. This number is the `fuel` bound in the Lean definition. Thus the theorem analyzes a complete run, not merely a partial transcript. Consequently, Equations (385) and (386) are the two matching operational statements that characterize the optimal value in Equation (7). The Lean theorem packages these two directions; it does not introduce a separate real-valued infimum or `limsup` object.

Before projecting to `SizeAsymptoticUpper`, the checked upper proof constructs a stronger `FixedUpperCertificate`: for the chosen formal `Cap` parameter it contains a constant  $C \geq 0$  such that, for every  $n$  and every fixed input,

$$\text{ALG}_{\mathcal{A}_n}(I) \leq R \cdot \text{OPT}(I) + Cn. \quad (387)$$

Since every effective length is at least one in obligatory testing and at least  $\min\{u, 1\}$  in the two optimization models with finite raw-execution cap  $u$ , Equation (3) then implies (386). For  $u \geq u_5^{\text{det}}$ , the separately verified proof for the plateau uses the same strategy and the same  $C$ , independent of  $u$ , including the obligatory limit. This uniformity is stronger than the quantifier order displayed by `exact_ratio_main`, which only exposes one strategy after the formal `Cap` parameter has been fixed.

### D.3 Correspondence with the two deterministic theorems

The first conjunct of `exact_ratio_main` quantifies over every finite  $u > 0$ . Substituting  $R = \text{exactCurve } u = R_{\text{RO}}^{\text{det}}(u)$ , its lower field gives the fixed-instance lower direction of Theorem 3.1, while its upper field supplies a completing strategy and the matching upper direction. The definition of `exactCurve` is literally the piecewise formula in Equation (44); the Lean development also proves its joins, continuity, plateau, and global maximum at  $u_2^{\text{det}}$ .

The second conjunct substitutes  $R = \text{RStar} = R_{\text{OT}}^{\text{det}}$  in the obligatory model. Its lower field gives the lower half of Theorem 3.2; its completing upper strategy together with (387) gives the upper half. The common formal infrastructure also proves that the offline benchmark is the shortest-first schedule of effective lengths and that the transcript cost is exactly the sum of each operation length times the number of jobs unfinished during that operation.

### D.4 Proof boundary

The root Lean module imports the complete lower- and upper-bound assemblies. The public theorem does not assume any unproved property of the formal execution interface, and the development contains no `sorry`, `admit`, or project-defined `axiom`. It does use `mathlib`’s classical real analysis and noncomputable choices of exact real parameters. Thus it proves mathematical properties of strategies with exact real parameters; it does not extract a floating-point implementation.

The theorem recorded here is specifically the size-asymptotic result. It does not assert the pointwise inequality  $\text{ALG} \leq R \cdot \text{OPT}$  without a remainder. Its checked remainder is the linear term in (387), and is therefore  $o(n^2)$ . The machine-checked upper bound on  $[u_4^{\text{det}}, u_5^{\text{det}}]$  uses the additional potential for jobs with  $p = u$ ; Appendix C gives an independent proof in the manuscript.

## References

- [ABC17] Peyman Afshani, J  r  my Barbay, and Timothy M. Chan. Instance-optimal geometric algorithms. *Journal of the ACM*, 64(1):3:1–3:38, 2017. doi:10.1145/3046673.
- [AE21] Susanne Albers and Alexander Eckl. Explorable uncertainty in scheduling with non-uniform testing times. In Christos Kaklamanis and Asaf Levin, editors, *Approximation and Online Algorithms: 18th International Workshop, WAOA 2020, Revised Selected Papers*, volume 12806 of *Lecture Notes in Computer Science*, pages 127–142. Springer, 2021. doi:10.1007/978-3-030-80879-2\_9.
- [Azu67] Kazuoki Azuma. Weighted sums of certain dependent random variables. *Tohoku Mathematical Journal*, 19(3):357–367, 1967. doi:10.2748/tmj/1178243286.



- [BS26] Felix Buld and Andreas S. Schulz. Scheduling with testing: Competitive algorithms for minimizing the total weighted completion time in the adversarial model, 2026. [arXiv:2606.25166](#).
- [Che52] Herman Chernoff. A measure of asymptotic efficiency for tests of a hypothesis based on the sum of observations. *The Annals of Mathematical Statistics*, 23(4):493–507, 1952. doi:10.1214/aoms/1177729330.
- [DDN<sup>+</sup>22] Fanny Dufossé, Christoph Dürr, Noël Nadal, Denis Trystram, and Óscar C. Vásquez. Scheduling with a processing time oracle. *Applied Mathematical Modelling*, 104:701–720, 2022. doi:10.1016/j.apm.2021.12.020.
- [DEL24] Konstantinos Dogeas, Thomas Erlebach, and Ya-Chun Liang. Scheduling with obligatory tests. In Timothy Chan, Johannes Fischer, John Iacono, and Grzegorz Herman, editors, *32nd Annual European Symposium on Algorithms (ESA 2024)*, volume 308 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 48:1–48:14, Dagstuhl, Germany, 2024. Schloss Dagstuhl – Leibniz-Zentrum für Informatik. doi:10.4230/LIPIcs.ESA.2024.48.
- [DEMM20] Christoph Dürr, Thomas Erlebach, Nicole Megow, and Julie Meißner. An adversarial model for scheduling with testing. *Algorithmica*, 82(12):3630–3675, 2020. doi:10.1007/s00453-020-00742-2.
- [DKL<sup>+</sup>23] Christoph Damerius, Peter Kling, Minming Li, Chenyang Xu, and Ruilong Zhang. Scheduling with a limited testing budget: Tight results for the offline and oblivious settings. In *31st Annual European Symposium on Algorithms (ESA 2023)*, volume 274 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 38:1–38:15. Schloss Dagstuhl – Leibniz-Zentrum für Informatik, 2023. doi:10.4230/LIPIcs.ESA.2023.38.
- [dMU21] Leonardo de Moura and Sebastian Ullrich. The Lean 4 theorem prover and programming language. In *Automated Deduction – CADE 28*, volume 12699 of *Lecture Notes in Computer Science*, pages 625–635. Springer, 2021. doi:10.1007/978-3-030-79876-5\_37.
- [Doo53] Joseph L. Doob. *Stochastic Processes*. Wiley, New York, 1953.
- [GCH24] Mingyang Gong, Zhi-Zhong Chen, and Kunitaru Hayashi. Approximation algorithms for multiprocessor scheduling with testing to minimize the total job completion time. *Algorithmica*, 86(5):1400–1427, 2024. doi:10.1007/s00453-023-01198-w.
- [GHK<sup>+</sup>26] Jan Grebík, Pavel Hubáček, Martin Koutecký, Matěj Kripner, Václav Rozhoň, Robert Šámal, and Adrián Zámečník. Bolzano: Case studies in LLM-assisted mathematical research, 2026. URL: <https://arxiv.org/abs/2604.16989>, [arXiv:2604.16989](#).
- [Hoe63] Wassily Hoeffding. Probability inequalities for sums of bounded random variables. *Journal of the American Statistical Association*, 58(301):13–30, 1963. doi:10.1080/01621459.1963.10500830.
- [Kah91] Simon Kahan. A model for data in motion. In *Proceedings of the 23rd Annual ACM Symposium on Theory of Computing (STOC 1991)*, pages 265–277. Association for Computing Machinery, 1991. doi:10.1145/103418.103449.

- [KLL<sup>+</sup>26] Bob Krekelberg, Alison Hsiang-Hsuan Liu, Fu-Hong Liu, Prudence W. H. Wong, and Xiao-Ou Zhang. The power of amortization on minimizing total completion time with explorable uncertainty, 2026. Version 2, revised 8 May 2026. [arXiv:2503.13357](#).
- [LL26] Kao-Chuan Liang and Ya-Chun Liang. The completion-threshold framework for obligatory-test scheduling on multiple machines, 2026. Version 2, revised 14 July 2026. [arXiv:2606.02029](#).
- [LLWZ23] Alison Hsiang-Hsuan Liu, Fu-Hong Liu, Prudence W. H. Wong, and Xiao-Ou Zhang. The power of amortization on scheduling with explorable uncertainty. In Jaroslav Byrka and Andreas Wiese, editors, *Approximation and Online Algorithms: 21st International Workshop, WAOA 2023*, volume 14297 of *Lecture Notes in Computer Science*, pages 90–103. Springer, 2023. doi:10.1007/978-3-031-49815-2\_7.
- [LMS19] Retsef Levi, Thomas L. Magnanti, and Yaron Shaposhnik. Scheduling with testing. *Management Science*, 65(2):776–793, 2019. doi:10.1287/mnsc.2017.2973.
- [LMS24] Retsef Levi, Thomas L. Magnanti, and Yaron Shaposhnik. Scheduling with testing of heterogeneous jobs. *Management Science*, 70(5):2934–2953, 2024. doi:10.1287/mnsc.2023.4833.
- [MPT94] Rajeev Motwani, Steven J. Phillips, and Eric Torng. Nonclairvoyant scheduling. *Theoretical Computer Science*, 130(1):17–47, 1994. doi:10.1016/0304-3975(94)90151-1.
- [NRTT24] Shyam Narayanan, Václav Rozhoň, Jakub Tětek, and Mikkel Thorup. Instance-optimality in I/O-efficient sampling and sequential estimation. In *65th IEEE Annual Symposium on Foundations of Computer Science (FOCS 2024)*, pages 658–688. IEEE, 2024. doi:10.1109/FOCS61266.2024.00048.
- [The20] The mathlib Community. The Lean mathematical library. In *Proceedings of the 9th ACM SIGPLAN International Conference on Certified Programs and Proofs (CPP 2020)*, pages 367–381. Association for Computing Machinery, 2020. doi:10.1145/3372885.3373824.
- [Yao77] Andrew Chi-Chih Yao. Probabilistic computations: Toward a unified measure of complexity. In *18th Annual Symposium on Foundations of Computer Science*, pages 222–227. IEEE, 1977. doi:10.1109/SFCS.1977.24.