

1. Crea una cuenta en github. Configura tu cuenta, para poder subir contenido al repositorio remoto sin necesidad de identificarse continuamente.


A terminal window titled 'MINGW64:/c/Users/Miguel' with standard window controls. It shows a series of git configuration commands being entered and executed. The first command is 'git config --global user.name "Mihego"', which results in an error message: 'git: 'config--global' is not a git command. See 'git --help''. The subsequent commands are 'git config --global user.name "Mihego"' and 'git config --global user.email "m.herrera@atlantidaformacionprofesional.es"', which execute successfully without output.

```
Miguel@DESKTOP-6M8HPMO MINGW64 ~
$ git config--global user.name "Mihego"
git: 'config--global' is not a git command. See 'git --help'.

Miguel@DESKTOP-6M8HPMO MINGW64 ~
$ git config --global user.name "Mihego"

Miguel@DESKTOP-6M8HPMO MINGW64 ~
$ git config --global user.email "m.herrera@atlantidaformacionprofesional.es"

Miguel@DESKTOP-6M8HPMO MINGW64 ~
$ |
```

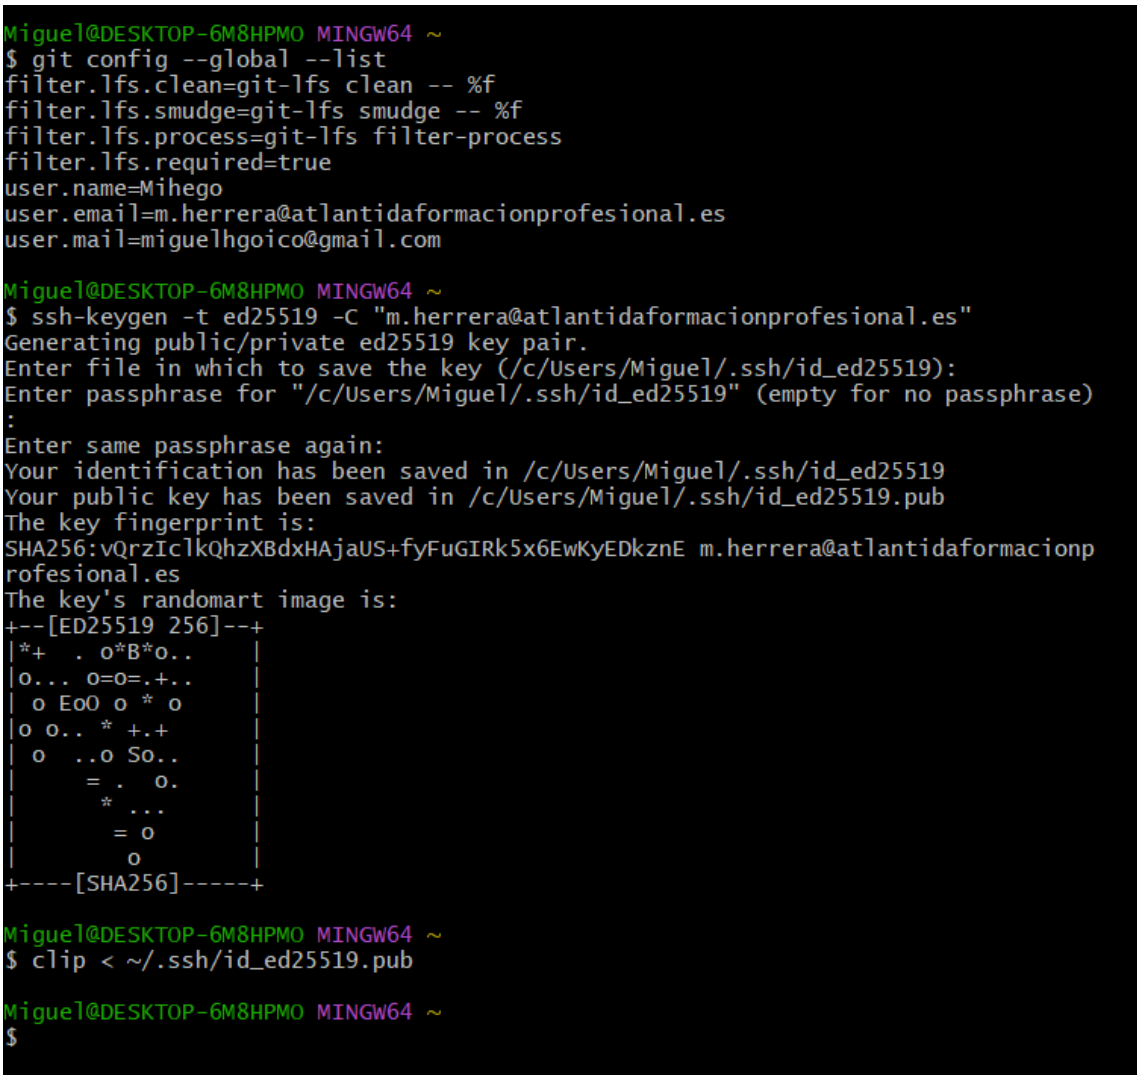
A terminal window showing the generation of an SSH key pair and the listing of global git configuration. The 'ssh-keygen' command is used with the '-t ed25519' option and a comment. It prompts for a file name and a passphrase. After confirmation, it displays the key's fingerprint and a randomart image. Finally, the 'git config --global --list' command is used to show the current configuration.

```
Miguel@DESKTOP-6M8HPMO MINGW64 ~
$ git config --global --list
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
user.name=Mihego
user.email=m.herrera@atlantidaformacionprofesional.es
user.mail=miguelhgoico@gmail.com

Miguel@DESKTOP-6M8HPMO MINGW64 ~
$ ssh-keygen -t ed25519 -C "m.herrera@atlantidaformacionprofesional.es"
Generating public/private ed25519 key pair.
Enter file in which to save the key (/c/Users/Miguel/.ssh/id_ed25519):
Enter passphrase for "/c/Users/Miguel/.ssh/id_ed25519" (empty for no passphrase)
:
Enter same passphrase again:
Your identification has been saved in /c/Users/Miguel/.ssh/id_ed25519
Your public key has been saved in /c/Users/Miguel/.ssh/id_ed25519.pub
The key fingerprint is:
SHA256:vQrzIcIkQhzXBdxHAjaUS+fyFuGIRk5x6EwKyEDkznE m.herrera@atlantidaformacionp
rofesional.es
The key's randomart image is:
+--[ED25519 256]--+
|*+ . o*B*o.. |
|o... o=o=.+.. |
| o EoO o * o |
|o o.. * +. + |
| o ..o So.. |
|      = . o. |
|      * ... |
|      = o   |
|      o     |
+----[SHA256]-----+

Miguel@DESKTOP-6M8HPMO MINGW64 ~
$ clip < ~/.ssh/id_ed25519.pub

Miguel@DESKTOP-6M8HPMO MINGW64 ~
$
```

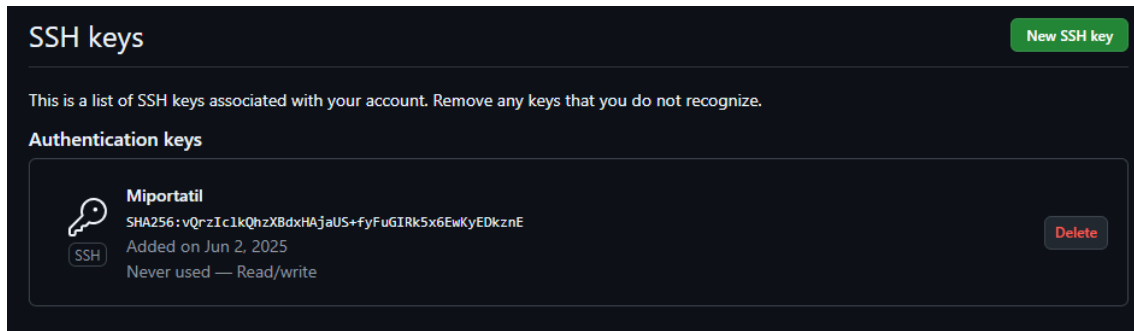

2. Imagina que tienes el siguiente código en java:

```
public void mostrarDatos(String nombre, int edad, int anios){  
  
    System.out.println("Nombre:" + nombre);  
  
    System.out.println("Edad:" + edad);  
  
    int aniosTotal = edad + anios;  
  
    System.out.println("Dentro de: " + anios + " años, " + nombre + " tendrá " +  
        aniosTotal + " años.");  
  
}
```

Crea un método sumarAnios basándote en los ejemplos del libro donde refactorices el código anterior para que sea más legible y fácil de mantener. El resultado deberá mostrar dos métodos diferentes que usándolos en conjunto tengan la misma funcionalidad que el método mostrarDatos sin refactorizar.

```
public class Main {  
    public static int sumarAnios(int edad, int anios){  
        return edad + anios;  
    }  
  
    public static void mostrarDatos(String nombre, int edad, int anios){  
        System.out.println("Nombre:" + nombre + "\nEdad:" + edad +  
            "\nDentro de: " + anios + " años, " + nombre + " tendrá " + sumarAnios(edad, anios)  
            + " años.");  
    }  
  
    public static void main(String[] args) {  
        mostrarDatos("Miguel", 33, 10);  
    }  
}
```

3. Utiliza la función de javadoc en tu IDE para documentar el código.

← → ↺

Archivo

E:/DAM/1º/Entornos%20de%20desarrollo/Tarea/DAM25/Javadoc/Main.html

☆

🔍

📄

📥

M

Error

PACKAGE CLASS TREE INDEX SEARCH HELP

unnamed Package > Main

Contents 🔍 Filter

Description

Constructor Summary

Method Summary

Constructor Details

Main()

Method Details

sumarAnios(int, int)

mostrarDatos(String, int, int)

main(String[])

Constructors

Constructor	Description
Main()	

Method Summary

All Methods Static Methods Concrete Methods

Modifier and Type	Method	Description
static void	main(String[] args)	
static void	mostrarDatos(String nombre, int edad, int anios)	Y otro donde se muestren los datos.
static int	sumarAnios(int edad, int anios)	Refactorizamos diferenciando bien las funciones en dos metodos: uno para sumar anio con los siguientes parámetros:

Methods inherited from class java.lang.Object

clone, equals, finalize, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

Constructor Details

Main

public Main()

Method Details

sumarAnios