


SYSTEM VIEW

Each wait spends from one remaining allowance

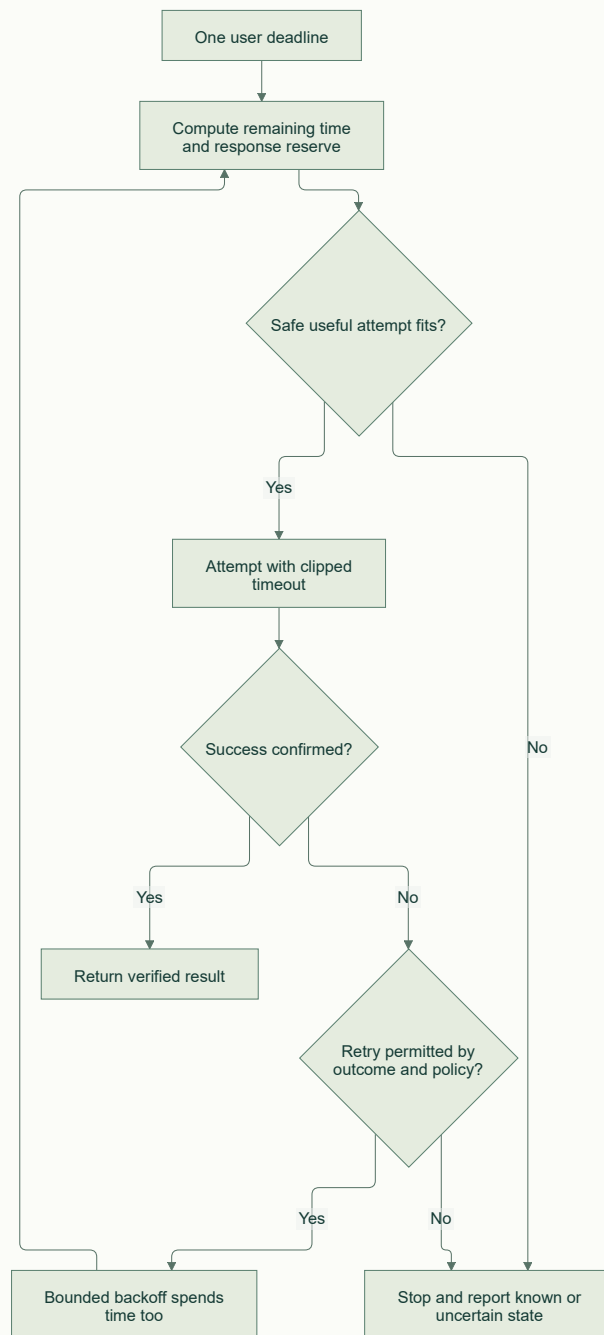

This is a recovery decision flow, not permission to repeat arbitrary effects. Each retry also needs stable operation identity, an appropriate error class, and an attempt/work budget.

1. Set one deadline for the user action.
2. Account for elapsed time and response work before each attempt.
3. Classify errors or uncertain outcomes before a permitted retry, and spend backoff from the same allowance.
4. Stop when a safe useful retry cannot fit, preserving uncertainty honestly.

Diagram labels

- Yes
- No
- One user deadline
- Compute remaining time and response reserve
- Safe useful attempt fits?
- Attempt with clipped timeout
- Success confirmed?
- Return verified result
- Retry permitted by outcome and policy?
- Bounded backoff spends time too
- Stop and report known or uncertain state