


Transfer learning: OnHW-chars (52 classes) -> OnHW-symbols (15 classes)

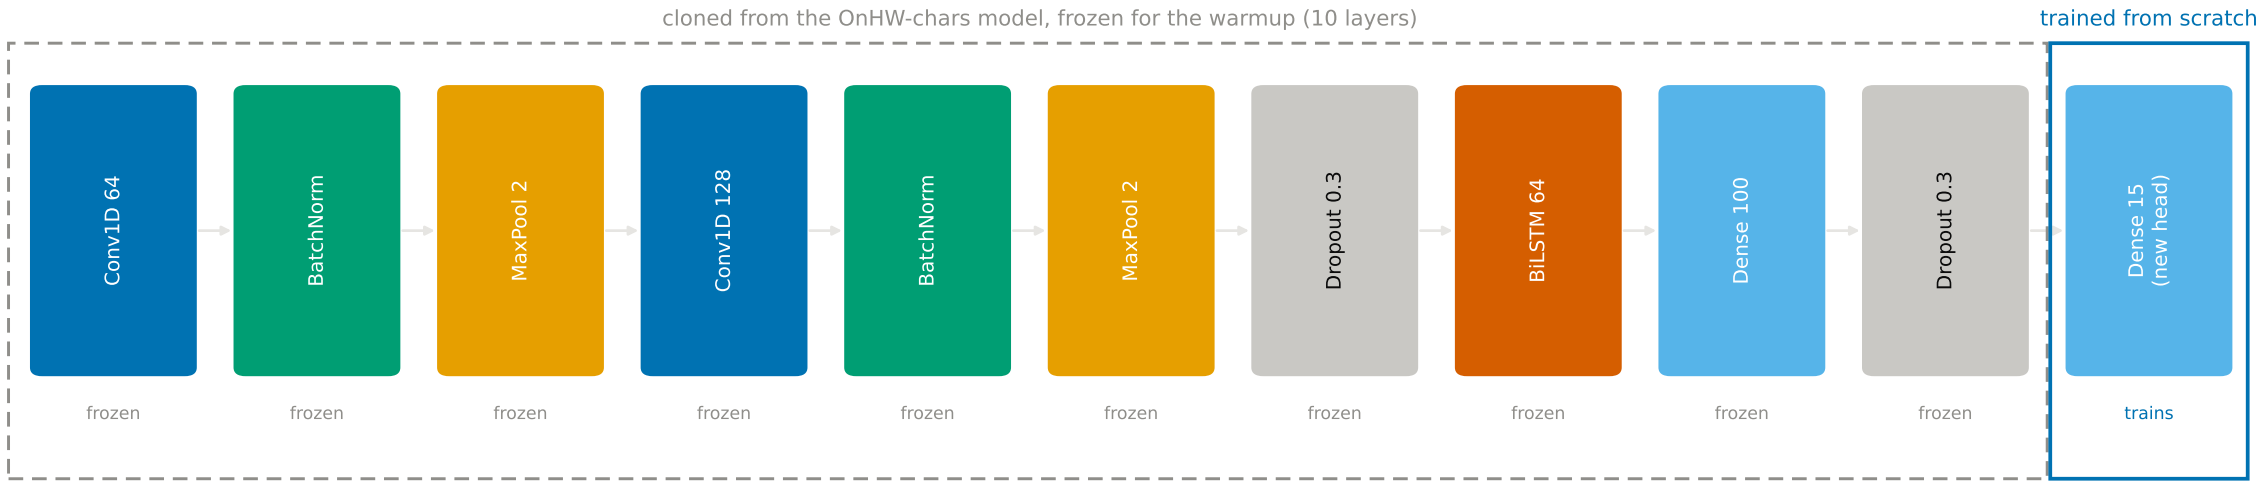

Phase 1 head only, 1,515 of 141,263 parameters train Phase 2 unfreeze_trunk(), all of them train at lr 1e-4

The trunk is cloned before reuse. A functional model built on another model's tensors shares its layer objects, so freezing or fine-tuning here would reach back and change the pretrained chars model in place.