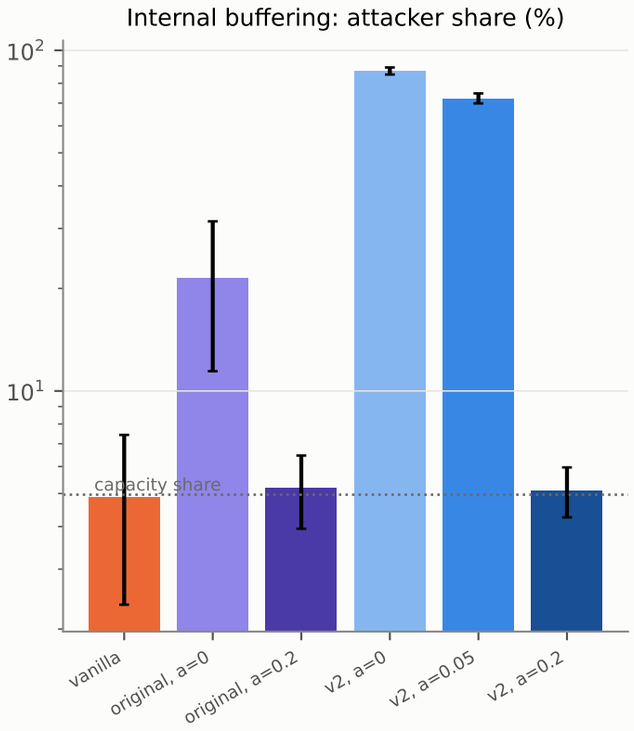

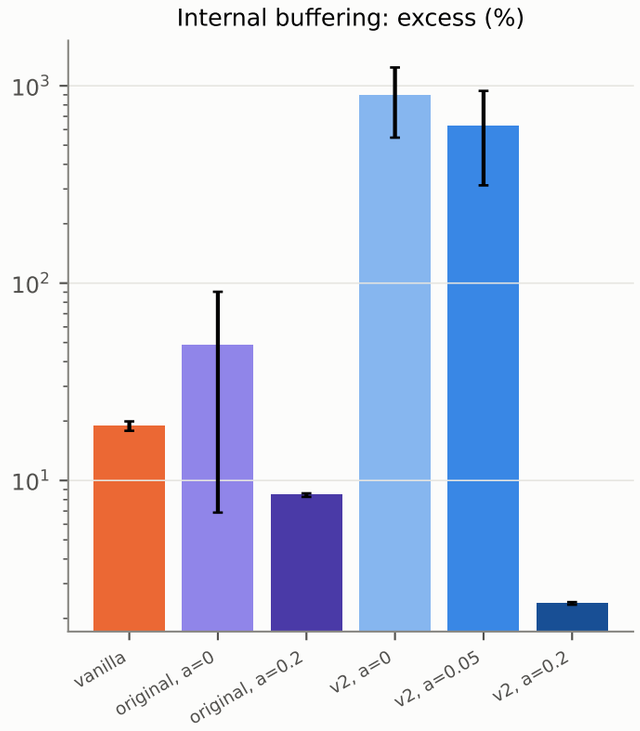

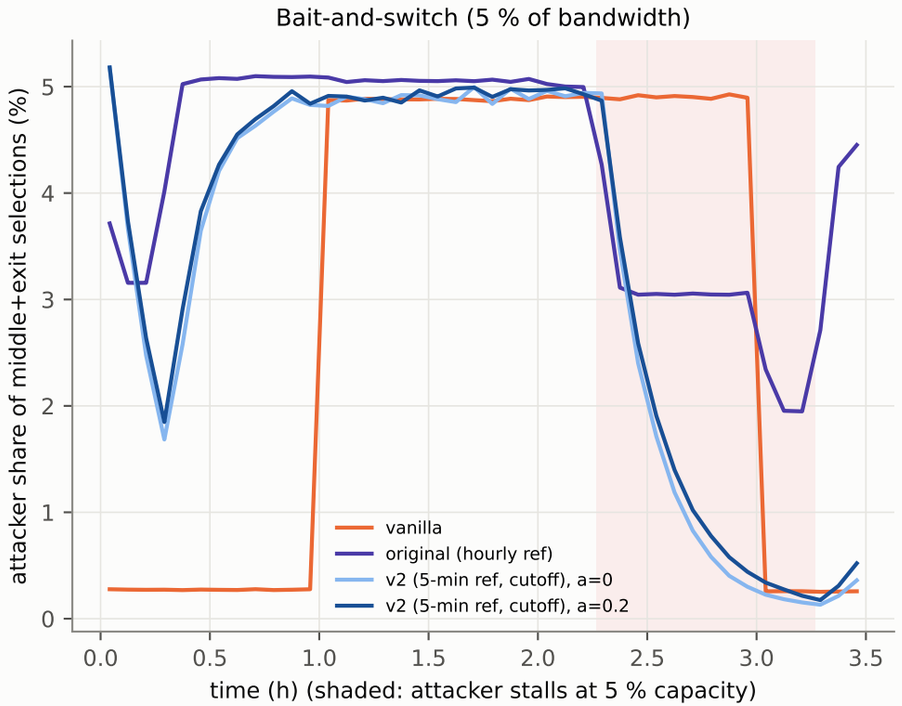

attacker = 5 % of bandwidth; 3 seeds; buffering: readings forced to 0.1