




Date: 2nd Feb 2024

Microsoft Azure Power Lunch

Today's Topic:
**DevOps deployment for Azure
Logic Apps (Standard)**

Series website: <http://azurepowerlunch.com/>

On-Demand Session Information (Recordings) are available here:
[Azure Power Lunch YouTube Channel](#)

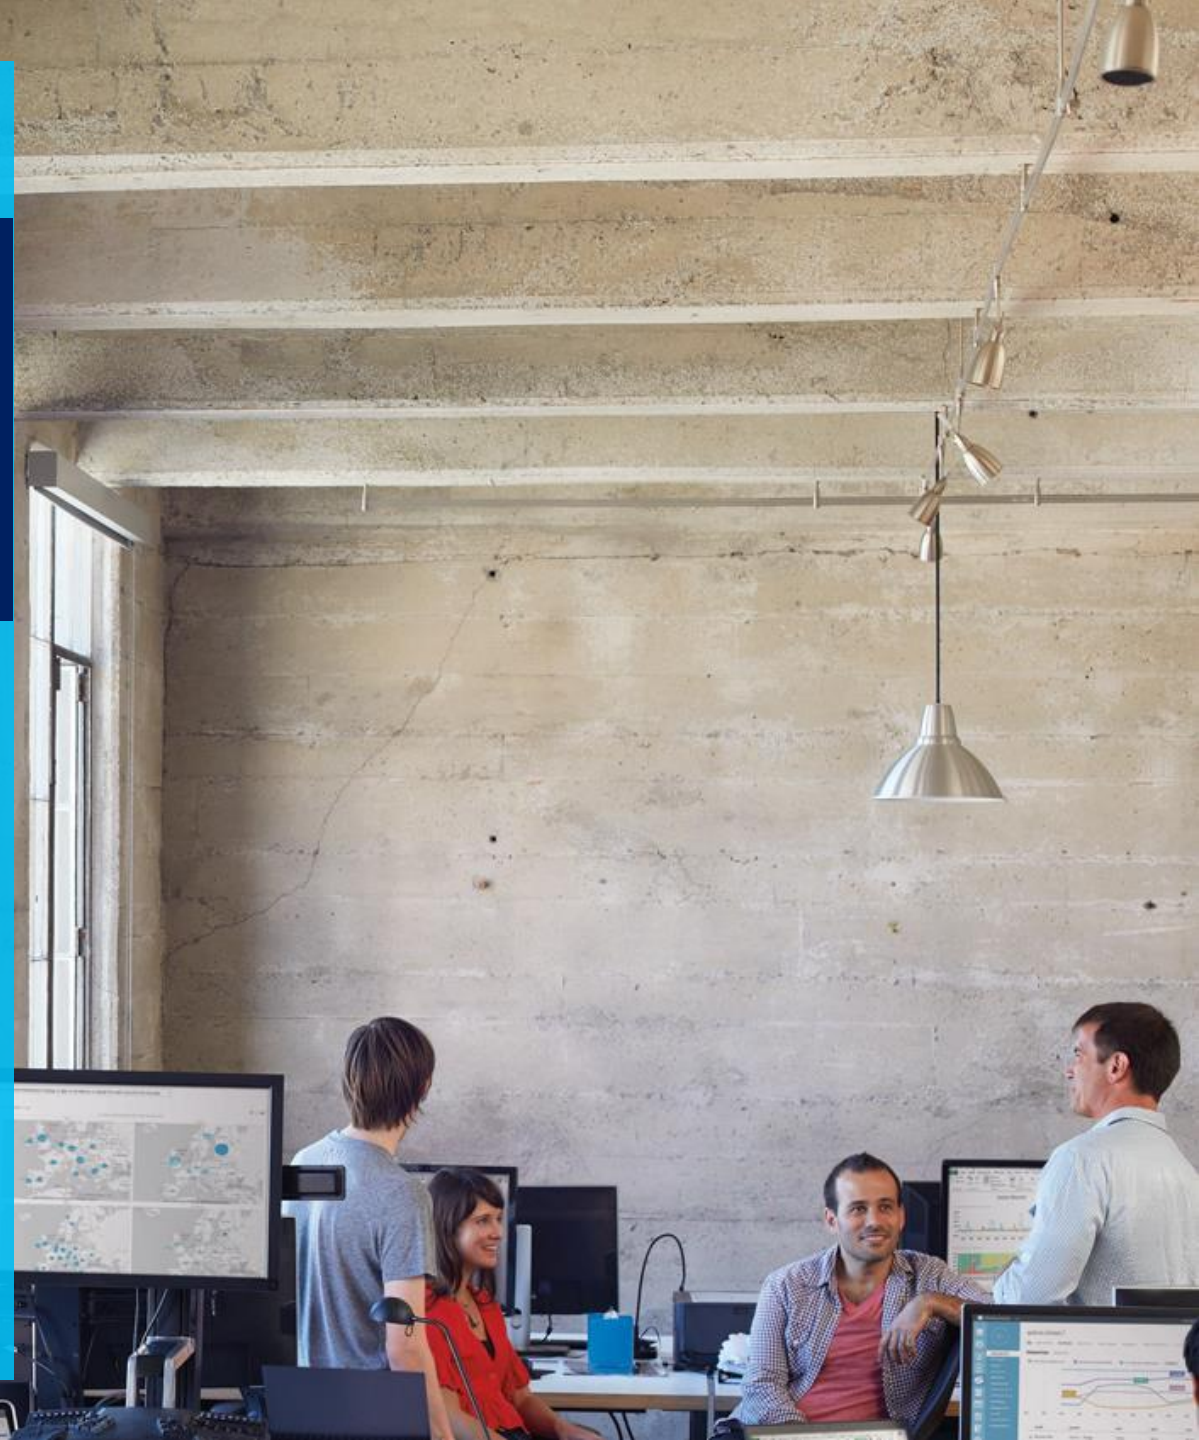

Naveed Zaheer – Cloud Solution Architect



Been with Microsoft for more than 19 years and in software industry for more than 28 years

Spent 10+ years with Microsoft Consulting Services in areas such as AppDev, Distributed Applications, SOA and Cloud Applications

Working with Azure since its inception


Currently in a Cloud Solution Architect role

Agenda

- Overview of DevOps deployment setup for Azure Logic Apps (Standard)
- Demo
 - Building CI Pipeline in Azure DevOps
 - Building CD Pipeline in Azure DevOps
- Q&A

Azure Logic Apps (Standard) - Structure


Logic Apps Structure

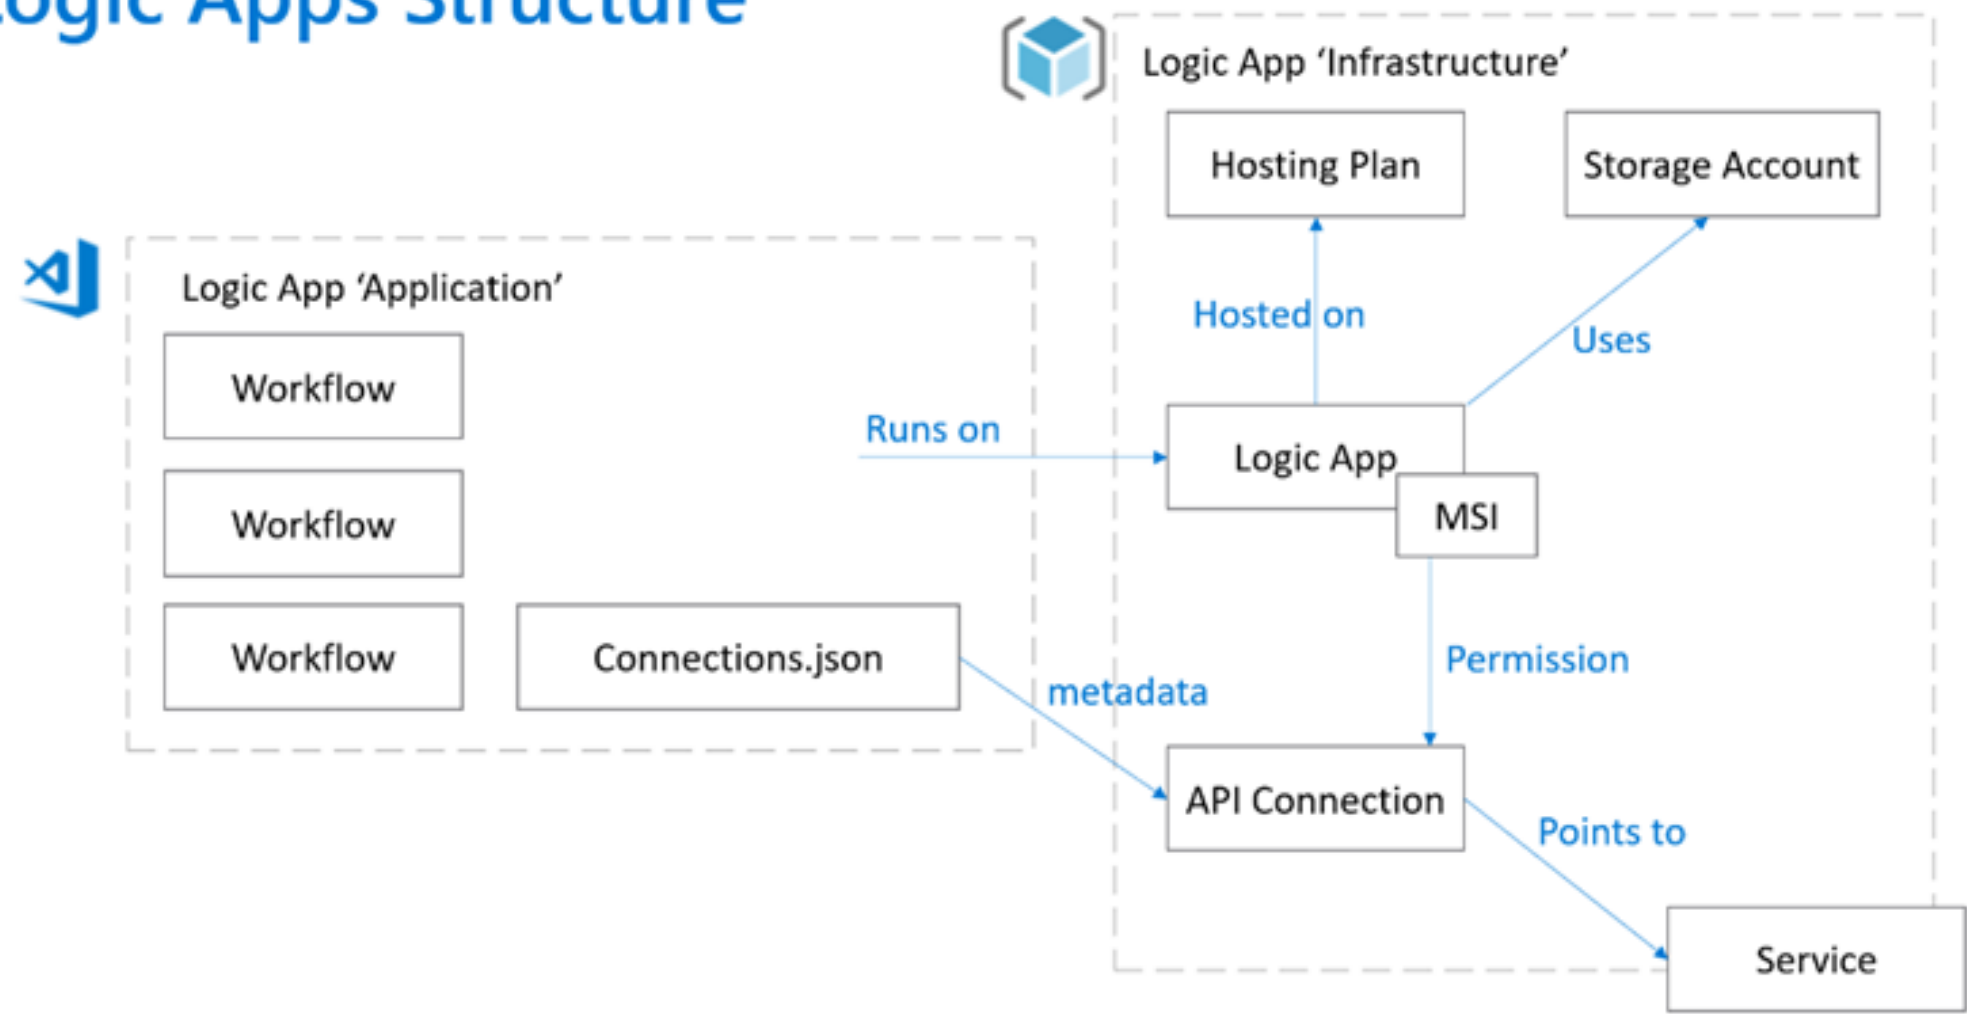


Azure Logic Apps (Standard) – Project Structure

Name	Folder or file	Description
.vscode	Folder	Contains Visual Studio Code-related settings files, such as extensions.json , launch.json , settings.json , and tasks.json files.
Artifacts	Folder	Contains integration account artifacts that you define and use in workflows that support business-to-business (B2B) scenarios.
<WorkflowName>	Folder	For each workflow, the <WorkflowName> folder includes a workflow.json file, which contains that workflow's underlying JSON definition.
workflow-designtime	Folder	Contains development environment-related settings files.
.funcignore	File	Contains information related to your installed Azure Functions Core Tools .
connections.json	File	Contains the metadata, endpoints, and keys for any managed connections and Azure functions that your workflows use.
host.json	File	Contains runtime-specific configuration settings and values, for example, the default limits for the single-tenant Azure Logic Apps platform, logic apps, workflows, triggers, and actions. At your logic app project's root level, the host.json metadata file contains the configuration settings and default values that all workflows in the same logic app use while running, whether locally or in Azure.
local.settings.json	File	Contains app settings, connection strings, and other settings that your workflows use while running locally. In other words, these settings and values apply only when you run your projects in your local development environment. During deployment to Azure, the file and settings are ignored and aren't included with your deployment.

Azure Logic Apps (Standard) – DevOps Pipeline

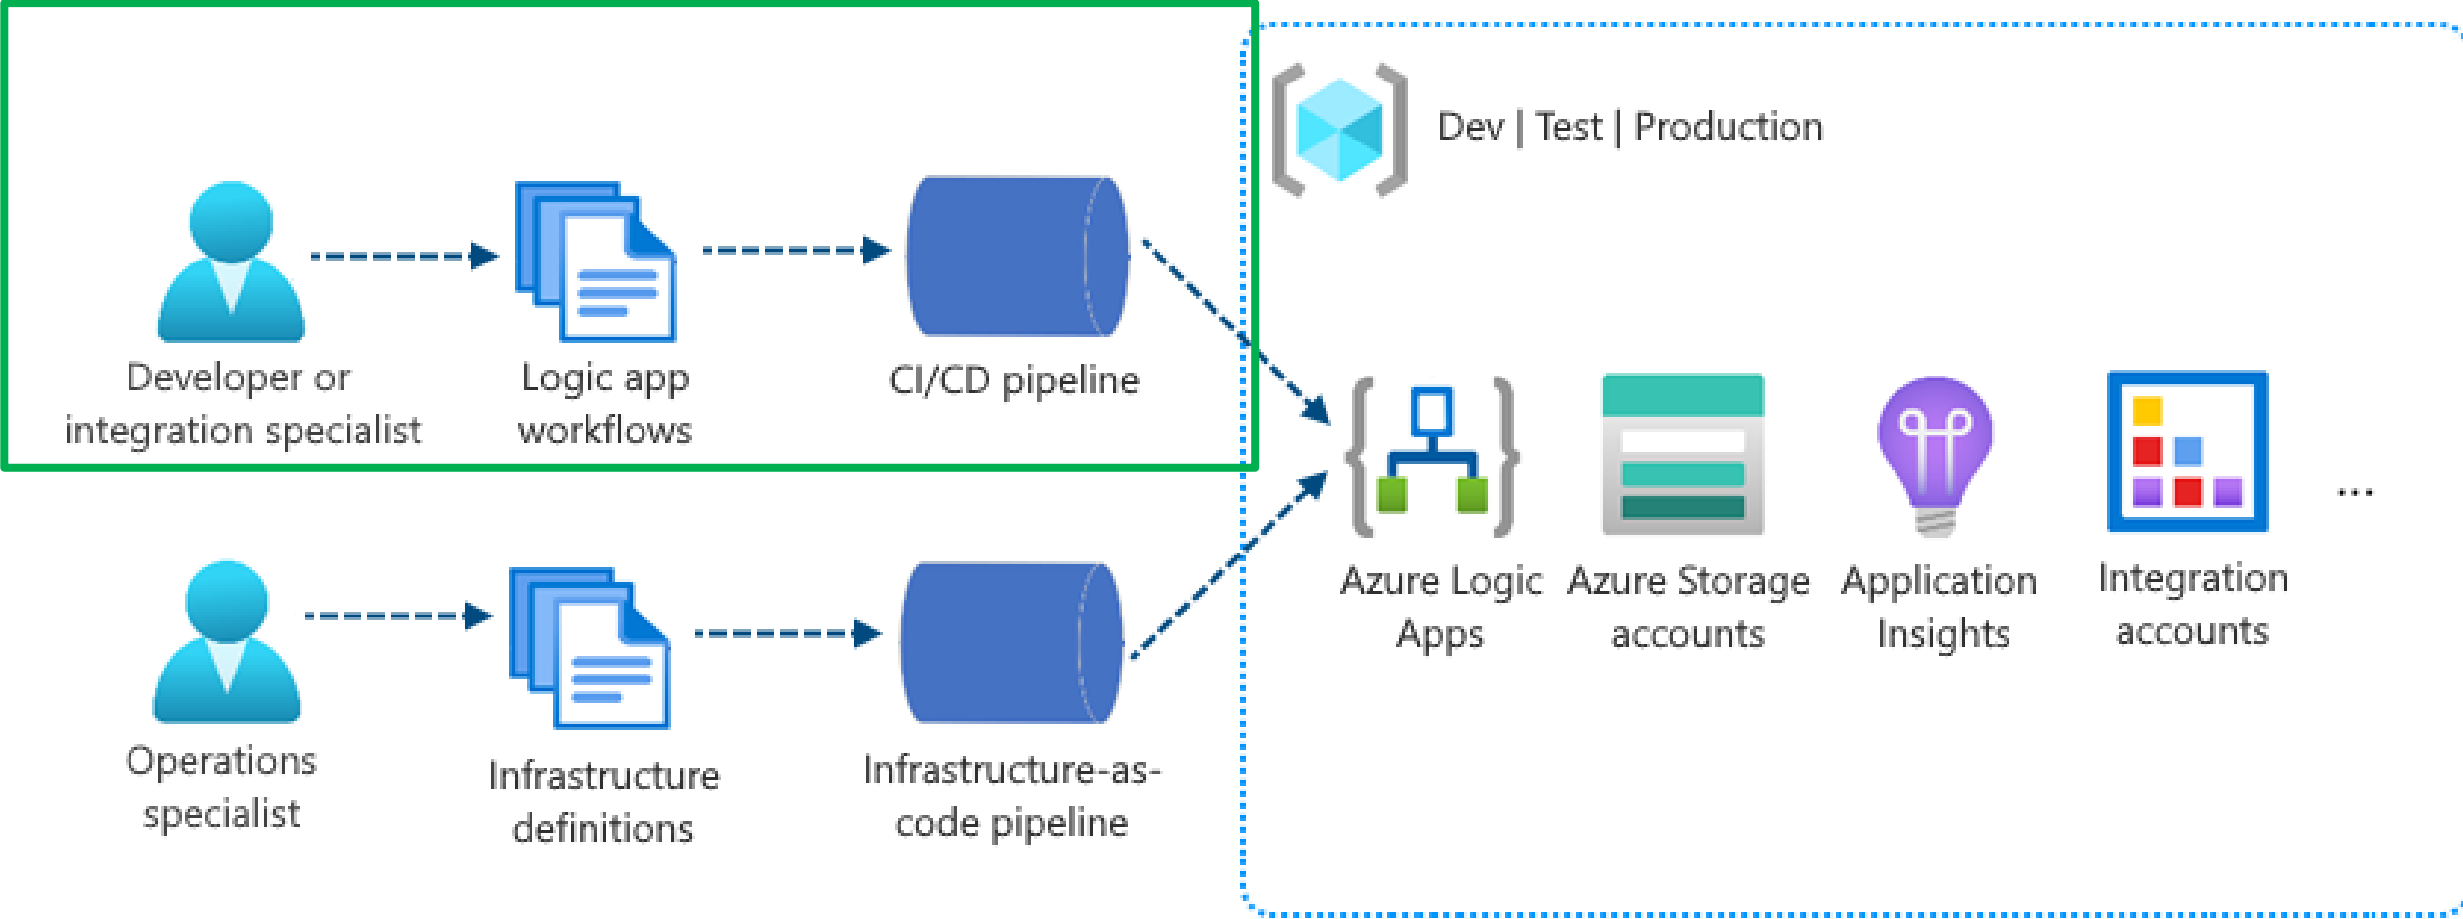

Azure Logic Apps (Standard) – Sample Application

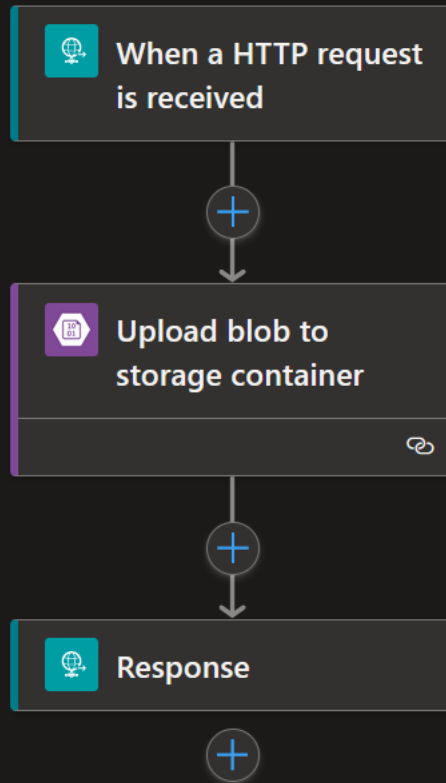

- Logic App is triggered by HTTP Request with a JSON payload with a specific schema
- An "Upload Blob" activity:
 - Connects to a Storage account using Managed Identity
 - Uploads incoming data to a Blob in a Blob container in a Storage account
- A "Response" activity sends the Blob key in the HTTP Response back to the caller

Demo

Resources

- [DevOps deployment for single-tenant Azure Logic Apps](#)
- [Set up DevOps deployment for Standard logic app workflows in single-tenant Azure Logic Apps](#)
- [Azure Logic Apps – DevOps Samples in GitHub](#)

