


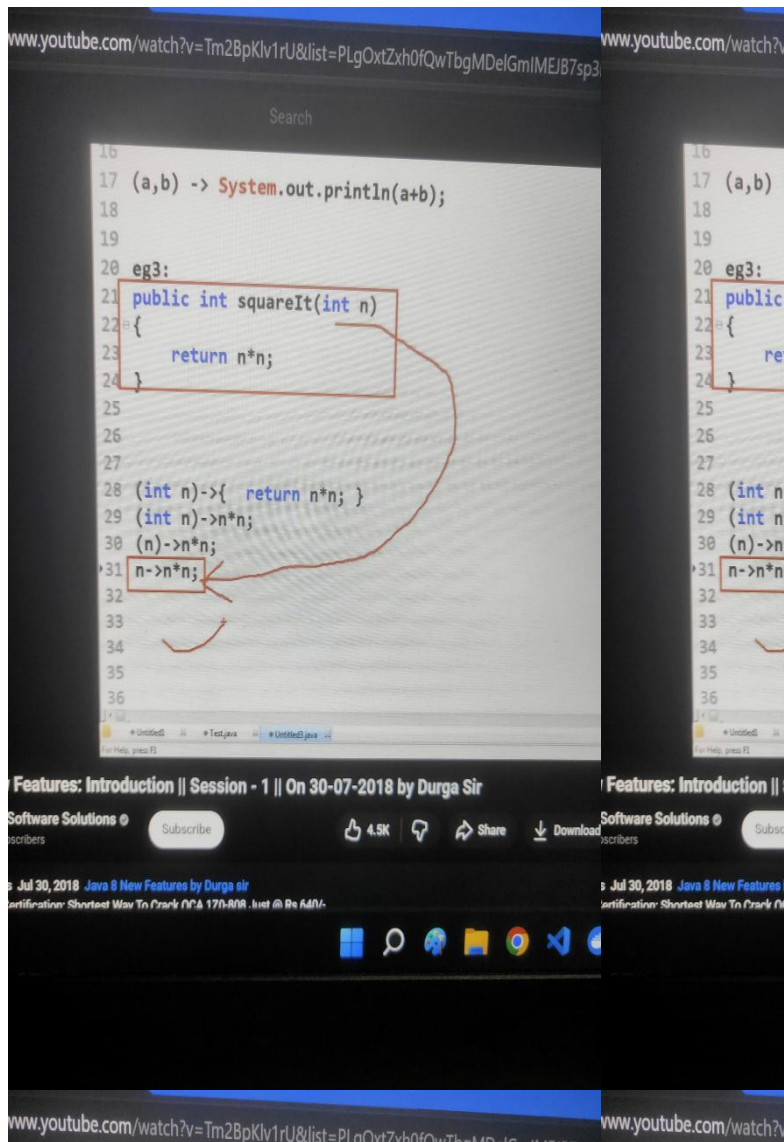
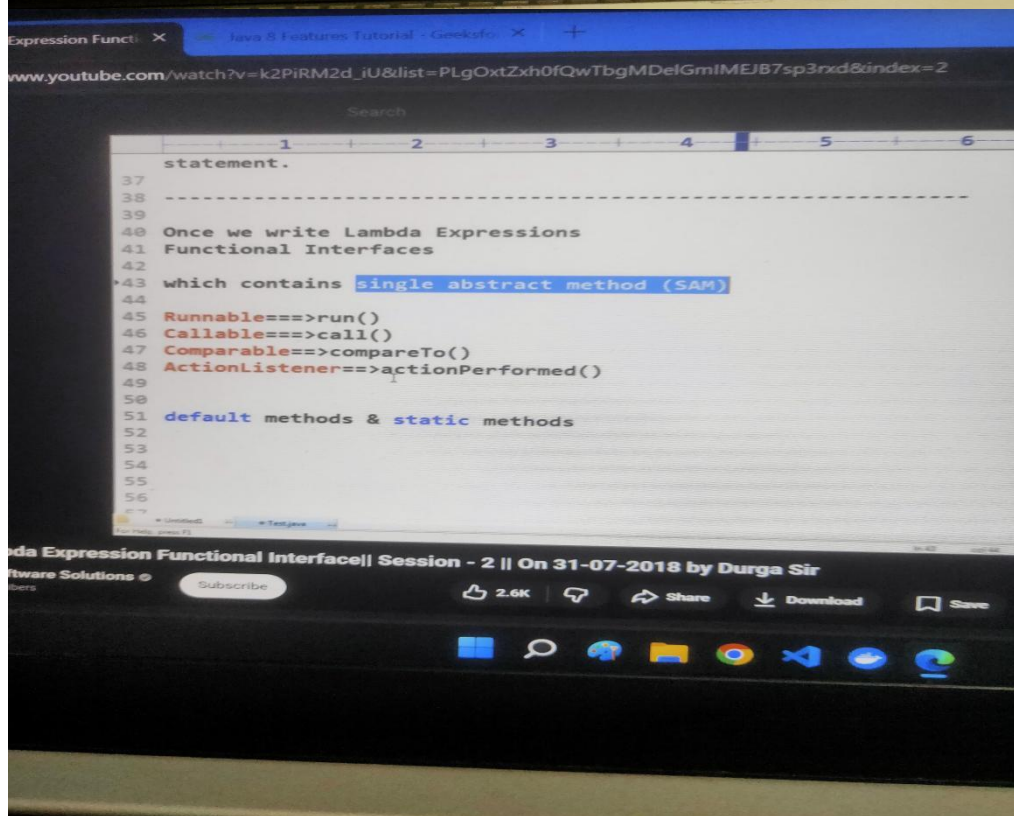


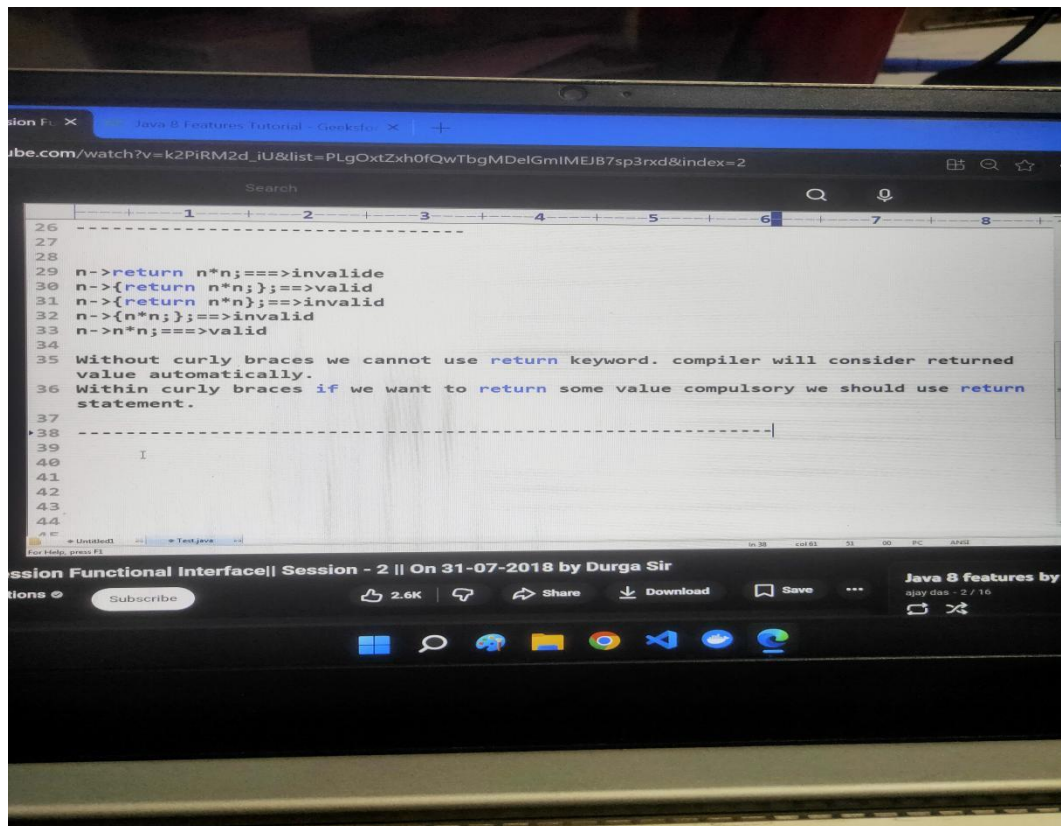

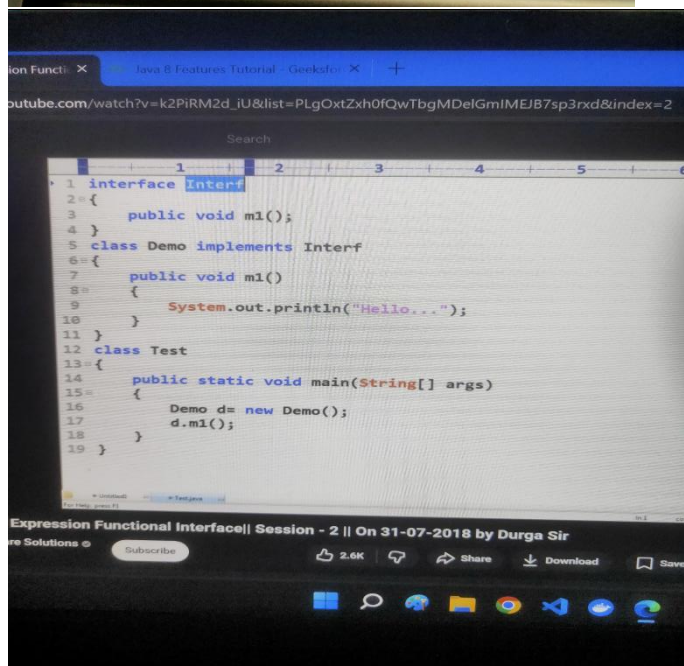

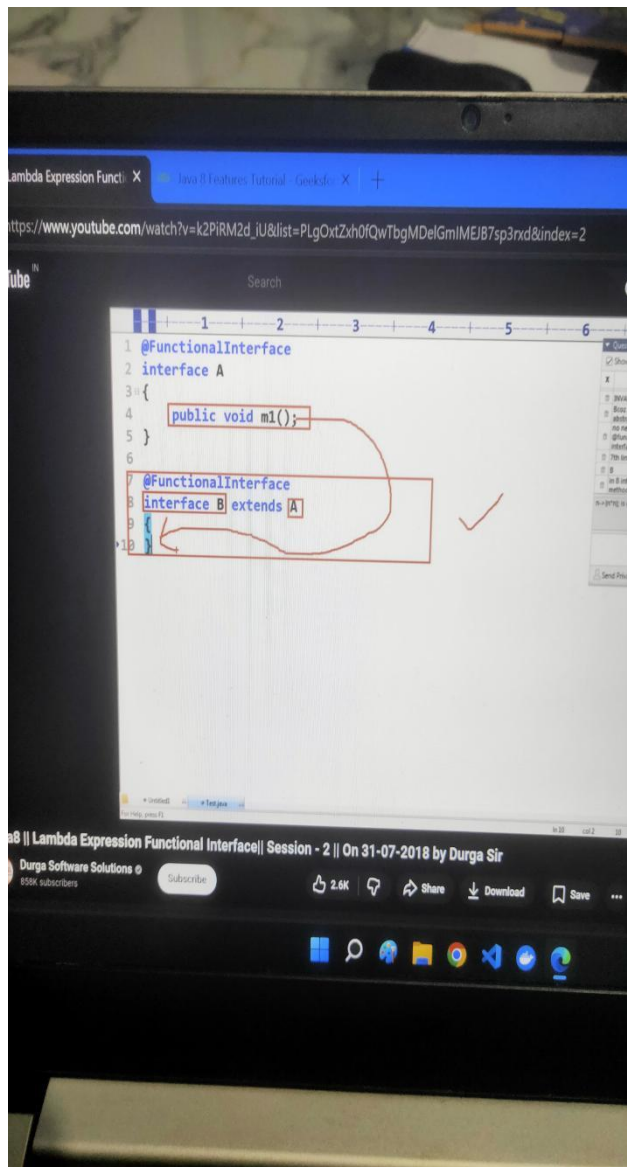

```
Search
1 interface Interf
2 {
3     public void m1();
4 }
5 class Demo implements Interf
6 {
7     public void m1()
8     {
9         System.out.println("Hello...");
10    }
11 }
12 class Test
13 {
14     public static void main(String[] args)
15     {
16         Interf i= new Demo();
17         i.m1();
18     }
19 }
```

pression Functional Interface|| Session - 2 || On 31-07-2018 by Durga Sir
Solutions @ Subscribe 2.6K Share Download

```
Search
1 interface Interf
2 {
3     public void m1();
4 }
5 class Demo implements Interf
6 {
7     public void m1()
8     {
9         System.out.println("Hello...");
10    }
11 }
12 class Test
13 {
14     public static void main(String[] args)
15     {
16         Interf i= ()->System.out.println("Hello...");
17         i.m1();
18     }
19 }
```

pression Functional Interface|| Session - 2 || On 31-07-2018 by Durga Sir
Solutions @ Subscribe 2.6K Share Download

ion Fi X Java 8 Features Tutorial - Geeksfor X +

ube.com/watch?v=k2PIRM2d_iU&list=PLgOxtZxh0fQwTbgMDeIGmIMEJB7sp3rxd&inde

Search

```
1 interface Interf
2 {
3     public void m1();
4 }
5 class Test
6 {
7     public static void main(String[] args)
8     {
9         Interf i = ()->System.out.println("Hello...");
10        i.m1();
11    }
12 }
```

Expression Functional Interface|| Session - 2 || On 31-07-2018 by Durga Sir

ware Solutions

Subscribe

2.6K

Share

Download

Save

ed. X Java 8 Features Tutorial - Geeksfor X +

com/watch?v=k2PIRM2d_iU&list=PLgOxtZxh0fQwTbgMDeIGmIMEJB7sp3rxd&index=2

Search

```
1 interface Interf
2 {
3     public void m1();
4 }
5 class Test
6 {
7     public static void main(String[] args)
8     {
9         Interf i = ()->System.out.println("Hello...By Lambda E
10        i.m1();
11    }
12 }
```



Questions


✓ Show Answered Questions

X	Question
☐	yes
☐	yes sir
☐	yes
☐	we can use implicit outside me
☐	what happen if we remove int
☐	yes
☐	yes sir
☐	ok sir

Java 8 feat

ajay das - 2 / 10

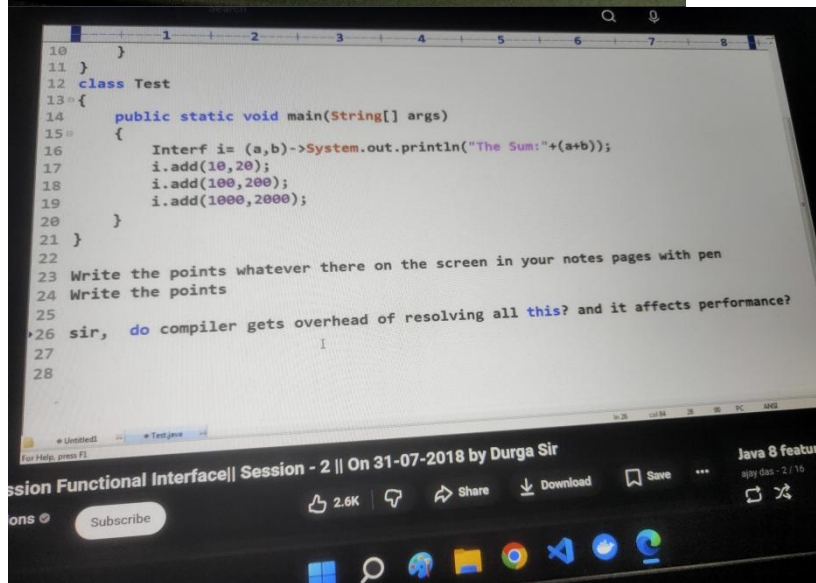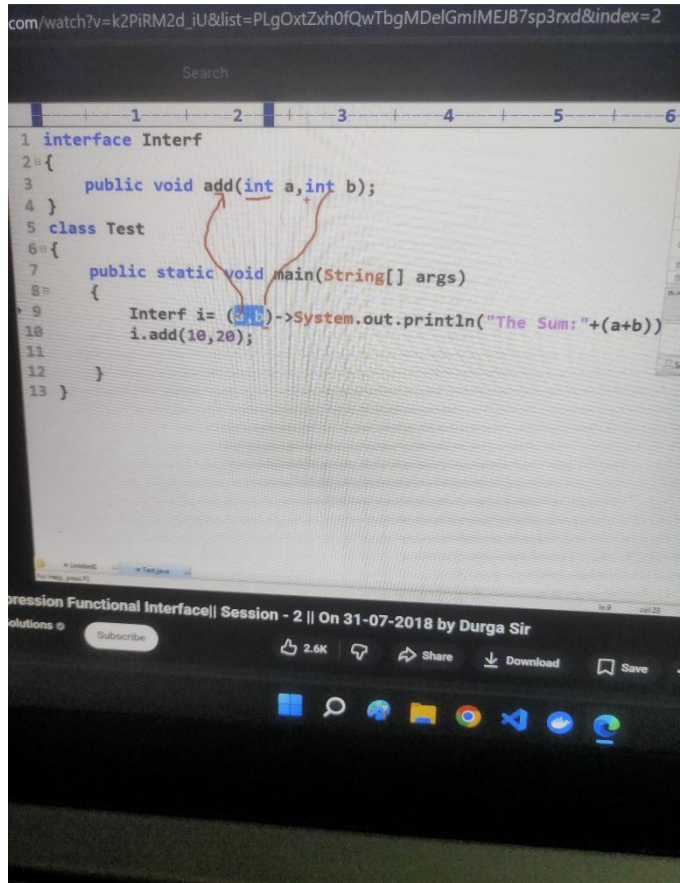

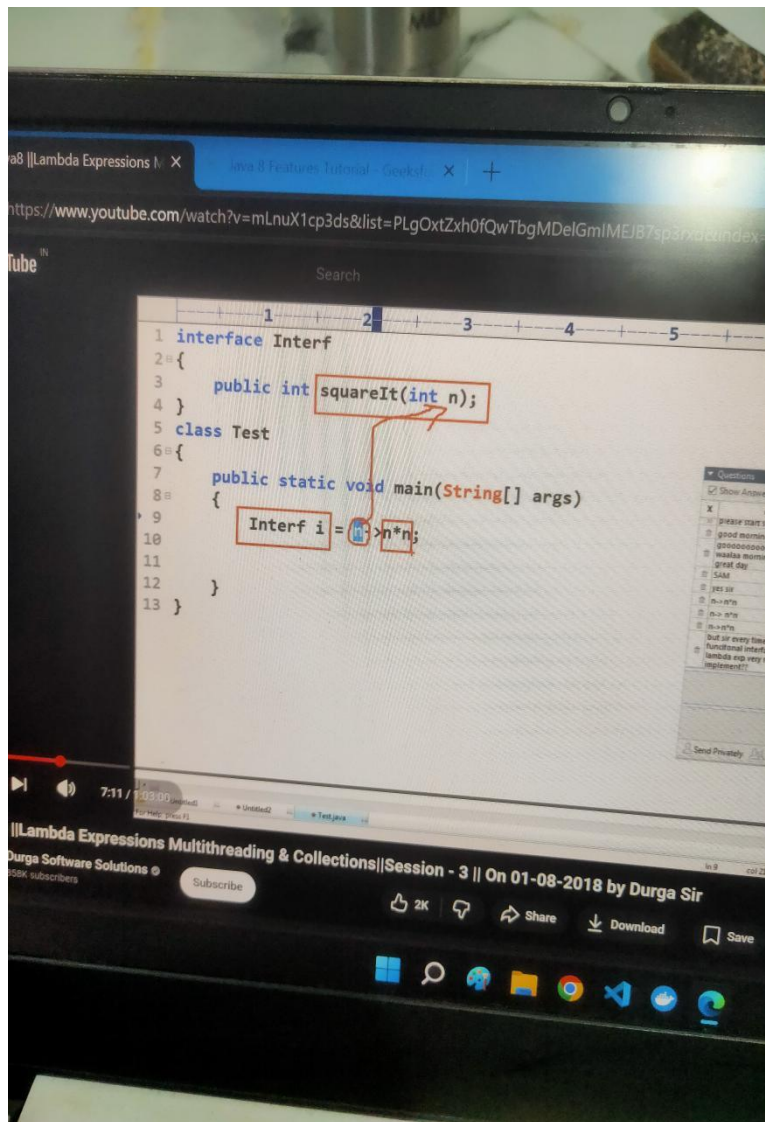

essions Multi X

youtube.com/watch?v=mLnuX1cp3ds&list=PLgOxtZxh0fQwTbgMDelGmiMEJB7sp3rxd&index=4

Search

1 interface Interf
2 {
3 public int squareIt(int n);
4 }
5 class Test
6 {
7 public static void main(String[] args)
8 {
9 Interf i = n -> n*n;
10 System.out.println(i.squareIt(4));
11 System.out.println(i.squareIt(5));
12 }
13 }

Questions

✓ Show Answered Questions

X	Question	Answer
☐	please start or	please start
☐	good morning	good morning
☐	good morning or p... have a great day	good morning or p... have a great day
☐	SAM	SAM
☐	yes or	yes or
☐	n -> n*n	n -> n*n
☐	n -> n*n	n -> n*n
☐	n -> n*n	n -> n*n
☐	but in many time we dont have functional interface thus it make lambda exp very hard to implement	but in many time we dont have functional interface thus it make lambda exp very hard to implement

Send Privately Send to All

Expressions Multithreading & Collections|Session - 3 || On 01-08-2018 by Durga Sir

are Solutions

Subscribe



2K

Share

Download

Save

Windows taskbar icons: File Explorer, Google Chrome, Visual Studio Code, etc.

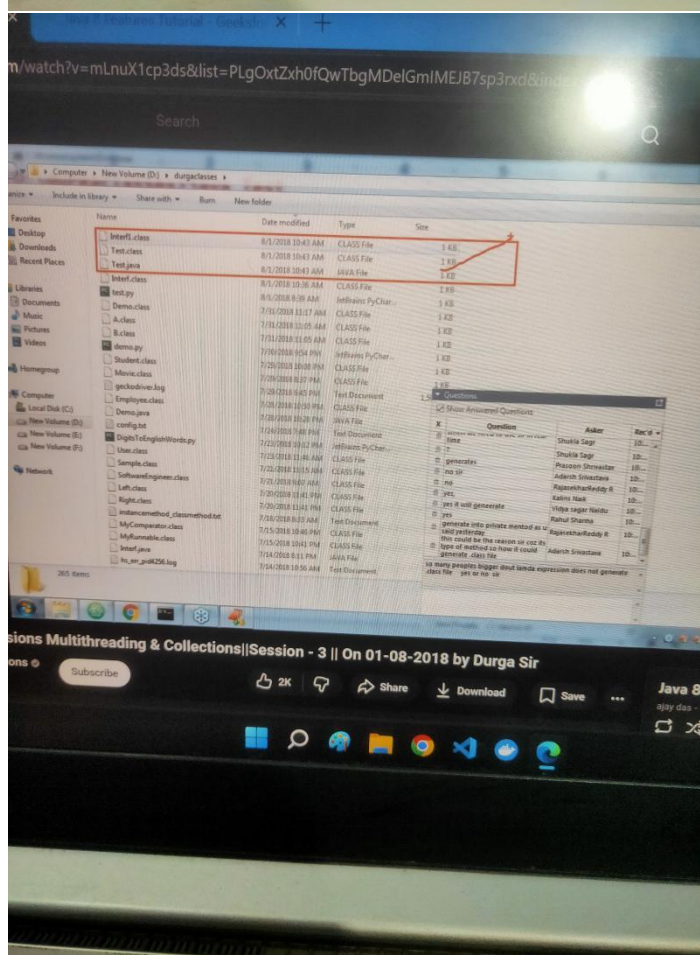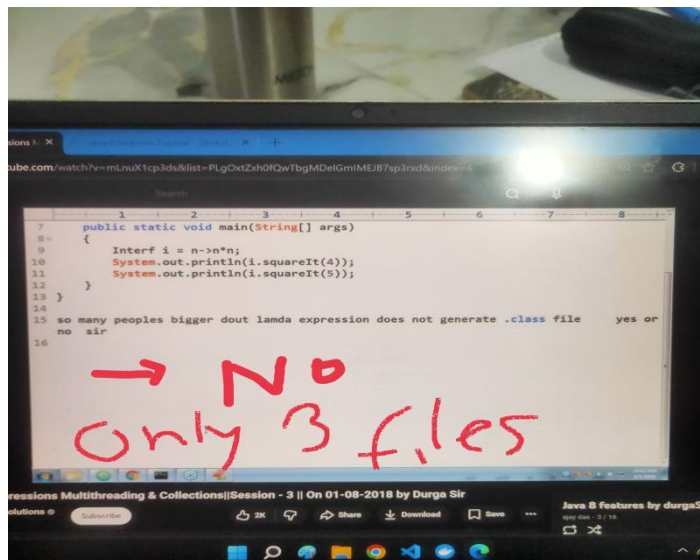

```
1 class MyRunnable implements Runnable
2 {
3     public void run()
4     {
5         for(int i =0; i <10;i++)
6         {
7             System.out.println("Child Thread");
8         }
9     }
10 }
11 class Test
12 {
13     public static void main(String[] args)
14     {
15         MyRunnable r = new MyRunnable();
16         Thread t = new Thread(r);
17         t.start();
18         for(int i =0; i<10; i++)
19         {
20             System.out.println("Main Thread");
21         }
22     }
23 }
```