


Maven Project To Connect To Web Servers Using Selenium Dependency

Step1:

Create a maven project on the terminal with the command:

```
$mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenSeleniumApp01 -DarchetypeArtifactId=maven-archetype-quickstart -DinteractiveMode=false
```

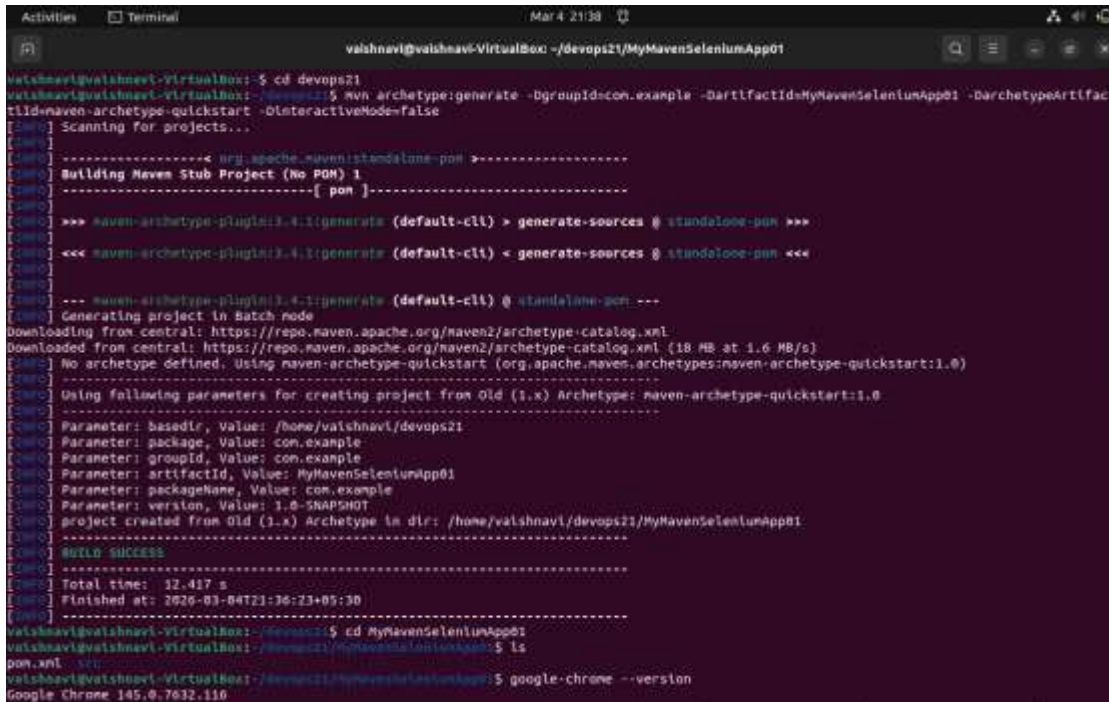

```

Activities Terminal Mar 4 21:38
valahnavi@valahnavi-VirtualBox: ~/devops21/MyMavenSeleniumApp01

valahnavi@valahnavi-VirtualBox:~$ cd devops21
valahnavi@valahnavi-VirtualBox:~/devops21$ mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenSeleniumApp01 -DarchetypeArtifactId=maven-archetype-quickstart -DinteractiveMode=false
[INFO] Scanning for projects...
[INFO]
[INFO] -----< org.apache.maven:standalone-pom >-----
[INFO] Building Maven Stub Project (No POM) 1
[INFO] -----[ pom ]-----
[INFO]
[INFO] >>> maven-archetype-plugin:3.4.1:generate (default-cli) > generate-sources @ standalone-pom >>>
[INFO] <<< maven-archetype-plugin:3.4.1:generate (default-cli) < generate-sources @ standalone-pom <<<
[INFO]
[INFO] --- maven-archetype-plugin:3.4.1:generate (default-cli) @ standalone-pom ---
[INFO] Generating project in Batch mode
[INFO] Downloading from central: https://repo.maven.apache.org/maven2/archetype-catalog.xml
[INFO] Downloaded from central: https://repo.maven.apache.org/maven2/archetype-catalog.xml (18 kB at 1.6 MB/s)
[INFO] No archetype defined. Using maven-archetype-quickstart (org.apache.maven.archetypes:maven-archetype-quickstart:1.0)
[INFO] Using following parameters for creating project from Old (1.x) Archetype: maven-archetype-quickstart:1.0
[INFO]
[INFO] Parameter: basedir, Value: /home/valahnavi/devops21
[INFO] Parameter: package, Value: com.example
[INFO] Parameter: groupId, Value: com.example
[INFO] Parameter: artifactId, Value: MyMavenSeleniumApp01
[INFO] Parameter: packageName, Value: com.example
[INFO] Parameter: version, Value: 1.0-SNAPSHOT
[INFO] Project created from Old (1.x) Archetype in dir: /home/valahnavi/devops21/MyMavenSeleniumApp01
[INFO]
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO]
[INFO] Total time: 12.417 s
[INFO] Finished at: 2020-03-04T21:36:23+05:30
[INFO]
[INFO] -----
valahnavi@valahnavi-VirtualBox:~/devops21$ cd MyMavenSeleniumApp01
valahnavi@valahnavi-VirtualBox:~/devops21/MyMavenSeleniumApp01$ ls
pom.xml
valahnavi@valahnavi-VirtualBox:~/devops21/MyMavenSeleniumApp01$ google-chrome --version
Google Chrome 145.0.7632.110

```

The command can be broken down as:

DgroupId=com.example – project’s base package (reverse-domain style).

-DartifactId=MyMavenSeleniumApp – defines the name of the project (will also be the folder name).

-DarchetypeArtifactId=maven-archetype-quickstart – sets the Maven template to be the basic Java application.

-DinteractiveMode=false – deactivates interactive mode and uses the given values automatically.

Step 2:

Use \$cd command to go into the directory.

\$gedit pom.xml

pom.xml file is created to configure the Maven project. It defines the project information, adds required dependencies like Guava and Commons IO libraries, and includes build plugins to compile the Java code, run unit tests, and package the application into an executable JAR file.

```
<dependencies>

  <dependency>

    <groupId>junit</groupId>

    <artifactId>junit</artifactId>

    <version>3.8.1</version>

    <scope>test</scope>

  </dependency>

  <!-- https://mvnrepository.com/artifact/org.seleniumhq.selenium/selenium-java -->
  <dependency>

    <groupId>org.seleniumhq.selenium</groupId>

    <artifactId>selenium-java</artifactId>

    <version>4.29.0</version>

  </dependency>
</dependencies>

<!-- Build: Configuring plugins and build settings -->
<build>
  <plugins>

    <!-- Example: Maven Compiler Plugin to compile Java code -->
    <plugin>

      <groupId>org.apache.maven.plugins</groupId>

      <artifactId>maven-compiler-plugin</artifactId>

      <version>3.8.1</version>

      <configuration>

        <source>1.7</source>

        <target>1.7</target>


      </configuration>
```

```
</plugin>
<!-- Example: Maven Surefire Plugin to run tests -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-surefire-plugin</artifactId>
<version>2.22.2</version>
</plugin>
<plugin>
    <groupId>org.apache.maven.plugins</groupId>

    <artifactId>maven-jar-plugin</artifactId>
    <version>3.0.1</version>
    <configuration>
        <archive>
            <manifestEntries>
                <Main-Class>com.example.App</Main-Class>
            </manifestEntries>
        </archive>
    </configuration>
</plugin>

</plugins>
</build>
</project>
```

Execute \$tree command to view the structure of the project

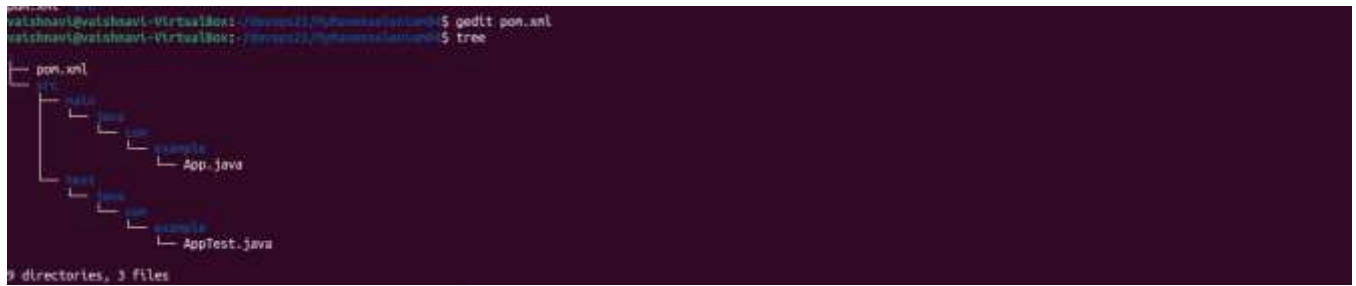

Step 3:

inspect the PracticeTestAutomation webpage to find the element IDs required for automation.

Right-click on the webpage and select Inspect. The HTML code will be displayed. Click on the cursor icon (arrow symbol) available on the top-left of the inspect panel, then hover over the username field to identify its ID, which is user-name.

Similarly, check the password field (ID: password) and the login button (ID:submit). Make a note of these IDs, as they will be used in the App.java file.

Next,

Edit the App.java file

```
package com.example;
```

```
import org.openqa.selenium.By;
```

```
import org.openqa.selenium.WebDriver;
```

```
import org.openqa.selenium.chrome.ChromeDriver;
```

```
/** * Hello world! * */
```

```
public class App
```

```
{
```

```
    public static void main( String[] args )
```

```
    {
```

```
        WebDriver driver=new ChromeDriver();
```

```
        driver.get("https://practicetestautomation.com/practice-test-login/");
```

```
        driver.manage().window().maximize();
```

```
        driver.findElement(By.id("user-name")).sendKeys("student");
```

```
        driver.findElement(By.id("password")).sendKeys("Password123");
```

```
        driver.findElement(By.id("submit")).click();
```

```

    }
}

```

Step 4:

Build and run the maven application

Execute the command `$mvn clean install`



```

vaishnavi@vaishnavi-virtualbox: ~/devops21/PracticeTest2
vaishnavi@vaishnavi-virtualbox:~/devops21/PracticeTest2$ mvn clean install
[INFO] Scanning for projects...
[INFO]
[INFO] -----[ com.example.MyMavenSeleniumApp01:1.0-SNAPSHOT ]-----
[INFO] Building MyMavenSeleniumApp01 1.0-SNAPSHOT
[INFO]
[INFO] --- maven-clean-plugin:3.1.0:clean (default-clean) @ MyMavenSeleniumApp01 ---
[INFO] Deleting /home/vaishnavi/devops21/PracticeTest2/target
[INFO]
[INFO] --- maven-resources-plugin:3.1.0:resources (default-resources) @ MyMavenSeleniumApp01 ---
[WARNING] Using platform encoding (UTF-8 actual) to copy filtered resources, i.e. build is platform dependent!
[INFO] skip non existing resourceDirectory /home/vaishnavi/devops21/PracticeTest2/src/main/resources
[INFO]
[INFO] --- maven-compiler-plugin:3.8.1:compile (default-compile) @ MyMavenSeleniumApp01 ---
[INFO] Changes detected - recompiling the module!
[WARNING] File encoding has not been set, using platform encoding UTF-8, i.e. build is platform dependent!
[INFO] Compiling 1 source file to /home/vaishnavi/devops21/PracticeTest2/target/classes
[INFO]
[INFO] --- maven-resources-plugin:3.1.0:testResources (default-testResources) @ MyMavenSeleniumApp01 ---
[WARNING] Using platform encoding (UTF-8 actual) to copy filtered resources, i.e. build is platform dependent!
[INFO] skip non existing resourceDirectory /home/vaishnavi/devops21/PracticeTest2/src/test/resources
[INFO]
[INFO] --- maven-compiler-plugin:3.8.1:testCompile (default-testCompile) @ MyMavenSeleniumApp01 ---
[INFO] Changes detected - recompiling the module!
[WARNING] File encoding has not been set, using platform encoding UTF-8, i.e. build is platform dependent!
[INFO] Compiling 1 source file to /home/vaishnavi/devops21/PracticeTest2/target/test-classes
[INFO]
[INFO] --- maven-surefire-plugin:2.22.1:test (default-test) @ MyMavenSeleniumApp01 ---
[INFO]
[INFO] -----[ T E S T ]-----
[INFO] Running com.example.AppTest
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 0.001 s - in com.example.AppTest
[INFO]
[INFO] Results:
[INFO]
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0
[INFO]
[INFO]
[INFO] --- maven-jar-plugin:3.1.0:jar (default-jar) @ MyMavenSeleniumApp01 ---
[INFO] Building jar: /home/vaishnavi/devops21/PracticeTest2/target/MyMavenSeleniumApp01-1.0-SNAPSHOT.jar
[INFO]
[INFO] --- maven-install-plugin:3.1.0:install (default-install) @ MyMavenSeleniumApp01 ---
[INFO] Installing /home/vaishnavi/devops21/PracticeTest2/target/MyMavenSeleniumApp01-1.0-SNAPSHOT.jar to /home/vaishnavi/.m2/repository/com/example/MyMavenSeleniumApp01/1.0-SNAPSHOT/MyMavenSeleniumApp01-1.0-SNAPSHOT.jar
[INFO] Installing /home/vaishnavi/devops21/PracticeTest2/pom.xml to /home/vaishnavi/.m2/repository/com/example/MyMavenSeleniumApp01/1.0-SNAPSHOT/MyMavenSeleniumApp01-1.0-SNAPSHOT.pom
[INFO]
[INFO] -----[ W O R K S ]-----
[INFO]
[INFO] Total time: 0.182 s
[INFO] Finished at: 2024-03-25T12:10:05+05:30
[INFO]
vaishnavi@vaishnavi-virtualbox:~/devops21/PracticeTest2$

```

If the command shows output as “build success”, it means that the project has compiled successfully

Step 5:

Execute `$ java -jar target/MyMavenSeleniumApp01-1.0-SNAPSHOT`

```

vaishnavi@vaishnavi-virtualbox:~/devops21/MyMavenSeleniumApp01$ java -jar target/MyMavenSeleniumApp01-1.0-SNAPSHOT
Error: Unable to access jarfile target/MyMavenSeleniumApp01-1.0-SNAPSHOT
vaishnavi@vaishnavi-virtualbox:~/devops21/MyMavenSeleniumApp01$

```

If we get error in executing the above jar file do run the below command

`$mvn exec:java -Dexec.mainClass="com.example.App"`

[illegible]

Test login | Practice Test Automation

HOME PRACTICE COURSES BLOG CONTACT

Test login


This is a single Login page. Students can use this page to practice writing single positive and negative login tests. Login successfully in something that most of the test automation engineers need to automate.

Use next credentials to login successfully:

Username: **student**
Password: **Password123**

Username

Password

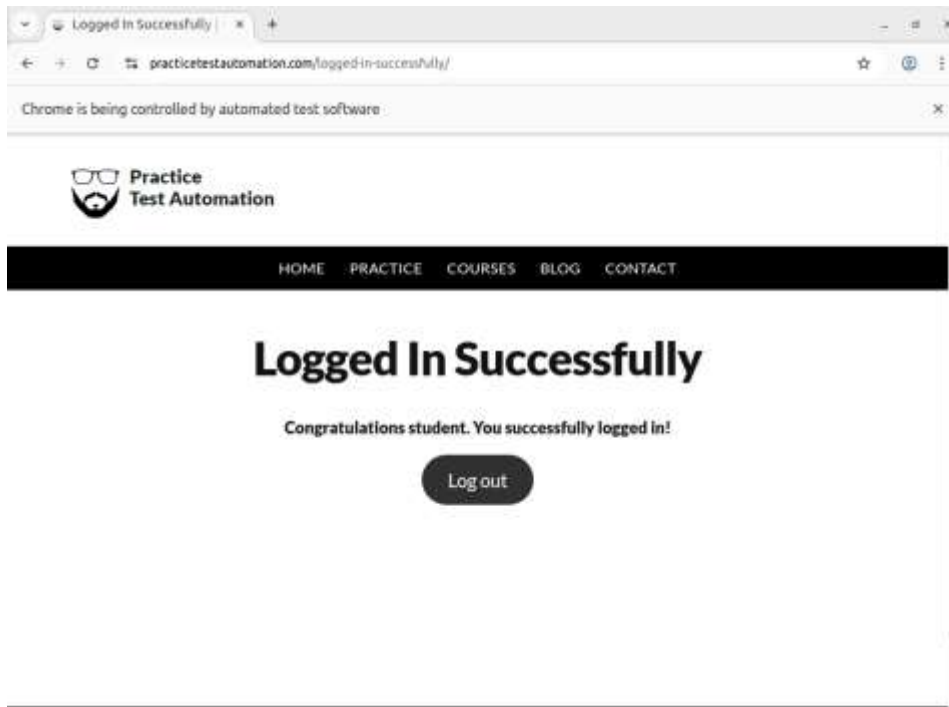

Practice Test Automation Website

<https://practicetestautomation.com/practice-test-login/> is a sample website used for testing and learning web automation tools like Selenium.

It is used for:

- Writing automation scripts and UI tests
- Practicing login functionality testing
- Learning and improving test automation skills

Pushing The Project into Git:

Execute the commands:

```
$ git config --global user.name "vaishnavim1121"
```

```
$ git config --global user.email "vaishnavim1121@gmail.com"
```

```
$git init
```

```
$git add .
```

\$git commit -m "initial commit"

\$ git remote add origin <https://github.com/vaishnavim1121/MyMavenSeleniumApp.git>

\$ git remote set-url origin https://*PAT*@github.com/vaishnavim1121/MyMavenSeleniumApp

\$ git push -u origin master

```

$ git branch -m main
Initialized empty Git repository in /home/vaishnavi/devops23/MyMavenSeleniumApp03/.git/
vaishnavi@vaishnavi-VirtualBox: ~/devops23/MyMavenSeleniumApp03 $ git add .
vaishnavi@vaishnavi-VirtualBox: ~/devops23/MyMavenSeleniumApp03 $ git commit -m "First commit"
[master (root-commit) 12f44db] First commit
 13 files changed, 305 insertions(+)
 create mode 100644 pom.xml
 create mode 100644 src/main/java/com/example/App.java
 create mode 100644 src/test/java/com/example/AppTest.java
 create mode 100644 target/MyMavenSeleniumApp03-1.0-SNAPSHOT.jar
 create mode 100644 target/classes/com/example/App.class
 create mode 100644 target/maven-archiver/gon.properties
 create mode 100644 target/maven-status/maven-compiler-plugin/compile/default-compile/createdFiles.lst
 create mode 100644 target/maven-status/maven-compiler-plugin/compile/default-compile/inputFiles.lst
 create mode 100644 target/maven-status/maven-compiler-plugin/testCompile/default-testCompile/createdFiles.lst
 create mode 100644 target/maven-status/maven-compiler-plugin/testCompile/default-testCompile/inputFiles.lst
 create mode 100644 target/surefire-reports/TEST-com.example.AppTest.xml
 create mode 100644 target/surefire-reports/com.example.AppTest.txt
 create mode 100644 target/test-classes/com/example/AppTest.class
vaishnavi@vaishnavi-VirtualBox: ~/devops23/MyMavenSeleniumApp03 $ git config --global user.name "vaishnavim1121"
vaishnavi@vaishnavi-VirtualBox: ~/devops23/MyMavenSeleniumApp03 $ git config --global user.email "vaishnavim1121@gmail.com"
vaishnavi@vaishnavi-VirtualBox: ~/devops23/MyMavenSeleniumApp03 $ git remote add origin https://github.com/vaishnavim1121/MyMavenSeleniumApp03.git
vaishnavi@vaishnavi-VirtualBox: ~/devops23/MyMavenSeleniumApp03 $ set-url origin https://ghu_hwyWp55sgt2QxFOV7huCjtJaL6ZV3WtFI@github.com/vaishnavim1121/MyMavenSeleniumApp03
set-url: command not found
vaishnavi@vaishnavi-VirtualBox: ~/devops23/MyMavenSeleniumApp03 $ git remote set-url origin https://ghu_hwyWp55sgt2QxFOV7huCjtJaL6ZV3WtFI@github.com/vaishnavim1121/MyMavenSeleniumApp03
vaishnavi@vaishnavi-VirtualBox: ~/devops23/MyMavenSeleniumApp03 $ git push -u origin master
remote: Repository not found.
fatal: repository 'https://github.com/vaishnavim1121/MyMavenSeleniumApp03/' not found
vaishnavi@vaishnavi-VirtualBox: ~/devops23/MyMavenSeleniumApp03 $ git remote set-url origin https://ghu_hwyWp55sgt2QxFOV7huCjtJaL6ZV3WtFI@github.com/vaishnavim1121/MyMavenSeleniumApp03
vaishnavi@vaishnavi-VirtualBox: ~/devops23/MyMavenSeleniumApp03 $ git push -u origin master
Enumerating objects: 39, done.
Counting objects: 100% (39/39), done.
Delta compression using up to 16 threads
Compressing objects: 100% (19/19), done.
Writing objects: 100% (39/39), 8.46 KiB | 721.00 KiB/s, done.
Total 39 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/vaishnavim1121/MyMavenSeleniumApp03
 * [new branch]      master -> master
Branch 'master' set up to track remote branch 'master' from 'origin'.
vaishnavi@vaishnavi-VirtualBox: ~/devops23/MyMavenSeleniumApp03 $

```