




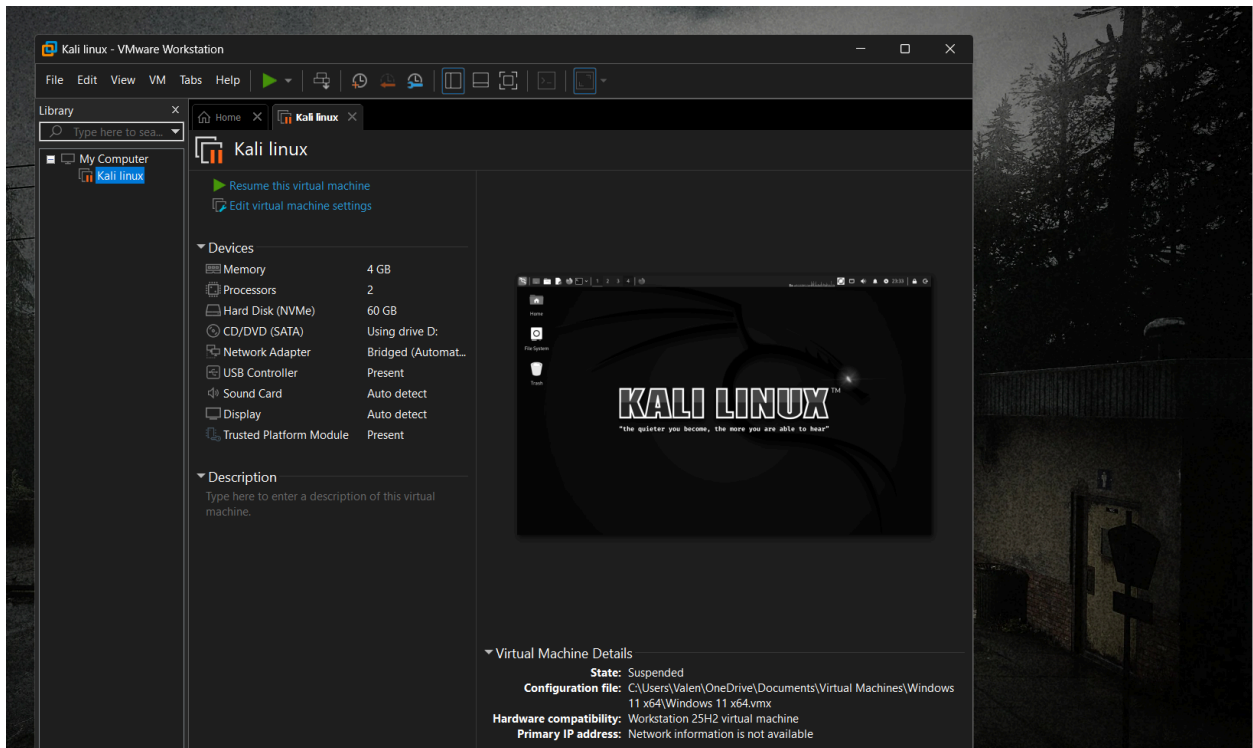


2

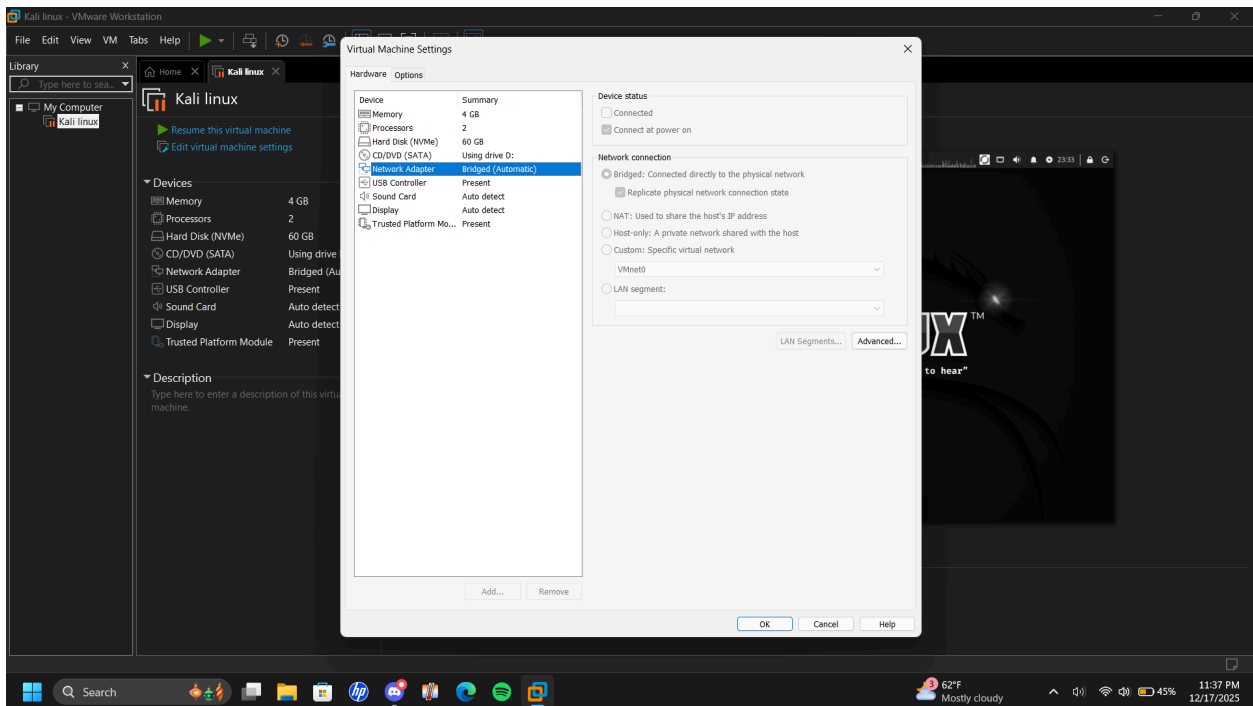


3

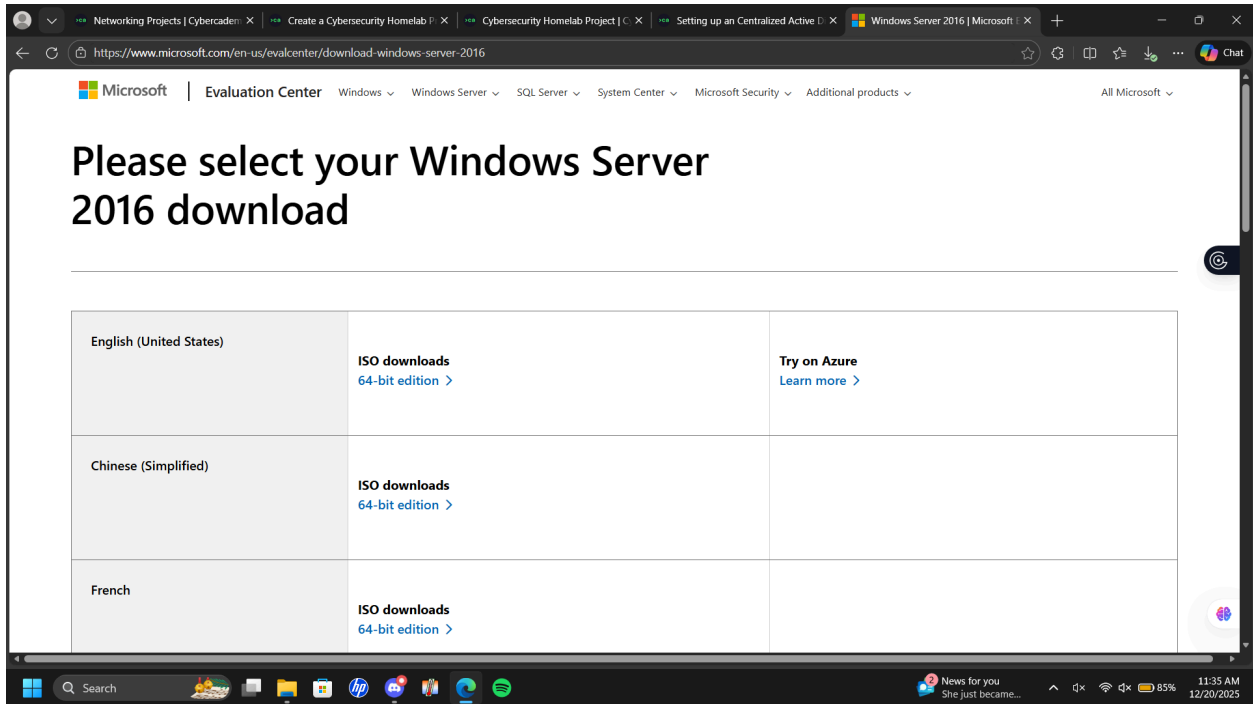


4

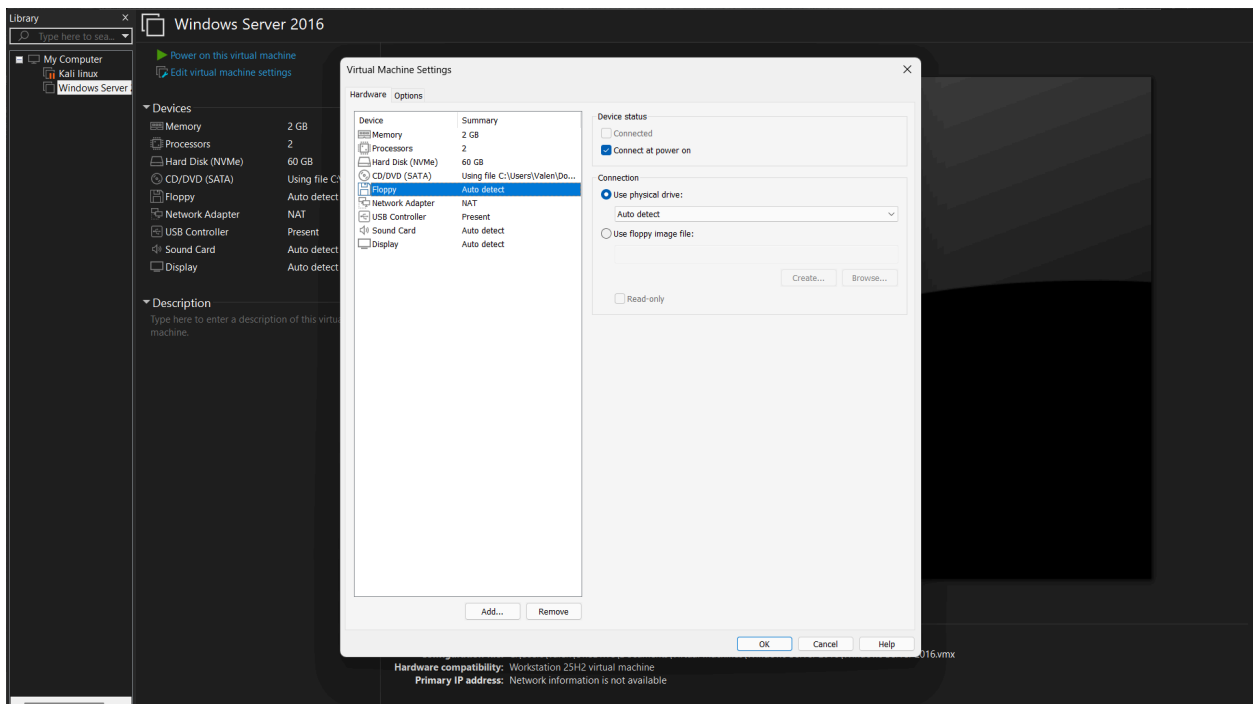


5

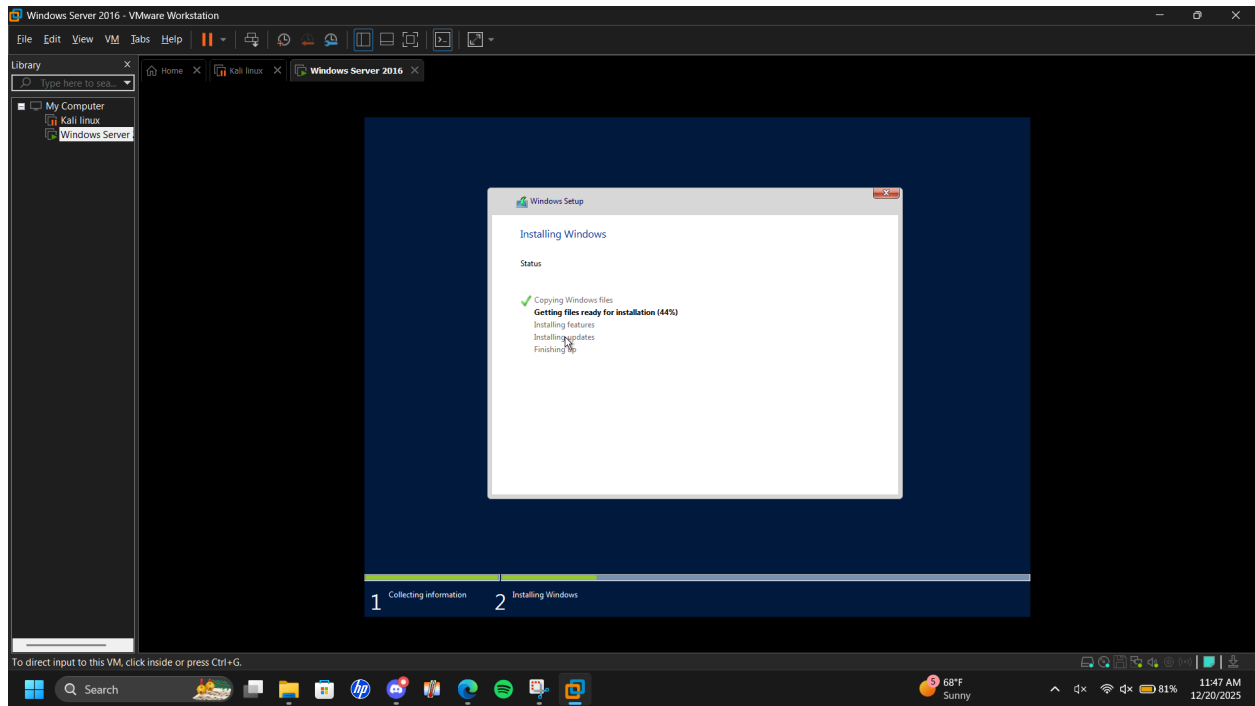


6

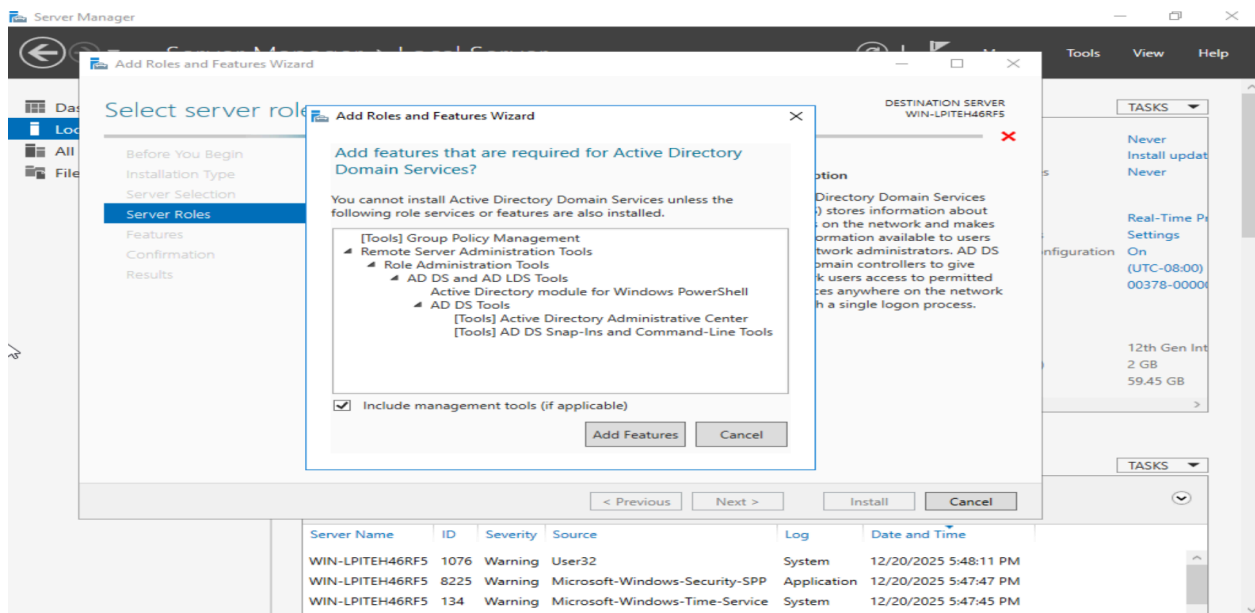


7

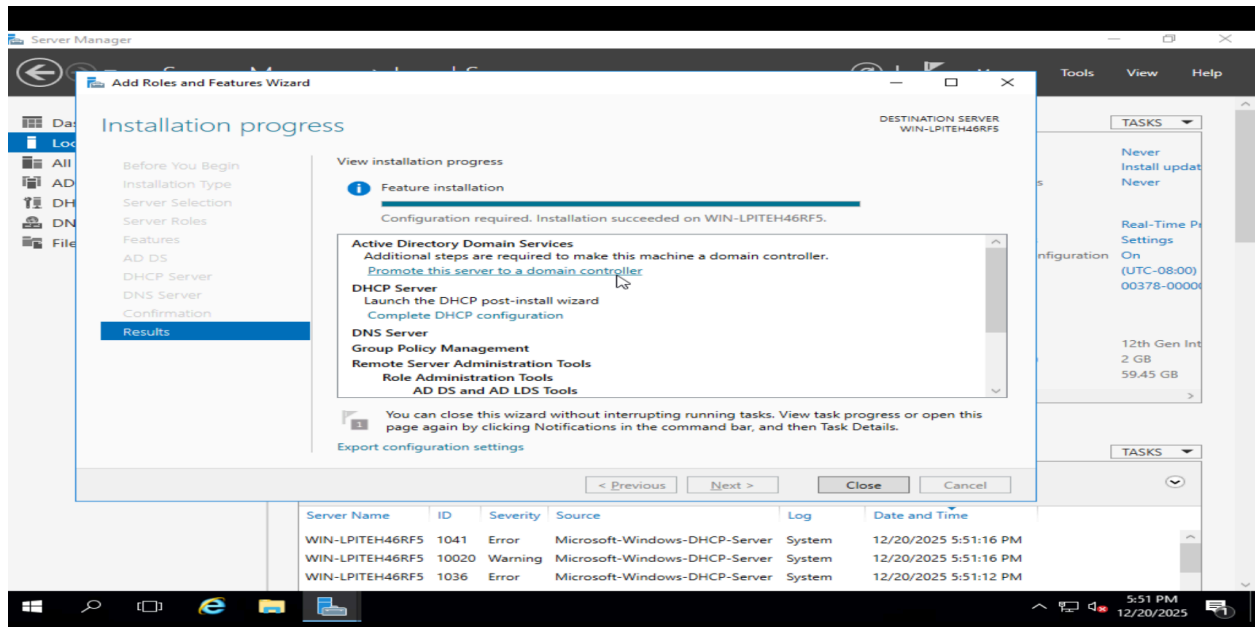


8

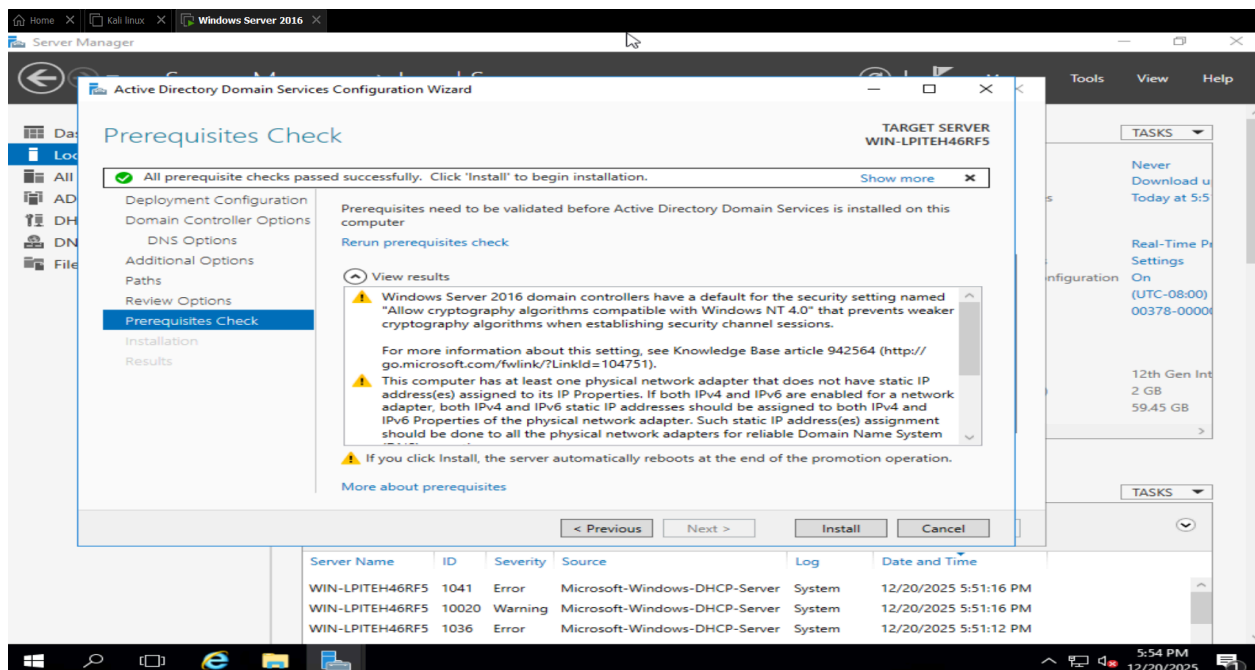


9

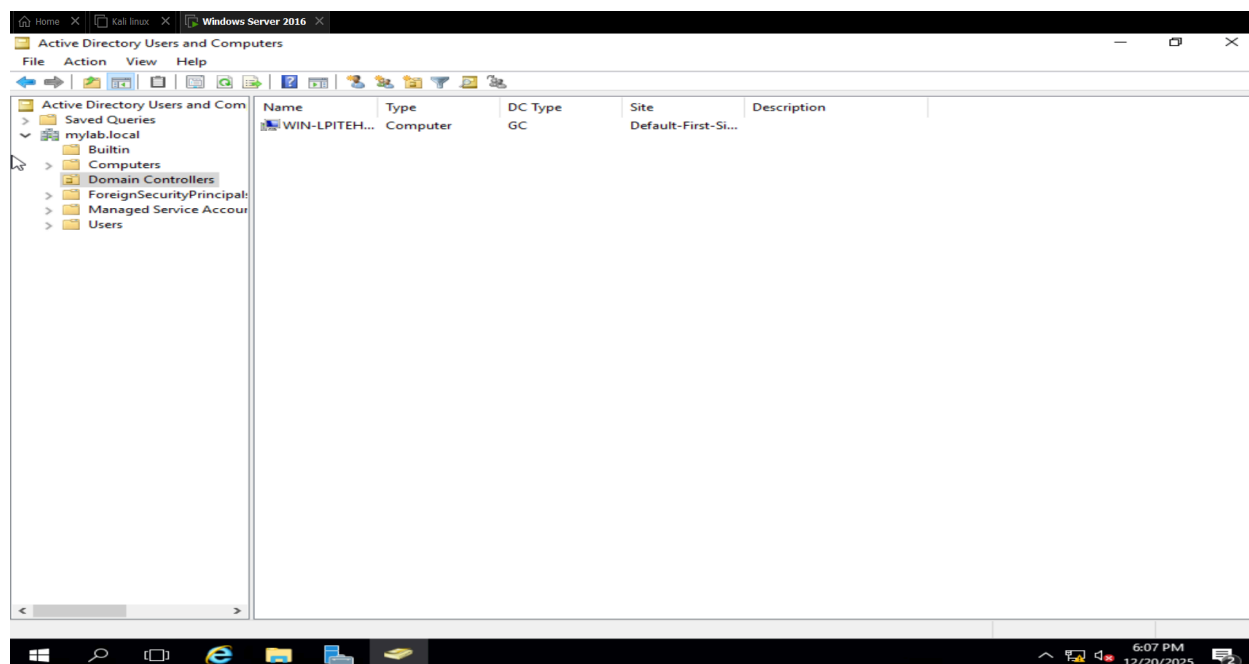


10

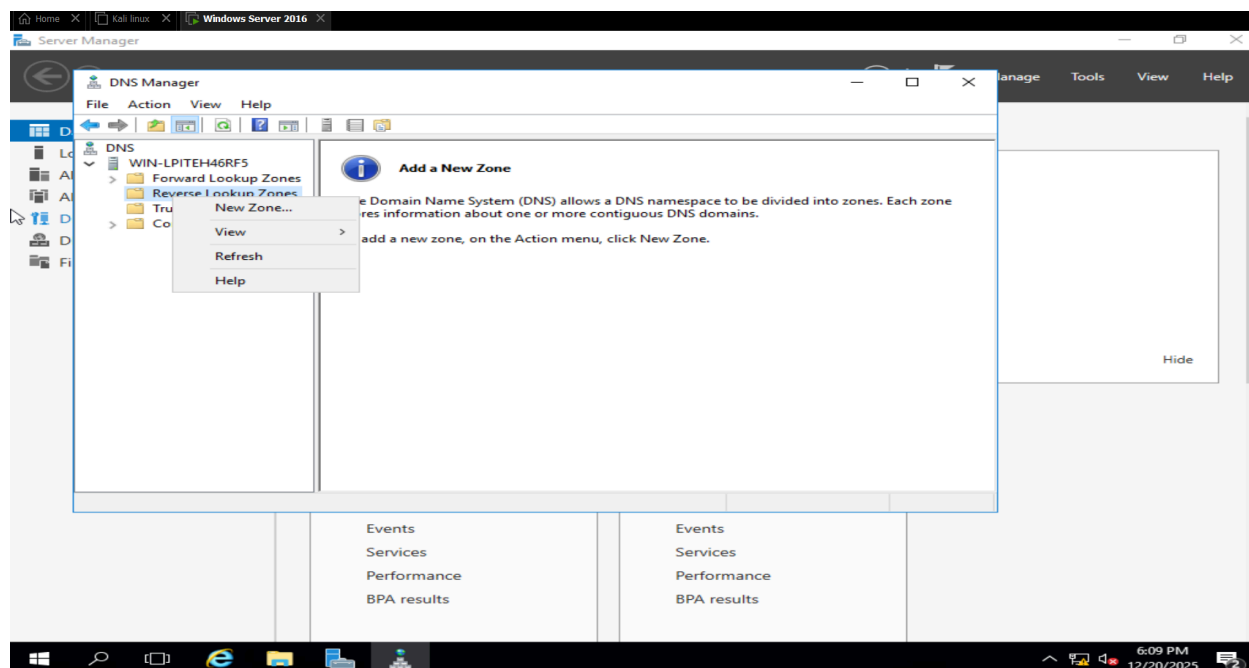


11

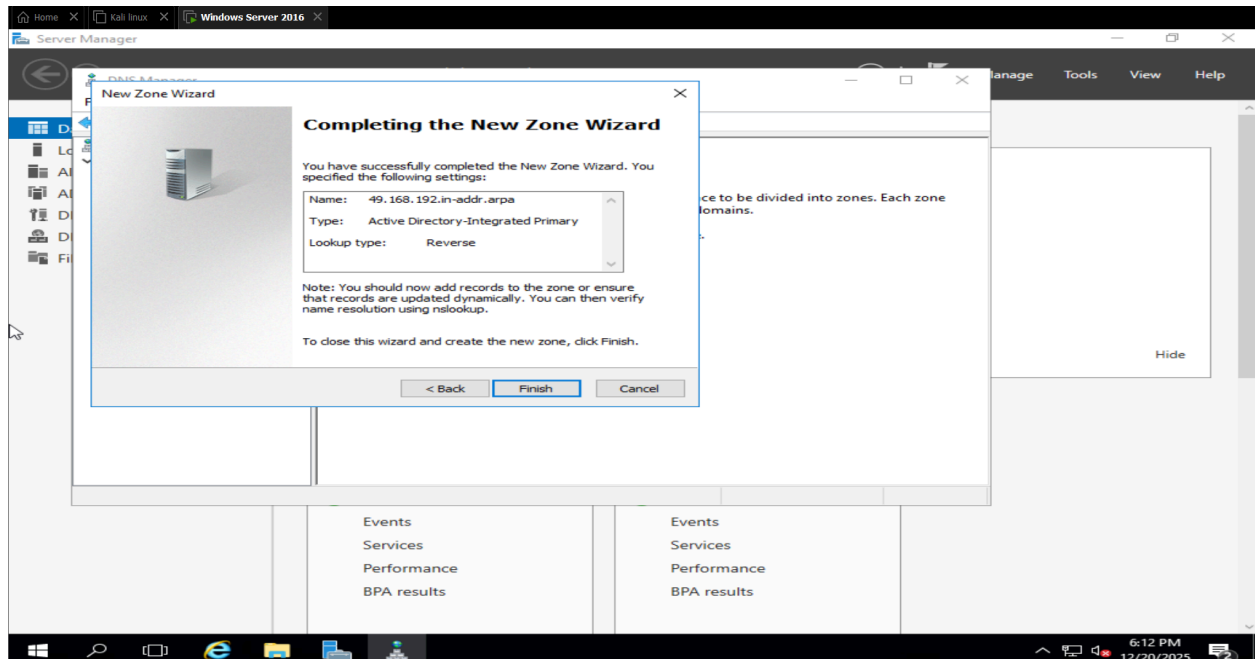


12

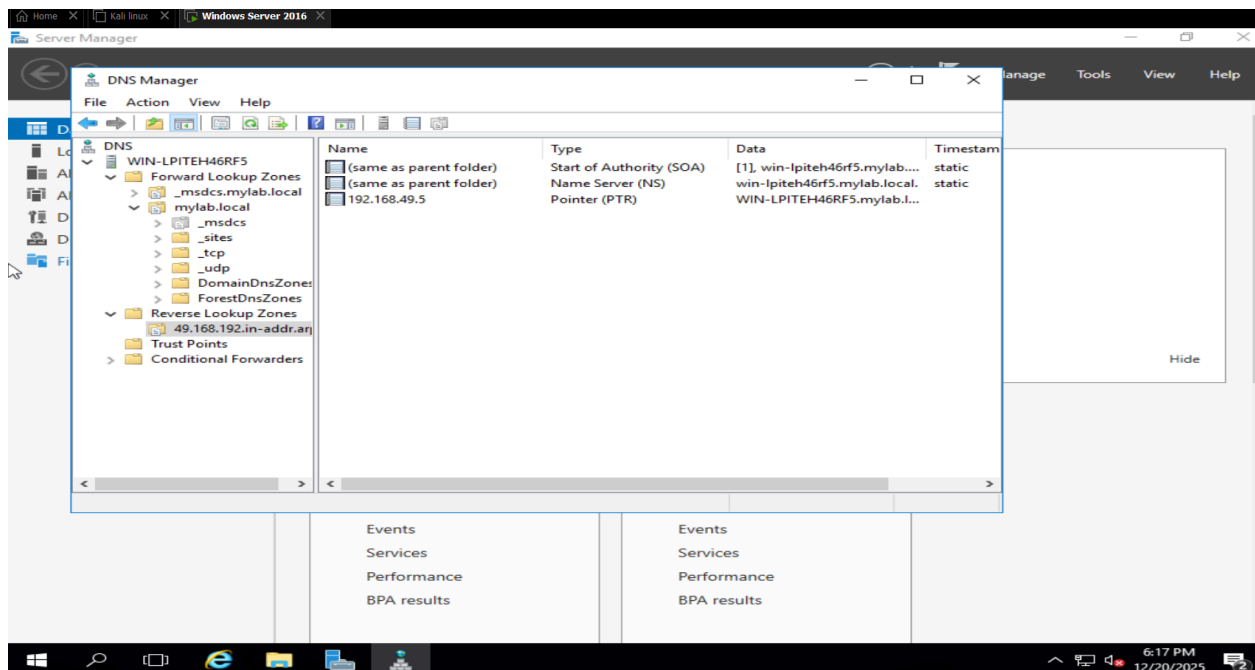


13

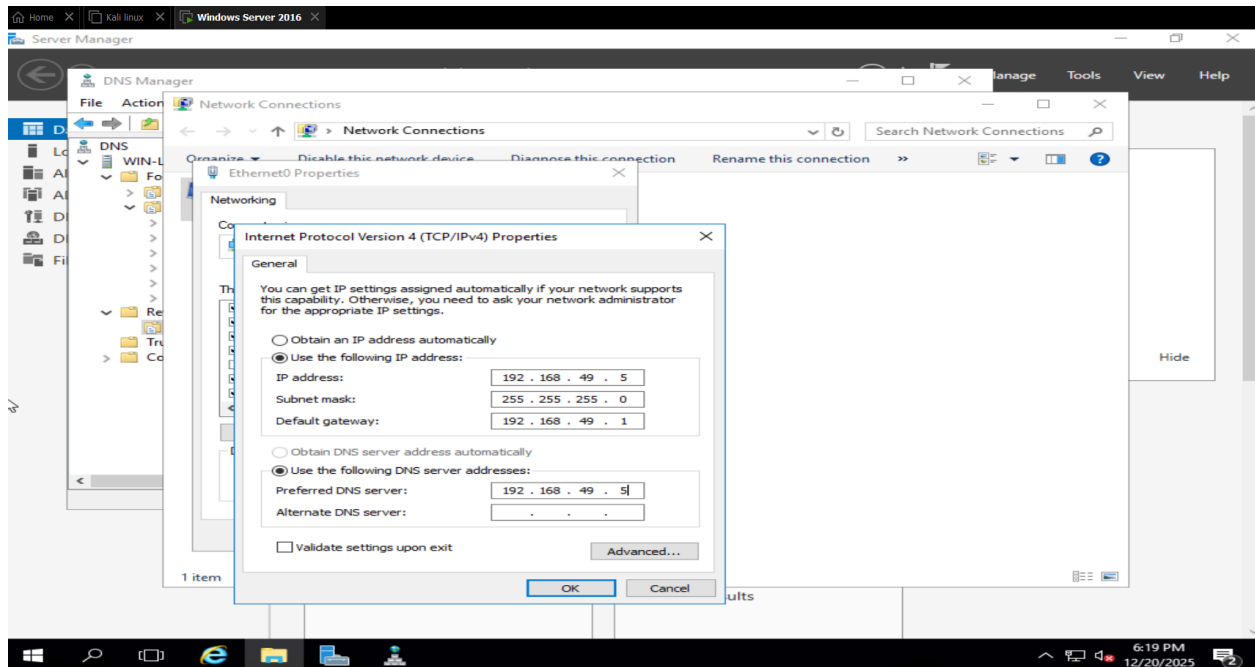


14

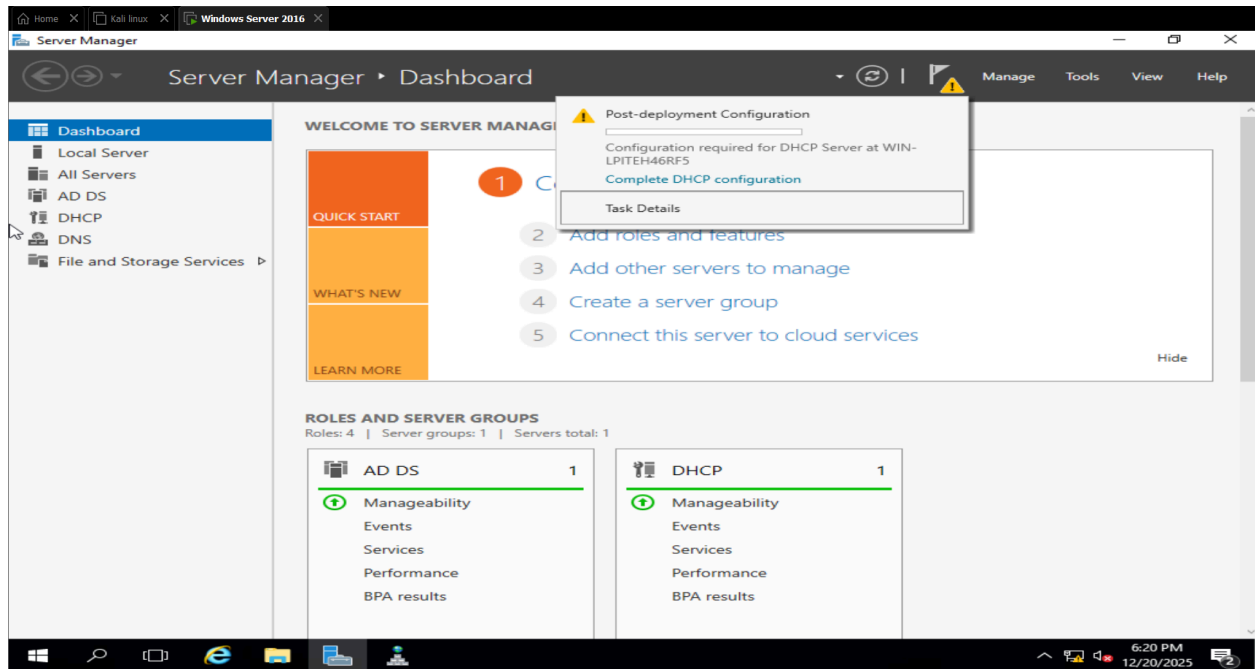


15

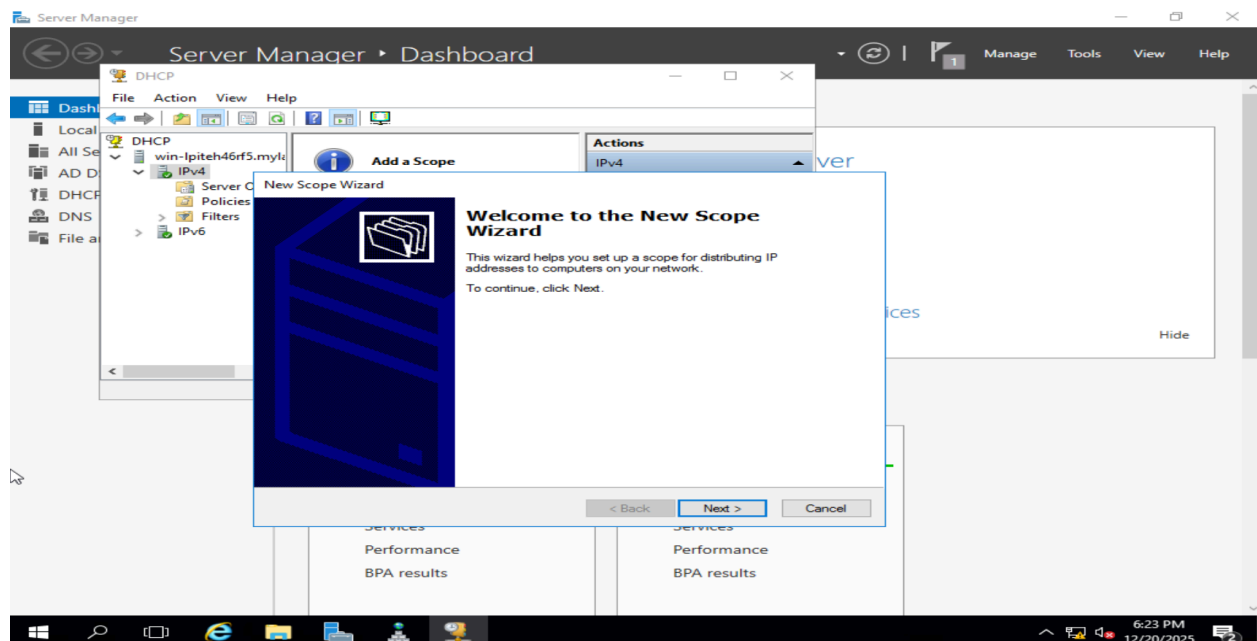


16

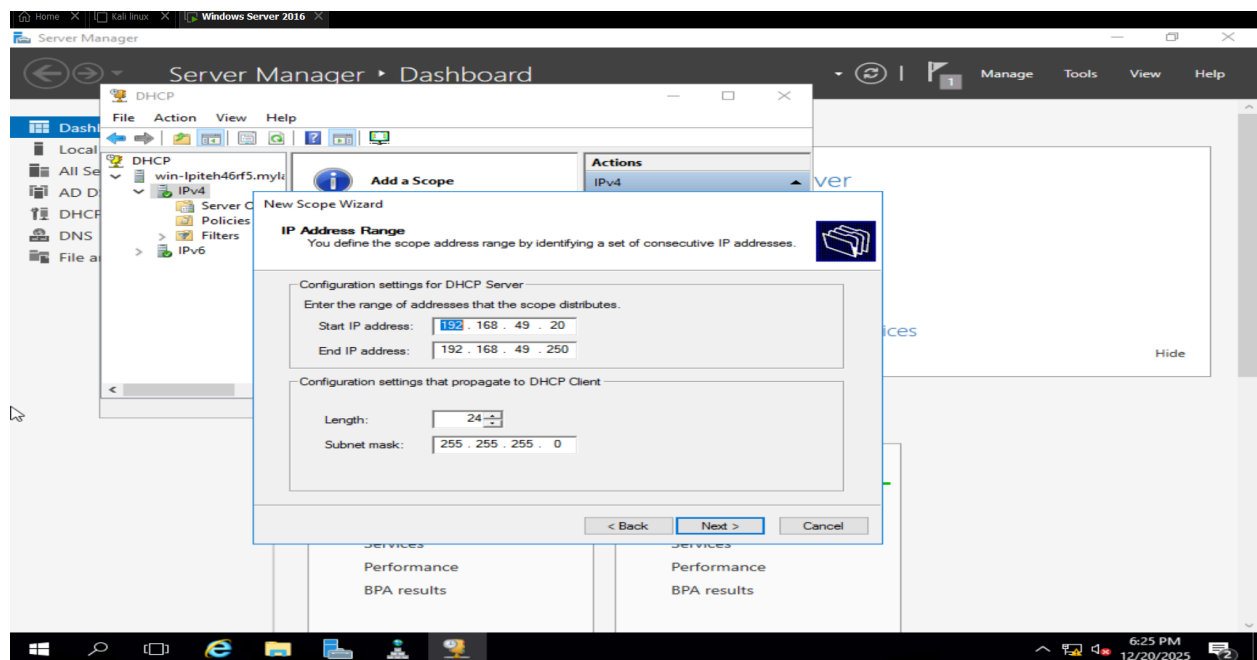


17

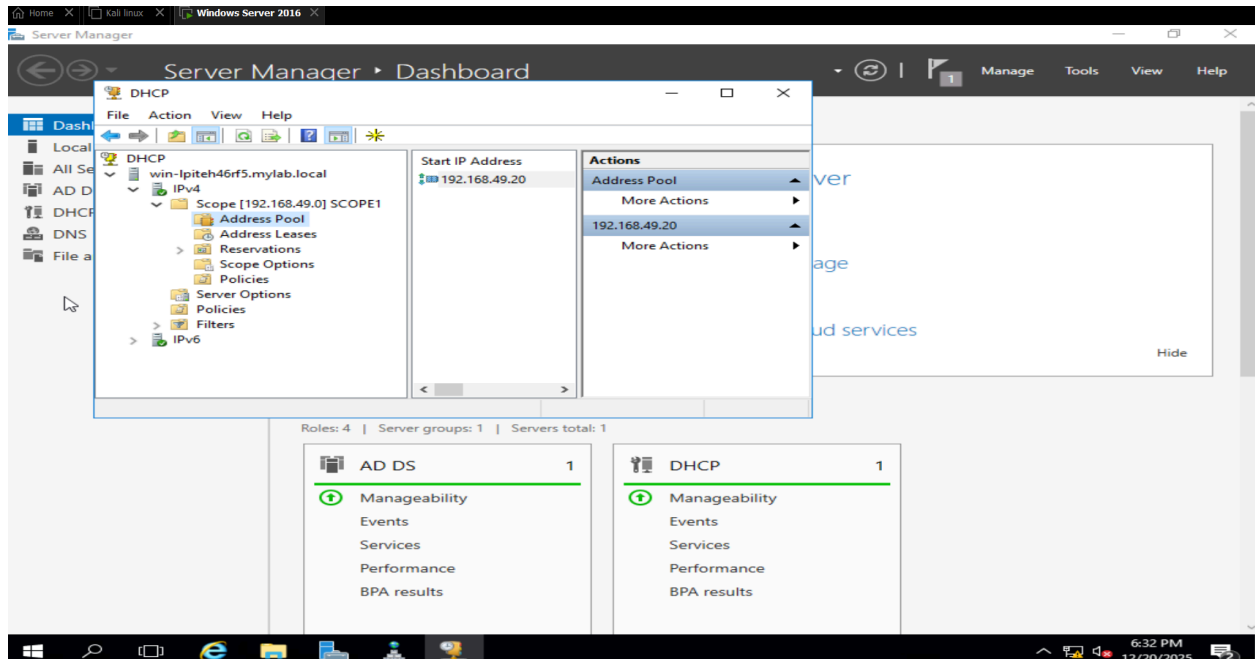


18

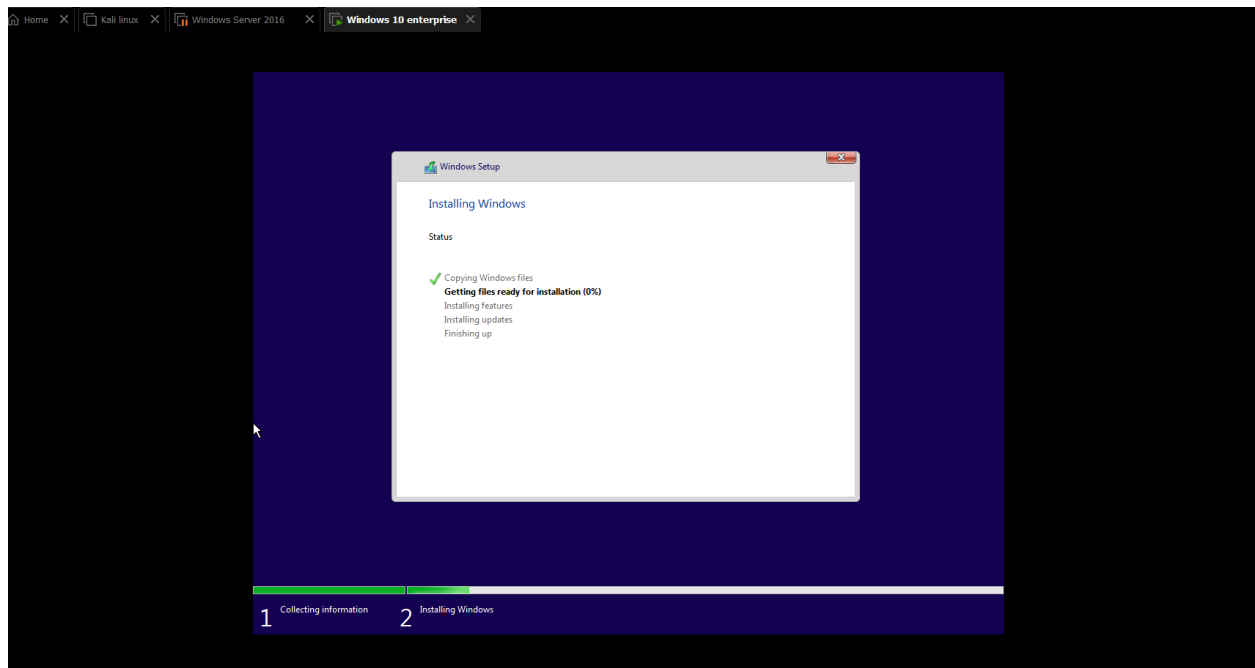


19

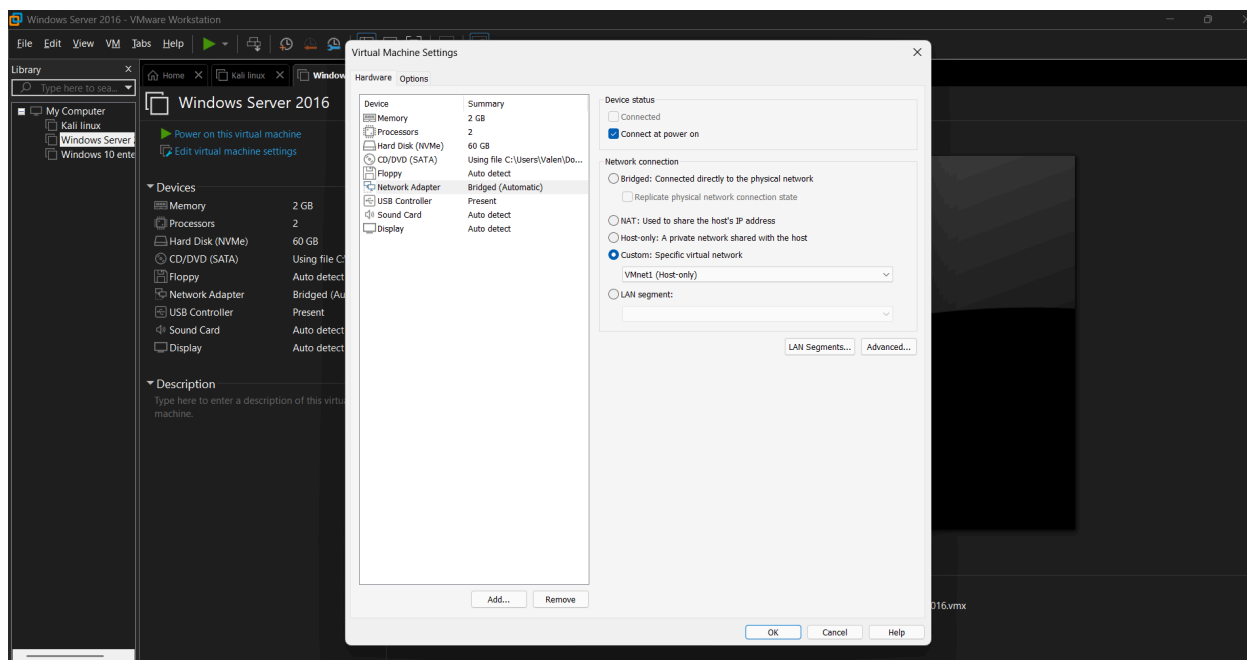


20

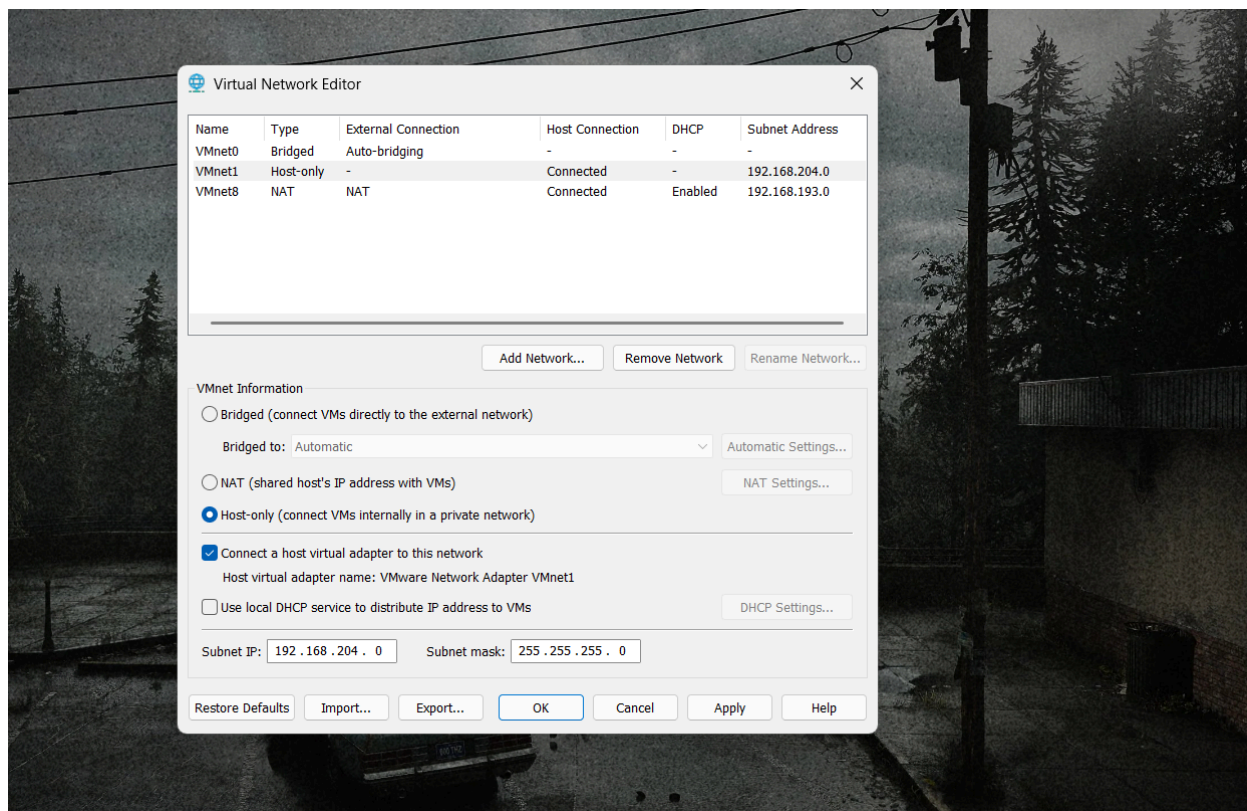


21

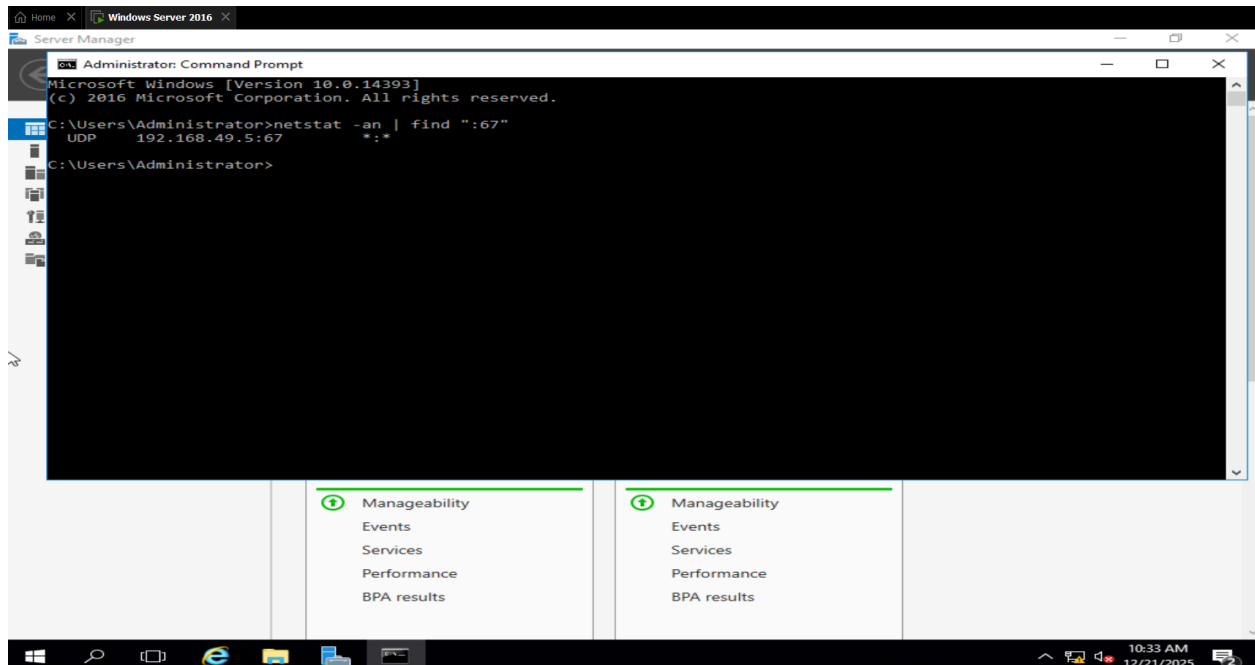


22

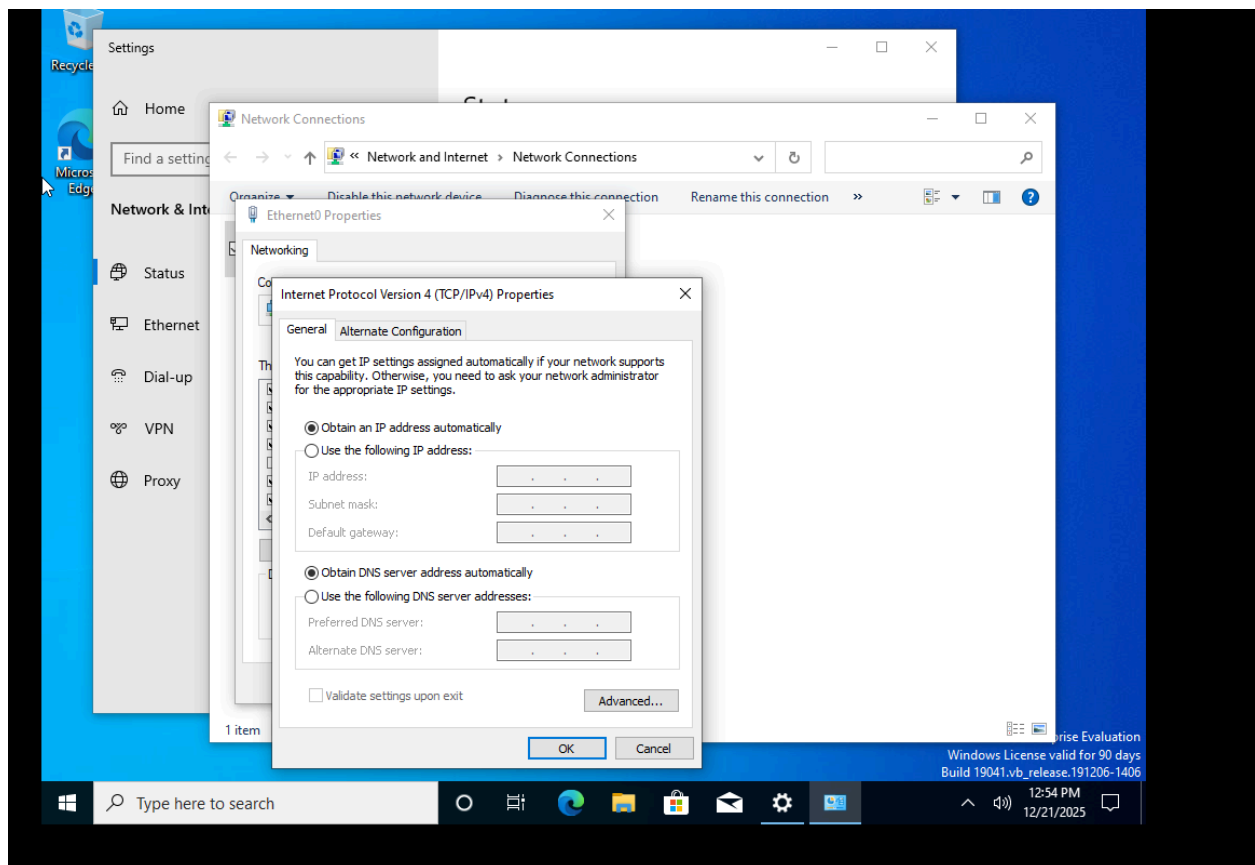


23

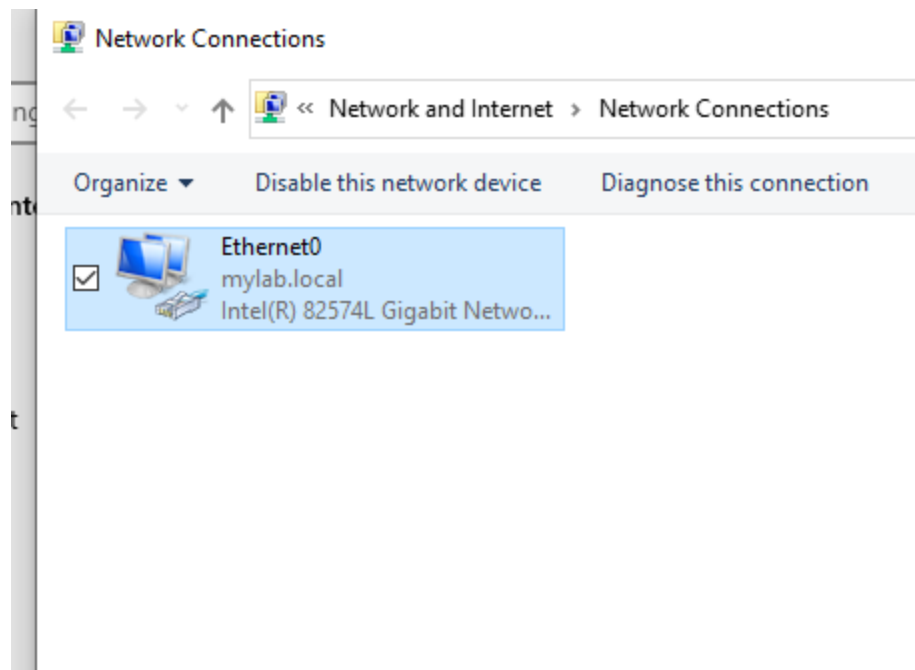


24

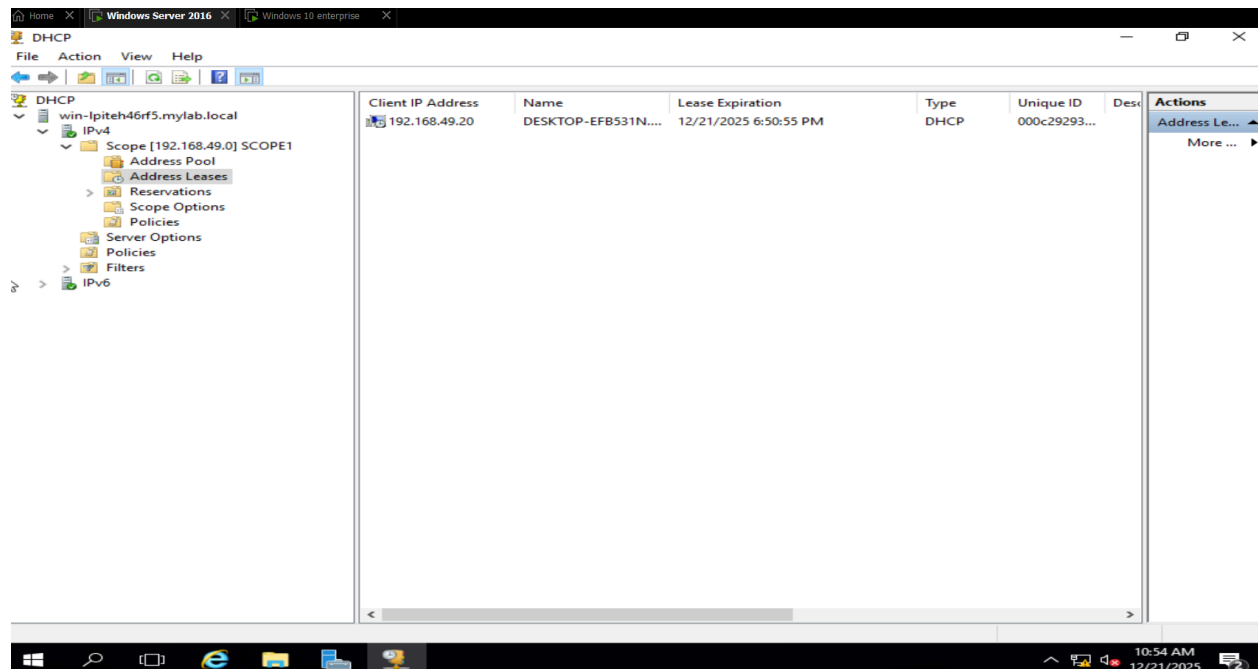


25

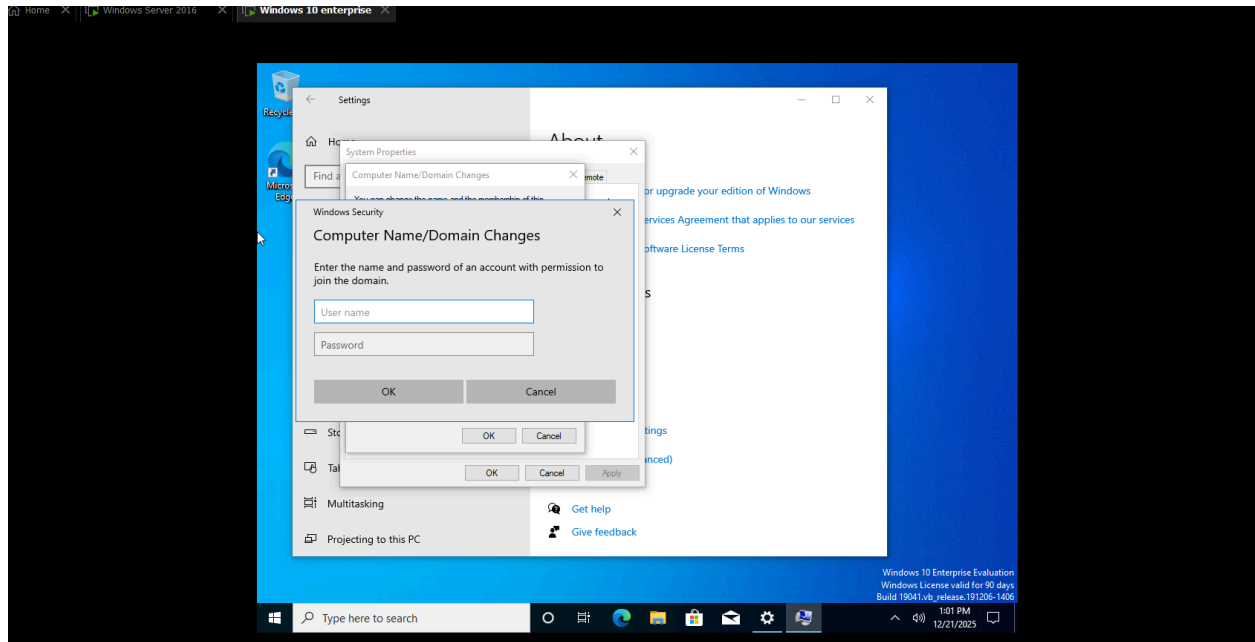


26

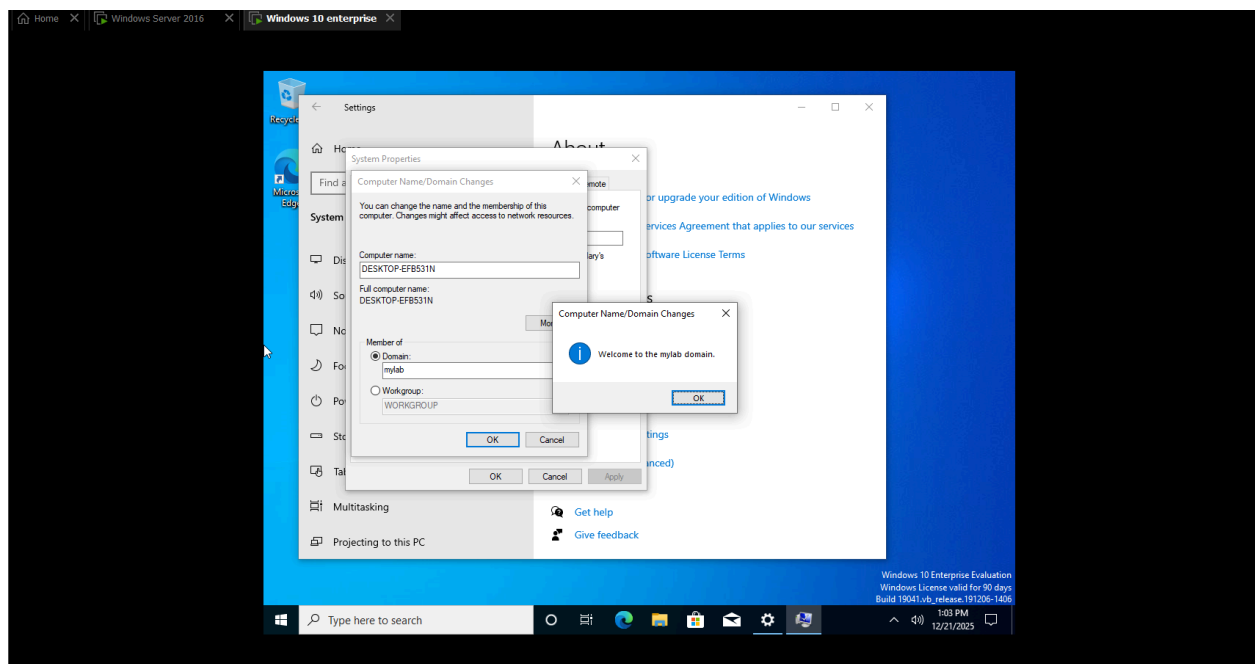


27

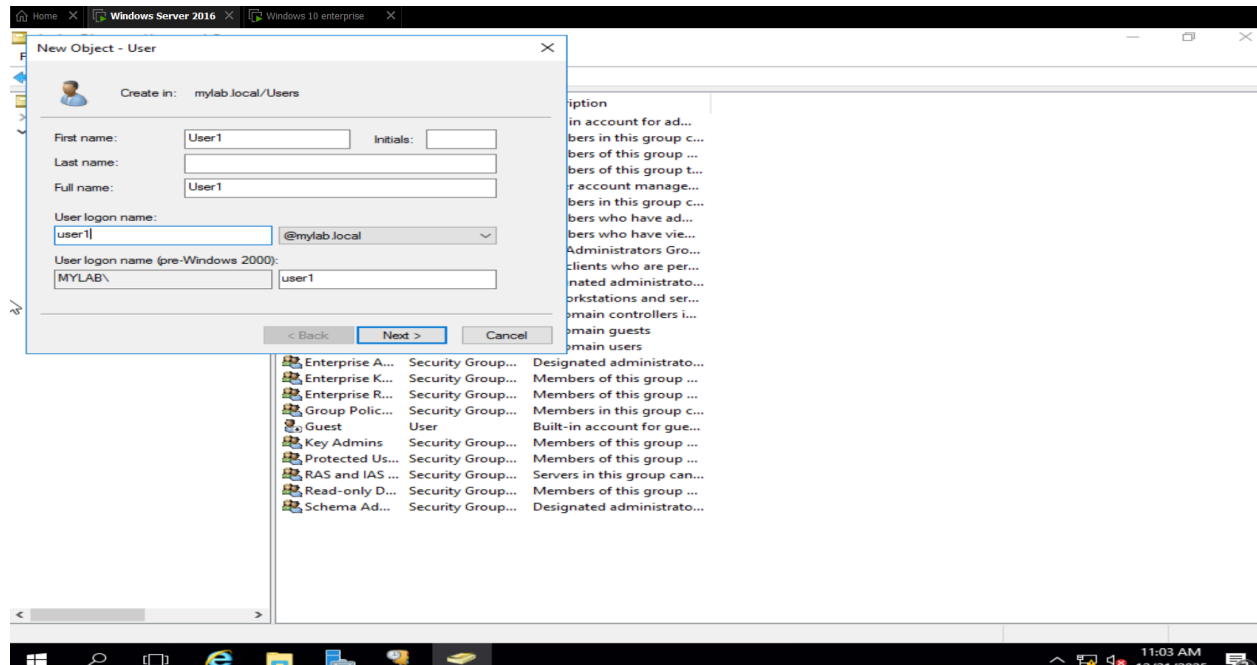


28

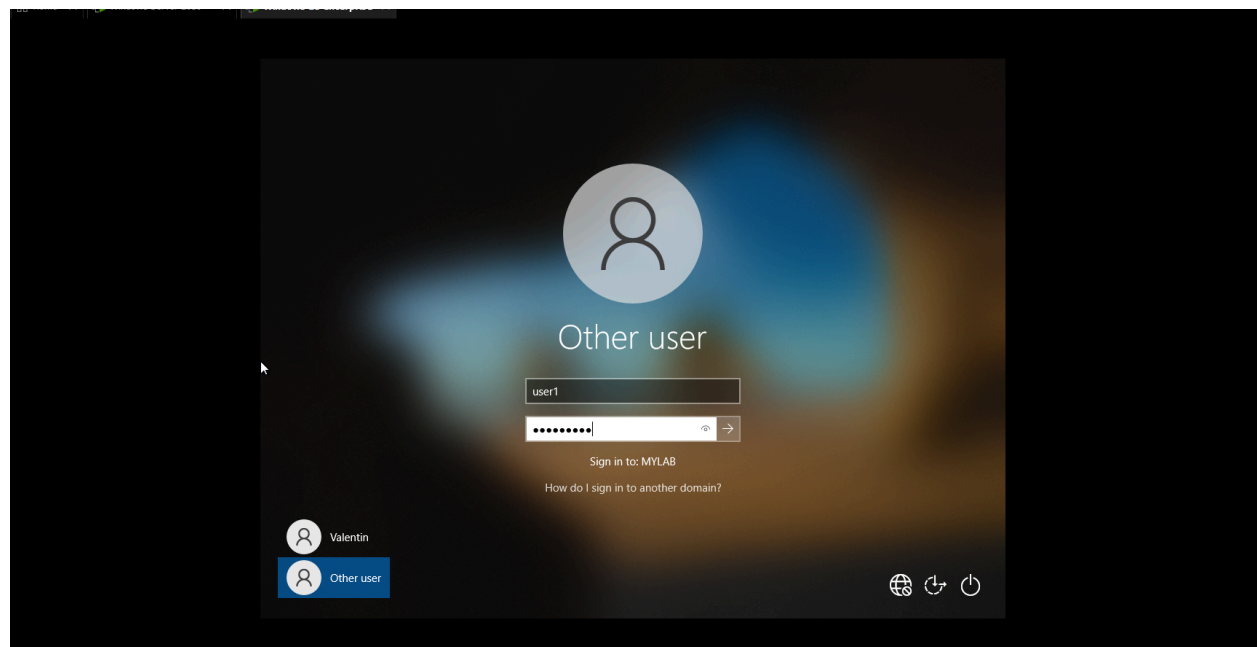


29

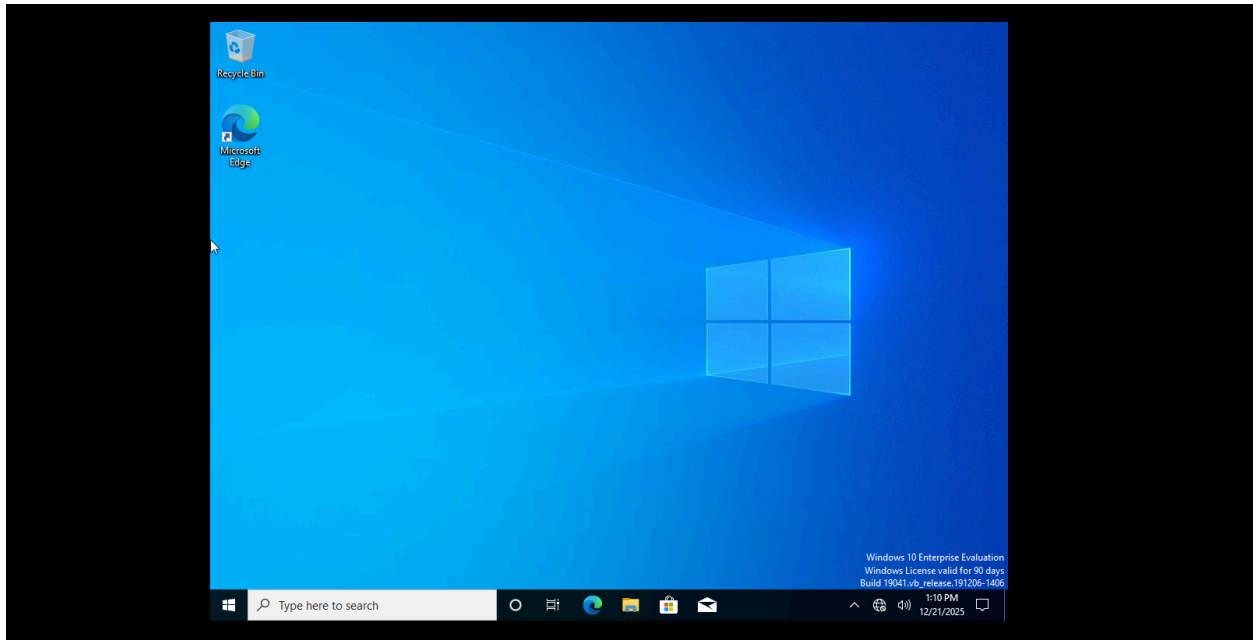


Step 30: GPO settings

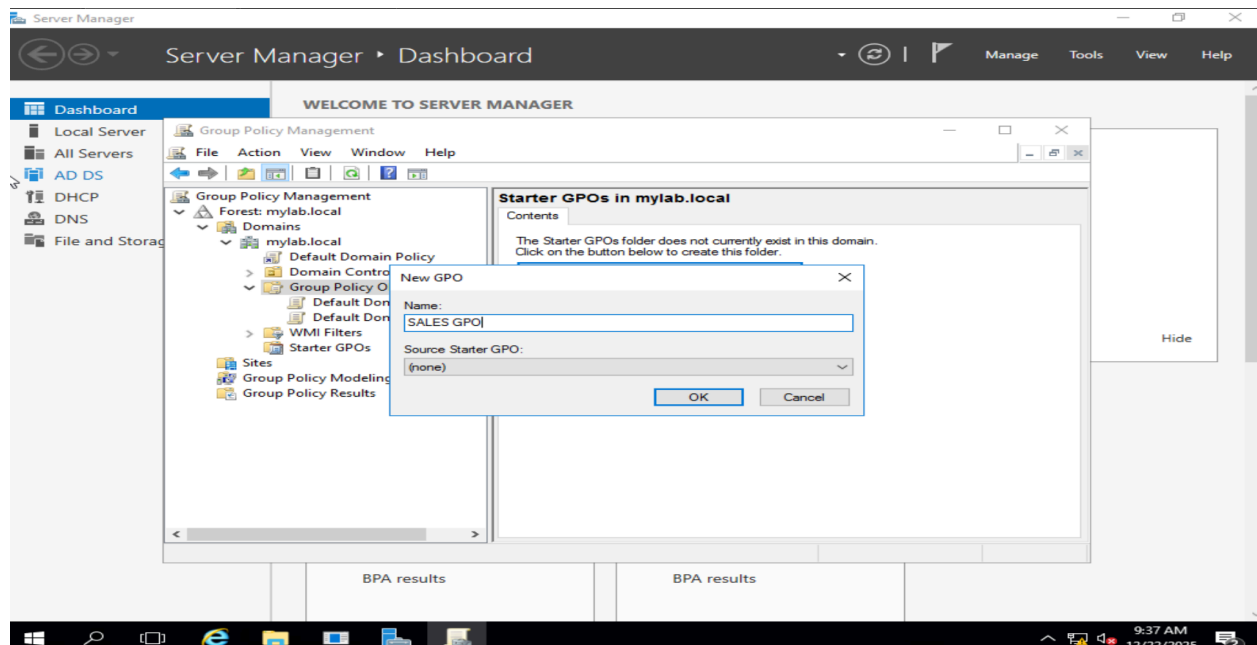


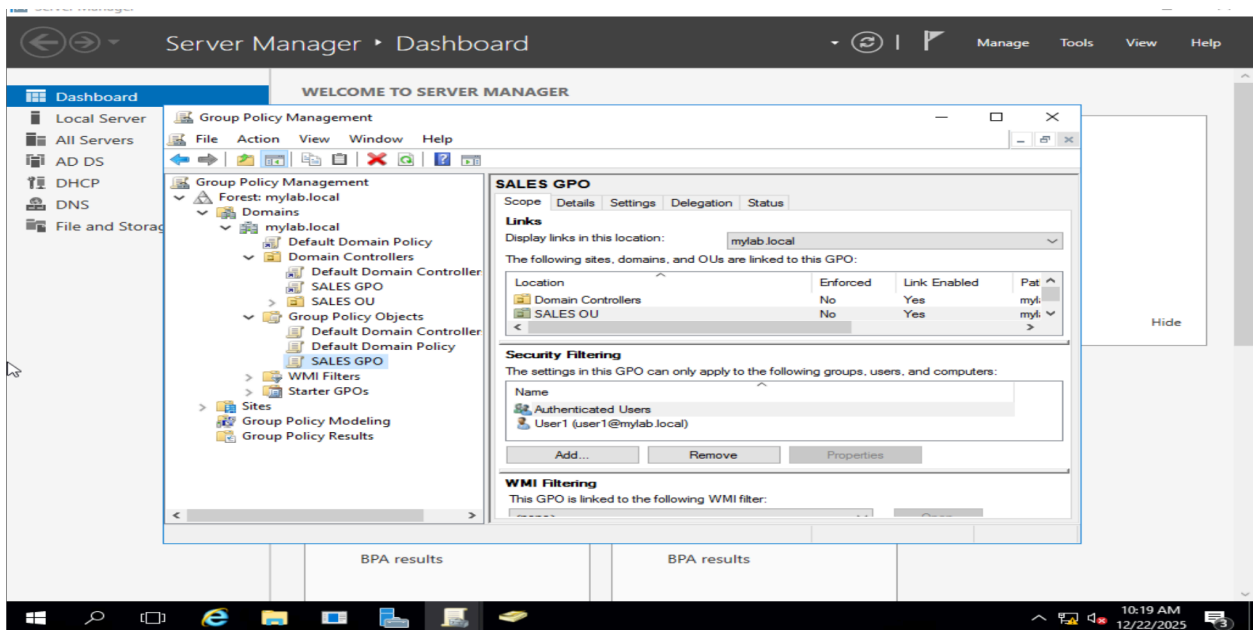

32

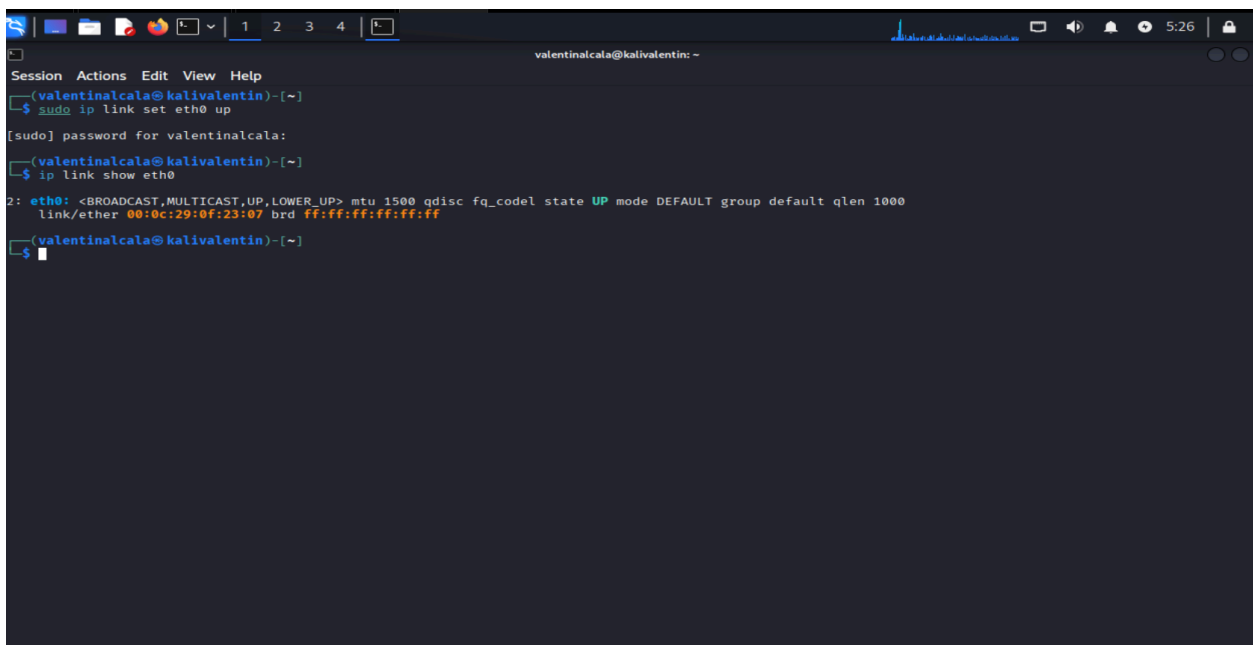

33

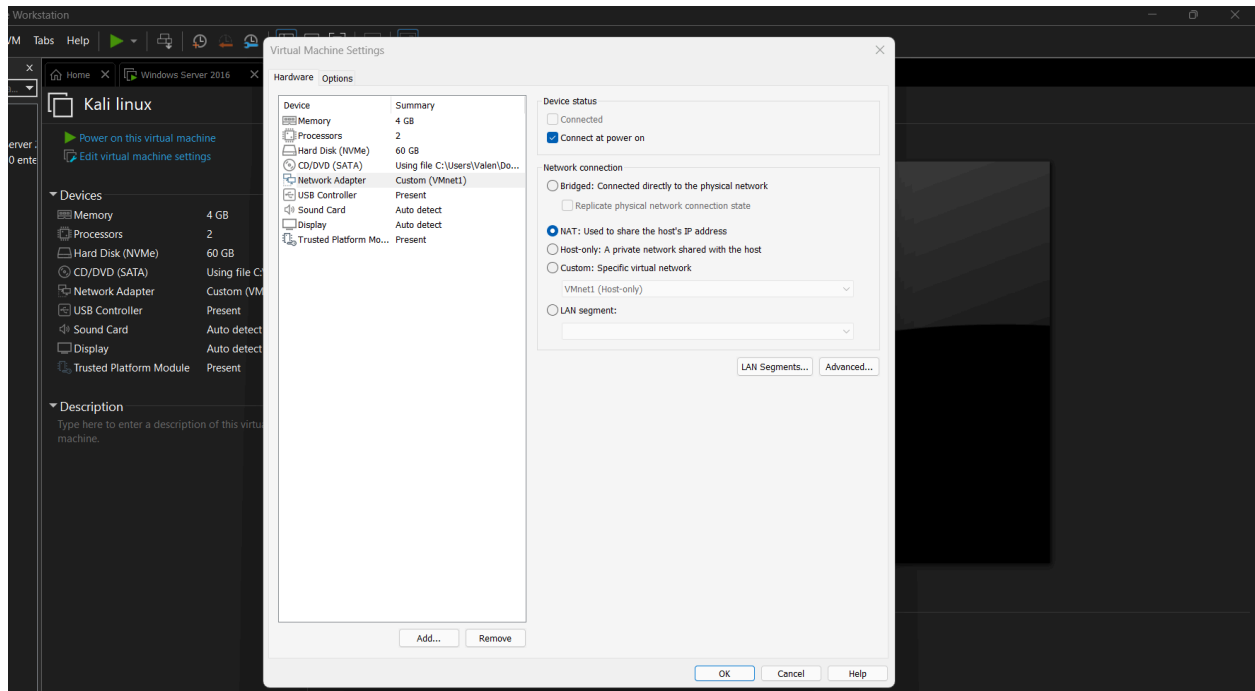

34

```

valentialcala@kalivalentin: ~
Session Actions Edit View Help
why-not - produce a reason trace for the current state of the package

See apt(8) for more information about the available commands.
Configuration options and syntax is detailed in apt.conf(5).
Information about how to configure sources can be found in sources.list(5).
Package and version choices can be expressed via apt_preferences(5).
Security details are available in apt-secure(8).
This APT has Super Cow Powers.

(valentialcala@kalivalentin)-[~]
$ sudo apt install isc-dhcp-client net-tools -y
net-tools is already the newest version (2.10-2).
Installing:
isc-dhcp-client
Installing dependencies:
isc-dhcp-common
Suggested packages:
resolvconf avahi-autoipd isc-dhcp-client-ddns
Summary:
Upgrading: 0, Installing: 2, Removing: 0, Not Upgrading: 148
Download size: 1,217 kB
Space needed: 3,079 kB / 35.3 GB available

Get:1 http://kali.download/kali kali-rolling/main amd64 isc-dhcp-client amd64 4.4.3-P1-8 [1,099 kB]
Get:2 http://kali.download/kali kali-rolling/main amd64 isc-dhcp-common amd64 4.4.3-P1-8 [118 kB]
Fetched 1,217 kB in 1s (2,020 kB/s)
Selecting previously unselected package isc-dhcp-client.
(Reading database ... 456702 files and directories currently installed.)
Preparing to unpack .../isc-dhcp-client_4.4.3-P1-8_amd64.deb ...
Unpacking isc-dhcp-client (4.4.3-P1-8) ...
Selecting previously unselected package isc-dhcp-common.
Preparing to unpack .../isc-dhcp-common_4.4.3-P1-8_amd64.deb ...
Unpacking isc-dhcp-common (4.4.3-P1-8) ...
Setting up isc-dhcp-client (4.4.3-P1-8) ...
Setting up isc-dhcp-common (4.4.3-P1-8) ...
Processing triggers for man-db (2.13.1-1) ...
Processing triggers for kali-menu (2025.4.3) ...

(valentialcala@kalivalentin)-[~]
$ ss

```

35

```
(n) Home X Windows server 2016 X Windows 10 enterprise X Kali linux X
valentinalcala@kalivalentin: ~
Session Actions Edit View Help
/usr/sbin/dhclient

(valentinalcala@kalivalentin)-[~]
$ sudo dhclient -v eth0

[sudo] password for valentinalcala:
Internet Systems Consortium DHCP Client 4.4.3-P1
Copyright 2004-2022 Internet Systems Consortium.
All rights reserved.
For info, please visit https://www.isc.org/software/dhcp/

Listening on LPF/eth0/00:0c:29:0f:23:07
Sending on LPF/eth0/00:0c:29:0f:23:07
Sending on Socket/fallback
DHCPDISCOVER on eth0 to 255.255.255.255 port 67 interval 6
DHCPDISCOVER on eth0 to 255.255.255.255 port 67 interval 7
DHCPDISCOVER on eth0 to 255.255.255.255 port 67 interval 14
DHCPDISCOVER on eth0 to 255.255.255.255 port 67 interval 16
DHCPOFFER of 192.168.49.20 from 192.168.49.5
DHCPREQUEST for 192.168.49.20 on eth0 to 255.255.255.255 port 67
DHCPACK of 192.168.49.20 from 192.168.49.5
Error: ipv4: Address already assigned.
bound to 192.168.49.20 -- renewal in 13987 seconds.

(valentinalcala@kalivalentin)-[~]
$ ip addr show eth0
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 00:0c:29:0f:23:07 brd ff:ff:ff:ff:ff:ff
    inet 192.168.49.20/24 brd 192.168.49.255 scope global dynamic noprefixroute eth0
        valid_lft 28771sec preferred_lft 28771sec
    inet6 fe80::20c:29ff:fe0f:2307/64 scope link noprefixroute
        valid_lft forever preferred_lft forever

(valentinalcala@kalivalentin)-[~]
$ ping -c 3 192.168.49.5
PING 192.168.49.5 (192.168.49.5) 56(84) bytes of data:
64 bytes from 192.168.49.5: icmp_seq=1 ttl=128 time=2.10 ms
64 bytes from 192.168.49.5: icmp_seq=2 ttl=128 time=0.498 ms
64 bytes from 192.168.49.5: icmp_seq=3 ttl=128 time=1.64 ms

--- 192.168.49.5 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2032ms
rtt min/avg/max/mdev = 0.498/1.415/2.104/0.675 ms
```

36

```
root@unifi: /home/valentinalcala
Session Actions Edit View Help

[sss_cache] [sss_tool_confdb_init] (0x0010): Can't access '/var/lib/sss/db/config.ldb', probably SSSD isn't configured
Can't find configuration db, was SSSD configured and run?
Warning: found /etc/apparmor.d/usr.sbin.sssd (/etc/apparmor.d/force-complain, forcing complain mode
Warning from /etc/apparmor.d/usr.sbin.sssd (/etc/apparmor.d/usr.sbin.sssd line 63): Caching disabled for: 'usr.sbin.sssd' due to force complain
update-rc.d: We have no instructions for the sssd init script.
update-rc.d: It looks like a non-network service, we enable it.
sssd-autofs.service is a disabled or a static unit, not starting it.
sssd-autofs.socket is a disabled or a static unit, not starting it.
sssd-nss.service is a disabled or a static unit, not starting it.
sssd-nss.socket is a disabled or a static unit, not starting it.
sssd-pam.service is a disabled or a static unit, not starting it.
sssd-pam.socket is a disabled or a static unit, not starting it.
sssd-ssh.service is a disabled or a static unit, not starting it.
sssd-ssh.socket is a disabled or a static unit, not starting it.
sssd-sudo.service is a disabled or a static unit, not starting it.
sssd-sudo.socket is a disabled or a static unit, not starting it.
sssd.service is a disabled or a static unit, not starting it.
Setting up sssd-proxy (2.10.1-2+b2) ...
Setting up sssd-dbus (2.10.1-2+b2) ...
sssd-ifp.service is a disabled or a static unit, not starting it.
Setting up sssd-ad-common (2.10.1-2+b2) ...
sssd-pac.service is a disabled or a static unit, not starting it.
sssd-pac.socket is a disabled or a static unit, not starting it.
Setting up sssd-krb5-common (2.10.1-2+b2) ...
Setting up smbclient (2:4.23.4+dfsg-1) ...
Setting up sssd-krb5 (2.10.1-2+b2) ...
Setting up sssd-ldap (2.10.1-2+b2) ...
Setting up sssd-ad (2.10.1-2+b2) ...
Setting up sssd-tools (2.10.1-2+b2) ...
Setting up sssd-ipa (2.10.1-2+b2) ...
Setting up sssd (2.10.1-2+b2) ...
Processing triggers for doc-base (0.11.2) ...
Processing 2 added doc-base files ...
Processing triggers for libc-bin (2.41-12) ...
Processing triggers for ufw (0.36.2-9) ...
Processing triggers for man-db (2.13.1-1) ...
Processing triggers for dbus (1.16.2-2) ...
Processing triggers for kali-menu (2025.4.3) ...
Processing triggers for oddjob (0.34.7-2.1+b1) ...
oddjob.service is a disabled or a static unit not running, not starting it.

root@unifi: /home/valentinalcala
#
```

37

```
Home X Windows Server 2016 X Windows 10 enterprise X Kali linux X
1 2 3 4 5
valentinalcala@unifi: ~
Session Actions Edit View Help
zsh: corrupt history file /home/valentinalcala/.zsh_history
(valentinalcala@unifi)-[~]
$ sudo realm discover mydomain.com
sudo: unable to resolve host unifi.mydomain.com: Temporary failure in name resolution
[sudo] password for valentinalcala:
realm: No such realm found: mydomain.com

(valentinalcala@unifi)-[~]
$ sudo realm discover mylab.local
sudo: unable to resolve host unifi.mydomain.com: Temporary failure in name resolution
mylab.local
type: kerberos
realm-name: MYLAB.LOCAL
domain-name: mylab.local
configured: no

(valentinalcala@unifi)-[~]
$
```

38

```
valentinalcala@unifi: ~ (o
Session Actions Edit View Help
zsh: corrupt history file /home/valentinalcala/.zsh_history
(valentinalcala@unifi)-[~]
$ sudo realm join -U Administrator mylab.local

sudo: unable to resolve host unifi: Temporary failure in name resolution
[sudo] password for valentinalcala:
realm: Already joined to this domain


(valentinalcala@unifi)-[~]
$ sudo /etc/hosts
sudo: unable to resolve host unifi: Temporary failure in name resolution
sudo: /etc/hosts: command not found

(valentinalcala@unifi)-[~]
$ cat /etc/hosts
127.0.0.1    localhost
192.168.49.20 unifi.mylab.local    kalivalentin


# The following lines are desirable for IPv6 capable hosts
::1        localhost ip6-localhost ip6-loopback
ff02::1    ip6-allnodes
ff02::2    ip6-allrouters

(valentinalcala@unifi)-[~]
$
```


39

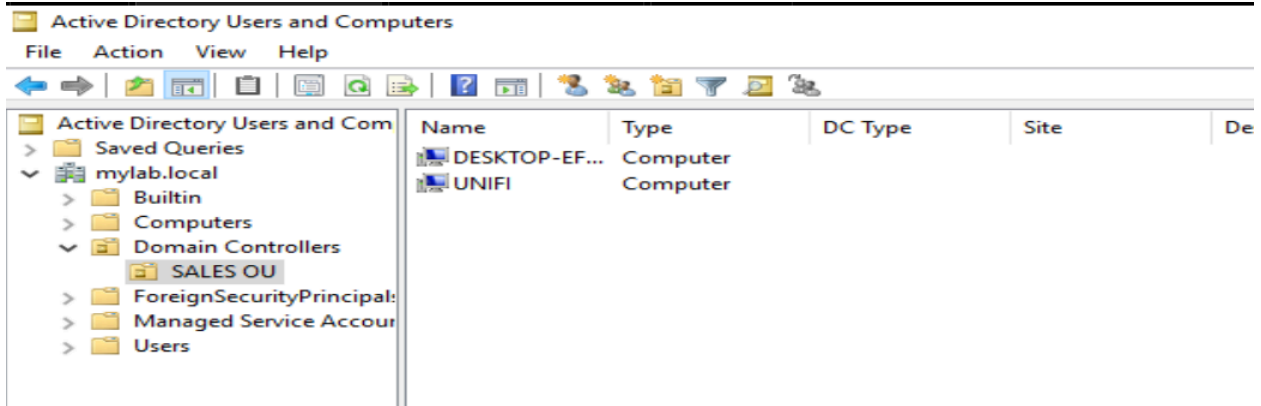


40

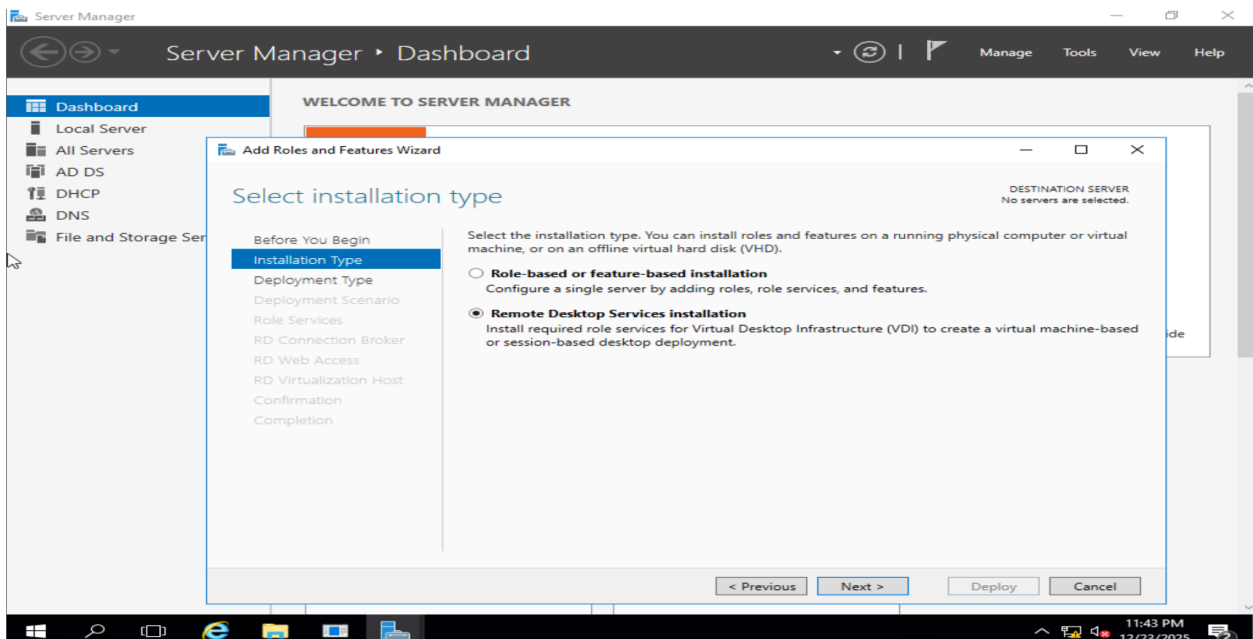


42

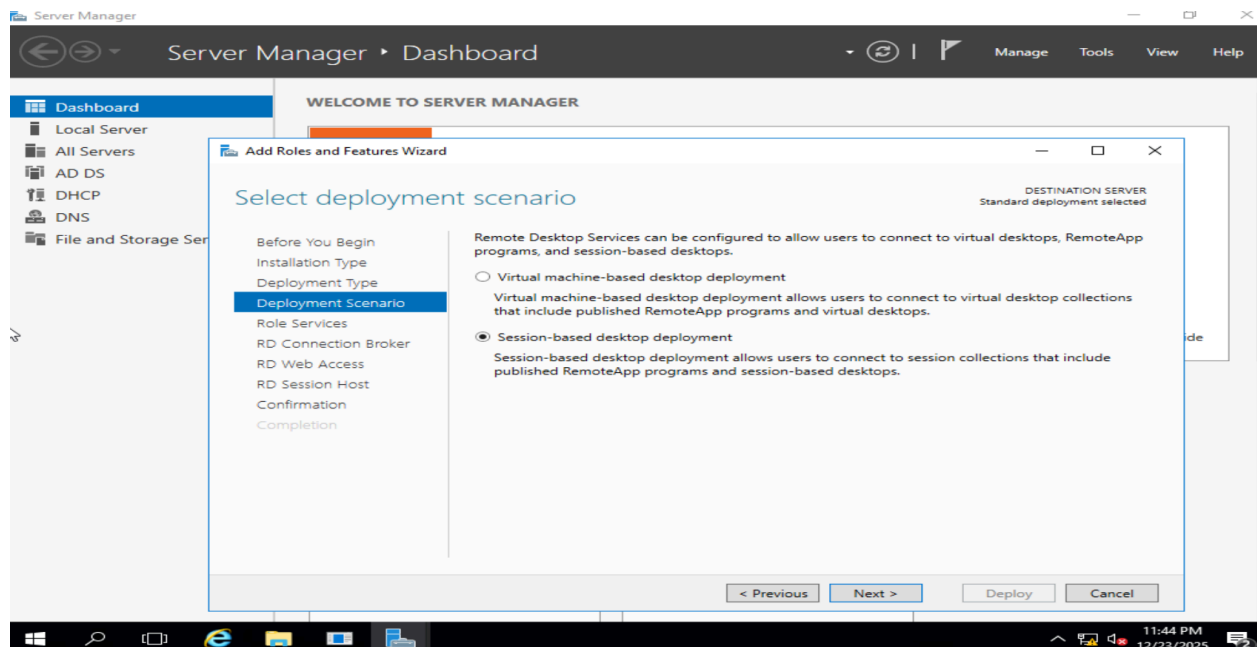


43

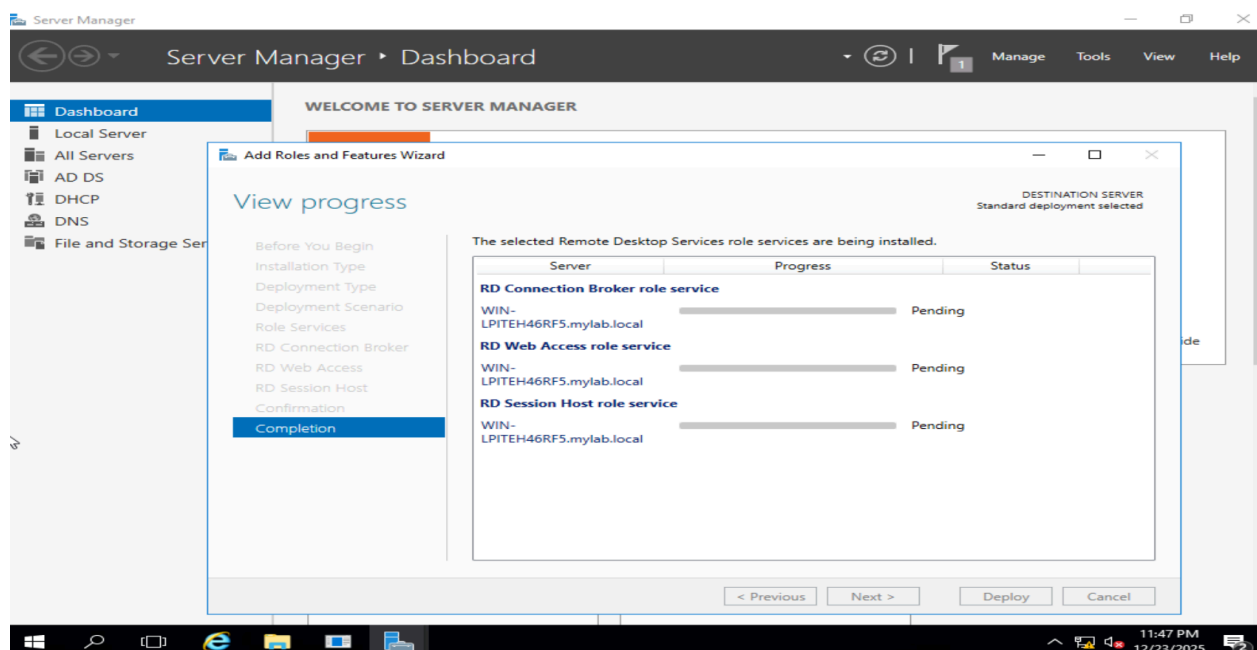


44

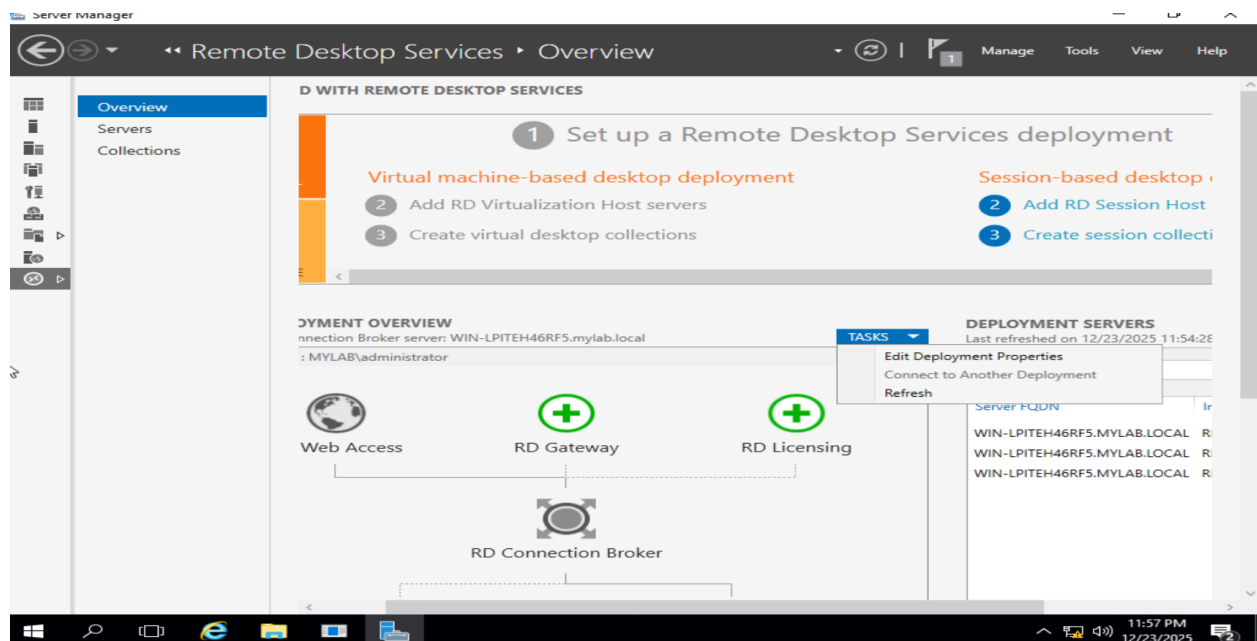


45

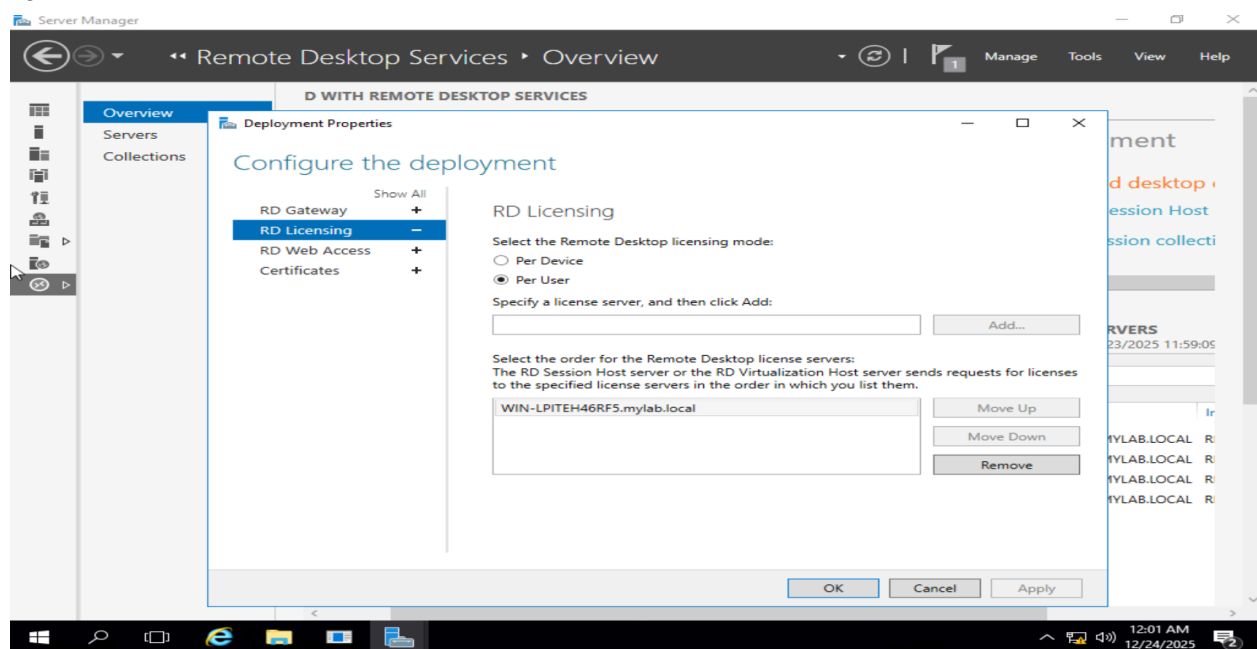


46

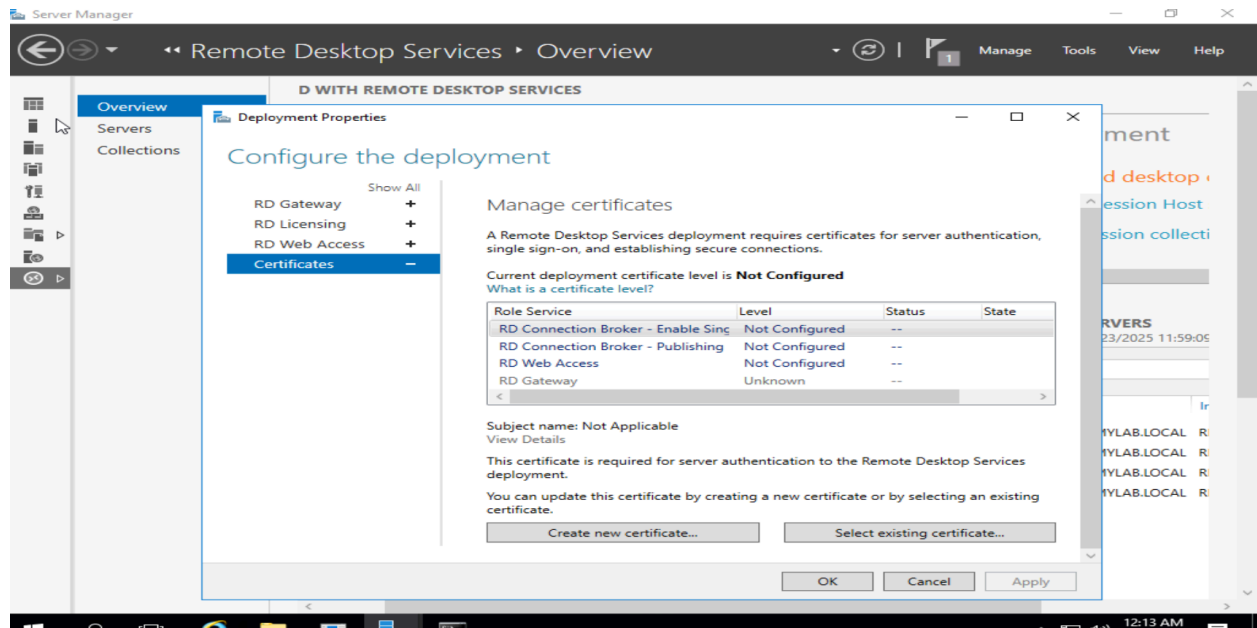


47

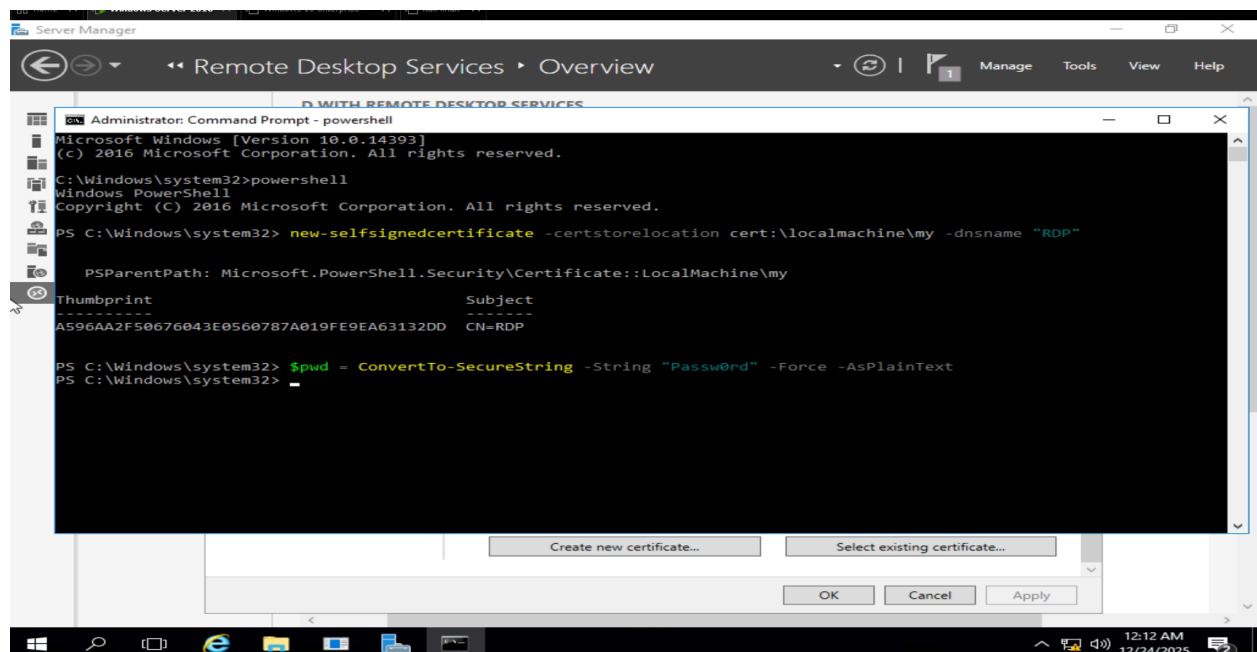


48

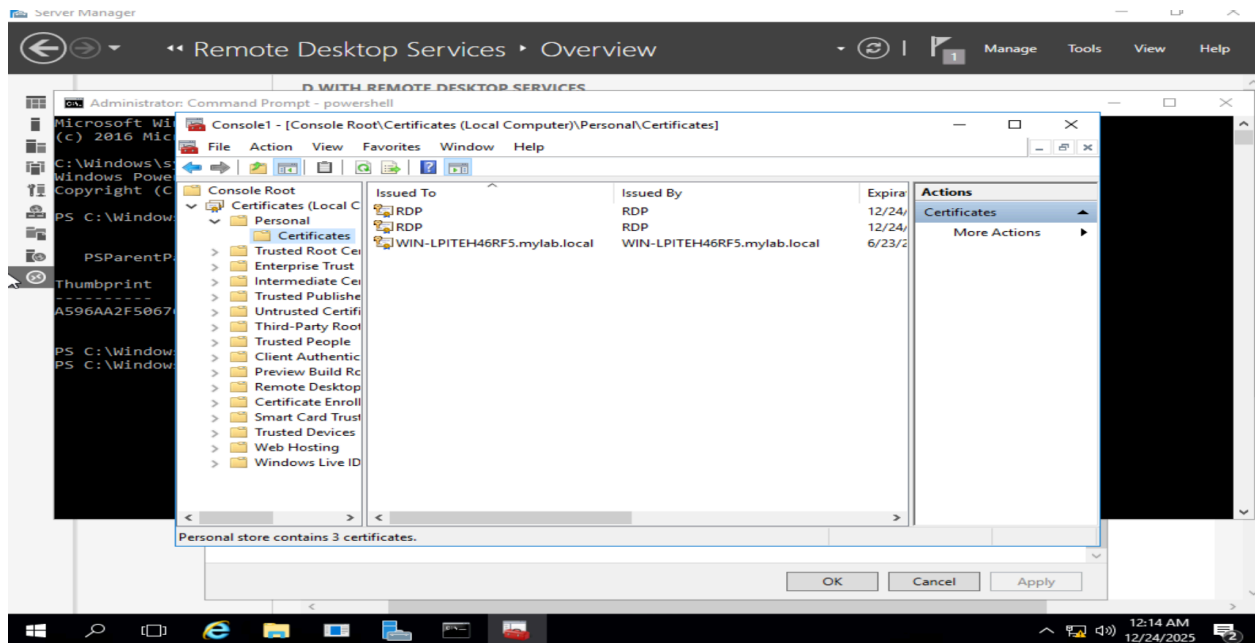


49

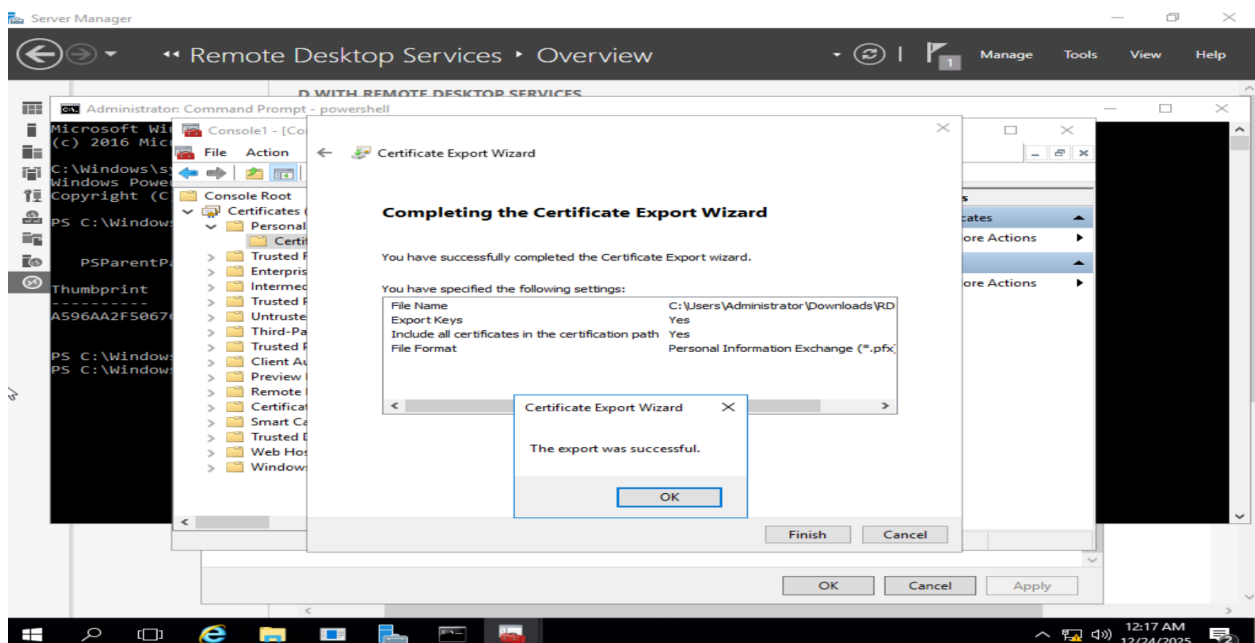


50

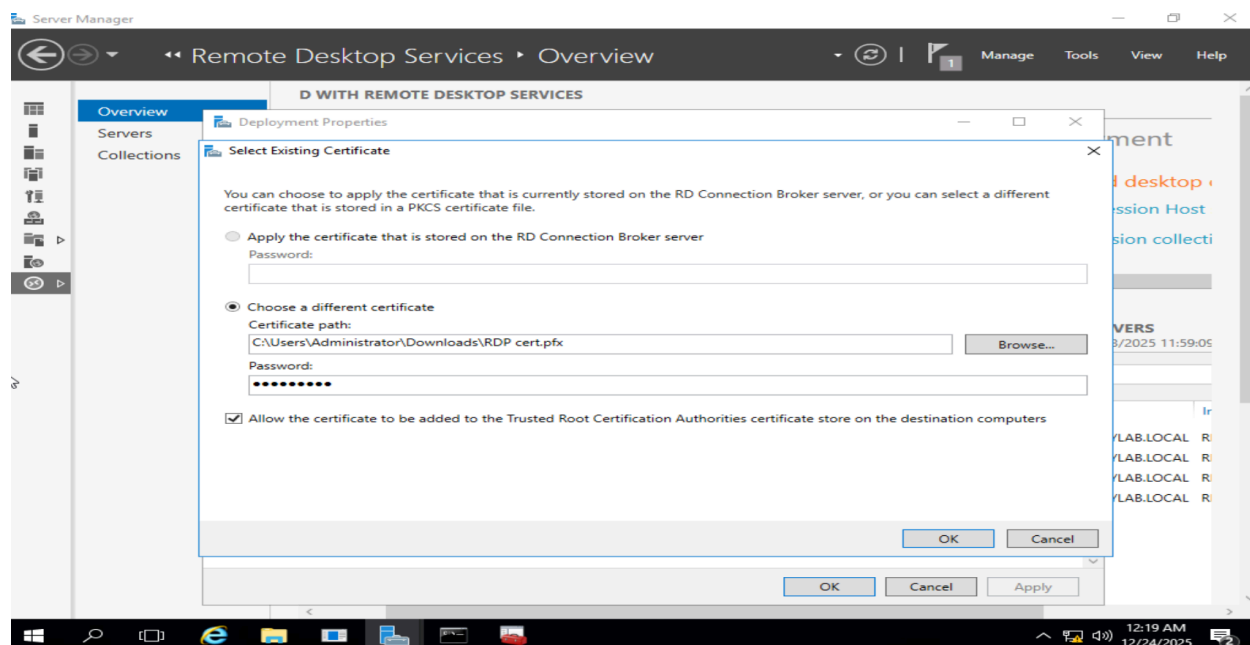


51

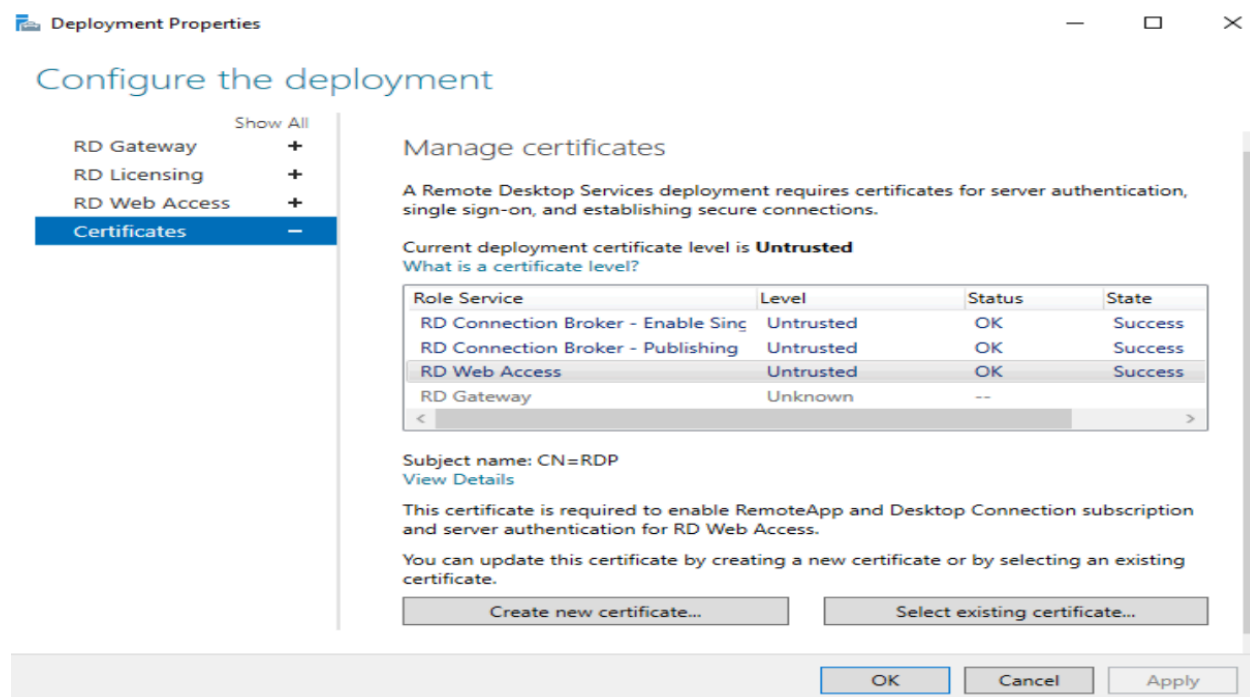


52

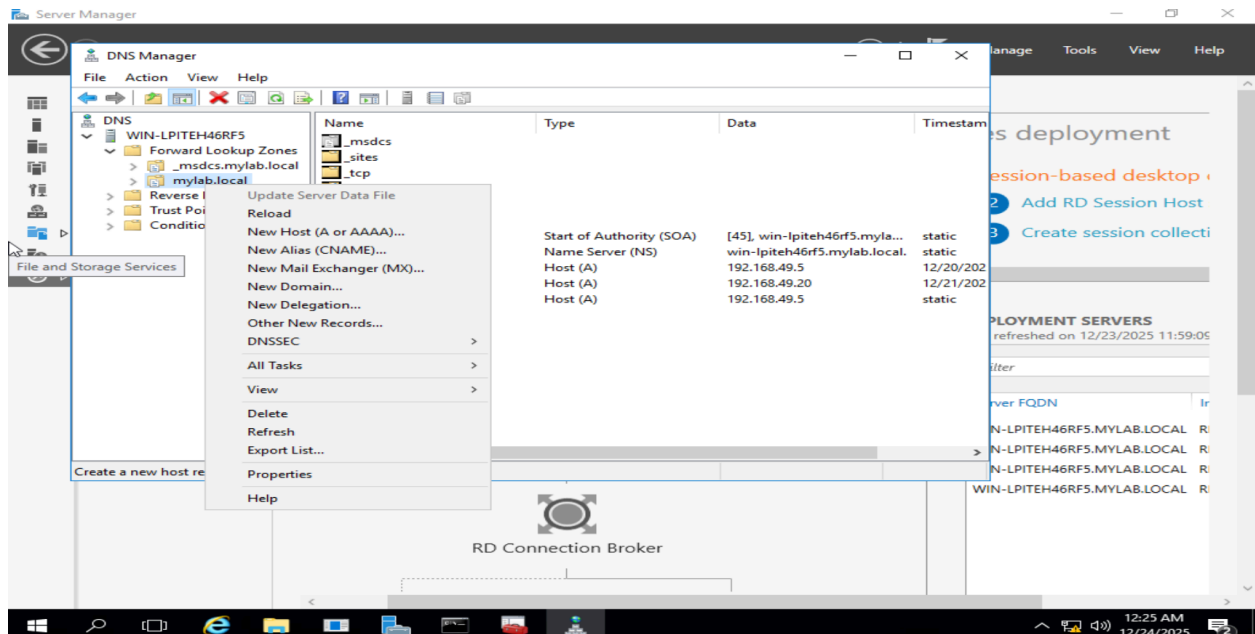


53

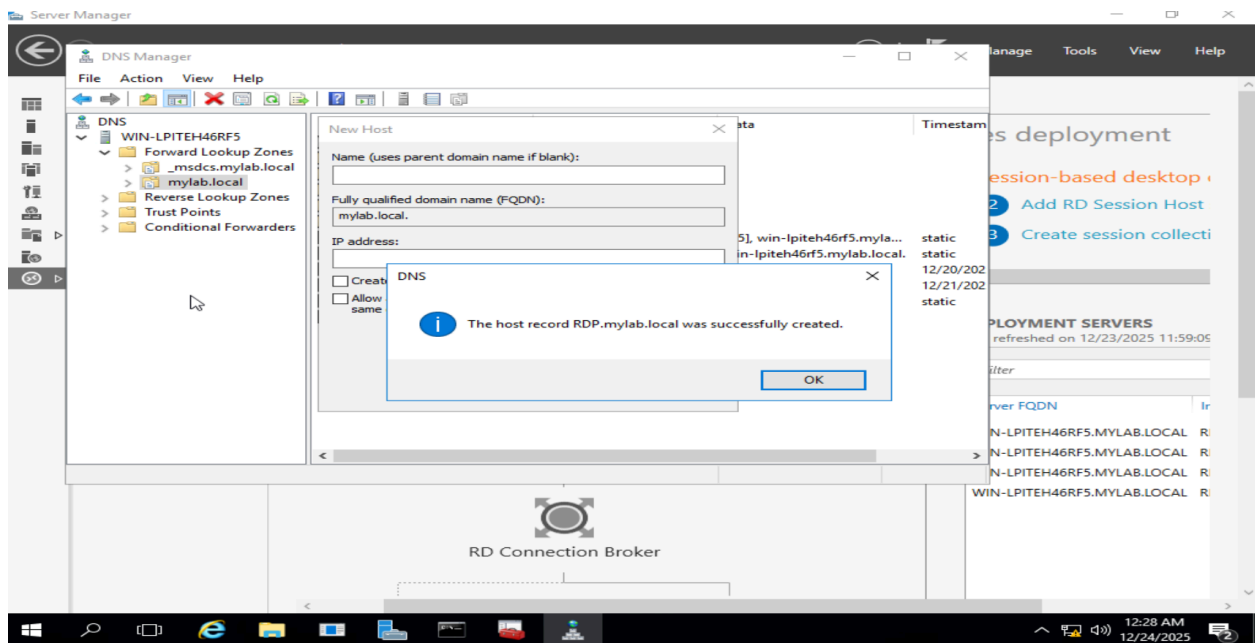


54

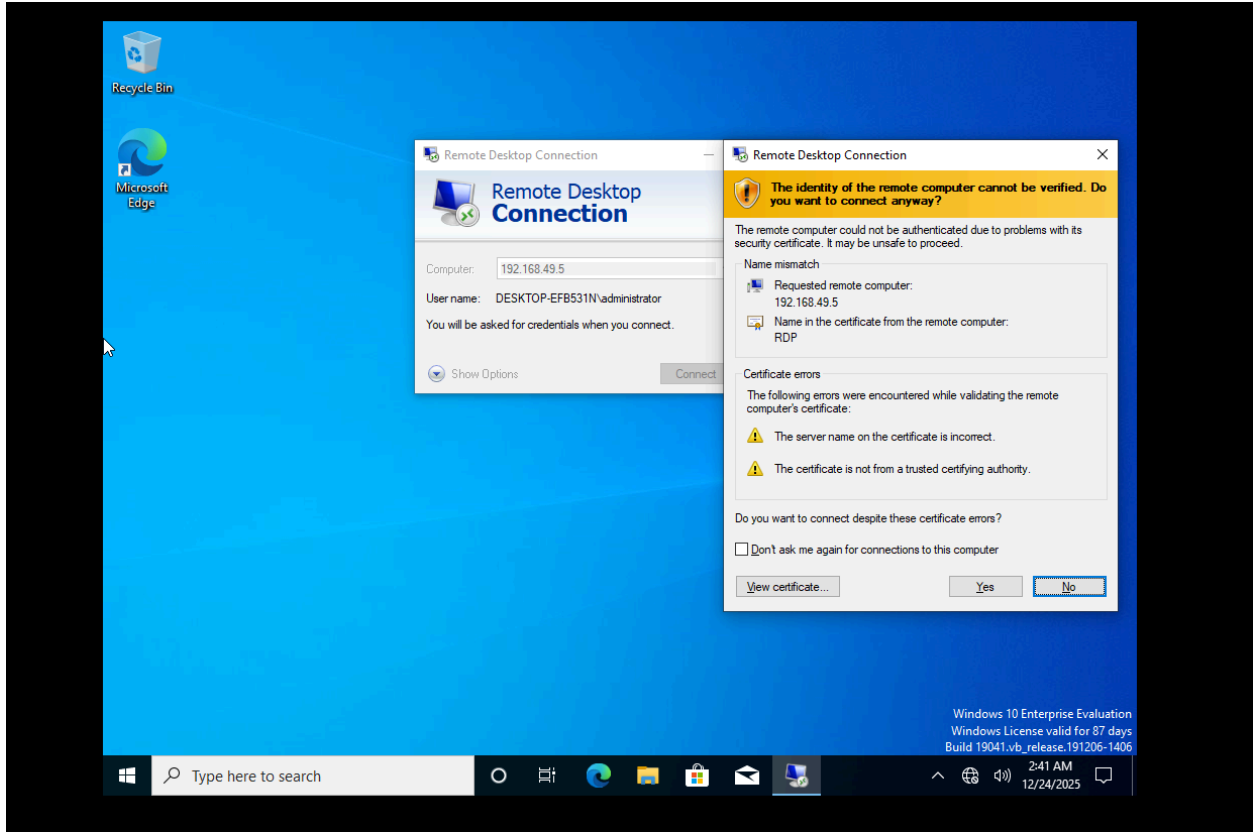


55

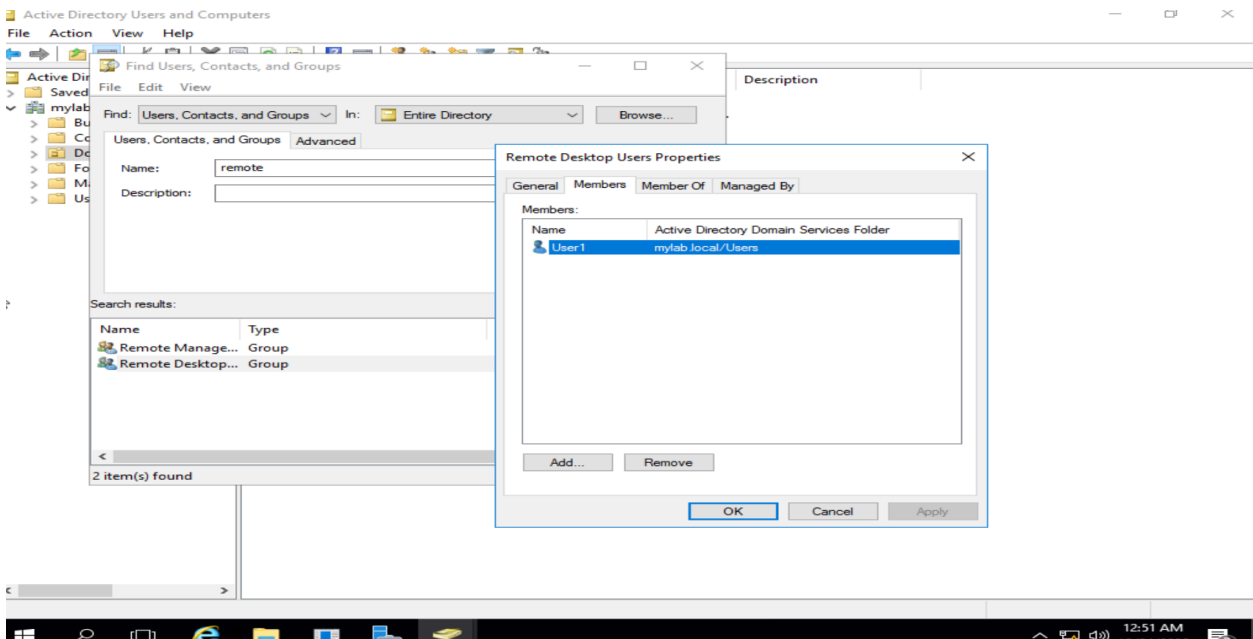


56

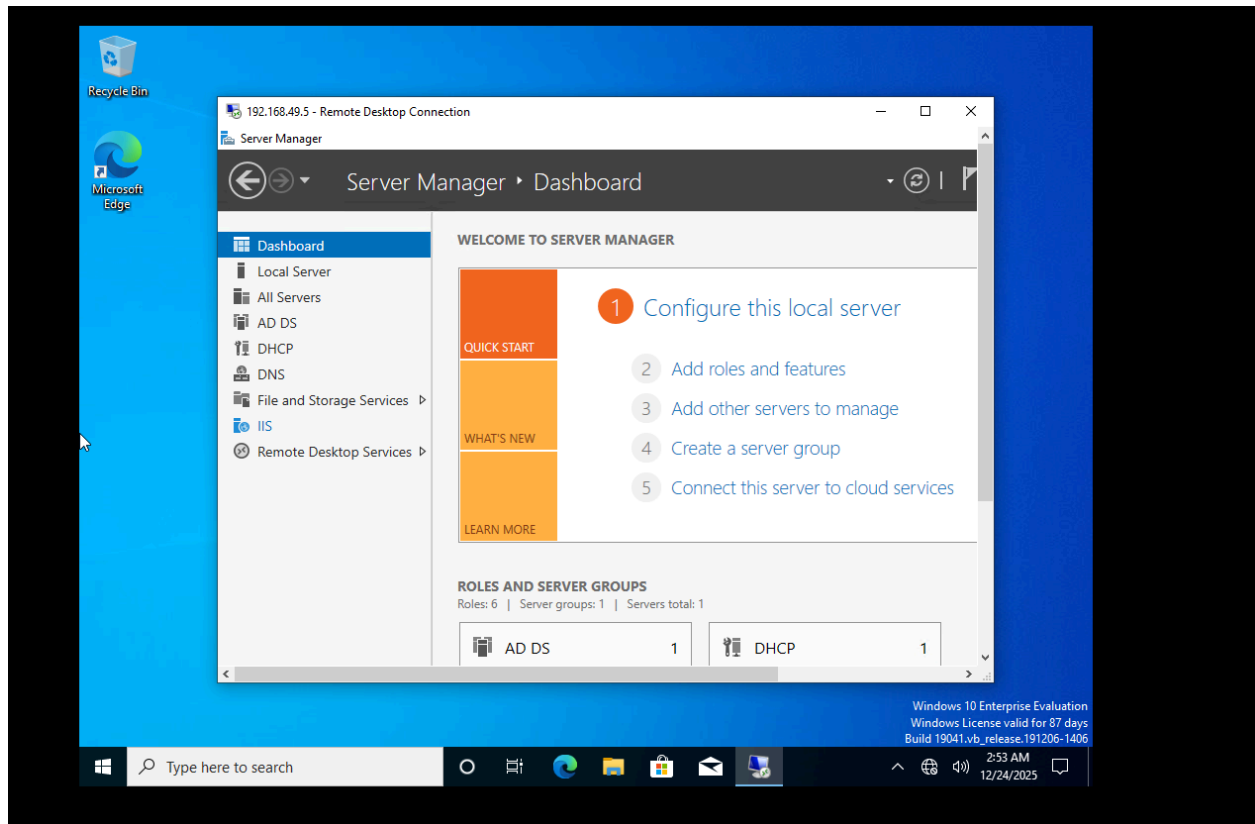


Step 57: VPN/RRAS

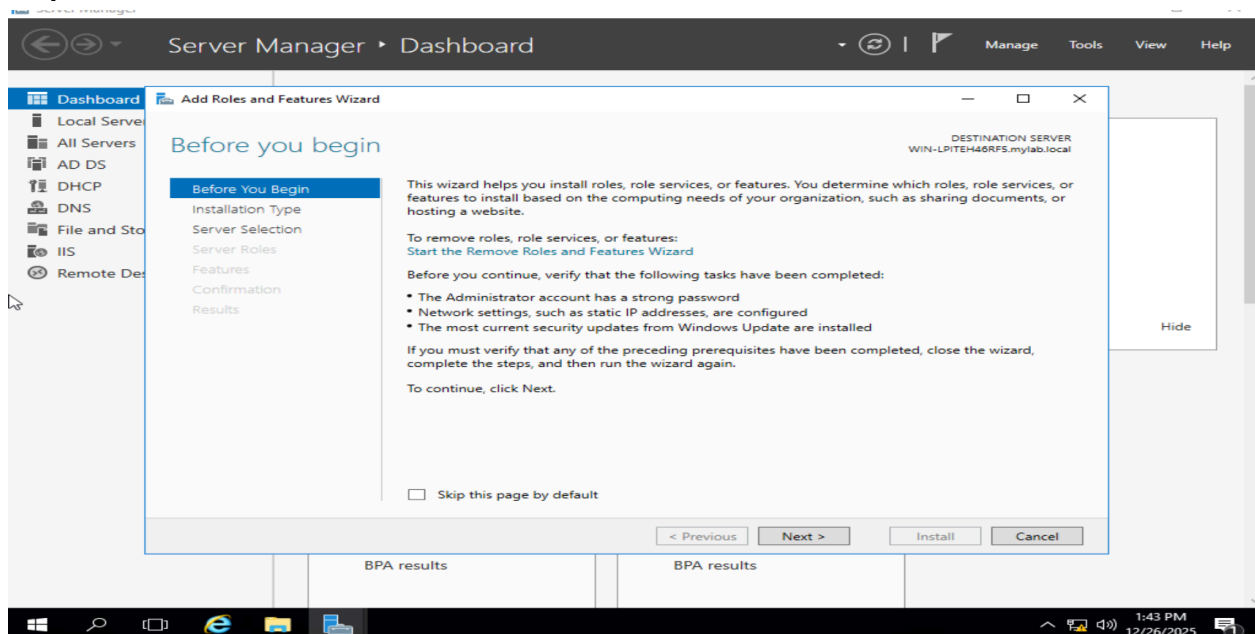


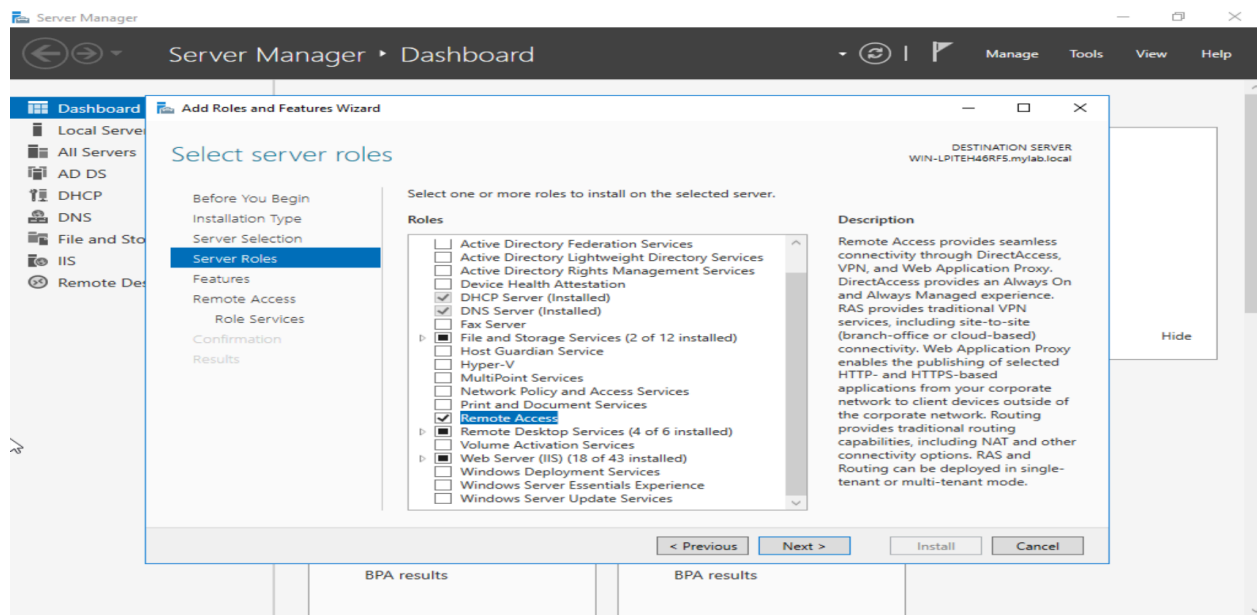


59

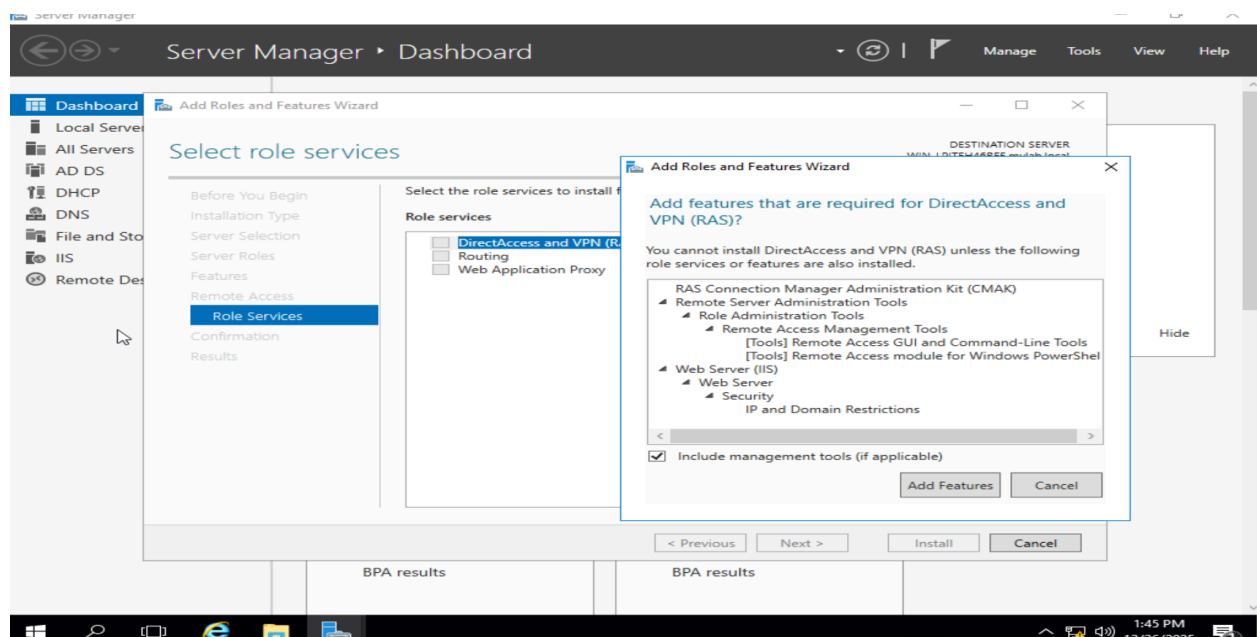


60

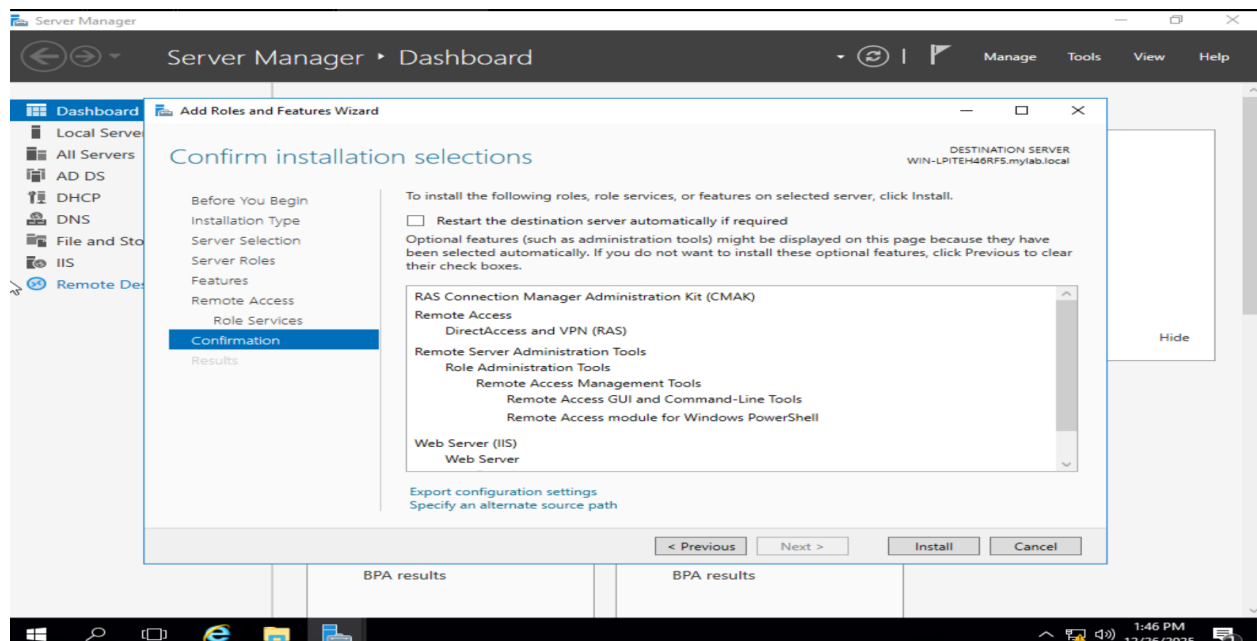

61

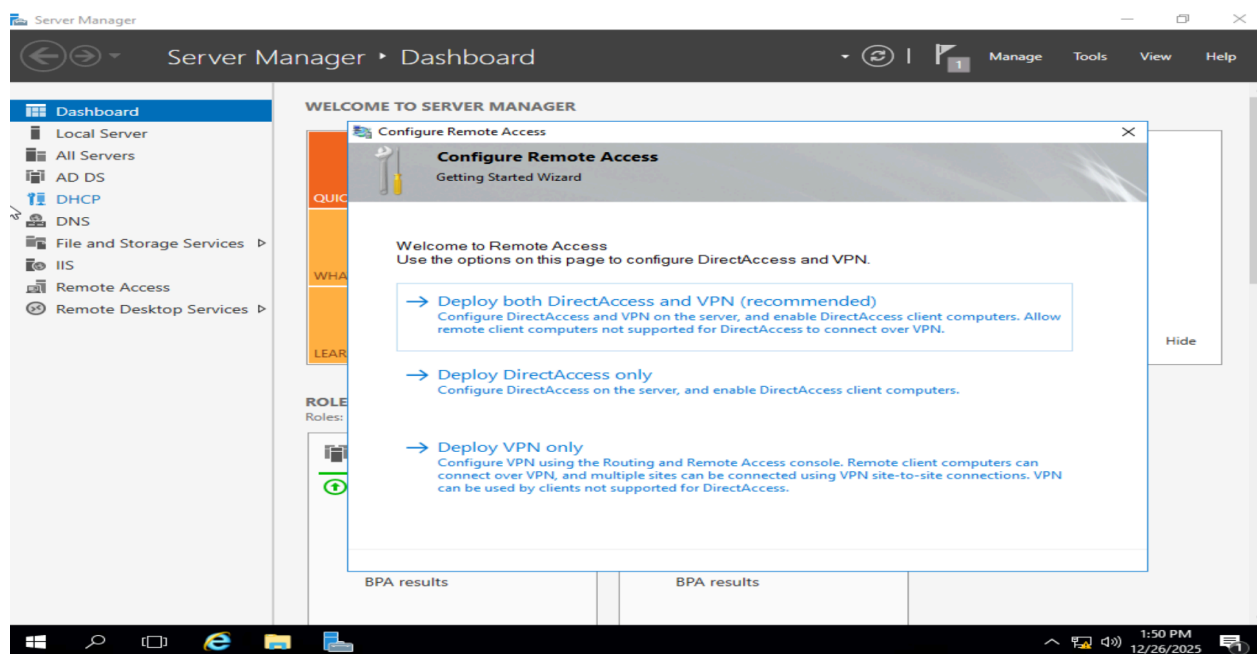

62

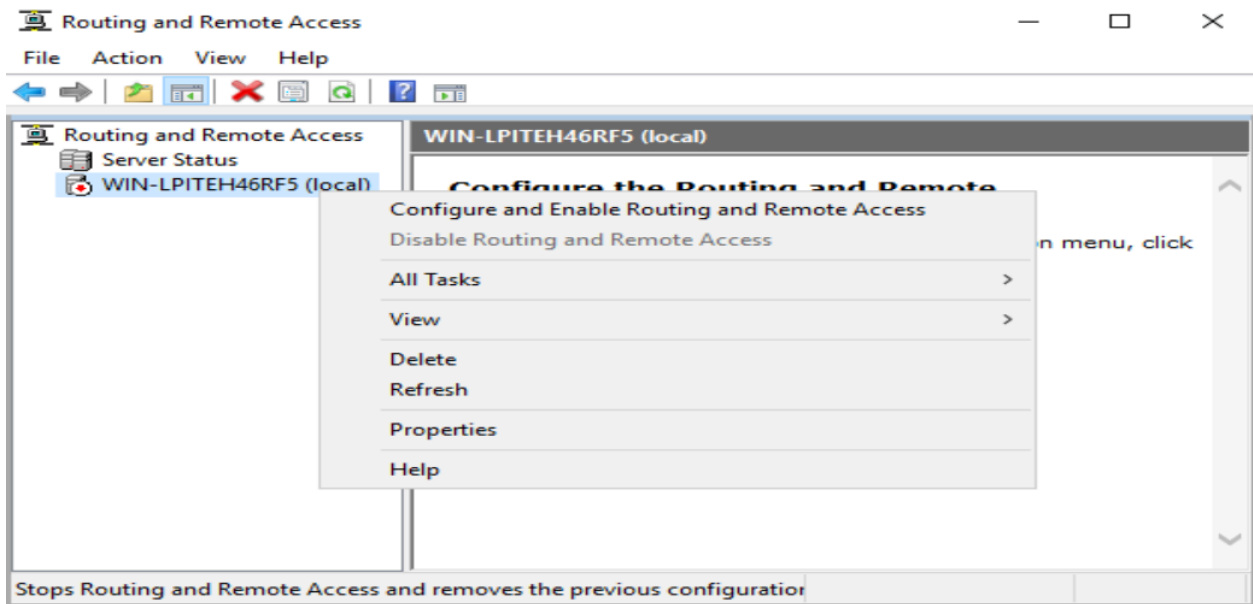

63

Routing and Remote Access Server Setup Wizard

Configuration

You can enable any of the following combinations of services, or you can customize this server.

- ☐ Remote access (dial-up or VPN)
Allow remote clients to connect to this server through either a dial-up connection or a secure virtual private network (VPN) Internet connection.
- ☐ Network address translation (NAT)
Allow internal clients to connect to the Internet using one public IP address.
- ☐ Virtual private network (VPN) access and NAT
Allow remote clients to connect to this server through the Internet and local clients to connect to the Internet using a single public IP address.
- ☐ Secure connection between two private networks
Connect this network to a remote network, such as a branch office.
- ☒ Custom configuration
Select any combination of the features available in Routing and Remote Access.

< Back

Next >

Cancel

64

Routing and Remote Access Server Setup Wizard

Completing the Routing and Remote Access Server Setup Wizard

You have successfully completed the Routing and Remote Access Server Setup wizard.

Summary of selections:

VPN access

After you close this wizard, configure the selected services in the Routing and Remote Access console.

To close this wizard, click Finish.

< Back

Finish

Cancel

65

You have successfully completed the Routing and Remote Access Server Setup wizard.

Routing and Remote Access

Start the service

The Routing and Remote Access service is ready to use.

Start service

Cancel

in the Routing and Remote Access console.


To close this wizard, click Finish.

< Back


Finish

Cancel

66

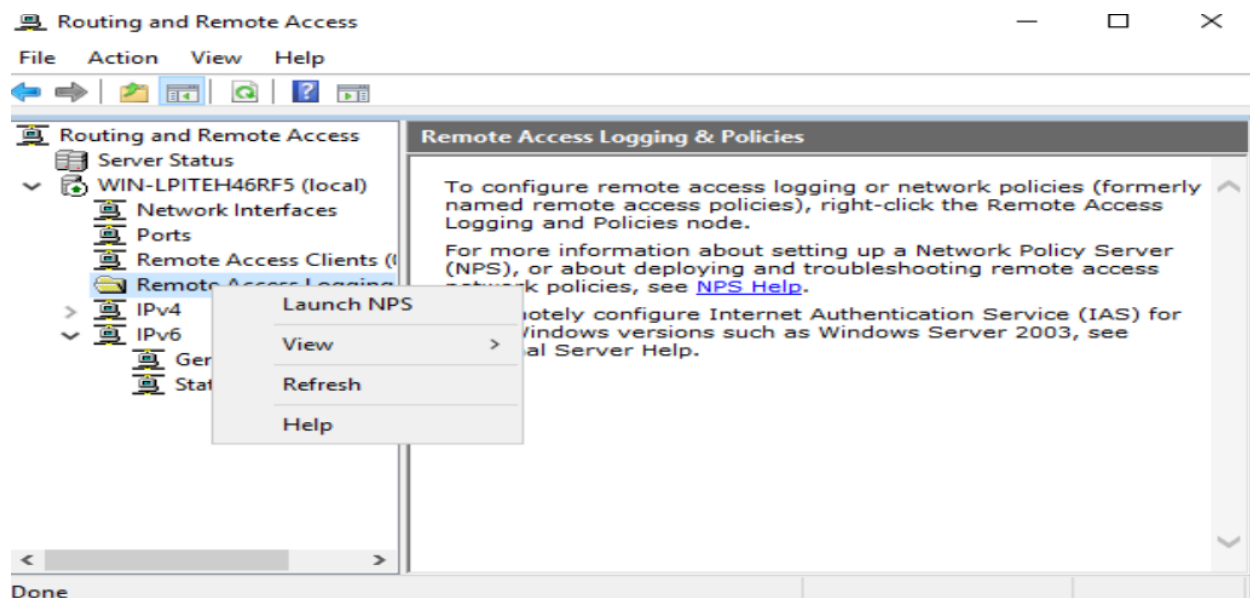

67

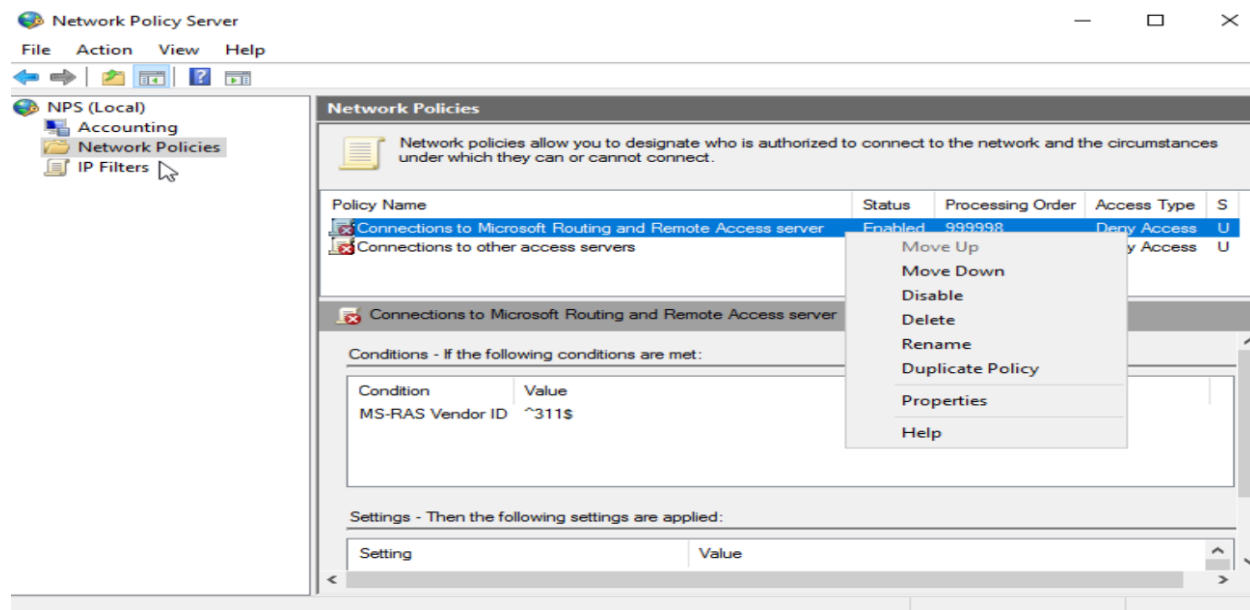

68

Connections to Microsoft Routing and Remote Access server Properties

Overview Conditions Constraints Settings

Policy name:

Policy State
If enabled, NPS evaluates this policy while performing authorization. If disabled, NPS does not evaluate this policy.

☒ Policy enabled

Access Permission
If conditions and constraints of the network policy match the connection request, the policy can grant or deny access. [What is access permission?](#)


☒ Grant access. Grant access if the connection request matches this policy.
☐ Deny access. Deny access if the connection request matches this policy.
☐ Ignore user account dial-in properties.
If the connection request matches the conditions and constraints of this network policy and the policy is configured to ignore user account dial-in properties, NPS will authorize the connection request with network policy only; do not evaluate the dial-in properties of user accounts.

Network connection method
Select the type of network access server that sends the connection request to NPS. You can select Unspecified or Vendor specific, but neither is required. If your network access server is an 802.1X authenticating network access server, select Unspecified.


☒ Type of network access server:

☐ Vendor specific:


69

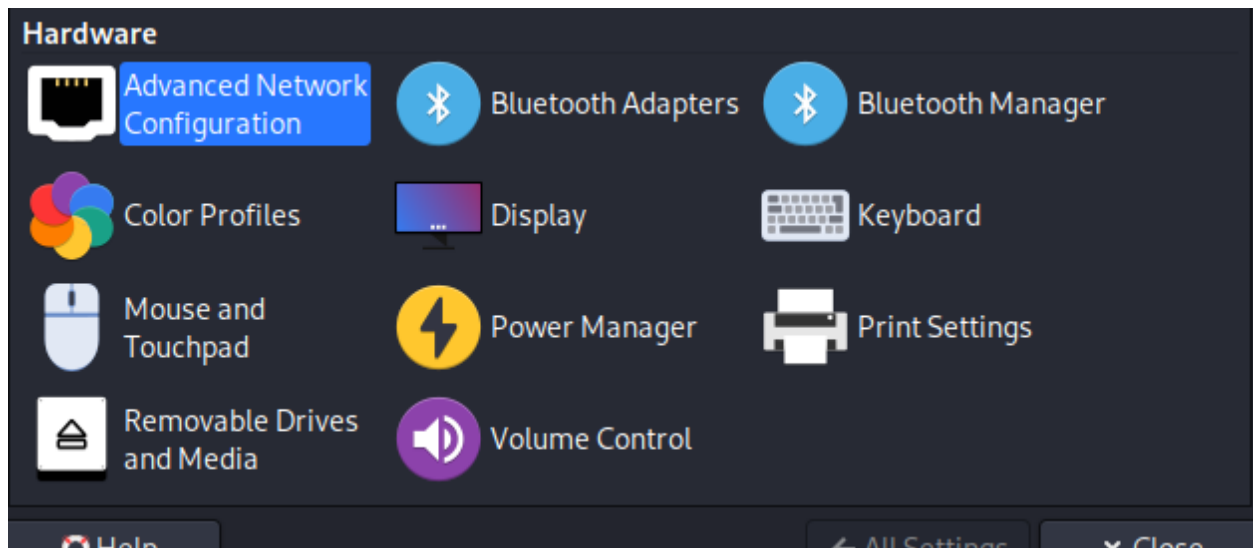


70

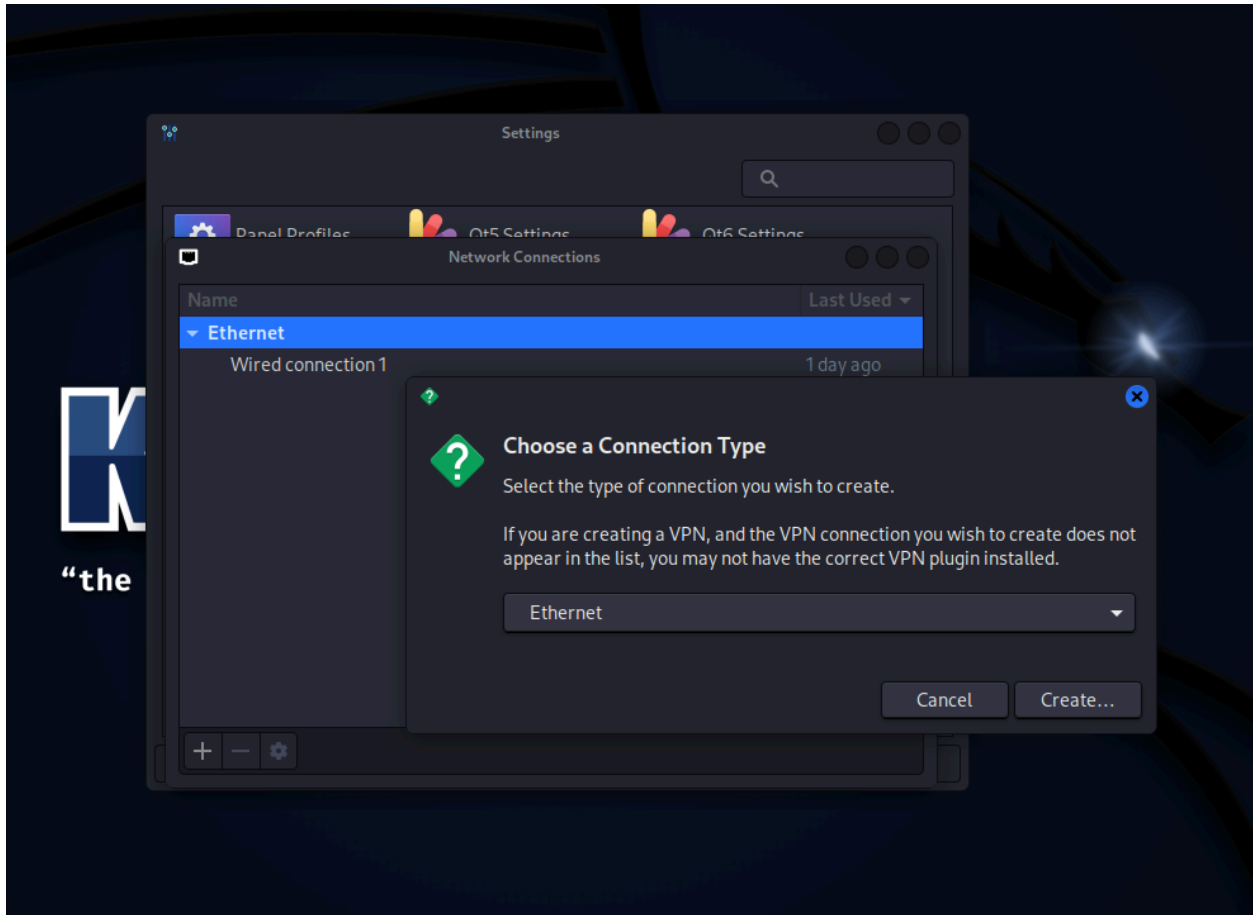


71

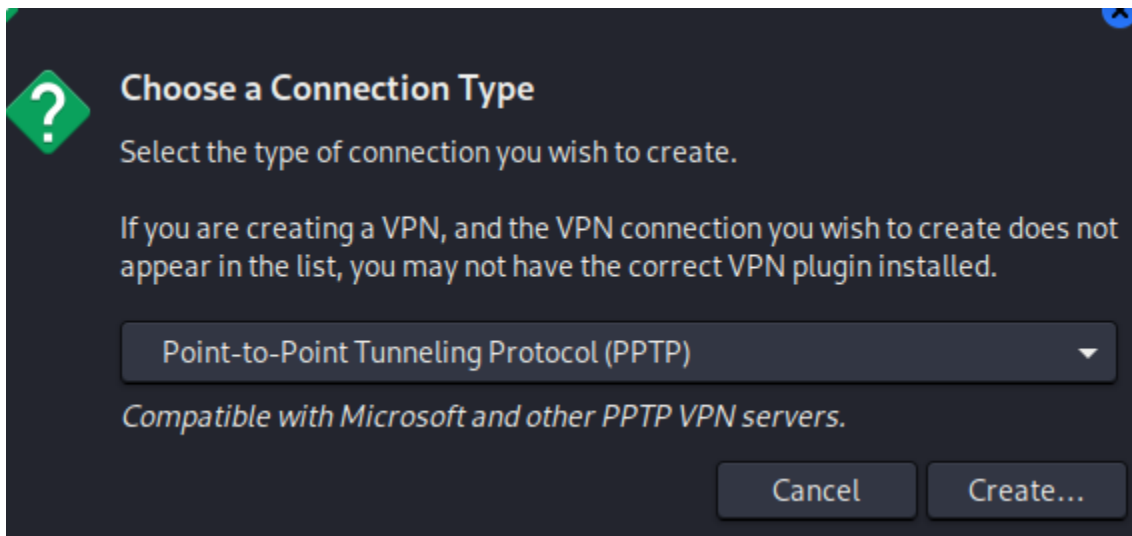


72

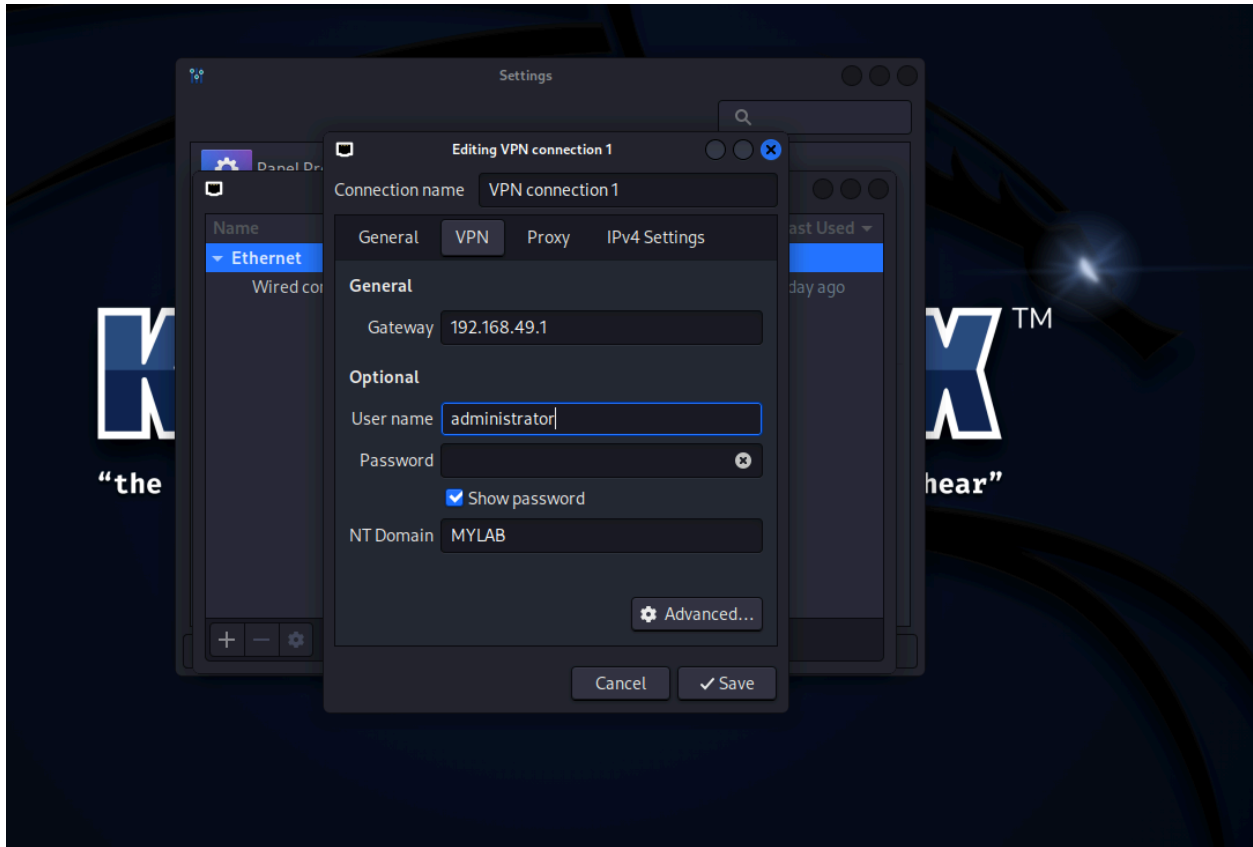


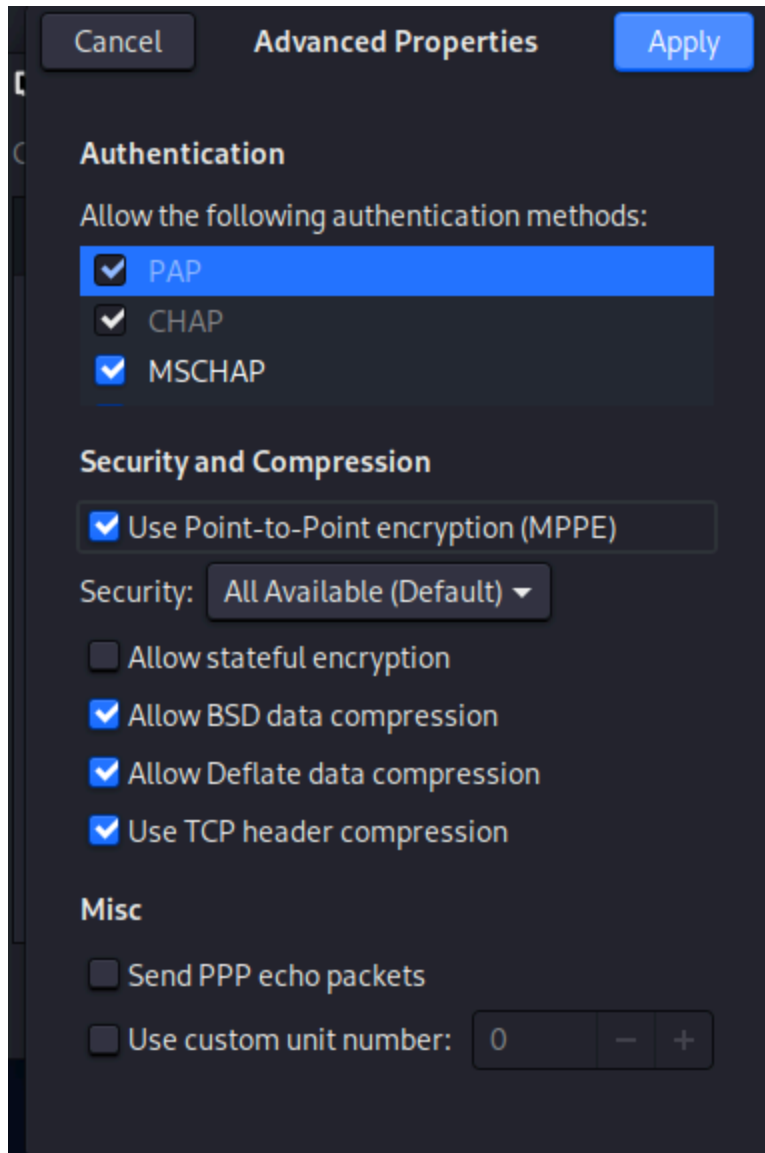


74 (borrowed image)

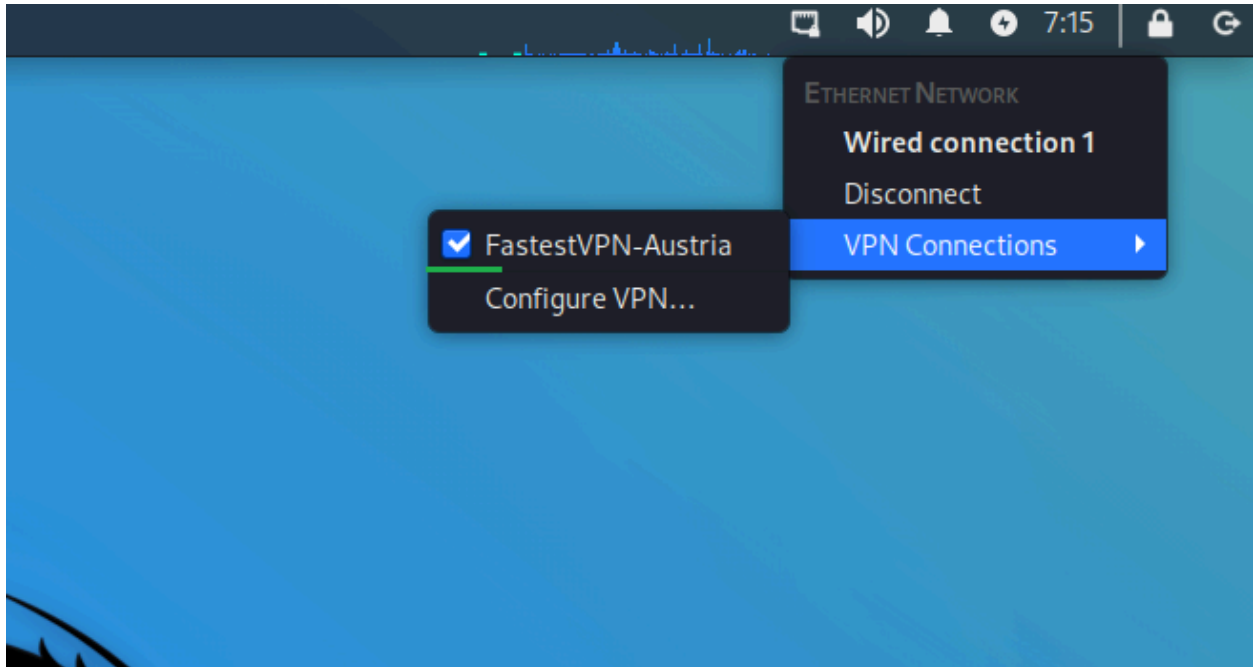

Step 75: vulnerability scanner

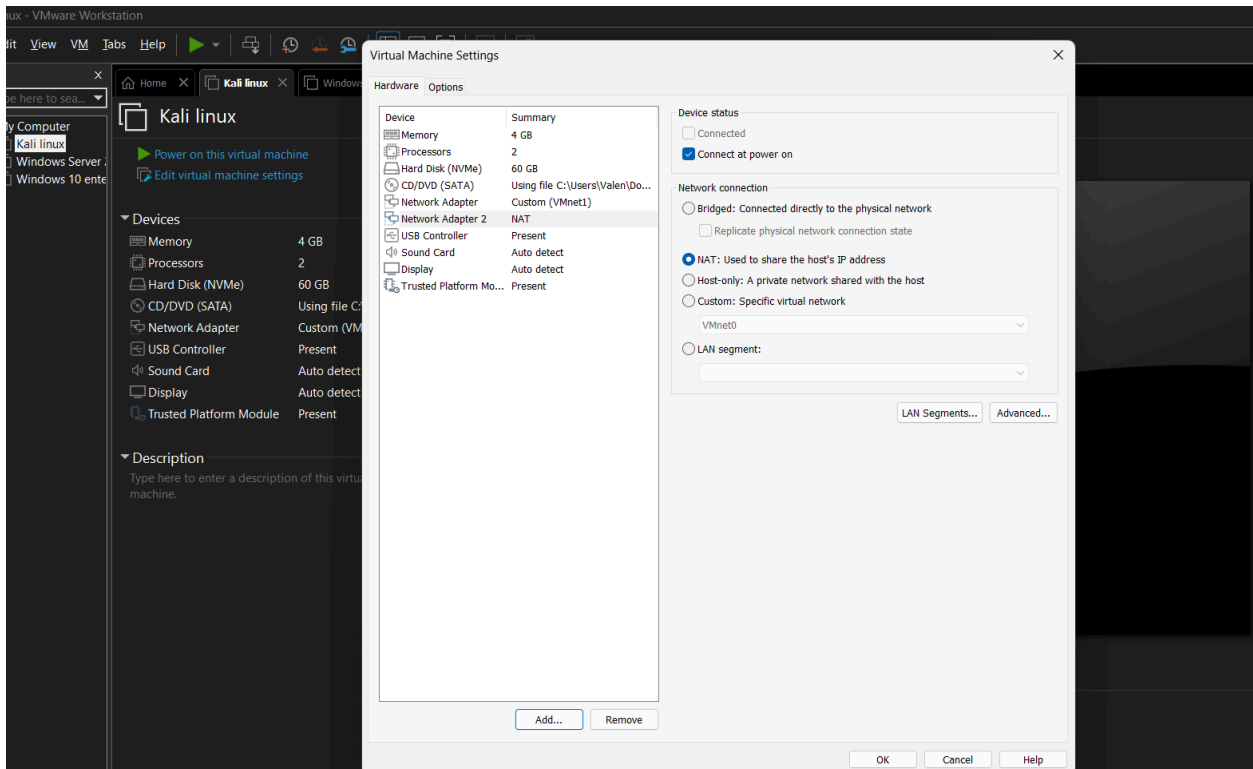

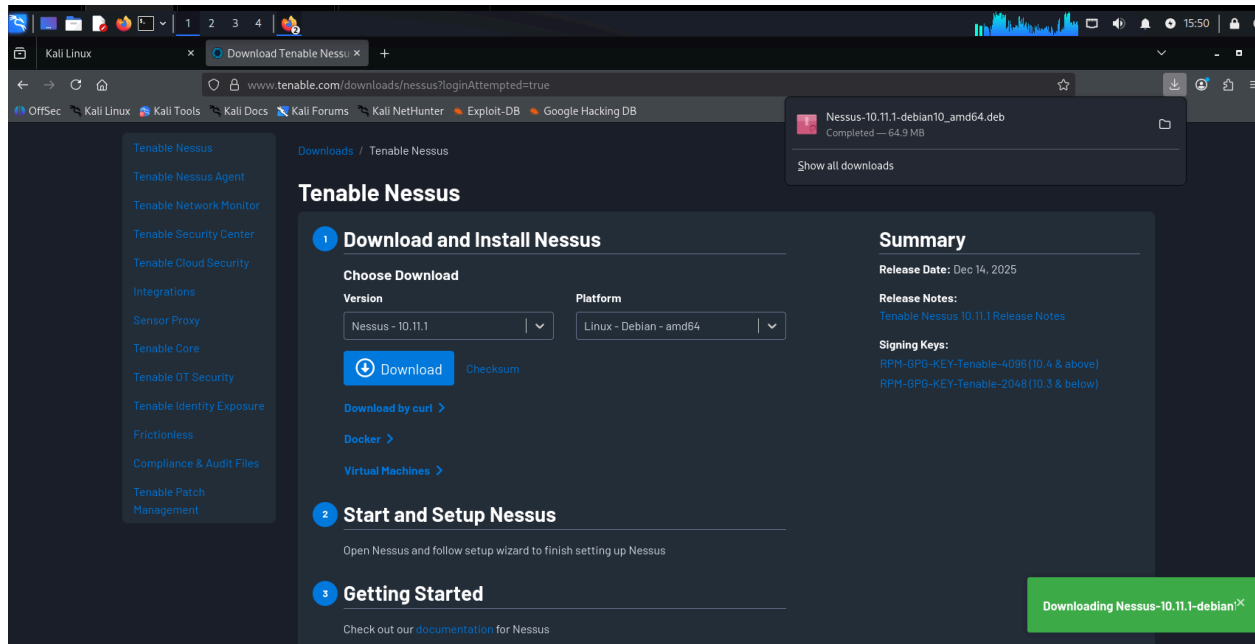

77

```
(valentialcala@unifi) ~/Downloads
$ ls -lh

total 67M
drwxr-xr-x 2 valentialcala valentialcala 4.0K Dec 11 16:37 DEBIAN
-rw-rw-r-- 1 valentialcala valentialcala 1.5M Nov  5 20:17 kali-legacy.png
-rw-rw-r-- 1 valentialcala valentialcala 65M Dec 28 15:50 Nessus-10.11.1-debian10_amd64.deb
drwxr-xr-x 3 valentialcala valentialcala 4.0K Dec 11 16:33 opt


(valentialcala@unifi) ~/Downloads
$ sudo pkg -i Nessus-10.11.1-debian10_amd64.deb

sudo: unable to resolve host unifi: Name or service not known
sudo: pkg: command not found


(valentialcala@unifi) ~/Downloads
$ sudo dpkg -i Nessus-10.11.1-debian10_amd64.deb

sudo: unable to resolve host unifi: Name or service not known
Selecting previously unselected package nessus.
(Reading database ... 457378 files and directories currently installed.)
Preparing to unpack Nessus-10.11.1-debian10_amd64.deb ...
Unpacking nessus (10.11.1) ...
Setting up nessus (10.11.1) ...
HMAC : (Module_Integrity) : Pass
SHA1 : (KAT_Digest) : Pass
SHA2 : (KAT_Digest) : Pass
SHA3 : (KAT_Digest) : Pass
TDES : (KAT_Cipher) : Pass
AES_GCM : (KAT_Cipher) : Pass
AES_ECB_Decrypt : (KAT_Cipher) : Pass
RSA : (KAT_Signature) : RNG : (Continuous_RNG_Test) : Pass
Pass
ECDSA : (PCT_Signature) : Pass
ECDSA : (PCT_Signature) : Pass
DSA : (PCT_Signature) : Pass
TLS13_KDF_EXTRACT : (KAT_KDF) : Pass
TLS13_KDF_EXPAND : (KAT_KDF) : Pass
TLS12_PRF : (KAT_KDF) : Pass
PBKDF2 : (KAT_KDF) : Pass
```

78

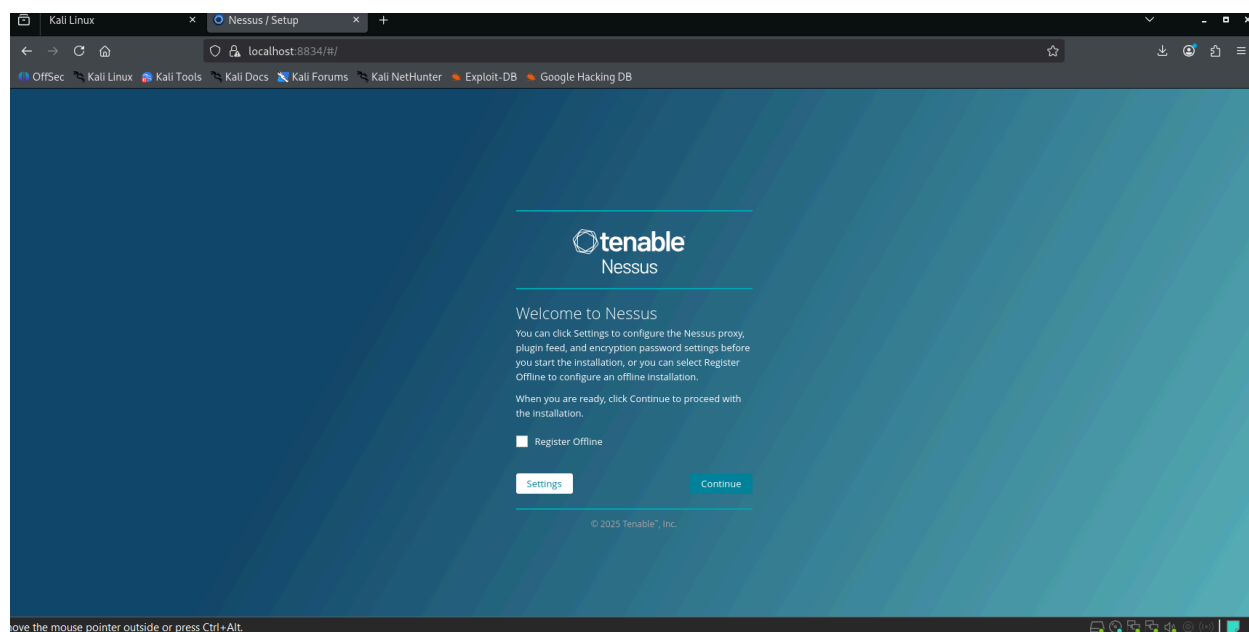

79

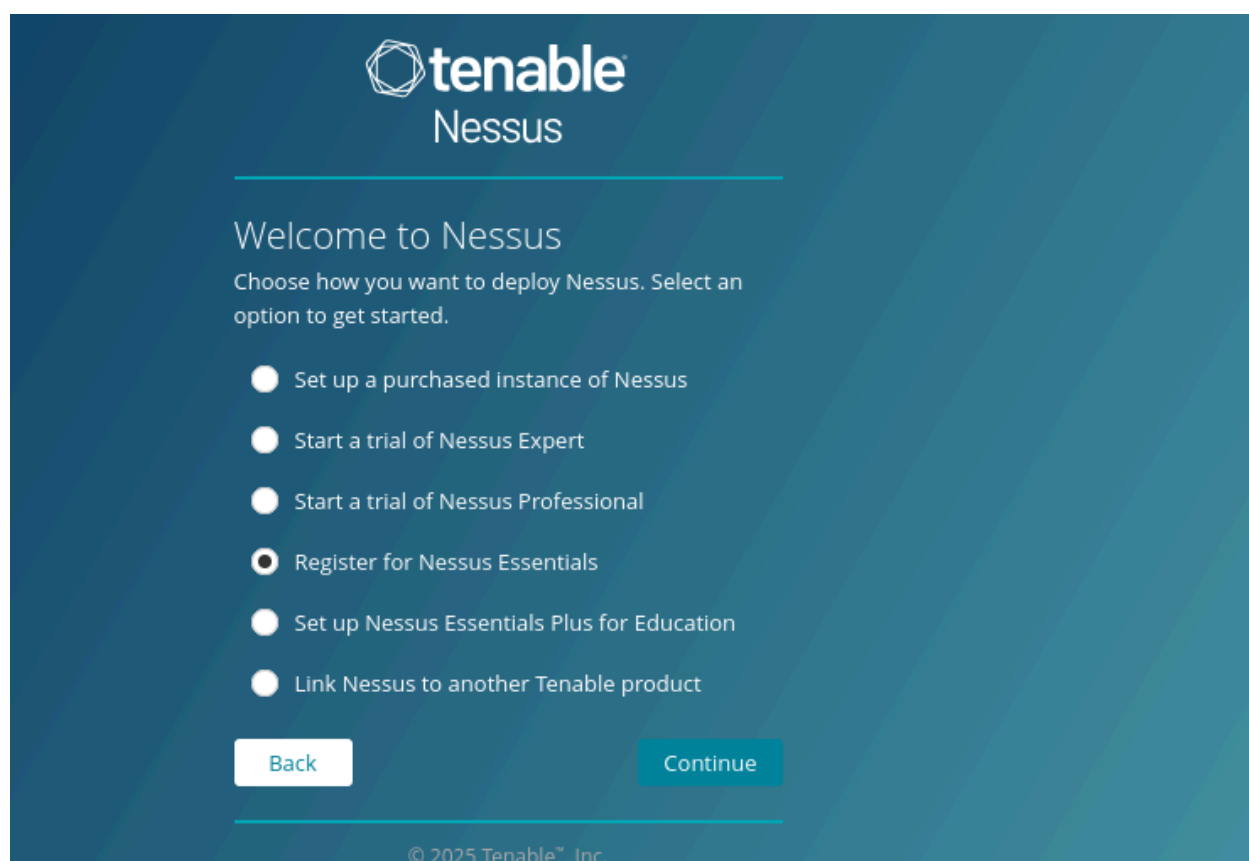

80



Create a user account

Create a Nessus administrator user account. Use this username and password to log in to Nessus.

Username *


Password *

[Back](#)[Submit](#)


© 2025 Tenable™, Inc.




82

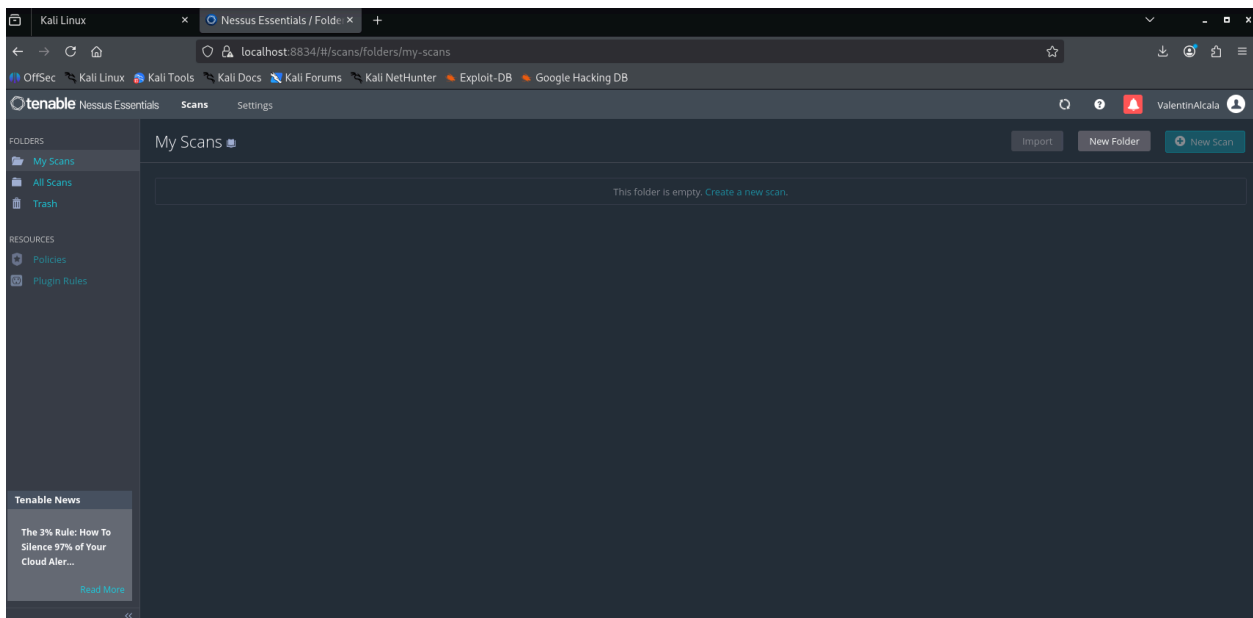


83

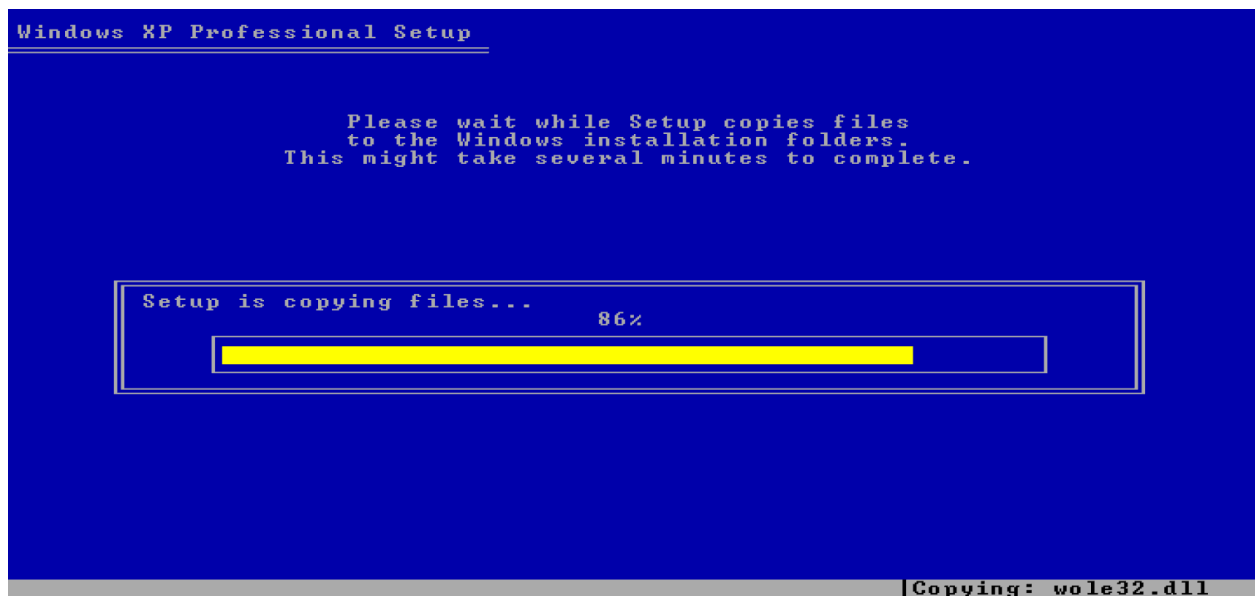

84

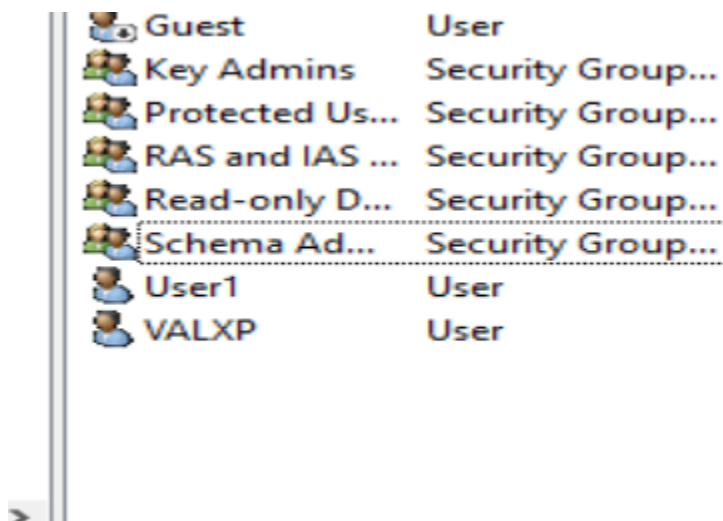


85

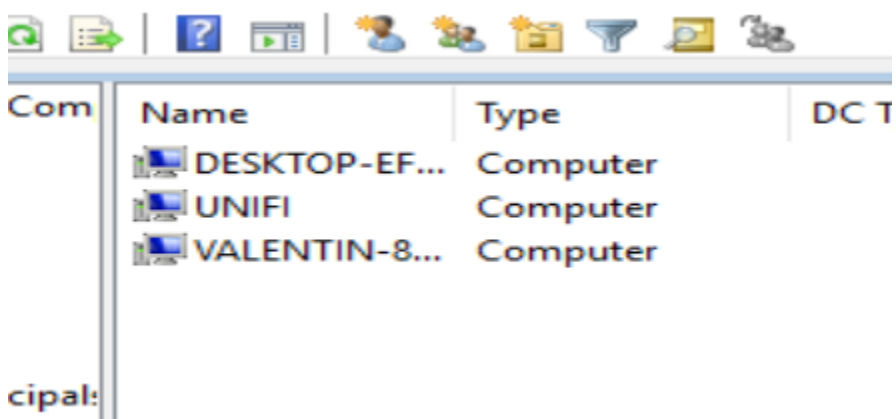


86




87

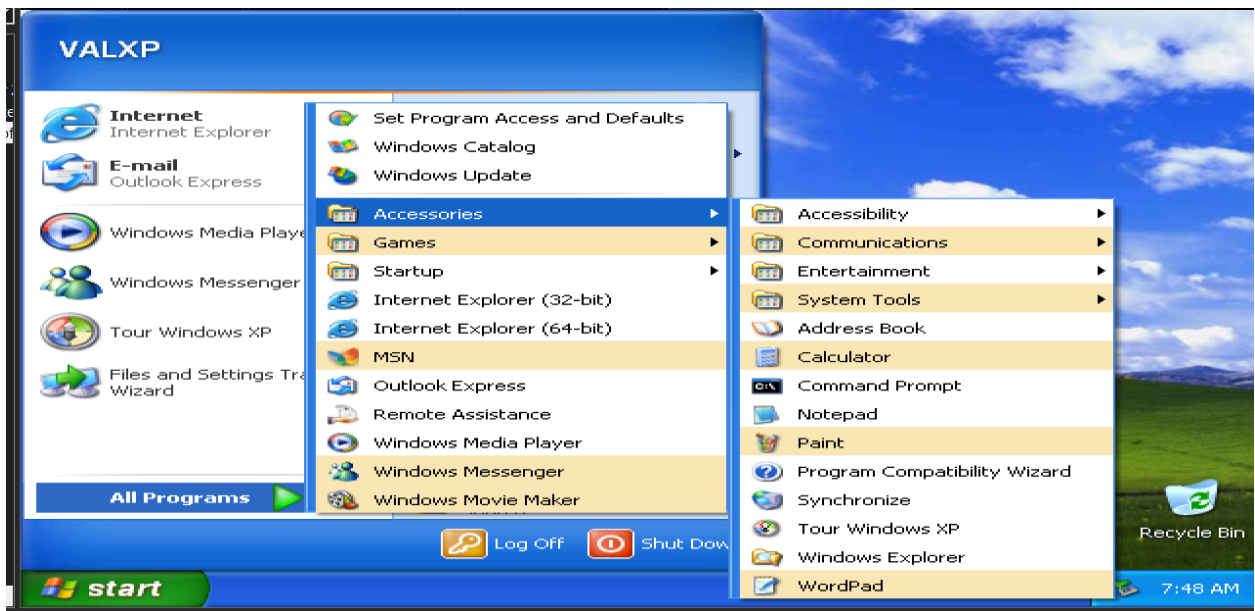


88

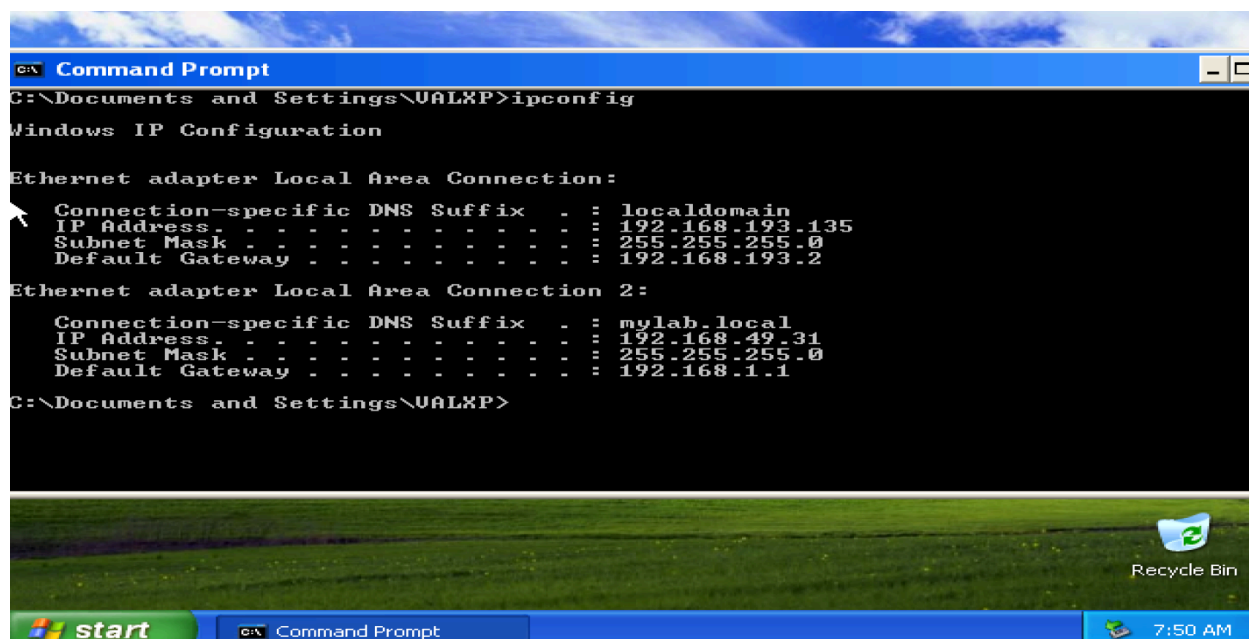


89

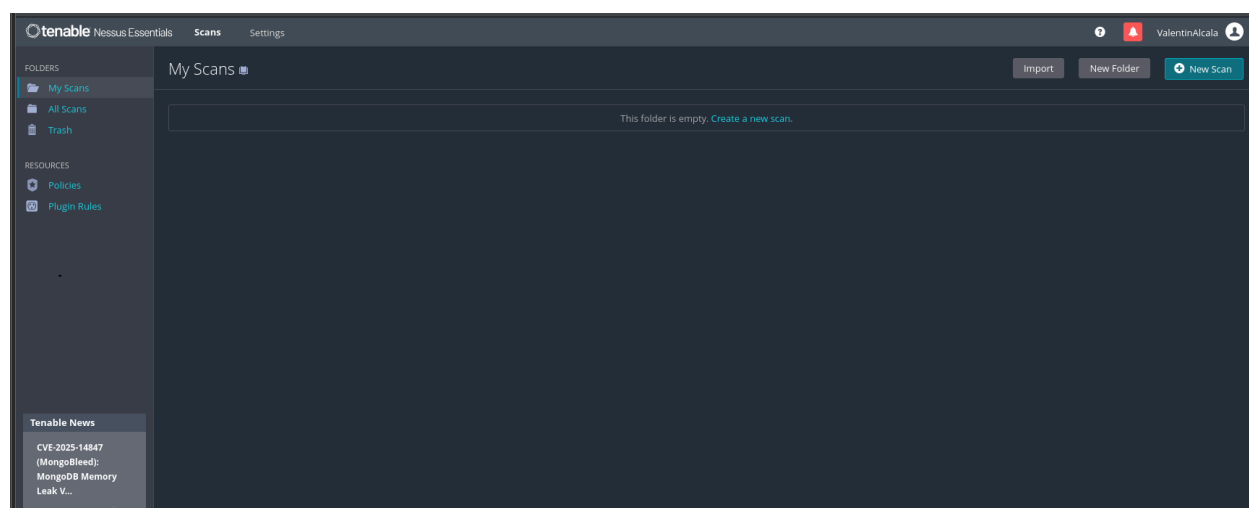


90

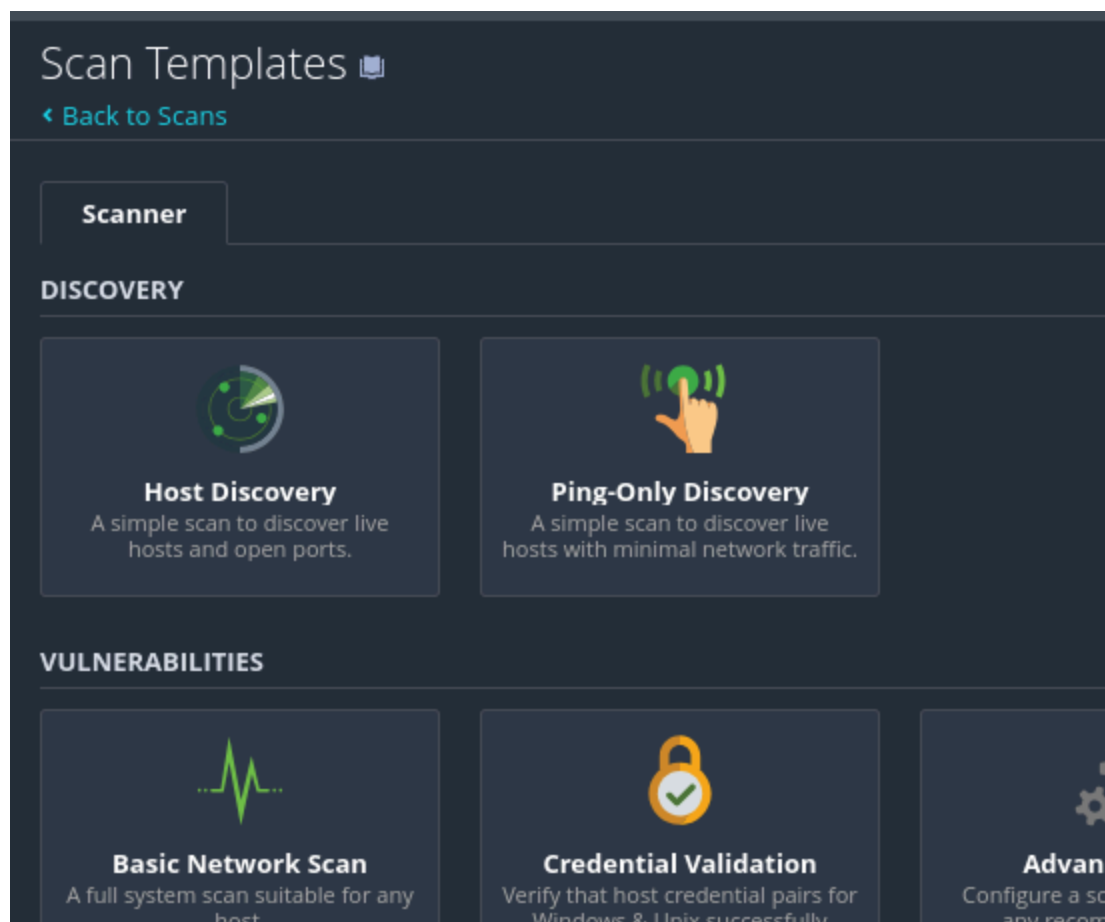


91

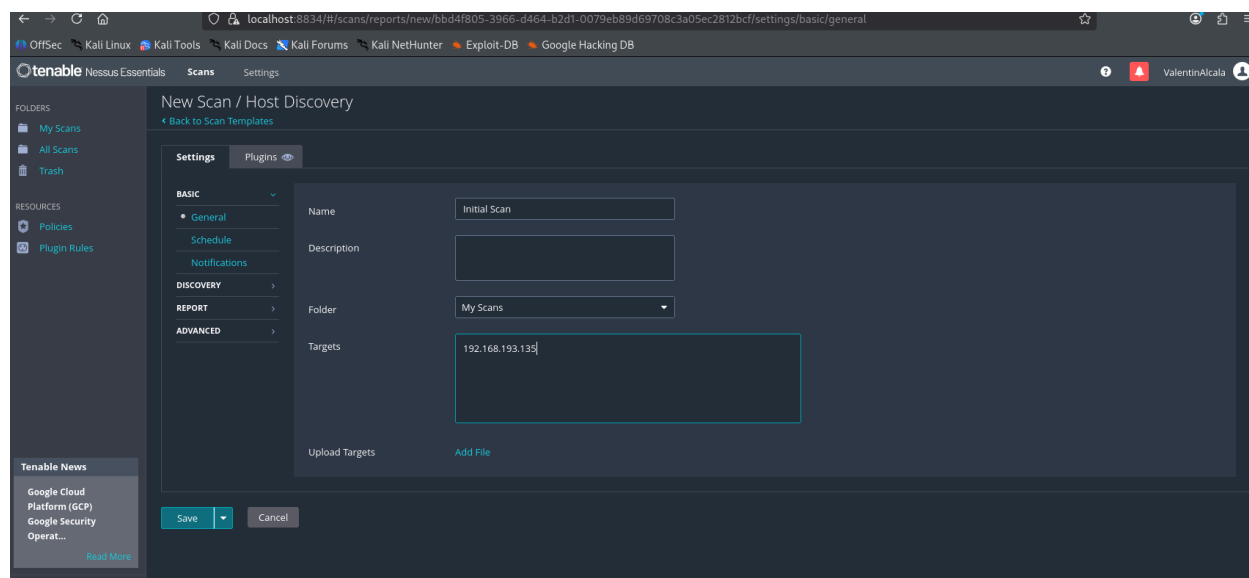


92

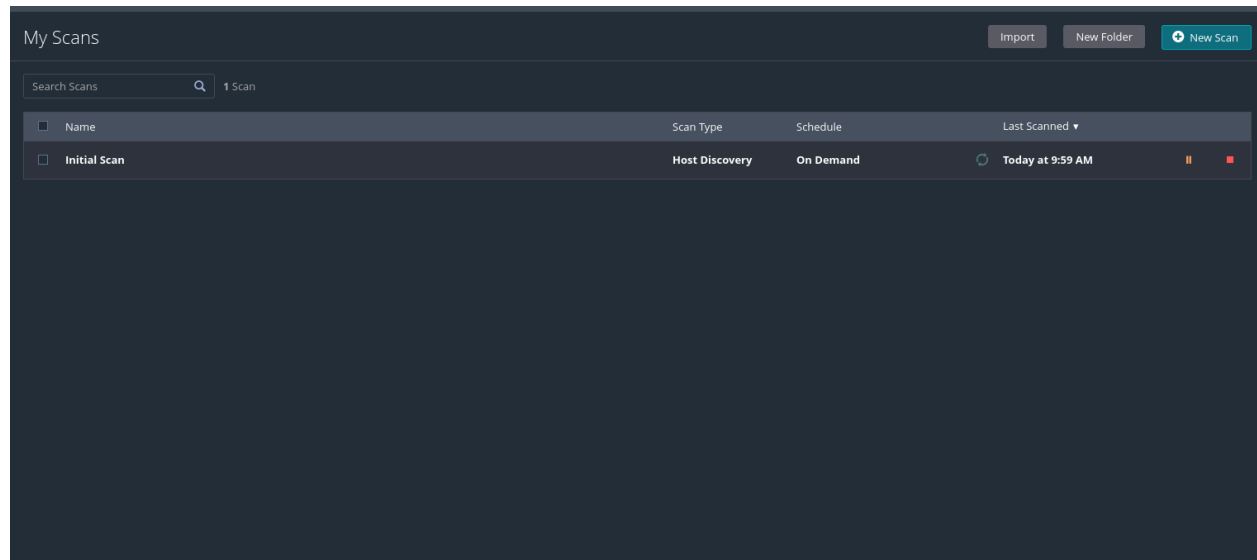


93

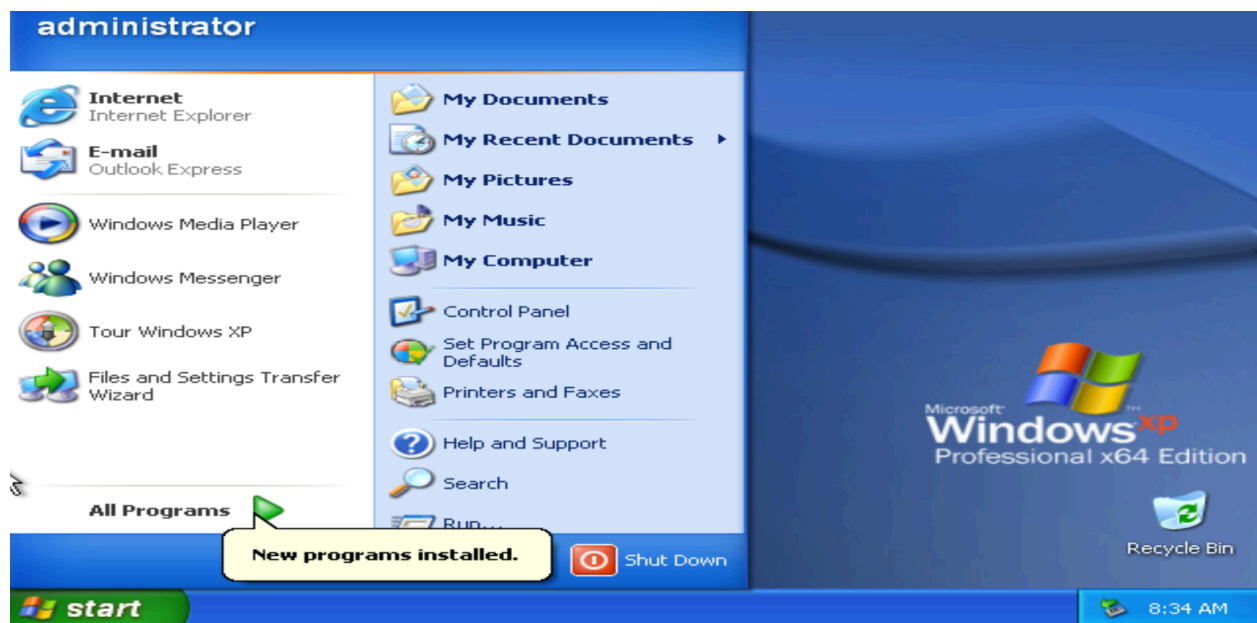


94

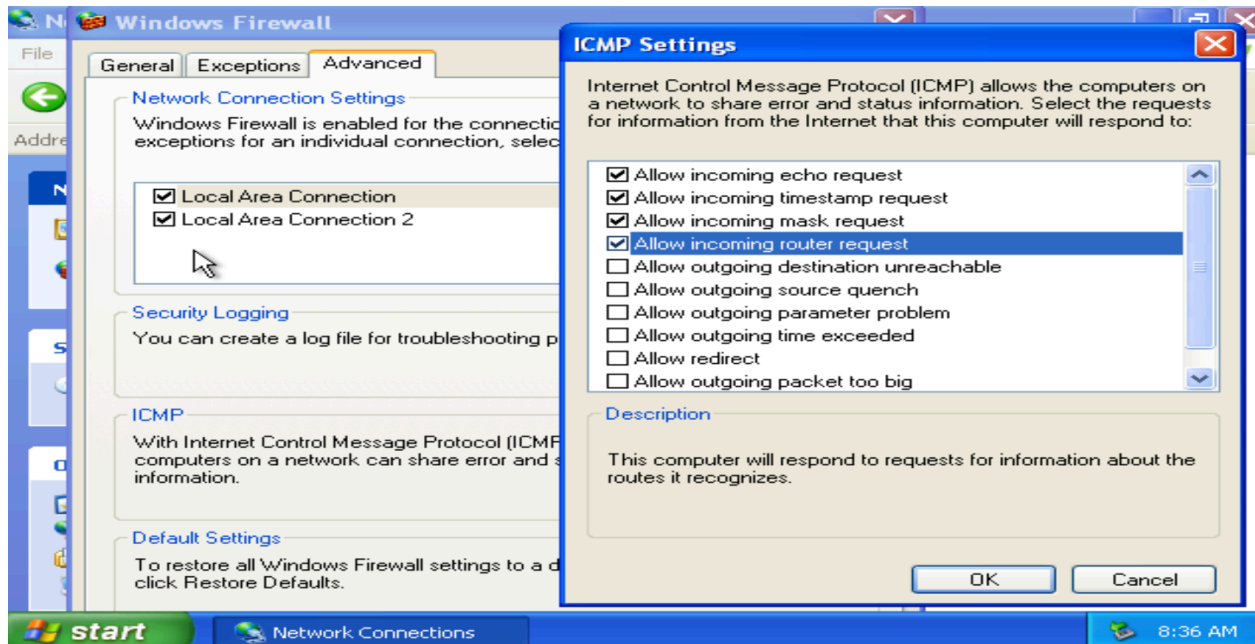


95

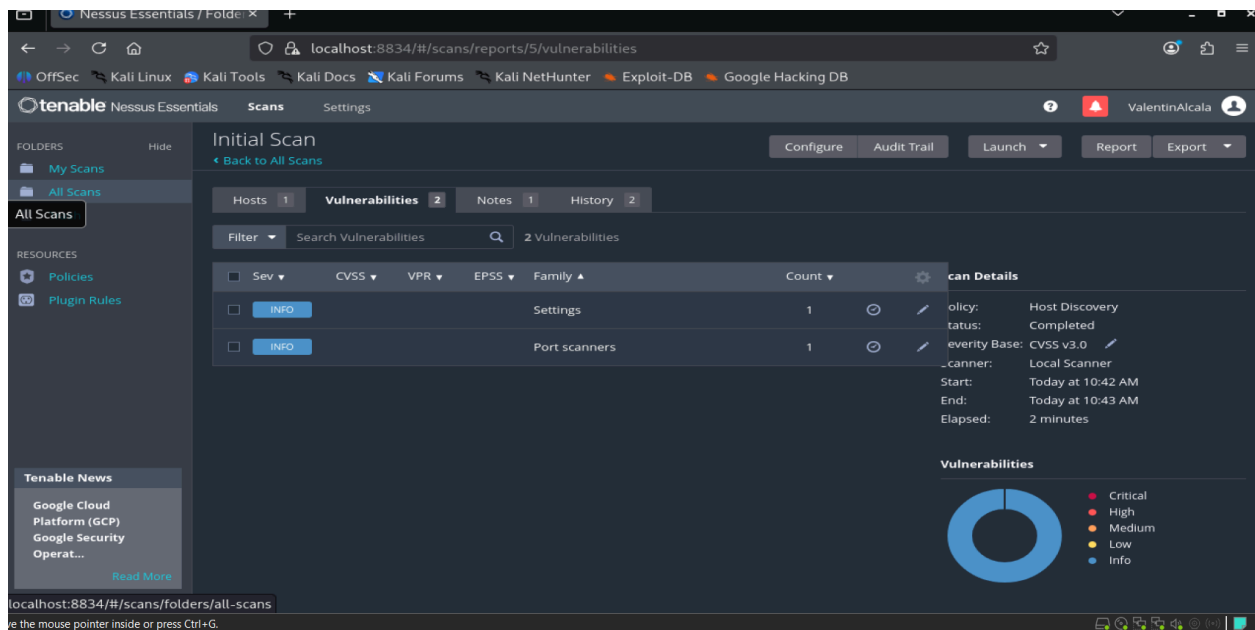

96

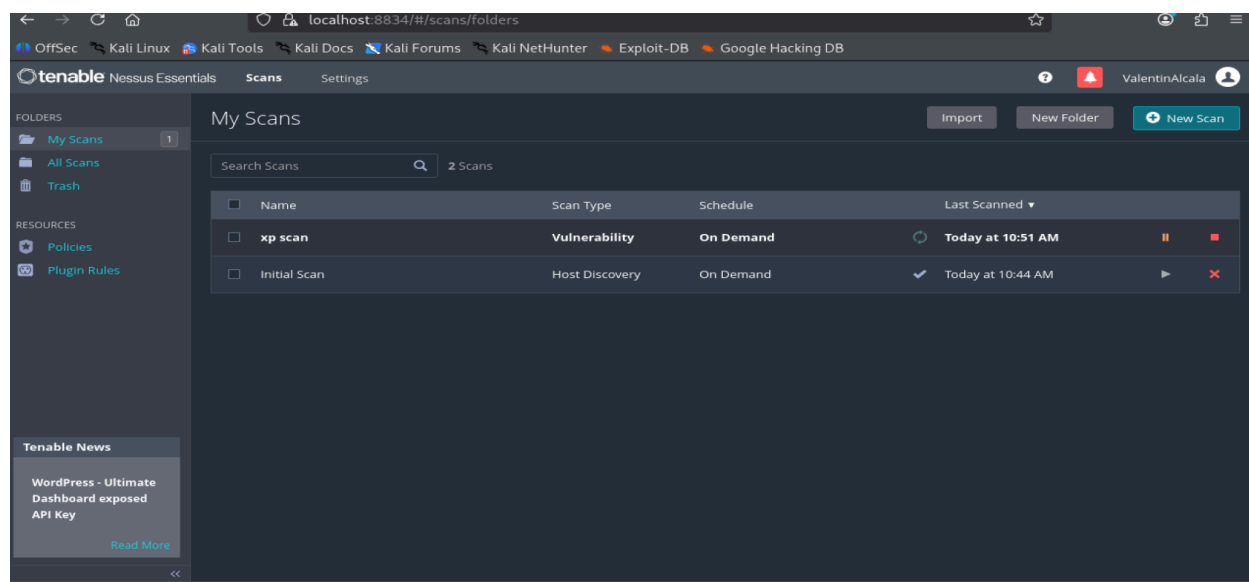

97

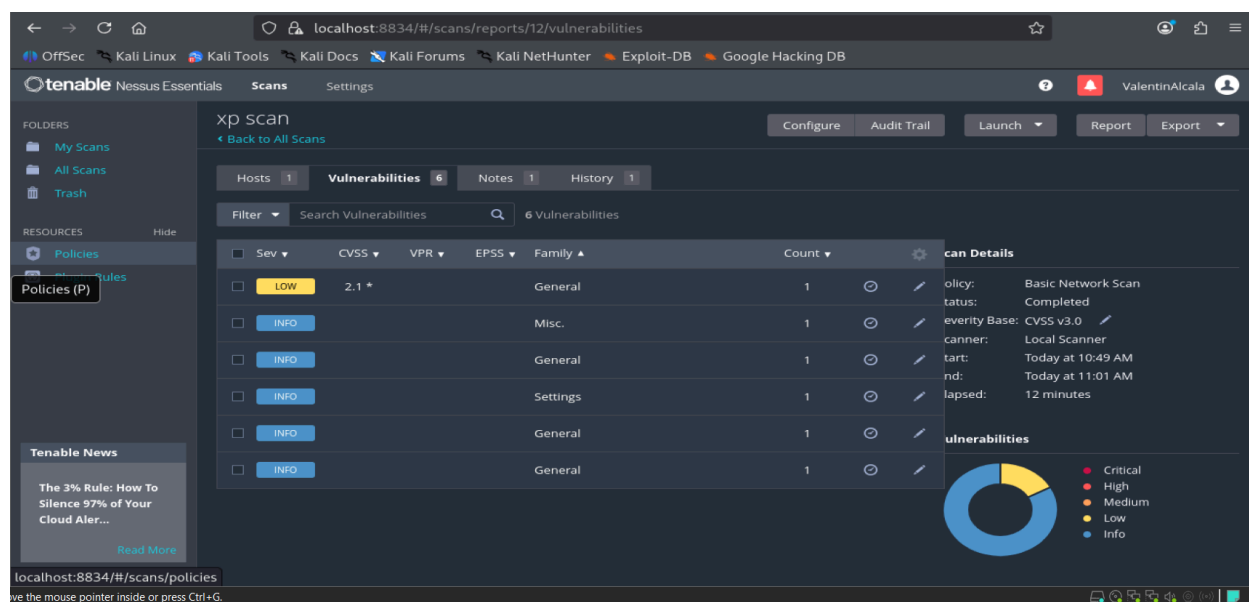

end