

The Multi-State Constraint Kalman Filter

Or, how we learned to stop worrying and love the null space

Valentin Peretroukhin and Lee Clement


AER1513 Course Project



Institute for Aerospace Studies
UNIVERSITY OF TORONTO


Problem: Mapless Navigation

Goal: Use an IMU with a monocular camera to estimate motion *without a map*.

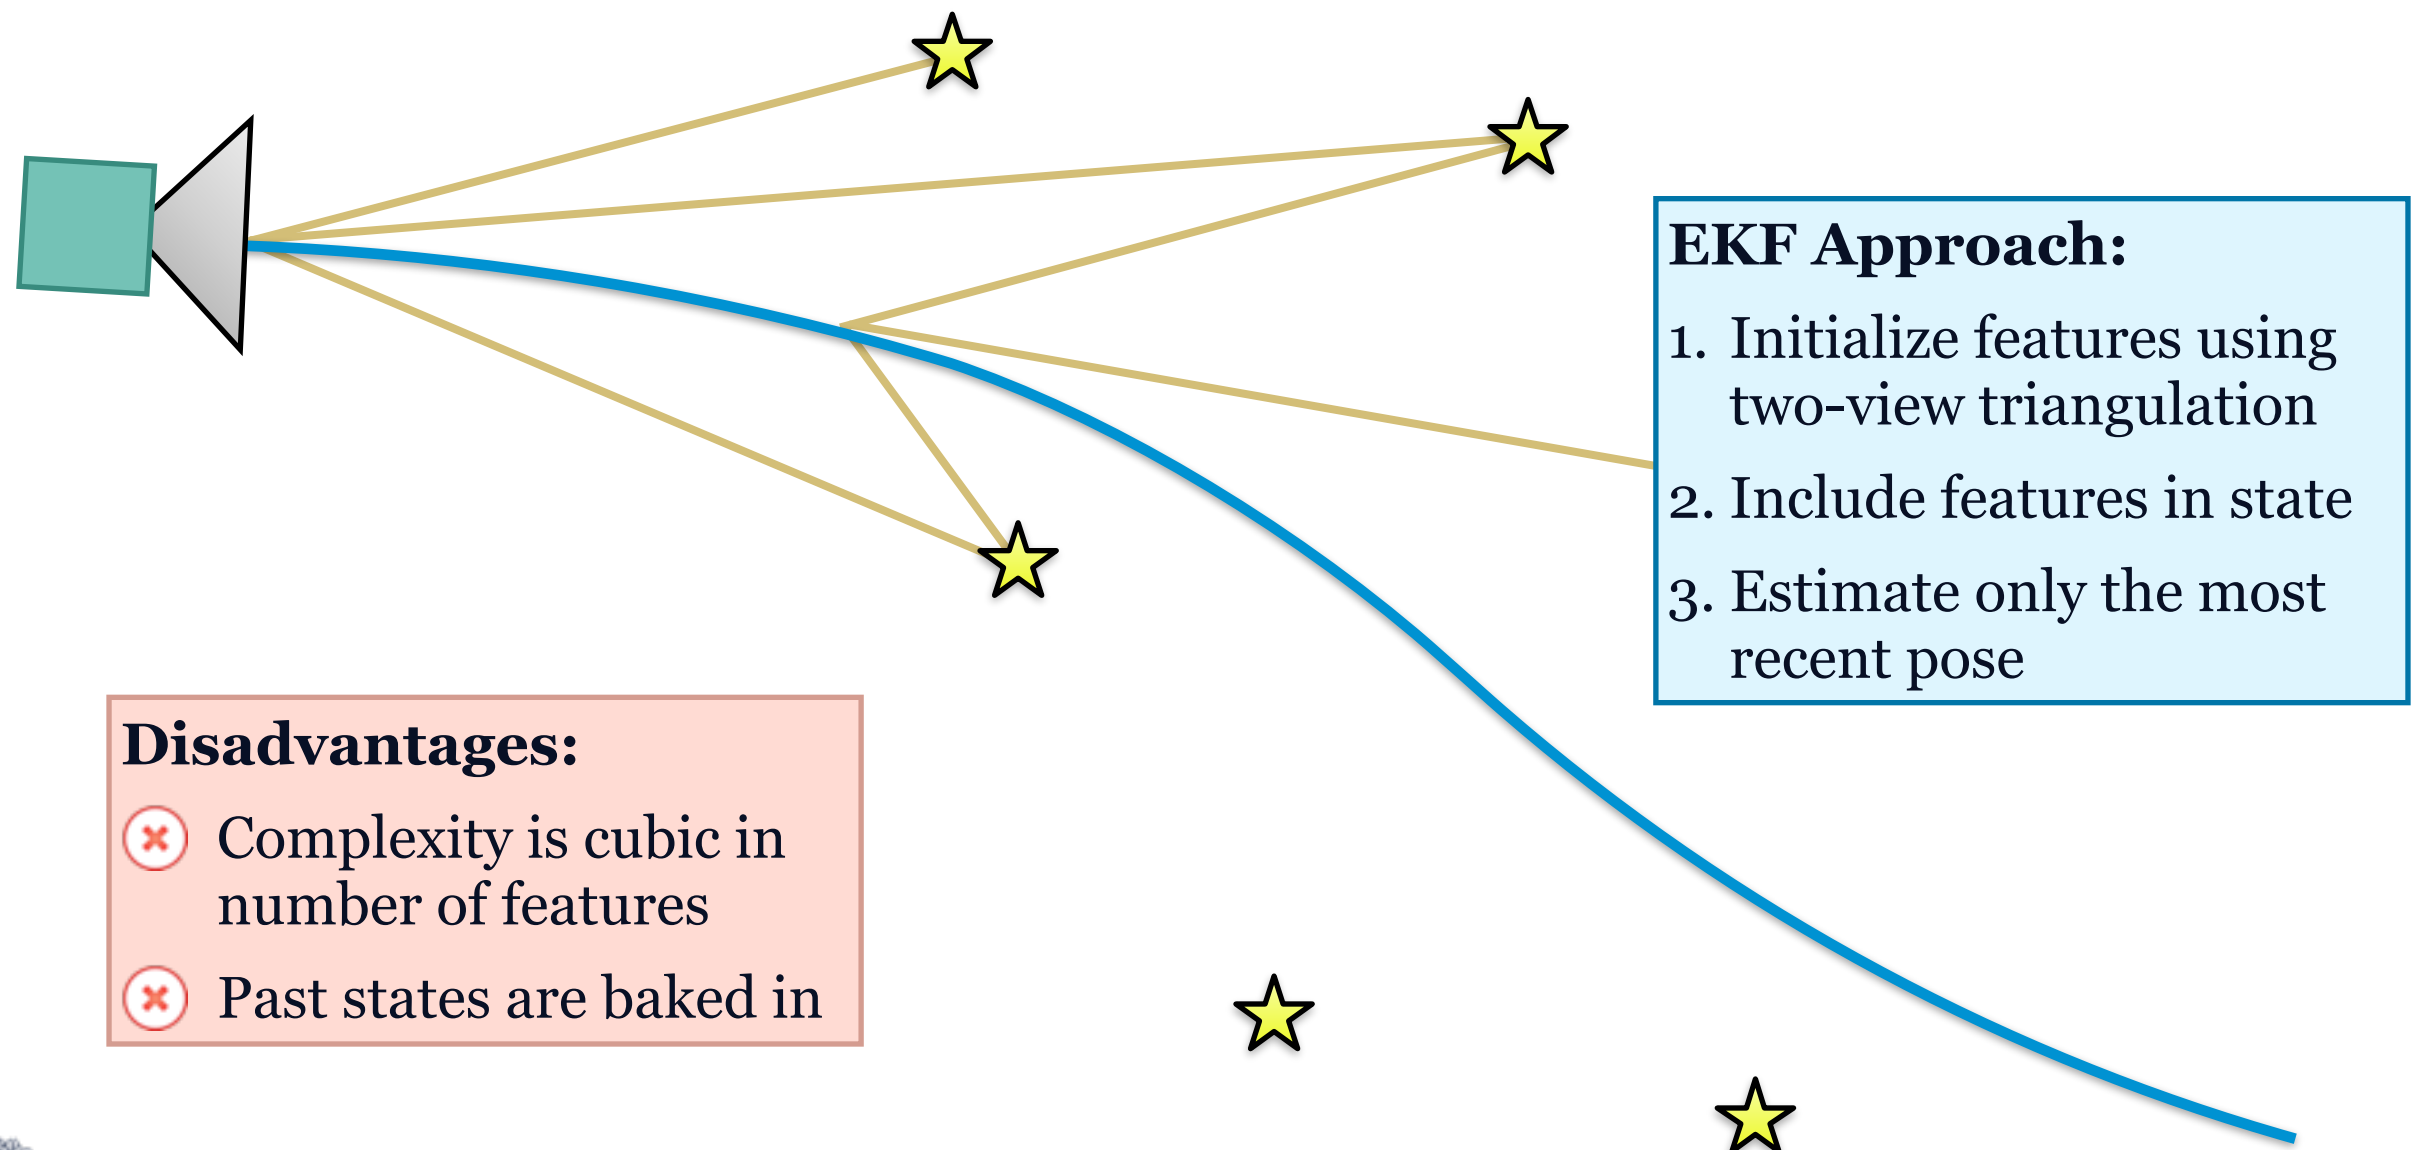

Algorithm: Multi-State Constraint Kalman Filter

MSCKF dead-reckons the vehicle state using interoceptive (IMU) measurements, just like the EKF, but treats exteroceptive (camera) measurements differently.

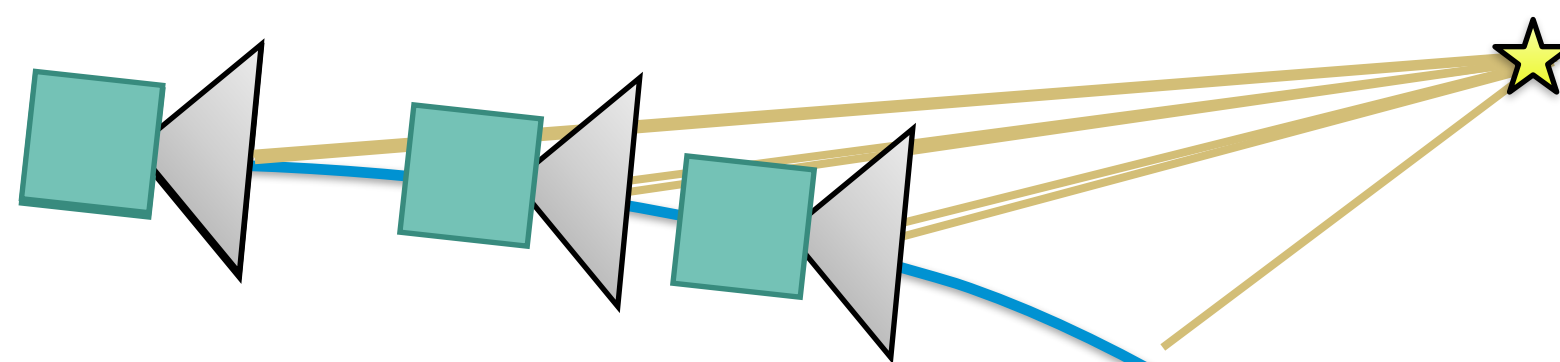

Advantages:

- ✓ Complexity is linear in number of features
- ✓ Each constraint affects multiple states, not just the most recent one

Hybrid Approach:

1. **Batch component** estimates feature position using Gauss-Newton
2. **Filter component** uses combined observations as one exteroceptive update using null-space trick
3. Repeat for all feature tracks over a **window of poses**

MSCKF: Null Space Trick

What we want: $\mathbf{e}_{\text{ext}} = \mathbf{G}_{\mathbf{x}} \delta \mathbf{x} + \text{noise}$

What we've got: $\mathbf{e}_{\text{ext}} = \mathbf{G}_{\mathbf{x}} \delta \mathbf{x} + \mathbf{G}_{\mathbf{p}_f} \delta \mathbf{p}_f + \text{noise}$


$$\mathbf{N} := \text{Null}(\mathbf{G}_{\mathbf{p}_f})$$

$$\mathbf{N}^T \mathbf{e}_{\text{ext}} = \mathbf{N}^T (\mathbf{G}_{\mathbf{x}} \delta \mathbf{x} + \mathbf{G}_{\mathbf{p}_f} \delta \mathbf{p}_f + \text{noise})$$

$\mathbf{0} \quad \because \quad (\mathbf{N}^T \mathbf{G}_{\mathbf{p}_f} = \mathbf{0})$

$$\mathbf{e}'_{\text{ext}} := \mathbf{G}'_{\mathbf{x}} \delta \mathbf{x} + \text{noise}'$$

Dataset: Starry Night (Assignment 3)



- ☑ Perfect data association
- ☑ Ground truth for landmark positions
- ☑ Pre-integrated IMU measurements



Planned Analysis: Comparison

We will **investigate** MSCKF parameters:

1. Feature track length
2. Maximum window size

We will **compare**:

MSCKF

vs. Sliding Window Batch

vs. EKF (time permitting)

without a map



Mortal Street Comparison **Kombat** Fight

Proof of Progress

```
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
```

```
=====STATE PROPAGATION=====
%Propagate state and covariance
msckfState = propagateMsckfCovar(msckfState, measurements{state_k}, noiseParams);

%Add camera pose to msckfState
msckfState = augmentState(msckfState, camera);

=====FEATURE TRACKING=====
% Add observations to the feature tracks, or initialize a new one
% If an observation is -1, add the track to featureTracksToResidualize
featureTracksToResidualize = {};
for featureId = 1:20
    meas_k = measurements{state_k}.y(:, featureId);
    if ismember(featureId, trackedFeatureIds)
        if meas_k(1,1) == -1
            %Add to residualize queue and remove from the original
            %struct
            featureTracksToResidualize{end+1} = featureTracks{trackedFeatureIds == featureId};
            featureTracks = featureTracks(trackedFeatureIds ~= featureId);
            trackedFeatureIds(trackedFeatureIds == featureId) = [];
        else
            %Append observation and increase k2
            featureTracks{trackedFeatureIds == featureId}.observations(:, end+1) = meas_k;
            featureTracks{trackedFeatureIds == featureId}.k2 = featureTracks{trackedFeatureIds == featureId}.k2 + 1;
        end
    else
        %Track new feature
        track.featureId = featureId;
        track.observations = meas_k;
        track.k1 = state_k;
        track.k2 = state_k;
        featureTracks{end+1} = track;
        trackedFeatureIds{end+1} = featureId;
    end
end

=====FEATURE RESIDUAL CORRECTIONS=====
featuresToResidualize = []; %1xN matrix of feature ids (this is just the column of y_k_j)
```



Questions?



Extra Slides



Algorithm: Multi-State Constraint Kalman Filter

Idea: Use a hybrid batch/recursive filter to incorporate all observations of a feature *without storing it in the state vector*.

Batch component: Track each feature until it goes out of view, then compute its position from *all available measurements* using Gauss-Newton optimization.

Recursive component: Use landmark position and all of its measurements (with null space trick) *to constrain motion*.

Advantages over plain EKF:

- **Sliding window of poses** allows each constraint to affect multiples states
- **Computational complexity is linear** in number of landmarks instead of cubic for plain EKF SLAM.