

# Open Source Formal Verification with PSL

## Coverage

Yann Thoma

Reconfigurable and Embedded Digital Systems Institute  
Haute Ecole d'Ingénierie et de Gestion du Canton de Vaud



This work is licensed under a Creative Commons Attribution-NonCommercial-ShareAlike 3.0 Unported License

July 2025

- 1 Introduction
- 2 Code coverage

# Coverage


- Coverage is the concept of knowing if we observed a certain number of sequences, states, or values
- Can be applied in:
  - Simulation
  - Formal verification

# cover directive

- It can be interesting to know if a certain sequence has been observed
- The operator `cover` is just what we need
- Example:
  - `cover {a;b;a} report "Seen";` displays a message when the sequence `a` followed by `b` and then again `a` is observed

# State machine - transitions

- If we have access to the internal architecture
- Ensure coverage of expected transitions

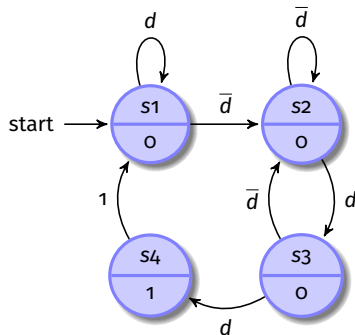

## Cover allowed transitions

```

cover {state = s1; state = s1};
cover {state = s1; state = s2};
cover {state = s2; state = s2};
cover {state = s2; state = s3};
cover {state = s3; state = s2};
cover {state = s3; state = s4};
cover {state = s4; state = s1};
  
```

# assert and coverage

- With SBY, running with the `cover` mode transforms the assertions into coverage points
  - It will cover the left-hand side of implications

## Example

```
assert always ({d;d;not d;not d} |-> detected) abort rst;  
assert always (a -> b) abort rst;
```

- Will check if the sequence `d;d;not d;not d` is observed, and if `a` went high
- Not particularly useful on unconstrained inputs
- But useful for outputs and constrained inputs
  - Maybe the assumptions were too strong

# Coverage - When?

- Coverage is there to know if we observed interesting behaviors or not
- To be used after the design has been proven correct
  - Maybe some assertions did not trigger because their left-hand side was never observed
- With SBY:
  - `sby -yosys "yosys -m ghdl" -f run.sby cover`
  - If it fails, display the covers or assertions that where not covered
    - Useful to label the `cover` directives

# A parenthesis for simulations



# Coverage in simulation

- Cover statements are also useful in simulation
- Can drive random-based coverage-driven verification
- Can detect that some sequences of events have been observed during simulation

# Code coverage (1)

- In simulation, most simulators allow code coverage analysis
  - Have all the lines of code been executed?
  - Have all the conditional branches been observed in both choices?

## Questasim

```
vcom +cover myfile.vhd  
vsim -coverage work.myfile_tb
```

- Can be visualized in Questasim
- Allows to compute a global coverage over various scenarios and the Verification Run manager

# Code coverage (2)

H   /home/ythoma/docs/1_Cours/vse/gti/cours/code/09-sv_coverage/code_coverage_shiftregister/src/shiftregister.vhd (/shiftregister_tb.duv) - by file - Default			
Hits	BC	Ln#	
		28	ser_in_msb_i : in std_logic;
		29	ser_in_lsb_i : in std_logic;
		30	value_o : out std_logic_vector(DATASIZE-1 downto 0)
		31	);
		32	end shiftregister;
		33	
		34	architecture behave of shiftregister is
		35	
		36	signal reg_s : std_logic_vector(DATASIZE-1 downto 0);
		37	
		38	begin
		39	
		40	process(clk_i, rst_i) is
		41	begin
✓		42	if (rst_i = '1') then
✓		43	reg_s <= (others => '0');
✓		44	elsif rising_edge(clk_i) then
✓	X	45	case mode_i is
		46	when "11" => reg_s <= load_value_i;
	X	47	when "01" => reg_s <= reg_s(DATASIZE-2 downto 0) & ser_in_lsb_i;
	X	48	when "10" => reg_s <= ser_in_msb_i & reg_s(DATASIZE-1 downto 1);
✓		49	when others => null;
		50	end case;
		51	end if;
		52	end process;
		53	
✓		54	value_o <= reg_s;
		55	
		56	
		57	end behave;
		58	

Example:



# Code coverage (3)

- Goal:
  - 100% of code coverage on the design files
- Do not add the tesbenches

```
if (observed /= expected) then  
  report "Huge mistake";  
end if;
```

← We expect this line not to be reached

- Except if you have testbenches with built-in self-tests
  - Need a way to inject errors in the observed values

# Conclusion

- Coverage is key for ensuring verification is complete
  - Well, as complete as possible
- In simulation
  - Activate code coverage
  - Use functional coverage when possible (OSVVM or SV coverage)
- In formal
  - Check coverage to ensure the assertions can be observed
    - It does not imply you did check enough
    - There is no real way of being sure we had enough assertions