Lecture 6: Linear classification

Machine Learning 2026

Federico Chiariotti (federico.chiariotti@unipd.it)




Università degli Studi di Padova

Recap




Università
degli Studi
di Padova

Supervised learning model

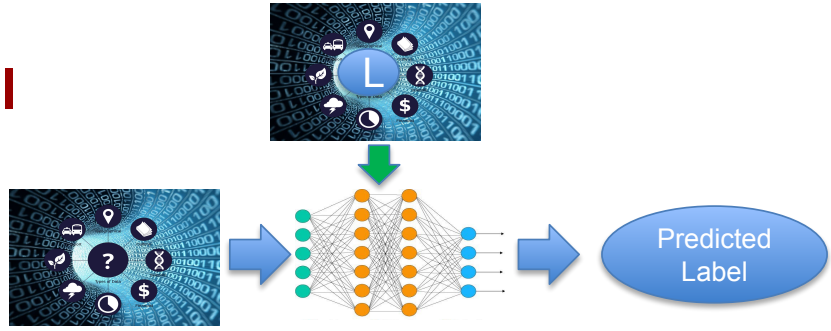

- Prediction rule $h : X \rightarrow Y$
  - The learner's output (hypothesis)
  - $A(S)$: hypothesis produced by algorithm A when it is fed training set S
- Data generation model
  - D is a distribution over X **(unknown to the machine learning algorithm)**
  - Instances are labeled according to $f : X \rightarrow Y$ **(unknown to the ML algorithm)**
  - Training set: sampling according to $D, y_i = f(x_i)\ \forall x_i \in S$
- Success metric
  - Classifier error: probability of predicting the wrong label over D


The bias-complexity trade-off

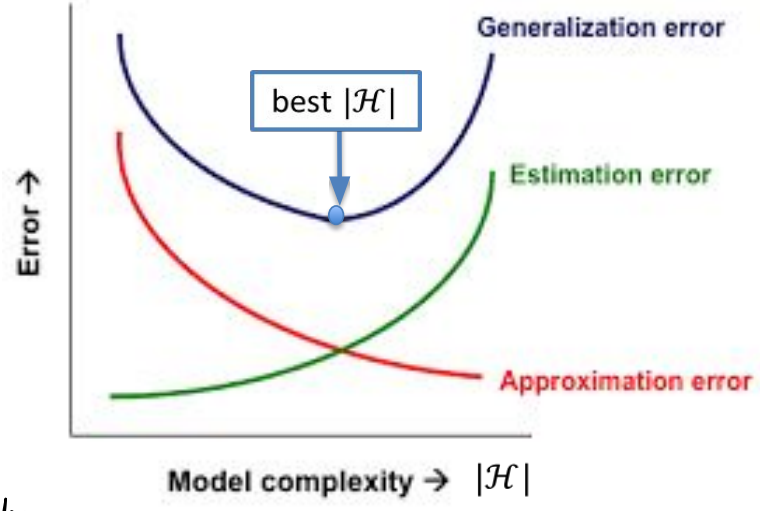

too much here:
H not "rich enough"

too much here:
overfitting, C_D ↗

Test and validation sets

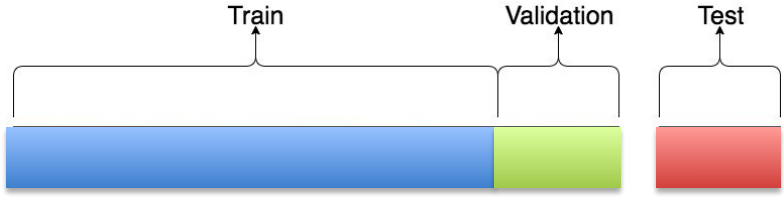


Important: the validation set needs data never seen before
ow, you optimize for it

We divide our data in 3 parts:

- ➔ The training set is used to choose the best hypothesis with ERM
- ➔ The validation set is used to choose the best hyperparameters or subclass
- ➔ The test set is used to estimate the true loss


K-fold Cross Validation

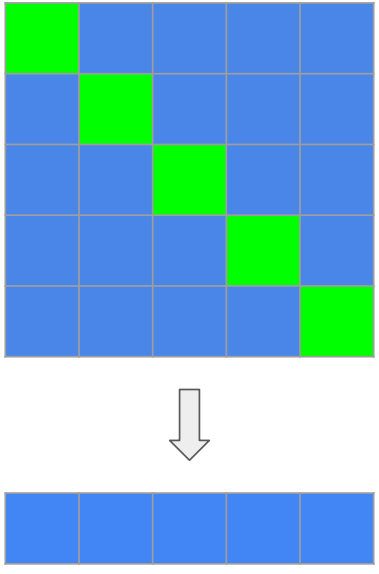

Actually, we can reuse the validation set:

1. Split the training set in K *folds*
2. Perform validation using K-1 as the training set and the other one as the validation set
3. The **score** of each subclass is the average validation set
4. Choose the subclass with the highest score
5. Retrain on the whole training set

Test set contamination

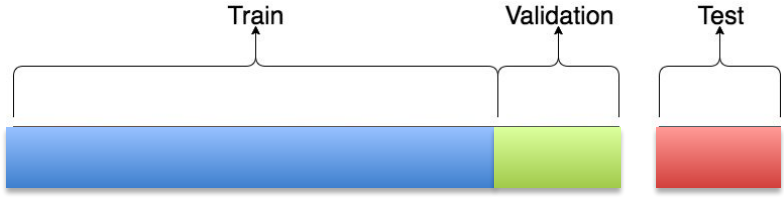

The test set should be drawn from D, but it should be independent from the training (i.e., should not be used in any way, or contain the same samples)

If we use the test set to make decisions, we are overfitting on it: the only way to use it to estimate $L_D(h)$ without cheating is to **only use it at the end**. If the test set is contaminated (i.e., we use it during the learning process in any way), we need a new test set!

Part 1:
Linear models



Università
degli Studi
di Padova

Affine functions

Class of affine functions:

vector of weights


$$L_d = \left\{ h_{\mathbf{w},b}, \mathbf{w} \in \mathbb{R}^d, b \in \mathbb{R} \right\}$$

Each function h is:

now $\in \mathbb{R}^d$ — $\sum_{i=1}^{d} w_i x_i$ è un fascio

$$h_{\mathbf{w},b}(\mathbf{x}) = \langle \mathbf{w}, \mathbf{x} \rangle + b = b + \sum_{i=1}^{d} w_i x_i$$

d=1 ⇒ mx+q — bias, needed to move the fascio



Affine functions are linear functions with a sum. There are d+1 parameters (d weights, plus the bias)


Which problem can we solve with ↗

Linear hypotheses


Binary classification:

Sign of the affine function

$$h_{\mathbf{w},b}(\mathbf{x}) = \underbrace{\text{sign}}_{\text{tomake it binary}}\underbrace{(\langle \mathbf{w}, \mathbf{x} \rangle + b)}_{\Rightarrow \text{usiamo come limite}}$$

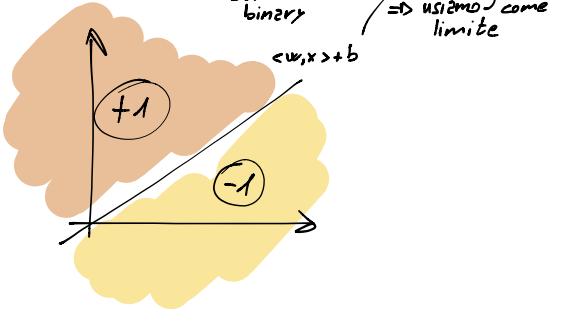

Regression:



Direct affine function

$$h_{\mathbf{w},b}(\mathbf{x}) = \langle \mathbf{w}, \mathbf{x} \rangle + b$$

A 2D example

Separating (hyper)plane: (if D>2)

$$w_1 x_1 + w_2 x_2 + b = 0$$

Plane definition:

$$x_2 = m x_1 + h$$


Intercept:

$$h = -\frac{b}{w_2}$$

Slope:

$$m = -\frac{w_1}{w_2}$$


The weight vector is orthogonal to the hyperplane

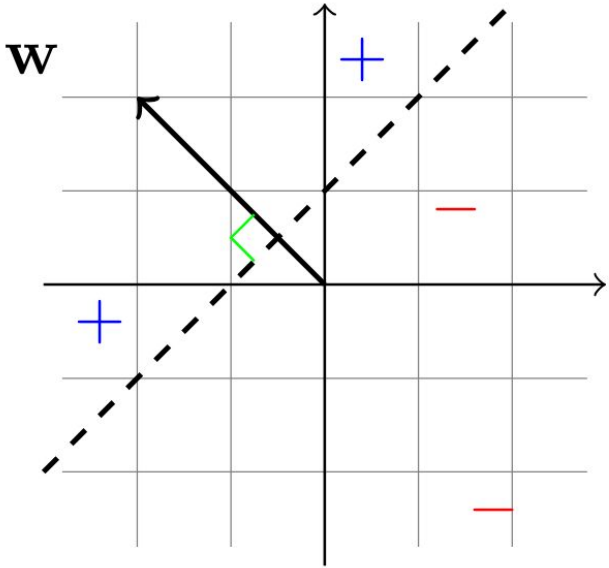

$$\begin{cases} w_1 x_1 + w_2 x_2 + b = 0 \\ x_2 = m x_1 + h \end{cases} \Rightarrow x_2 = \frac{-w_1 x_1 - b}{w_2} \Rightarrow \begin{matrix} h = -b/w_2 \\ m = -\frac{w_1}{w_2} \end{matrix}$$

x'

Homogeneous coordinates

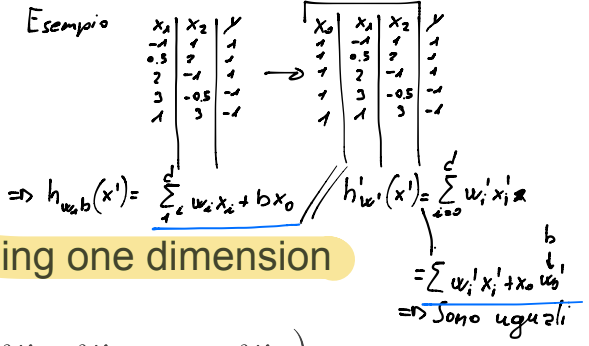

We can incorporate the bias into the weights by adding one dimension

$$\mathbf{x}' = (1, x_1, x_2, \ldots, x_d) \quad \mathbf{w}' = (b, w_1, w_2, \ldots, w_d)$$

In this way, the affine function becomes a linear function

$$h_{\mathbf{w},b}(\mathbf{x}) = b + \sum_{i=1}^{d} w_i x_i \qquad h_{\mathbf{w}'}(\mathbf{x}') = 1 \times b + \sum_{i=1}^{d} w_i x_i$$

The result is exactly the same, but the notation is much more compact


Classification: halfspaces


Domain: $X \subset \mathbb{R}^d$

Labels: $Y = \{-1, 1\}$

Loss: 0-1

Hypothesis class: $H = \text{sign} \circ L_d$ (class of affine func) $\qquad h_{\mathbf{w}'}(\mathbf{x}') = \text{sign}(\langle \mathbf{w}', \mathbf{x}' \rangle)$

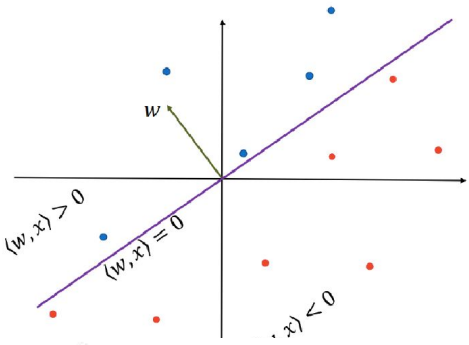

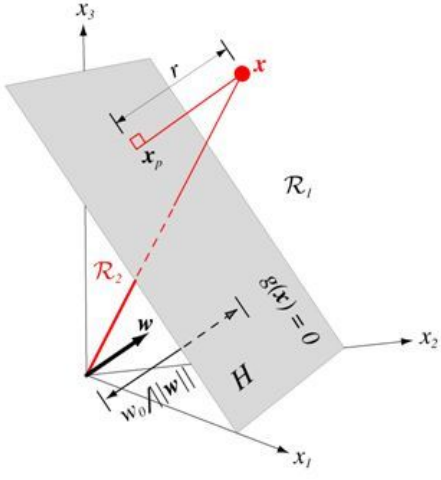

2D: a line divides the two regions (d=2, d'=3)

3D: a plane divides the two regions (d=3, d'=4)

You can go up with d as much as you want!


The VC dimension of halfspaces

There are uncountably infinite possible halfspaces even in 2 dimensions (all possible straight lines on a plane)

The VC dimension of the halfspace hypothesis class in d dimensions is d+1, considering non-homogeneous coordinates (d for homogeneous)

Idea

VC dimension in R^2

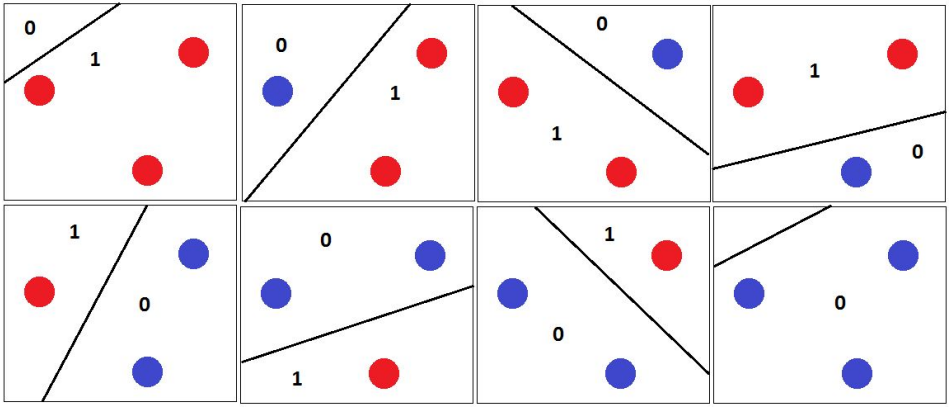


We can shatter any set of size 3 in 2 dimensions (we have all possible examples in the figure) => all possible restrictions

We can't shatter 4 points



We are working with linear func

No way with a line to divide the circle from the x



Impossible to...

↑ Geometrical proof ↑

↓ Mathematical proof ↓

TP: d-dim TS: VC is dim ≥ 2

set base: $(e_1,\dots,e_d)$ with $e_i(i)=\begin{cases}1 & \text{if } i=j\\ 0 & \text{ow.}\end{cases}$ | usual base

set: $w_i = y_i \Rightarrow$ shatter... boh

In $\mathbb{R}^d$ $\exists \vec{z}\neq 0$ (vector) : $\sum_{i=1}^{dim} z_i x_i = 0$ (perché la base ne ha d) $\rightarrow$ set $I: \{i : z_i \geq 0\}$, $J: \{j : z_j < 0\}$ $\Rightarrow$ $\sum_{i\in I} z_i x_i + \sum_{j\in J} z_j x_j = 0$

$\sum_{i\in I} z_i x_i + \sum_{j\in J} |z_j| x_j = 0$

Per assurdo: $\Rightarrow$ ....

$\langle w_j, x_j\rangle < 0 \quad \forall j\in J$

$\langle w_i, x_i\rangle > 0 \quad \forall i\in I$ $\Rightarrow \sum_{i\in I} \overbrace{z_i}^{\geq 0} \overbrace{\langle w_i, x_i\rangle}^{>0} \geq 0$

$\sum_{j\in J} \underbrace{|z_j|}_{>0} \underbrace{\langle w_j, x_j\rangle}_{<0} < 0$

Now, previous result: $w \cdot \sum_{i\in I} \langle z_i x_i\rangle = w \cdot \sum_{j\in J} \langle |z_j| x_j\rangle$ | gioca con $\langle\dots\rangle$

$\Rightarrow \sum_{i\in I} \langle w z_i x_i\rangle = \sum_{j\in J} \langle w_j |z_j| x_j\rangle$

$\sum_{i\in I} z_i \langle w_i \cdot x_i\rangle = \sum_{j\in J} |z_j| \langle w_j x_j\rangle$

$\Rightarrow$ pos = neg imp $\Rightarrow$ can't be scattered


VC dimension in R^2

1. Point D is inside triangle ABC: 0001 is impossible

2. ABCD is a convex polygon: 0101 (on the two diagonals) is impossible

3. D is on the AB line: 0001 is impossible

No set of size 4 can be shattered: **VC=3**

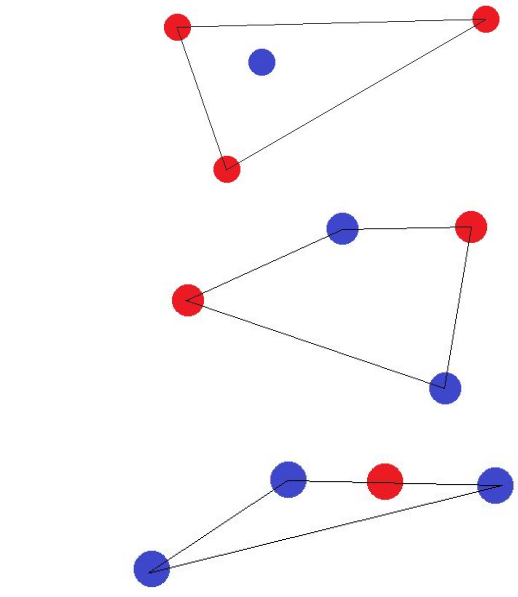

Proof: first step (homogeneous case)

We show that VC≥d in the homogeneous case:

Let us consider the base $\mathbf{e}_1, \ldots, \mathbf{e}_d$, with $\mathbf{e}_i = (0, 0, \ldots, 0, 1, 0, \ldots, 0)$, non-zero only in i

If we set $w_i = y_i$, the set is always shattered: all vectors are orthogonal, and only the product of the i-th dimension with the i-th label is non-zero

Proof: second step (homogeneous case)

We then need to show that VC<d+1 in the homogeneous case:

If we have a set of d+1 vectors in d dimensions, they must be linearly dependent:

$$\exists \mathbf{a} \neq 0 : \sum_{i=1}^{d+1} a_i \mathbf{x}_i = 0$$

We can then split the indices in two sets:

$$I = \{i : a_i \geq 0\} \qquad\qquad J = \{j : a_j < 0\}$$

Proof: third step (homogeneous case)

We split the indices in two sets:

$$I = \{i : a_i \geq 0\} \qquad\qquad J = \{j : a_j < 0\}$$

If neither is empty, we need to keep the sum equal to 0, so we get

$$\sum_{i \in I} a_i \mathbf{x}_i = \sum_{j \in J} |a_j| \mathbf{x}_j$$

We can proceed *ad absurdum*: if the set can be shattered, we can create $\mathbf{w}$ such that

$$\langle \mathbf{w}, \mathbf{x}_j \rangle < 0 \ \forall j \in J \qquad\qquad \langle \mathbf{w}, \mathbf{x}_i \rangle > 0 \ \forall i \in I$$

Proof: final step (homogeneous case)

$$\langle \mathbf{w}, \mathbf{x}_j \rangle < 0 \; \forall j \in J \qquad\qquad \langle \mathbf{w}, \mathbf{x}_i \rangle > 0 \; \forall i \in I$$

We then multiply by a:

$$\sum_{i \in I} a_i \langle \mathbf{w}, \mathbf{x}_i \rangle = \sum_{i \in I} \langle a_i \mathbf{x}_i, \mathbf{w} \rangle > 0$$

$$\sum_{j \in J} |a_j| \langle \mathbf{w}, \mathbf{x}_j \rangle = \sum_{j \in J} \langle |a_j| \mathbf{x}_j, \mathbf{w} \rangle < 0$$

There is a contradiction with $\sum_{i \in I} a_i \mathbf{x}_i = \sum_{j \in J} |a_j| \mathbf{x}_j$

The contradiction proves that the VC dimension is d (in the homogeneous case), as no set of size d+1 can be shattered

Part 2: Linear classification

how do we apply ERM on $|H| = +\infty$?



UNIVERSITÀ
DEGLI STUDI
DI PADOVA

We change our view of the problem

Linear programming as ERM


Linear programming (LP) is an optimization framework that can be solved efficiently. We can pose the ERM rule as a constraint, using a dummy objective

$$\begin{aligned} &\text{maximize } 1 \\ &\text{such that } \mathbf{A}\mathbf{w} \geq (1, \ldots, 1)^T \end{aligned}$$

Each row of matrix **A** is simply given by $y_i \mathbf{x}_i$

There are optimized solvers for LP (e.g., simplex), but we don't need to implement them here and now

At each iteration we focus on a mislabeled point...




We focus on □ and we move the line

The perceptron



1958 (Rosenblatt): first iterative algorithm to find the separating hyperplane

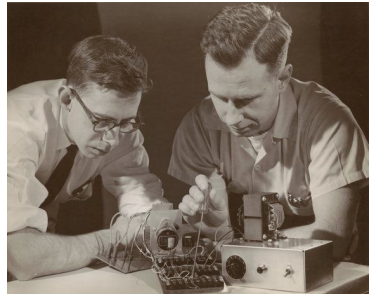

At each step, the perceptron focuses on **a single** misclassified sample and pushes the boundary towards it

Always converges to ERM if we have realizability

REMEMBER: the perceptron cannot train on all samples at once!

Funzionamento: start

The perceptron algorithm

Start: $\mathbf{w}^{(0)} = (0, \ldots, 0)$ ← it gets it wrong for su

Repeat until convergence:

1. Find a sample with $\text{sign}(\langle \mathbf{w}^{(i)}, \mathbf{x}_m \rangle) = -y_m$
2. Compute the new $\mathbf{w}^{(i+1)} = \mathbf{w}^{(i)} + \alpha \mathbf{x}_m y_m$

Controls the push you give to the line ↗ $\in [0,1]$ "learning rate"


Parameter α is the learning rate (if omitted, it is set to 1)

Termination depends on realizability: if the training set is not linearly separable, the perceptron will go on forever

Pseudocode

Input: training set $(\mathbf{x}_1, y_1), \ldots, (\mathbf{x}_m, y_m)$
initialize $\mathbf{w}^{(1)} = (0, \ldots, 0)$;
for $t = 1, 2, \ldots$ **do**
  if $\exists i$ *s.t.* $y_i \langle \mathbf{w}^{(t)}, \mathbf{x}_i \rangle \leq 0$ **then** $\mathbf{w}^{(t+1)} \leftarrow \mathbf{w}^{(t)} + y_i \mathbf{x}_i$;
  else return $\mathbf{w}^{(t)}$;

Interpretation of update:



Note that:

$$y_i \langle \mathbf{w}^{(t+1)}, \mathbf{x}_i \rangle = y_i \langle \mathbf{w}^{(t)} + y_i \mathbf{x}_i, \mathbf{x}_i \rangle$$
$$= y_i \langle \mathbf{w}^{(t)}, \mathbf{x}_i \rangle + ||\mathbf{x}_i||^2$$

$\Rightarrow$ update guides $\mathbf{w}$ to be "more correct" on $(\mathbf{x}_i, y_i)$.

Perceptron convergence

If the training set is linearly separable, the perceptron will converge after fewer than $(RB)^2$ iterations, converging to an ERM rule, with

$$R = \max(||\mathbf{x}_i||)$$

$$B = \min\{||\mathbf{w}|| : y_i \langle \mathbf{w}, \mathbf{x}_i \rangle \geq 1\} \forall i$$

set: $R = \max(\|x_i\|)$

$B = \min\{\|w\| : y_i \langle w_i, x_i \rangle \geq \forall i\}$

$T \leq (RB)^2$

T: # of iterations

Proof

$w^* = \text{argmin} \|w\|$ s.t. $Aw \geq 1$ $\Rightarrow \|w^*\| = B$

t: iteration

Guardiamo: $\langle w^*, w_t \rangle - \langle w^*, w_{t-1} \rangle$

$= \langle w^*, \underbrace{w_t - w_{t-1}}_{y_t x_t} \rangle$

$= \langle w^*, y_t x_t \rangle$ y_t, x_t are constant

$\geq y_t \langle w^*, x_t \rangle$ by definition: $\langle w^*, w_t \rangle - \langle w^*, w_{t-1} \rangle \geq 1$

$\langle w^*, \vec{w_0}^{=0} \rangle = 0$

$\Rightarrow \langle w^*, w_T \rangle \geq T$

Ora guardiamo: $\|w_T\|^2 = \|w_{t-1} + y_t x_t\|^2$

$= \|w_{t-1}\|^2 + \underbrace{\|\overset{\pm 1}{y_t} x_t\|^2}_{\leq R^2} + 2 y_t \underbrace{\langle w_{t-1}, x_{t-1} \rangle}_{<0 \text{ if } y_t = -1}$ (def R)

$\Rightarrow \|w_t\|^2 \leq \|w_{t-1}\|^2 + R^2 + 0$

$\|w_0\|^2 = 0 \Rightarrow \|w_T\|^2 \leq R^2 T$

Ora: $\underbrace{\langle w^*, w_T \rangle}_{\geq T} \leq \underbrace{\|w^*\| \|w_T\|}_{\leq B\sqrt{TR^2}}$

$\Rightarrow T \leq \sqrt{T} RB$

$T \leq (RB)^2$

Proof: first step

It is simple to prove that the perceptron will stop at an ERM rule, as it only stops when no samples are misclassified.

We define a vector that satisfies ERM with the minimum weight:

$$\mathbf{w}^* = \text{argmin}_{\mathbf{w}:\mathbf{A}\mathbf{w}\geq 1}||\mathbf{w}||$$

We need to bound the iteration T at which we reach convergence.

Proof: second step

$$\langle \mathbf{w}^*, \mathbf{w}_t \rangle - \langle \mathbf{w}^*, \mathbf{w}_{t-1} \rangle = \langle \mathbf{w}^*, \mathbf{w}_t - \mathbf{w}_{t-1} \rangle$$

During the t-th iteration, the weights are changed by a misclassified sample:

$$\mathbf{w}_t - \mathbf{w}_{t-1} = y_t \mathbf{x}_t$$

We then have

$$\langle \mathbf{w}^*, \mathbf{w}_t \rangle - \langle \mathbf{w}^*, \mathbf{w}_{t-1} \rangle = \langle \mathbf{w}^*, y_t \mathbf{x}_t \rangle$$

We can take y out of the inner product:

$$\langle \mathbf{w}^*, \mathbf{w}_t \rangle - \langle \mathbf{w}^*, \mathbf{w}_{t-1} \rangle = y_t \langle \mathbf{w}^*, \mathbf{x}_t \rangle$$

Proof: third step

$$\langle \mathbf{w}^*, \mathbf{w}_t \rangle - \langle \mathbf{w}^*, \mathbf{w}_{t-1} \rangle = y_t \langle \mathbf{w}^*, \mathbf{x}_t \rangle$$

By the definition of ERM, we have

$$y_i \langle \mathbf{w}^*, \mathbf{x}_i \rangle \geq 1 \; \forall i$$

At every step, the inner product between w* and w_t increases by at least 1:

$$\langle \mathbf{w}^*, \mathbf{w}_T \rangle \geq T$$

Proof: fourth step

We want to find a bound for $||\mathbf{w}_T||$. We have

$$||\mathbf{w}_t||^2 = ||\mathbf{w}_{t-1} + y_t \mathbf{x}_t||^2$$

We expand the square:

$$||\mathbf{w}_t||^2 = ||\mathbf{w}_{t-1}||^2 + 2y_t \langle \mathbf{w}_{t-1}, \mathbf{x}_t \rangle + ||\mathbf{x}||^2$$

By definition, R is at least as large as the norm of any input vector:

$$||\mathbf{w}_t||^2 \leq ||\mathbf{w}_{t-1}||^2 + 2y_t \langle \mathbf{w}_{t-1}, \mathbf{x}_t \rangle + R^2$$

Since we have a misclassified sample, the product term is negative:

$$||\mathbf{w}_t||^2 \leq ||\mathbf{w}_{t-1}||^2 + R^2$$

Proof: fifth step

After T iterations, we have $||\mathbf{w}_T||^2 \leq TR^2$ and $\langle \mathbf{w}^*, \mathbf{w}_T \rangle \geq T$

By definition, $||\mathbf{w}^*|| = B$ $(B = \min\{||\mathbf{w}|| : y_i \langle \mathbf{w}, \mathbf{x}_i \rangle \geq 1\} \forall i)$

We know that $||\mathbf{w}_T||\,||\mathbf{w}^*|| \leq \sqrt{T}RB$

Proof: final step

$$||\mathbf{w}_T||\,||\mathbf{w}^*|| \leq \sqrt{T}RB \qquad\qquad \langle \mathbf{w}^*, \mathbf{w}_T \rangle \geq T$$

We can apply the Cauchy-Schwarz inequality:

$$\langle \mathbf{w}_1, \mathbf{w}_2 \rangle \leq ||\mathbf{w}_1||\,||\mathbf{w}_2||$$

We get

$$T \leq \langle \mathbf{w}^*, \mathbf{w}_T \rangle \leq \sqrt{T}RB$$

Simplifying, we have

$$\sqrt{T} \leq RB$$

This is equivalent to the theorem statement (just square both sides)

Perceptron: graphical example

refers to an equation
"positive class" the +
negative class the −

We set:

We can see the line doesn't divide them


Initial Values:

$\eta = 0.2$ includes the bias b

$$w^{(1)} = \begin{pmatrix} 0 \\ 1 \\ 0.5 \end{pmatrix}$$

$\langle w, x \rangle = 0$ perchè...

$\Rightarrow 0 + x_1 + 0{,}5 x_2 = 0 \Rightarrow x_2 = -2x_1$

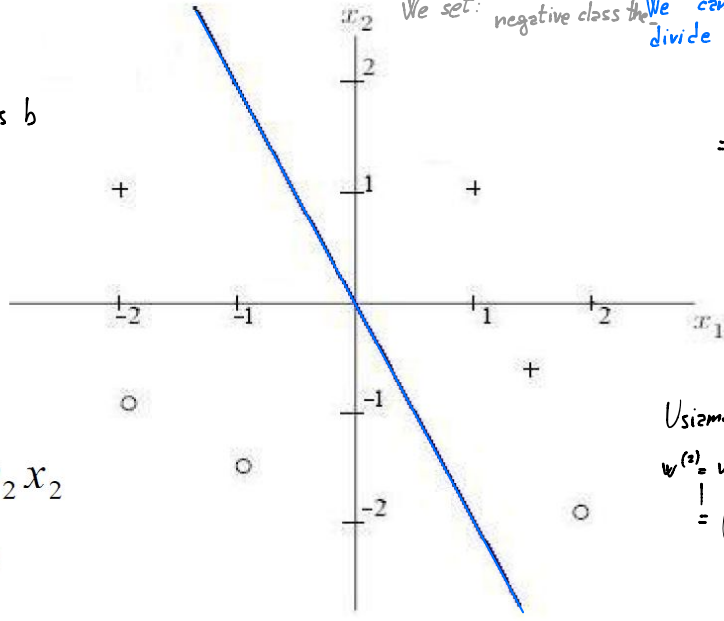

$$0 = w_0 + w_1 x_1 + w_2 x_2$$
$$= 0 + x_1 + 0.5 x_2$$
$$\Rightarrow \quad x_2 = -2x_1$$

We look (1,1) +1 (✓ classified)

$\Rightarrow \langle w, x' \rangle = \langle (0,1,0{,}5), (1,1,1) \rangle$

$\overset{!}{=} 1 + 0{,}5 > 0$ ed è + $\Rightarrow$ ✓

We look at (2,−2)

$\langle w, x' \rangle = \langle (0,1\ 0.5)(1,2,2) \rangle$

$\overset{!}{=} 2 - 1 > 0$ ma è − $\Rightarrow$ misclass.

$\Rightarrow$ lo scegliamo

Usiamo η: per cambiare w

$$w^{(2)} = w^{(1)} + \eta\, y_2 x_2$$

$$\overset{!}{=} \begin{pmatrix} 0 \\ 1 \\ 0.5 \end{pmatrix} - 0.2 \begin{pmatrix} 1 \\ 2 \\ -2 \end{pmatrix} = \begin{pmatrix} -0.2 \\ 0.6 \\ 0.2 \end{pmatrix}$$


Perceptron: graphical example

$\eta = 0.2$

$$w = \begin{pmatrix} 0 \\ 1 \\ 0.5 \end{pmatrix}$$

$x_1 = 1, x_2 = 1$
$w^T x > 0$


Correct classification,
no action

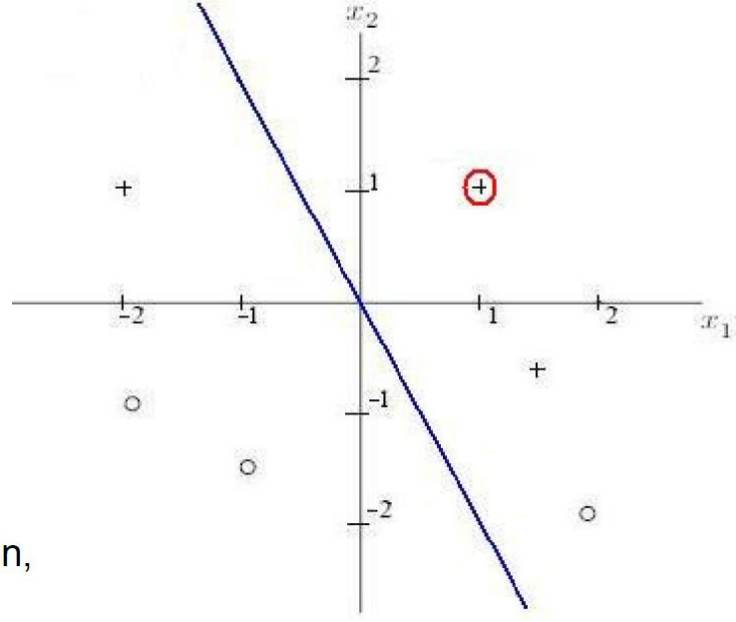

Perceptron: graphical example

$\eta = 0.2$

$$w = \begin{pmatrix} 0 \\ 1 \\ 0.5 \end{pmatrix}$$

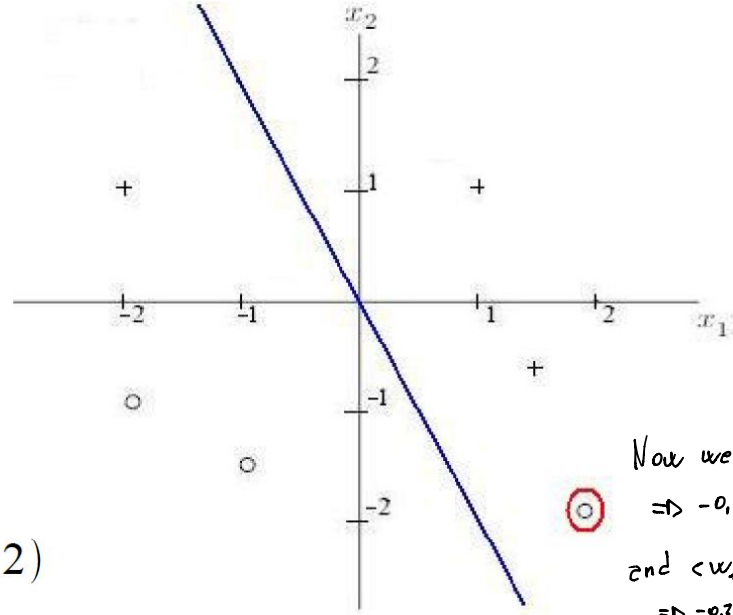

$x_1 = 2,\ x_2 = -2$

$$w_0 = w_0 - 0.2 * 1$$
$$w_1 = w_1 - 0.2 * 2$$
$$w_2 = w_2 - 0.2 * (-2)$$

$$new\ \boldsymbol{w} = \begin{bmatrix} -0.2 \\ 0.6 \\ 0.9 \end{bmatrix}$$

Now we have $\langle w, (1, x, 0) \rangle = 0$

$\Rightarrow -0,2 + 0,6 x_1 = 0 \Rightarrow x_1 = 1/3$

and $\langle w, (1, 2, x_2) \rangle = 0$


$\Rightarrow -0,2 + 1,2 + 0,9 x_2 = 0 \Rightarrow 0,2 x_2 = 1$

$\Rightarrow$ nuove rette!

Perceptron: graphical example

$\eta = 0.2$

$$w = \begin{pmatrix} -0.2 \\ 0.6 \\ 0.9 \end{pmatrix}$$

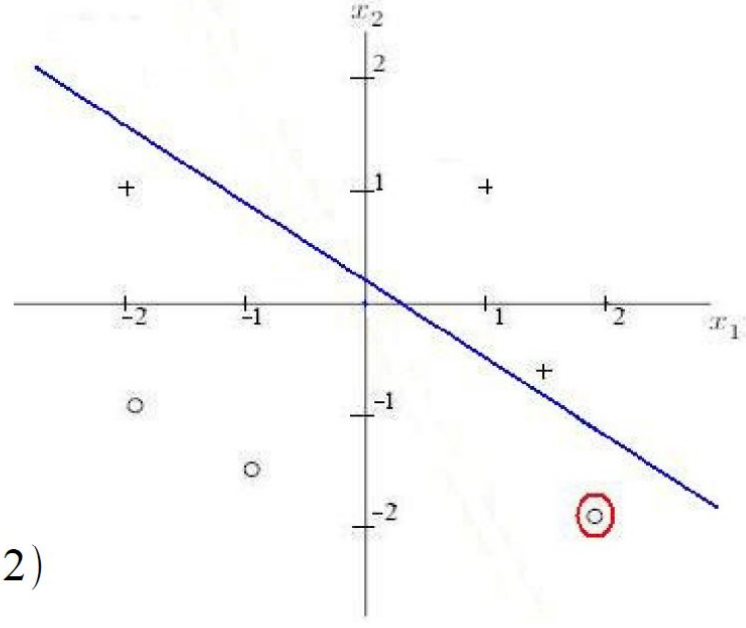

$x_1 = 2,\ x_2 = -2$

$$w_0 = w_0 - 0.2 * 1$$
$$w_1 = w_1 - 0.2 * 2$$
$$w_2 = w_2 - 0.2 * (-2)$$

Perceptron: graphical example


$\eta = 0.2$

$$w = \begin{pmatrix} -0.2 \\ 0.6 \\ 0.9 \end{pmatrix}$$

$x_1 = -1,\ x_2 = -1.5$

$w^T x < 0$

Correct classificatior
no action

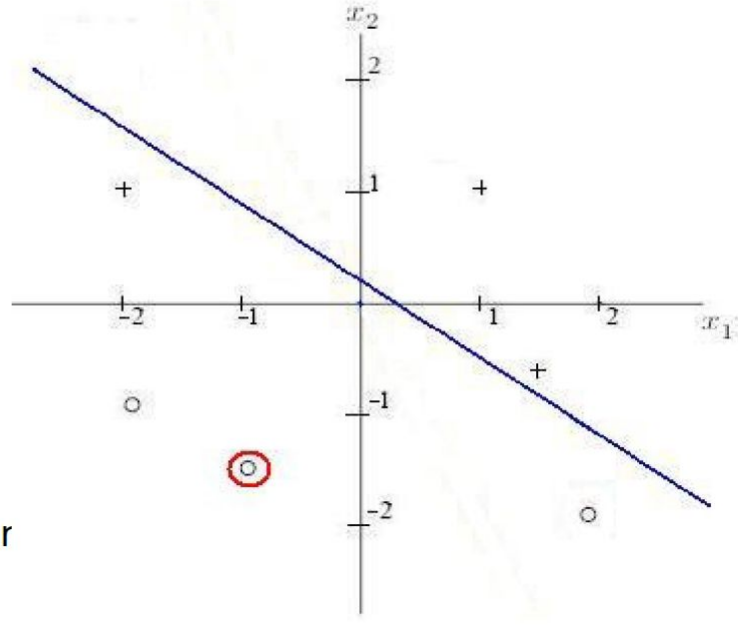

Perceptron: graphical example

Here now:


$w^{(2)} = w^{(1)} + \eta \begin{pmatrix} 1 \\ -2 \\ 1 \end{pmatrix}$ ← b

$= \begin{pmatrix} -0.2 \\ 0.0 \\ 0.9 \end{pmatrix} + \begin{pmatrix} 0.2 \\ -0.4 \\ 0.2 \end{pmatrix} = \begin{pmatrix} 0 \\ 0.2 \\ 1.1 \end{pmatrix}$

$\Rightarrow 0.2 x_1 + 1.1 x_2 = 0 \Rightarrow x_2 = \frac{0.2}{1.1} x_1$

$\eta = 0.2$

$$w = \begin{pmatrix} -0.2 \\ 0.6 \\ 0.9 \end{pmatrix}$$

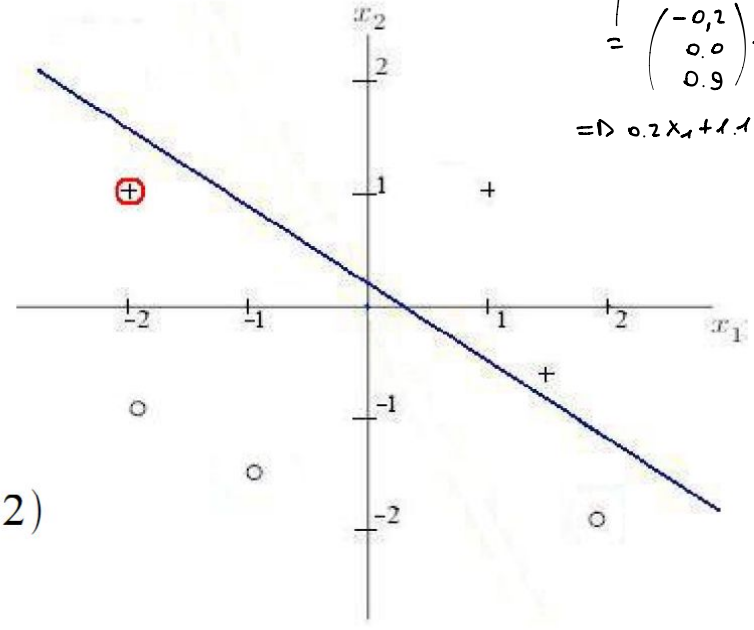

$x_1 = -2, x_2 = 1$

$w_0 = w_0 + 0.2 * 1$

$w_1 = w_1 + 0.2 * (-2)$

$w_2 = w_2 + 0.2 * 1$

$$new\ \boldsymbol{w} = \begin{bmatrix} 0 \\ 0.2 \\ 1.1 \end{bmatrix}$$

But we moved too far: $\langle (0, 0.2, 1.1), (1, 1.5, -0.5) \rangle = 0.3 - 0.55 < 0$ ma era un + => another round


Perceptron: graphical example

$$\Rightarrow w^{(3)} = \begin{pmatrix} 0 \\ 0.2 \\ 1.1 \end{pmatrix} + 0.2 \begin{pmatrix} 1 \\ 1.5 \\ -0.5 \end{pmatrix} = \begin{pmatrix} 0.2 \\ 0.5 \\ 1 \end{pmatrix}$$

nuova retta: $0.2 + 0.5x_1 = 0$

$\eta = 0.2$

$$w = \begin{pmatrix} 0 \\ 0.2 \\ 1.1 \end{pmatrix}$$

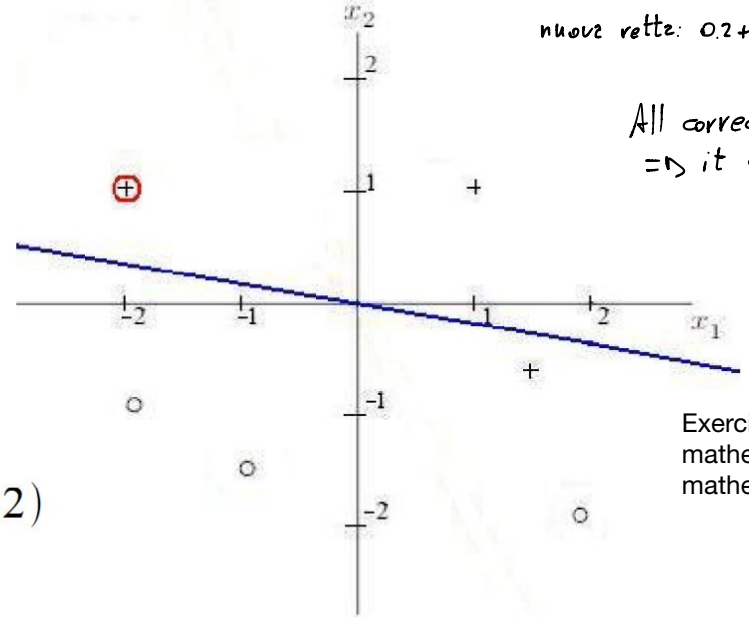

All correctly classified
=> it stops

$x_1 = -2,\ x_2 = 1$


$$w_0 = w_0 + 0.2 * 1$$
$$w_1 = w_1 + 0.2 * (-2)$$
$$w_2 = w_2 + 0.2 * 1$$

Exercise exam: from the plot give the mathematics or vice versa, from the mathematics to the plot

Perceptron: graphical example

$\eta = 0.2$

$$w = \begin{pmatrix} 0 \\ 0.2 \\ 1.1 \end{pmatrix}$$

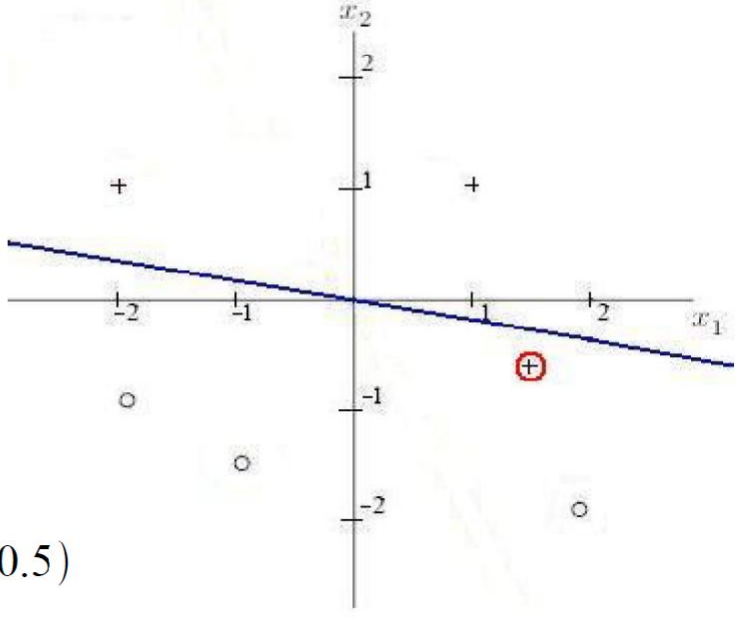

$x_1 = 1.5,\ x_2 = -0.5$


$$w_0 = w_0 + 0.2 * 1$$
$$w_1 = w_1 + 0.2 * 1.5$$
$$w_2 = w_2 + 0.2 * (-0.5)$$

$$new\ \boldsymbol{w} = \begin{bmatrix} 0.2 \\ 0.5 \\ 1 \end{bmatrix}$$

Perceptron: graphical example

$\eta = 0.2$

$$w = \begin{pmatrix} 0.2 \\ 0.5 \\ 1 \end{pmatrix}$$

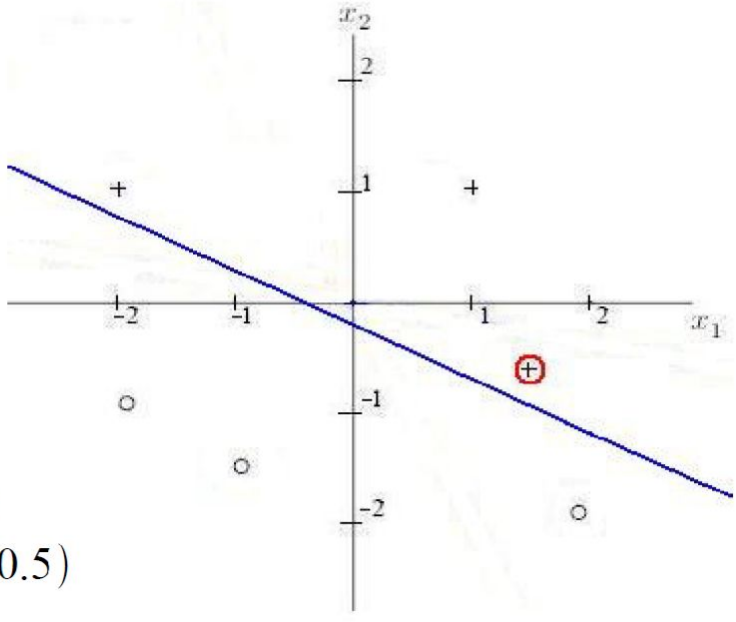

$x_1 = 1.5,\ x_2 = -0.5$

$$w_0 = w_0 + 0.2 * 1$$
$$w_1 = w_1 + 0.2 * 1.5$$
$$w_2 = w_2 + 0.2 * (-0.5)$$

Stopping condition (ERM)

Perceptron: implementation notes

- ➔ Normalizing the input can reduce convergence time (the perceptron may swing a lot if one dimension has a much wider dynamic range)
- ➔ Randomizing the selection of the **single** sample to use at each iteration can reduce the risk of unlucky orderings (i.e., a lot of misleading samples in the first positions)
- ➔ **Pocket algorithm**: compute the error for each iteration, keep the best one so that we have an approximate solution if the set is not linearly separable
- ➔ The perceptron will reach the ERM solution, but depending on the training, it may reach *any* ERM solution

