



Prompt editor

Author reusable prompt content while leaving persistence to the host.

Problem and boundary

Public contract

Working integration

@epam/ai-dial-prompt-editor



When this library is useful

Author reusable prompt content while leaving persistence to the host.

01

Create a prompt

Edit name, description
and Markdown content.

02

Revise a prompt

Seed the form with
stable initialValues.

03


Add folder controls

Compose
PromptFolderField
separately when
needed.



Follow the ownership boundary

Inputs and effects stay explicit.

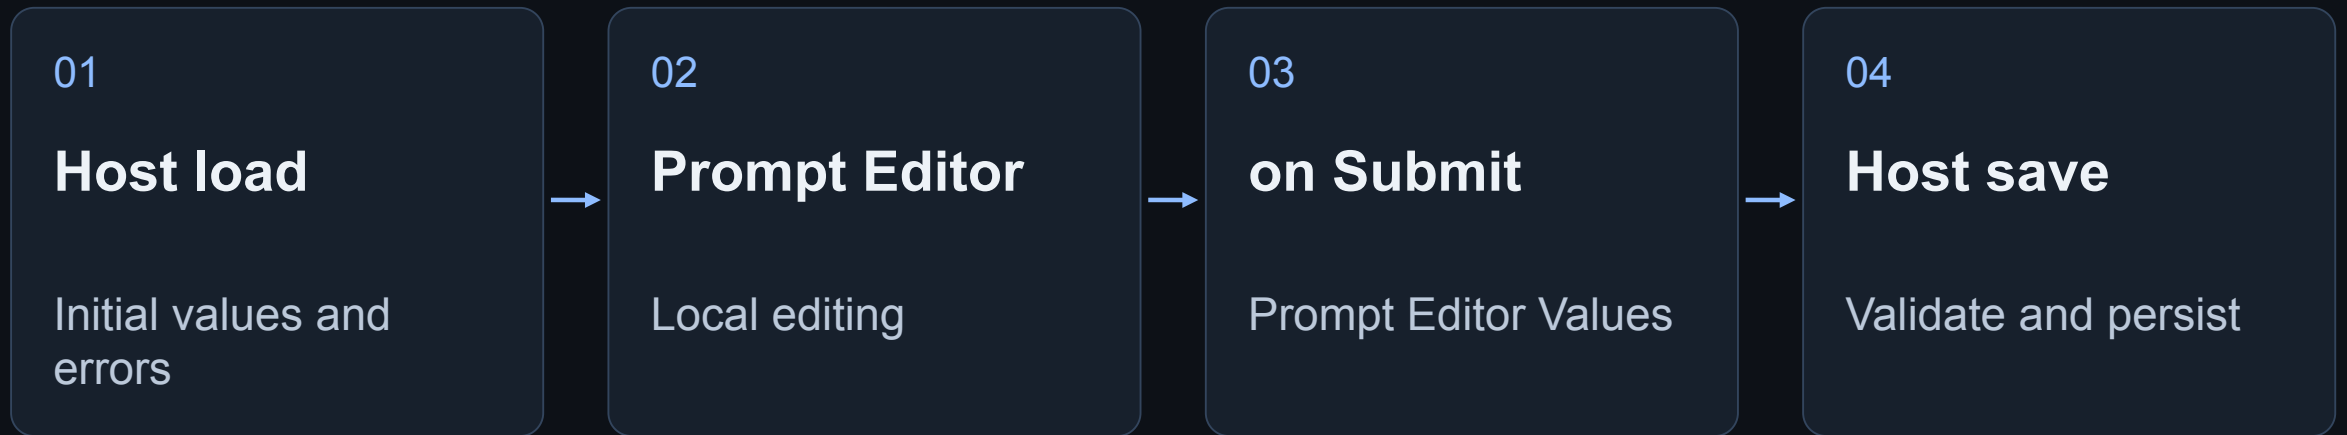

Library: Prompt form fields, editing state and optional folder-field UI.



The public contract to start with

PromptEditor · selected surface; full API index is in the bundle.

Input or operation	Contract
onSubmit	(values: PromptEditorValues) => void
onCancel	() => void
initialValues (optional)	Partial<PromptEditorValues>
errors (optional)	PromptEditorErrors



A minimal workspace integration

TypeScript / React example · imports and host setup abridged.

```
<PromptEditor
  initialValues={{
    name: 'Demo summary',
    content: 'Summarize {{topic}}',
  }}
  onSubmit={save}
  onCancel={onCancel}
/>
```

Full example: [examples/prompt-editor.tsx](#) · uses [@epam/ai-dial-prompt-editor](#)



Wire a realistic host workflow

Keep prompt editor focused on its public responsibility.

01

Load a prompt

Supply initialValues with a name and prompt content.

02

Edit and submit

The editor collects the next values through onSubmit.

03

Save in the host

Persist through an app adapter and decide where to navigate.



Available customization

01

Load and save states

`isLoading`, `hasLoadError` and `isSaving` drive the form experience.

02

Editor customization

Pass labels, limits and `markdownEditorTheme`.

03

Separate folder field

`PromptFolderField` delegates mutations through `folderActions`.



Find the integration and its checks

Existing tests are evidence of intended behavior; suite results are not claimed.

Evidence	Where to look
Real consumer	chat/pages/PromptEditor/PromptEditor.tsx
Test evidence	stamps the form column that holds the fields
Test evidence	renders the create heading by default



Constraints that affect integration

01

No built-in folder picker

PromptEditor itself renders no folder field.

02

Stable initial values

Changing their identity can reseed editing state.

03

Host validation

Backend naming and storage rules do not belong in this form.