


filters / windowed_sinc

fir_impulse / operation: fir / PASS

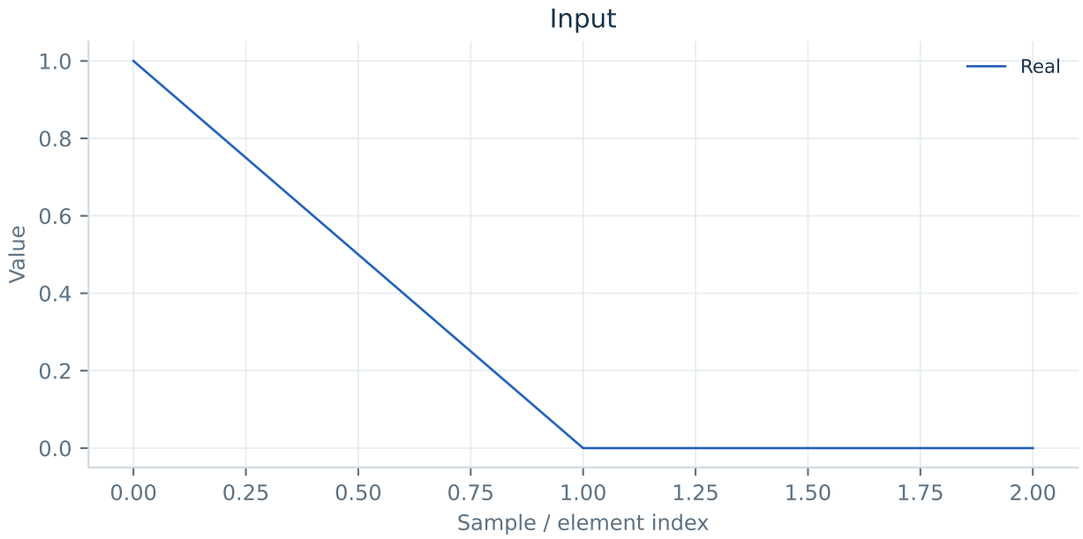

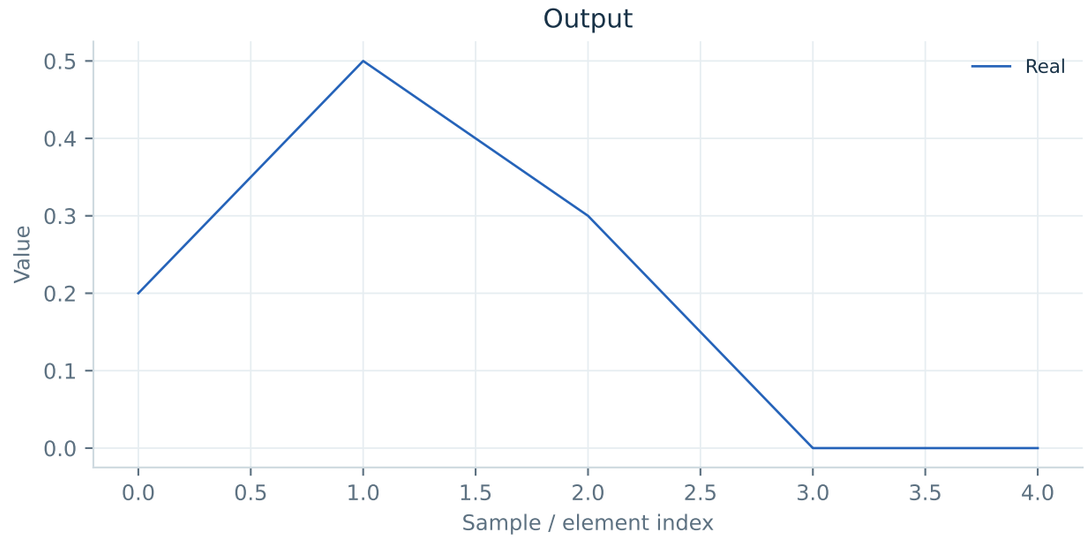

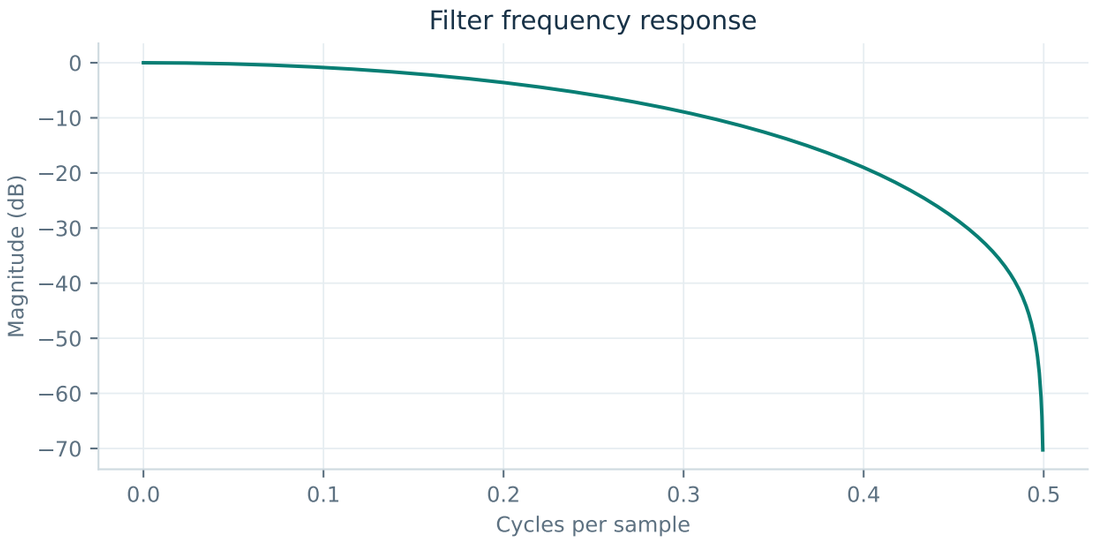

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 0
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

filters / windowed_sinc

fir_complex / operation: fir / PASS

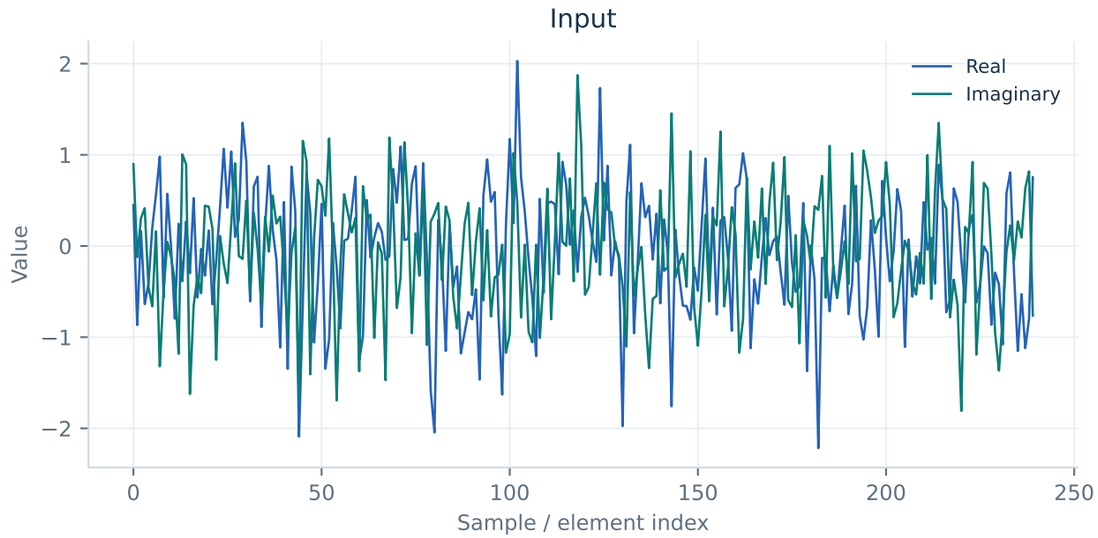

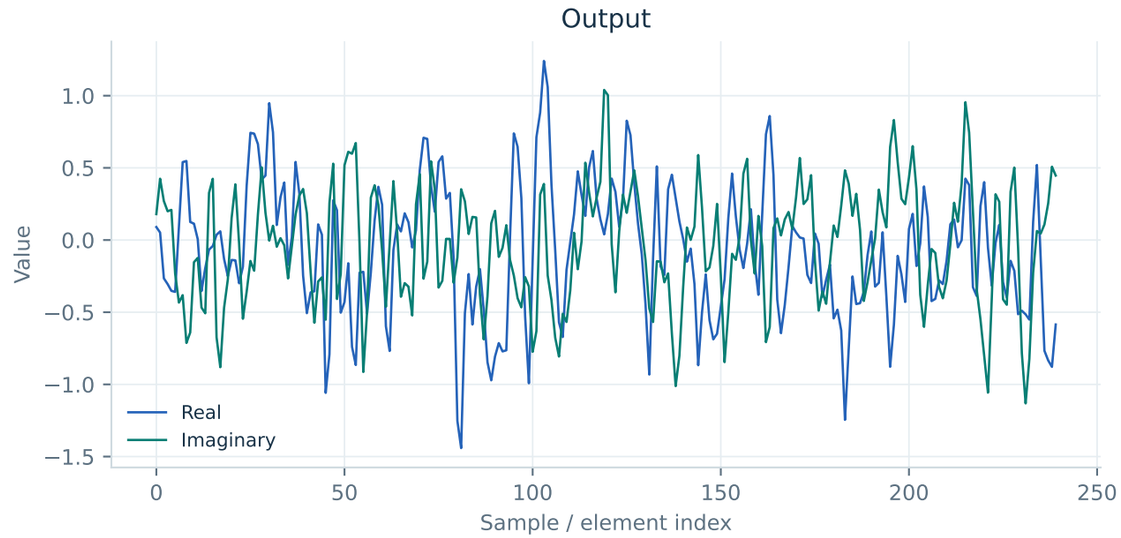

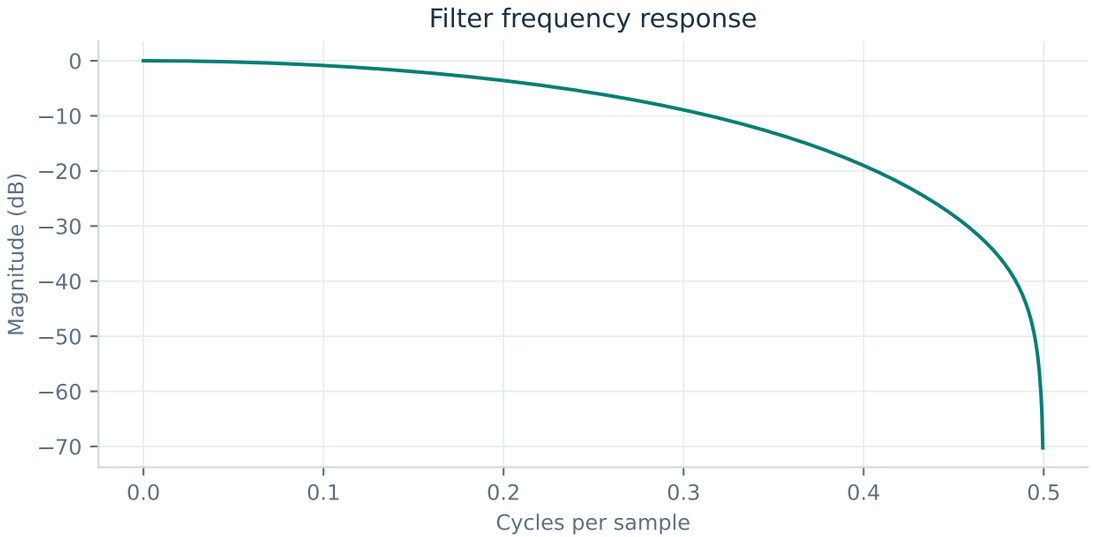

NUMERIC AGREEMENT


octave: max |difference| = 2.26e-16
matlab: max |difference| = 2.26e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

filters / windowed_sinc

hamming_lowpass / operation: wsinc / PASS

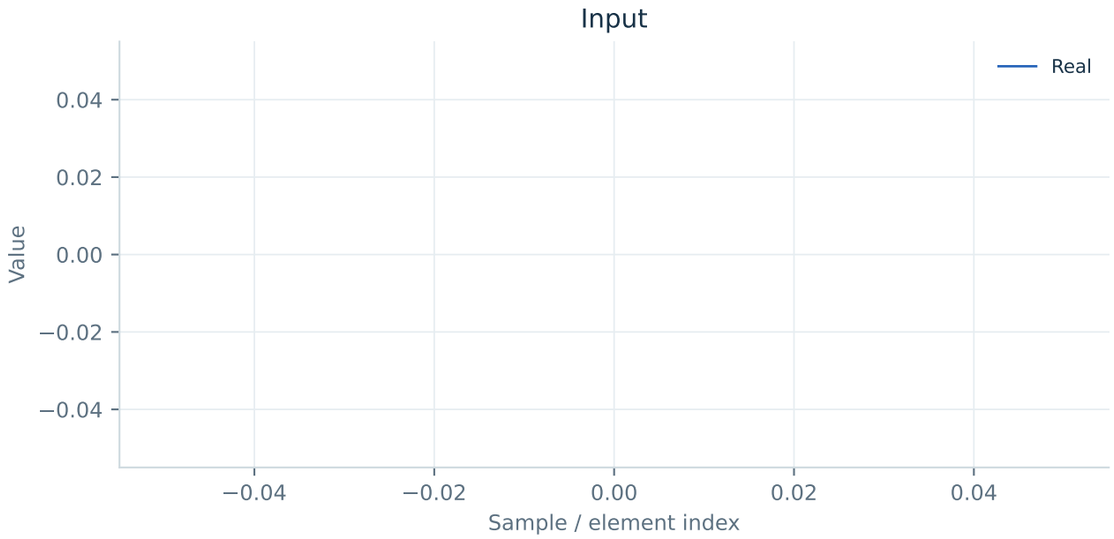

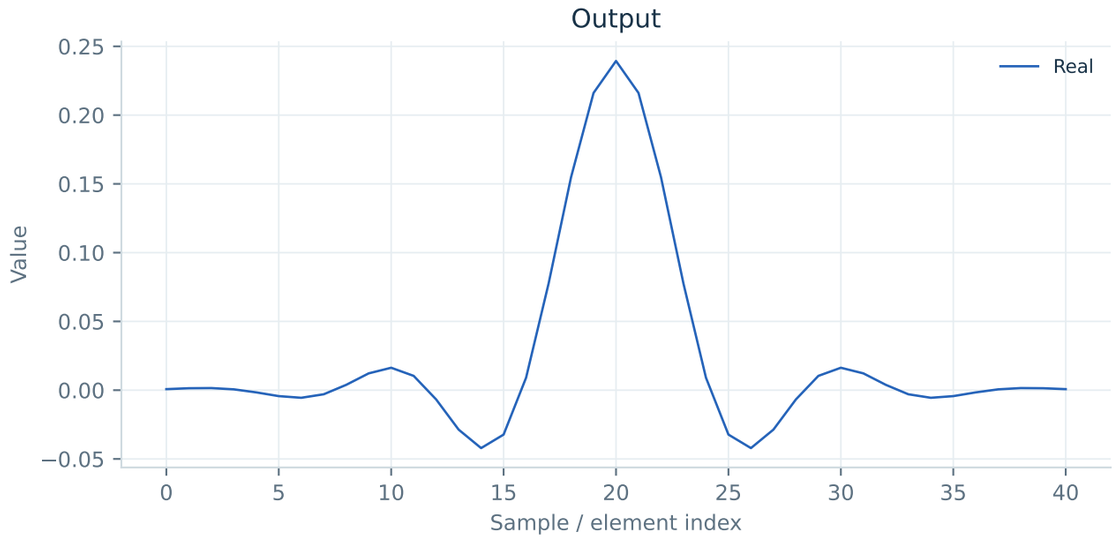

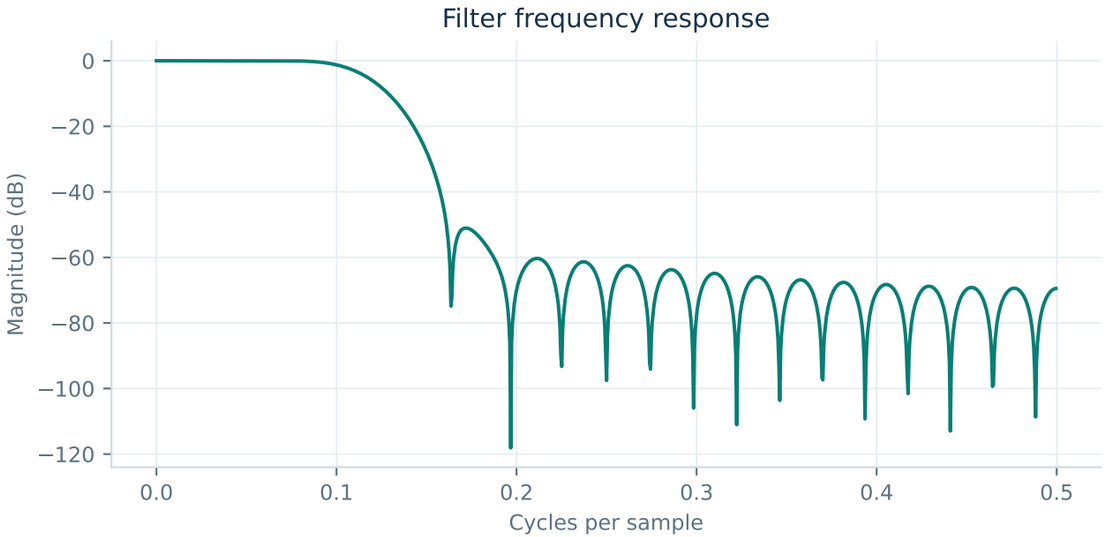

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 5.55e-17
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
stopband peak db: -60.307
dc gain: 1


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

filters / windowed_sinc

two_tone_filter / operation: fir / PASS

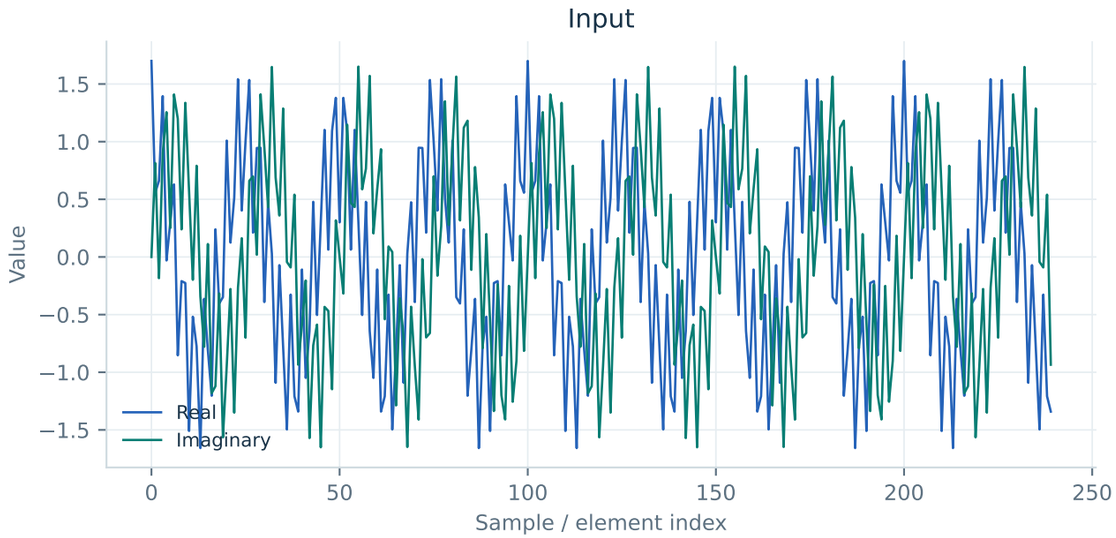

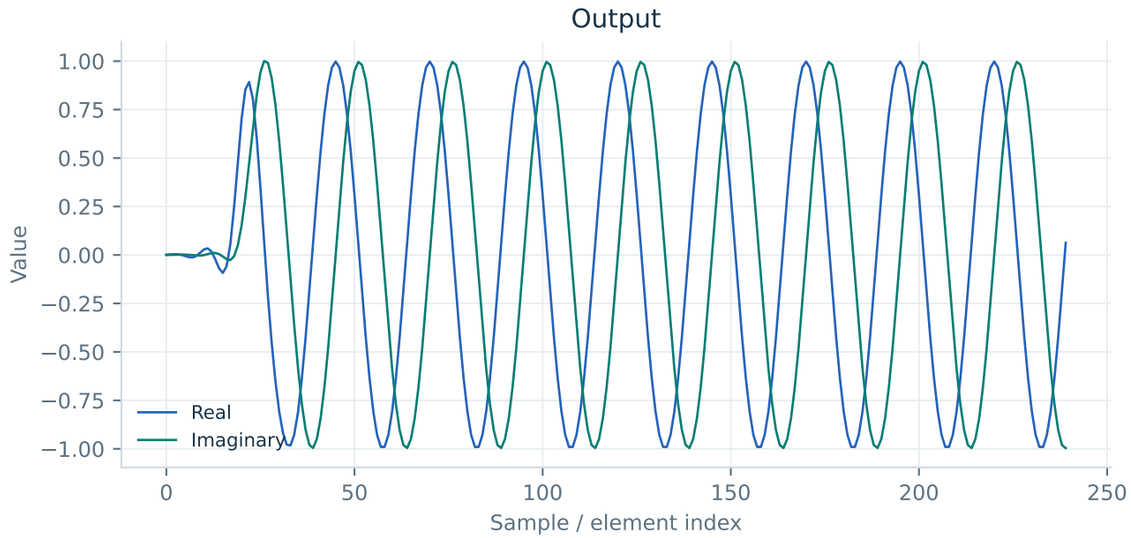

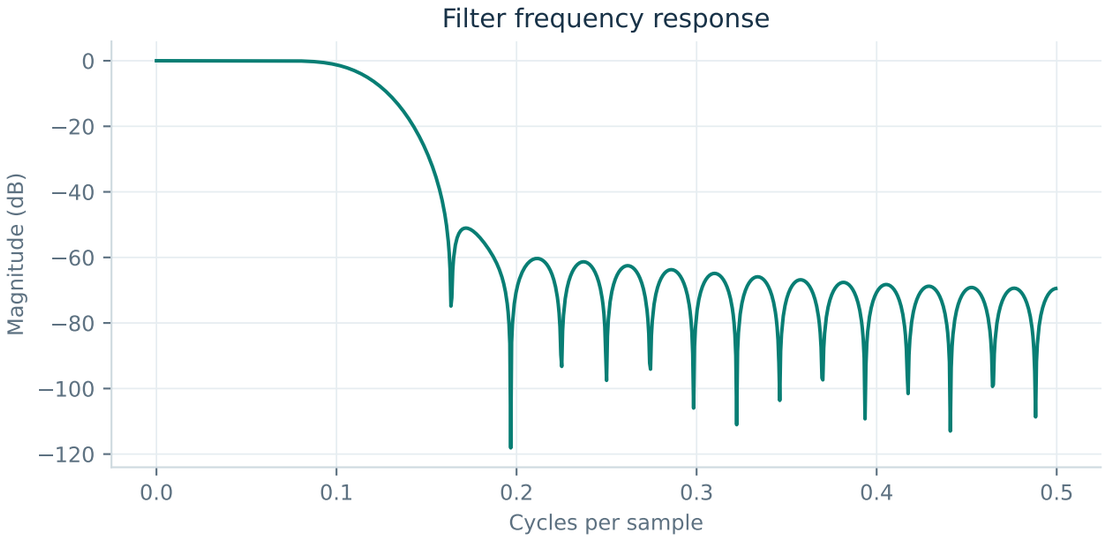

NUMERIC AGREEMENT


octave: max |difference| = 5.98e-16
matlab: max |difference| = 5.98e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

adaptive / lms_nlms_rls

lms / operation: lms / PASS

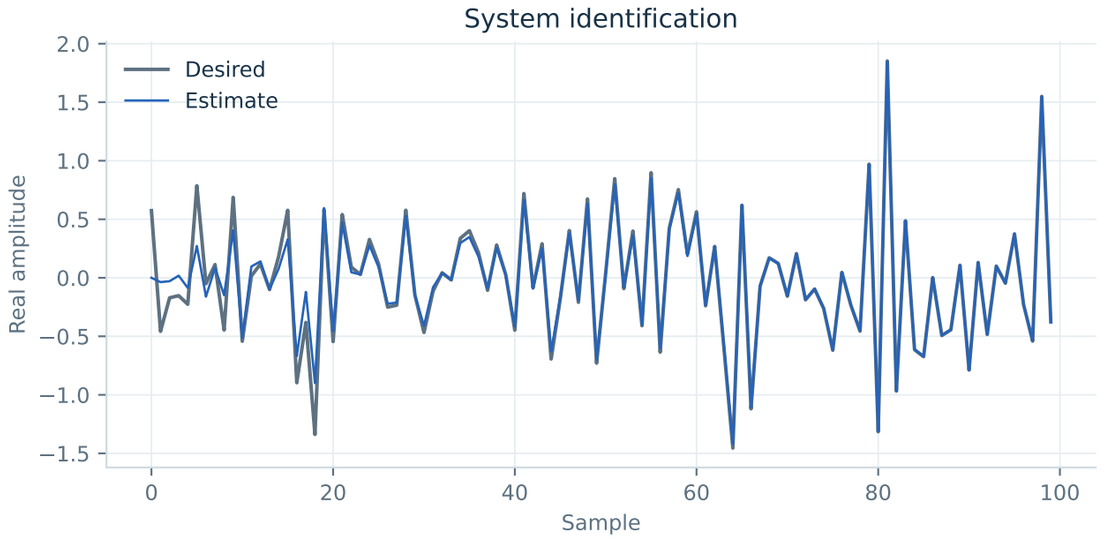

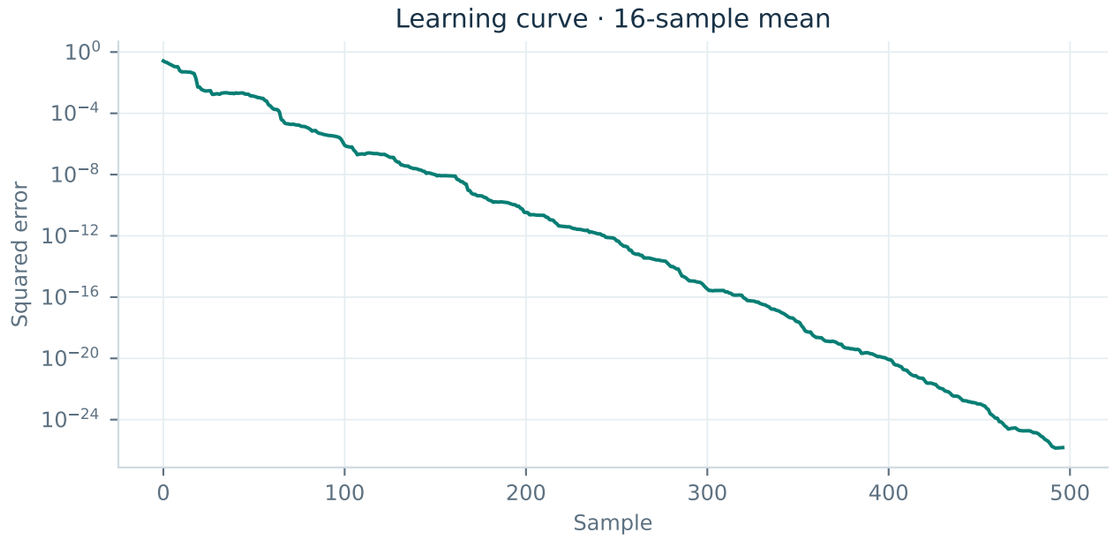

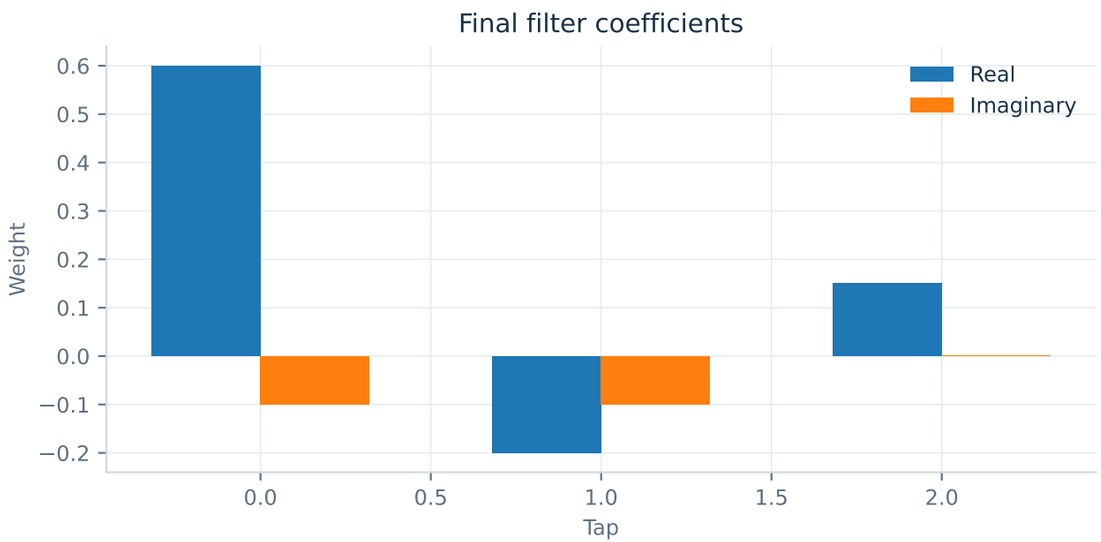

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 2.79e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
initial mse: 0.15245
final mse: 5.3302e-21
improvement db: 194.56


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

adaptive / lms_nlms_rls

nlms / operation: nlms / PASS

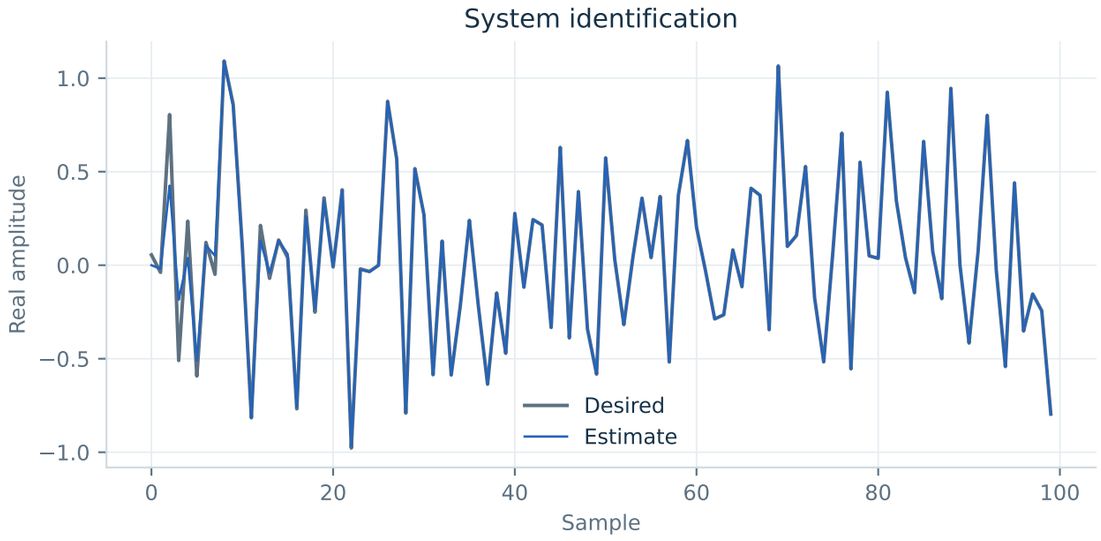

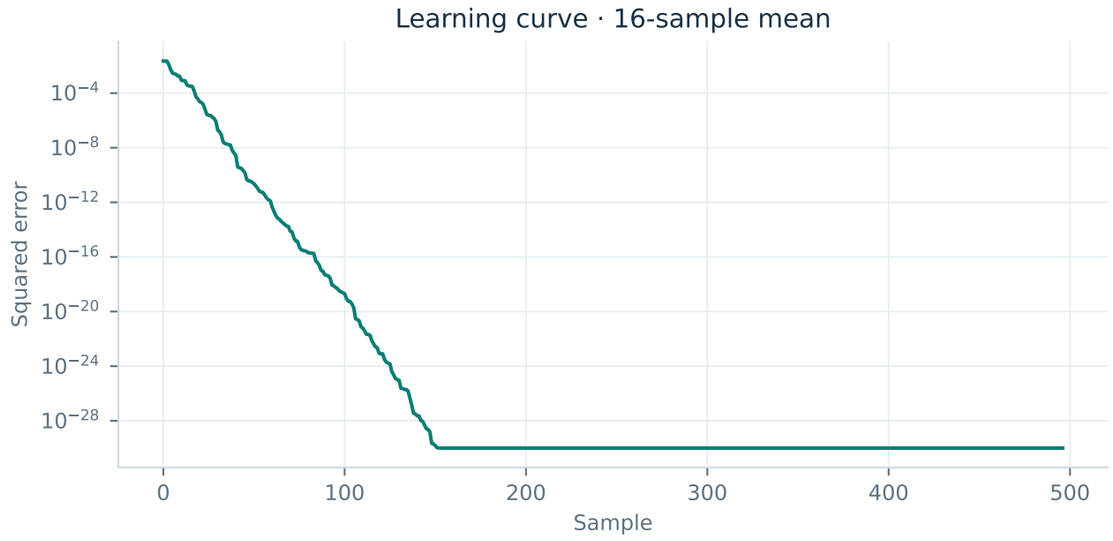

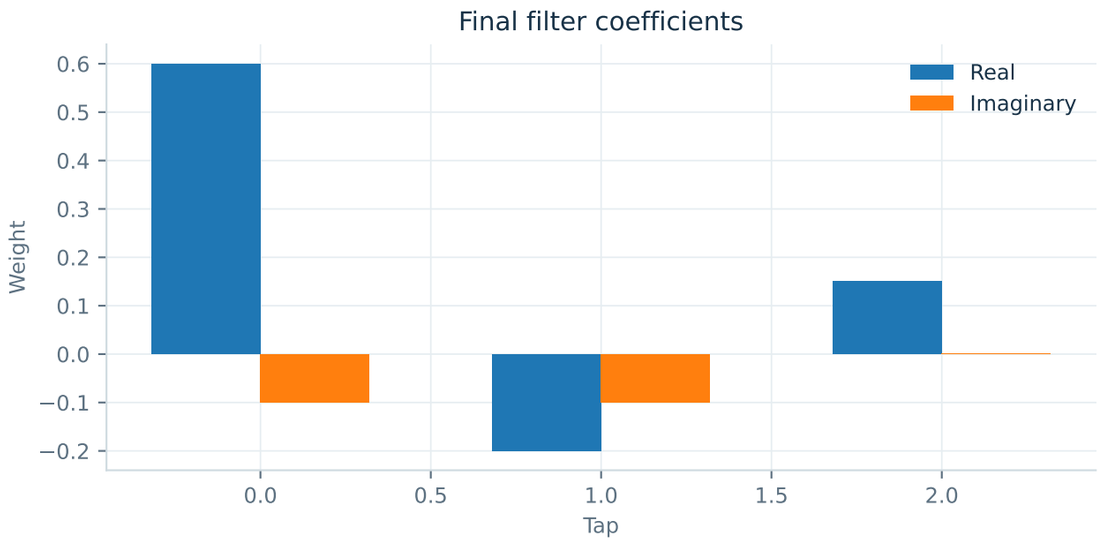

NUMERIC AGREEMENT


octave: max |difference| = 3.72e-16
matlab: max |difference| = 3.51e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
initial mse: 0.011526
final mse: 5.7269e-33
improvement db: 280.62


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

adaptive / lms_nlms_rls

rls / operation: rls / PASS

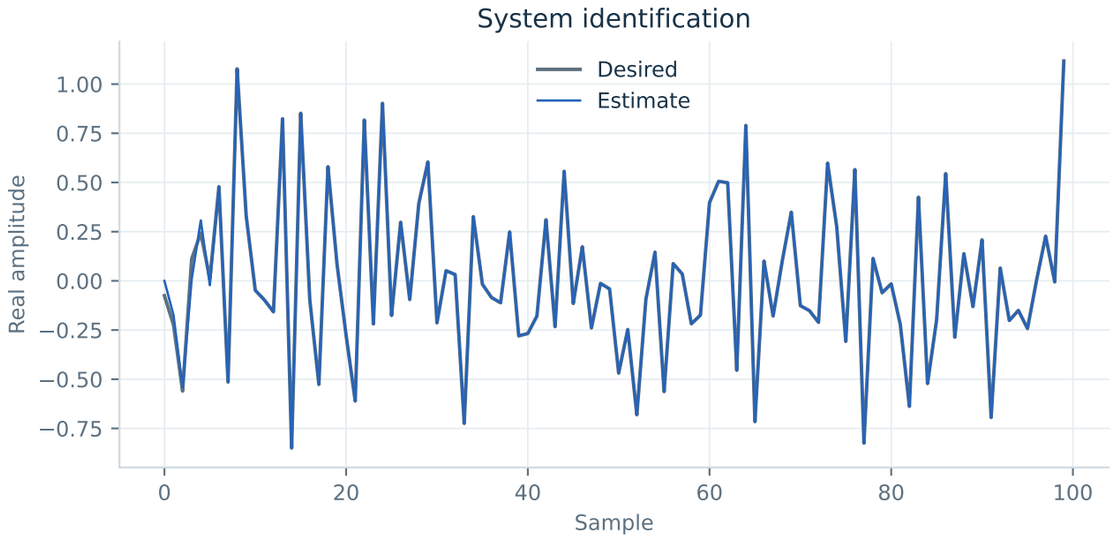

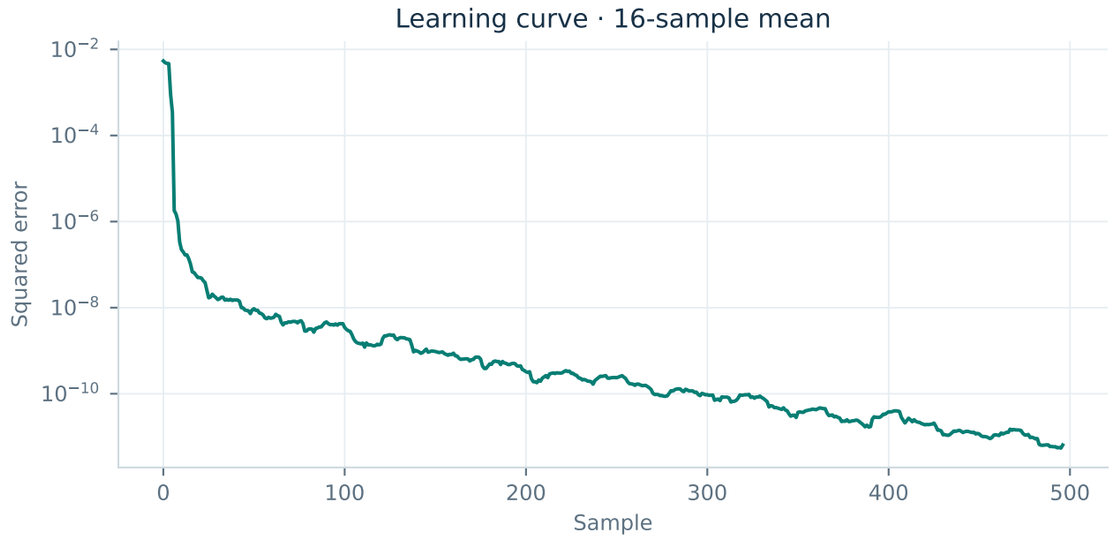

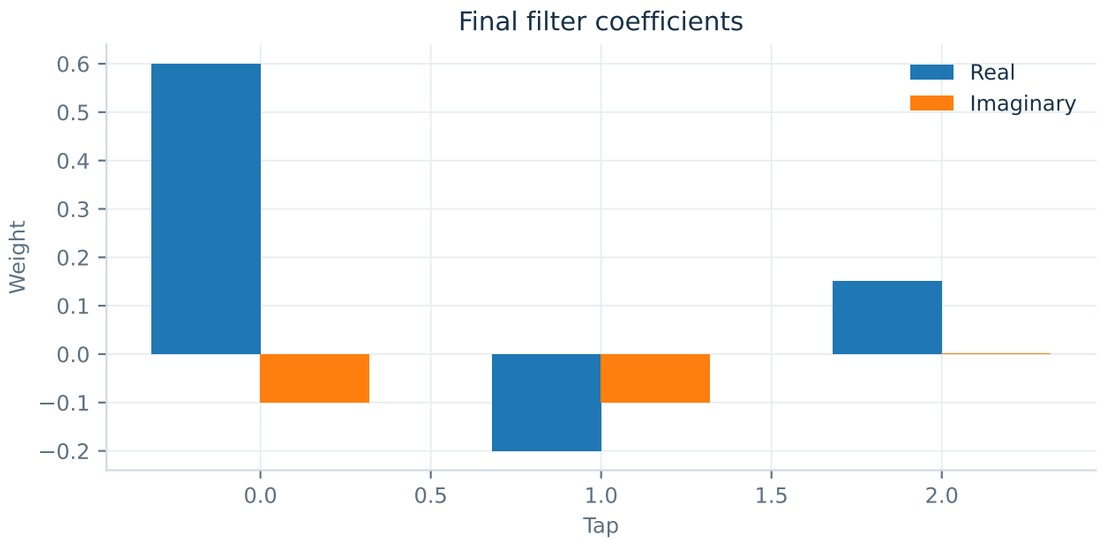

NUMERIC AGREEMENT


octave: max |difference| = 4.48e-16
matlab: max |difference| = 4.45e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
initial mse: 0.0026955
final mse: 1.6607e-11
improvement db: 82.104


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

channelizers / pfb_wola

pfb_decimation_4 / operation: pfb / PASS

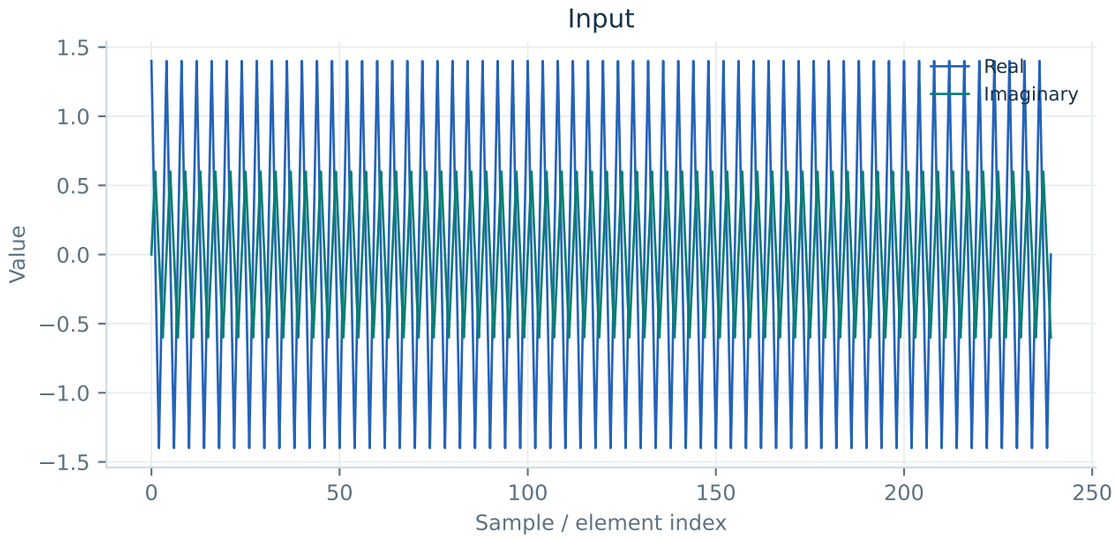

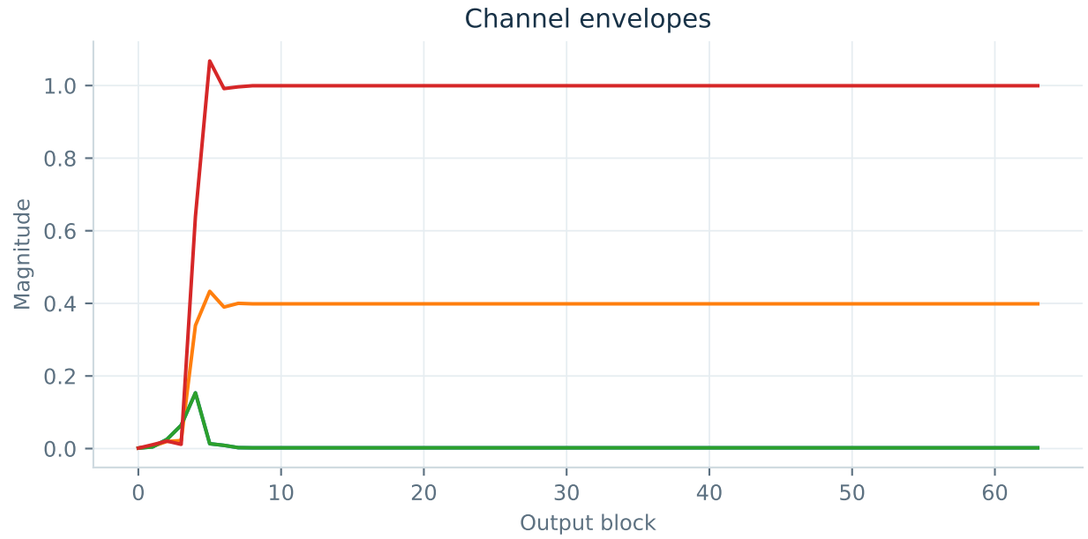

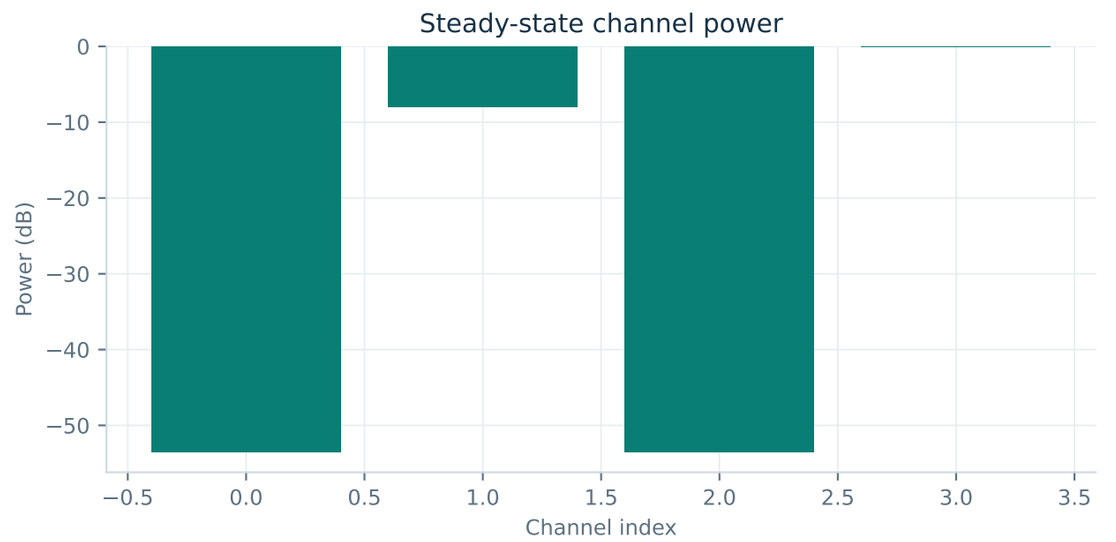

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 2.52e-29
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
desired to dc leakage db: 53.504


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

channelizers / pfb_wola

pfb_decimation_3 / operation: pfb / PASS

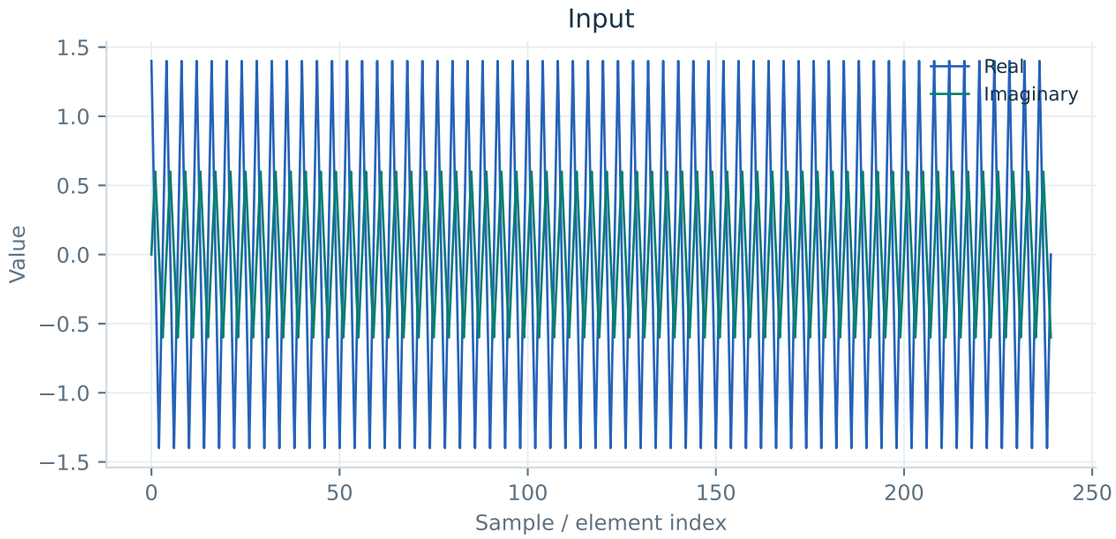

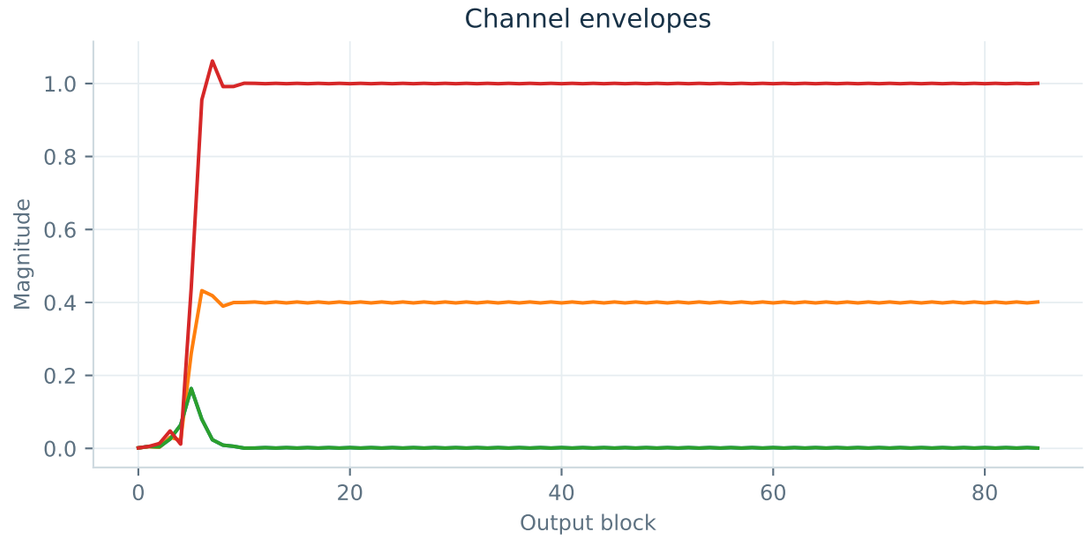

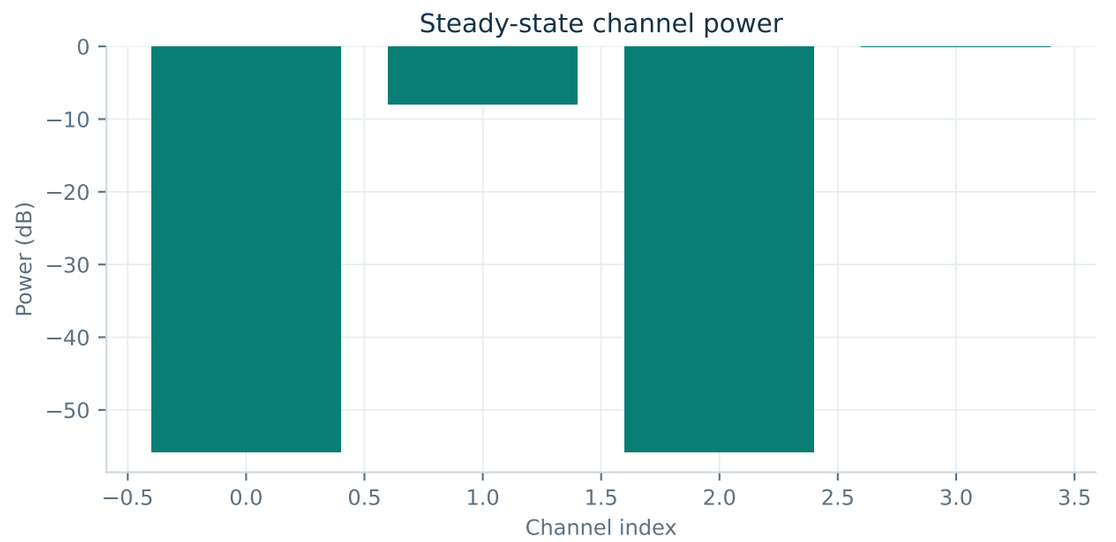

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 6.31e-30
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
desired to dc leakage db: 55.787


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

channelizers / pfb_wola

wola_decimation_4 / operation: wola / PASS

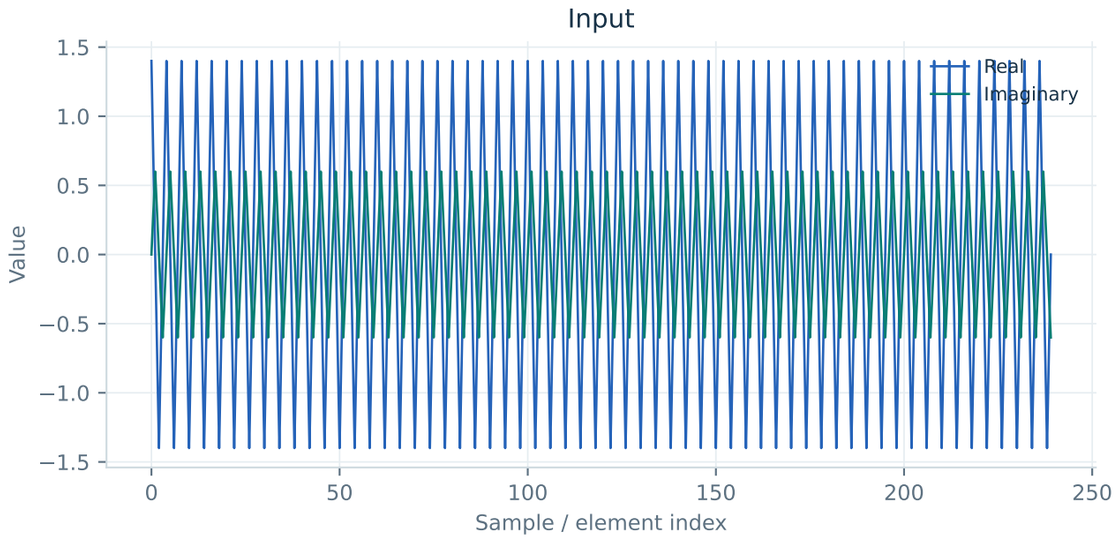

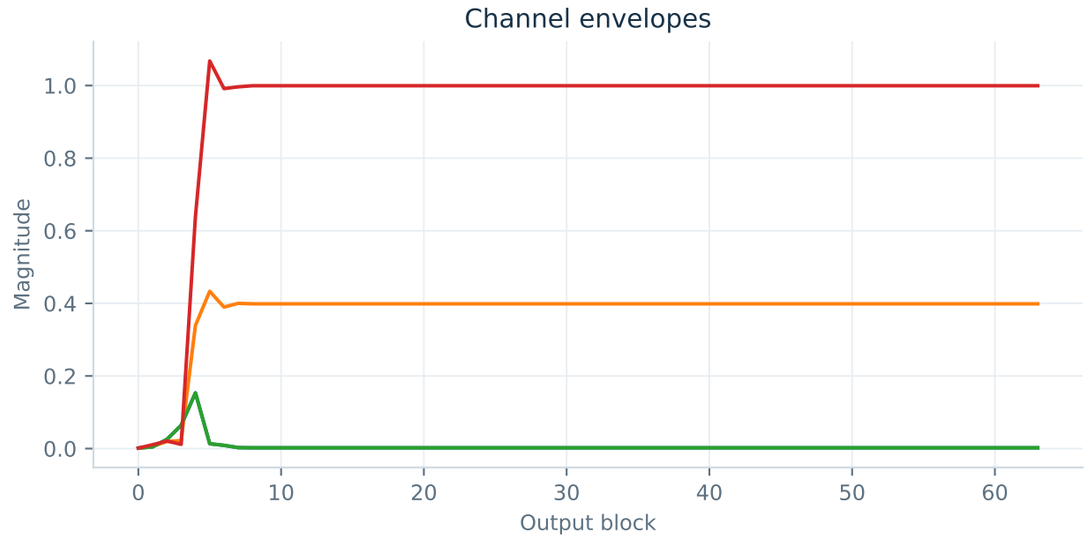

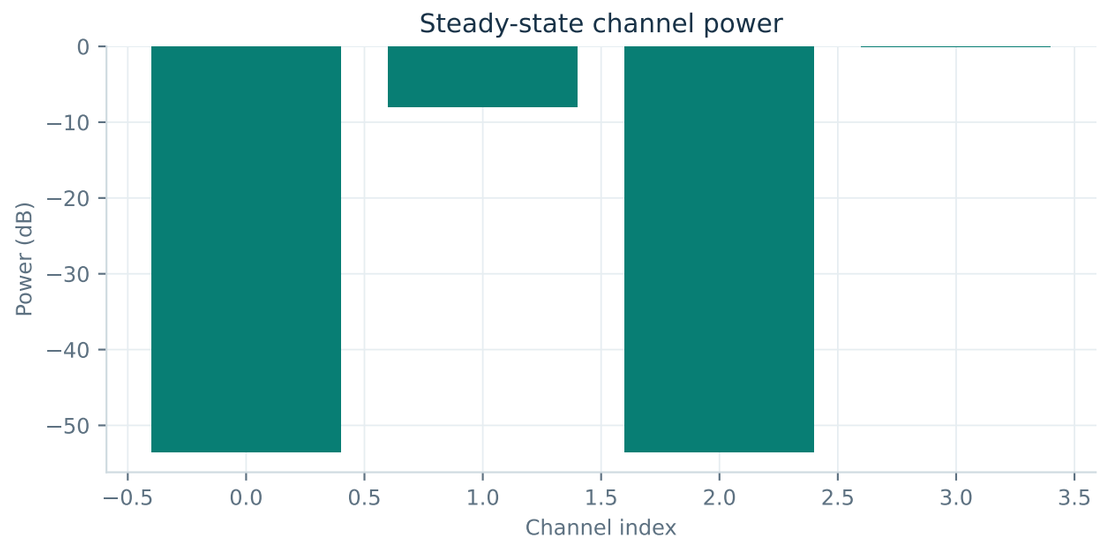

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 2.52e-29
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
desired to dc leakage db: 53.504


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

channelizers / pfb_wola

wola_decimation_3 / operation: wola / PASS

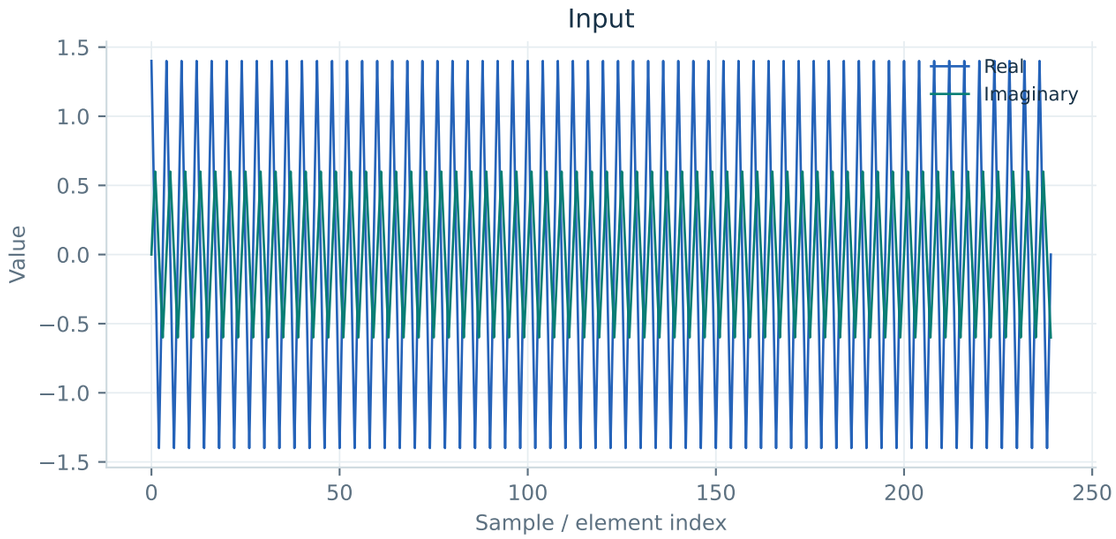

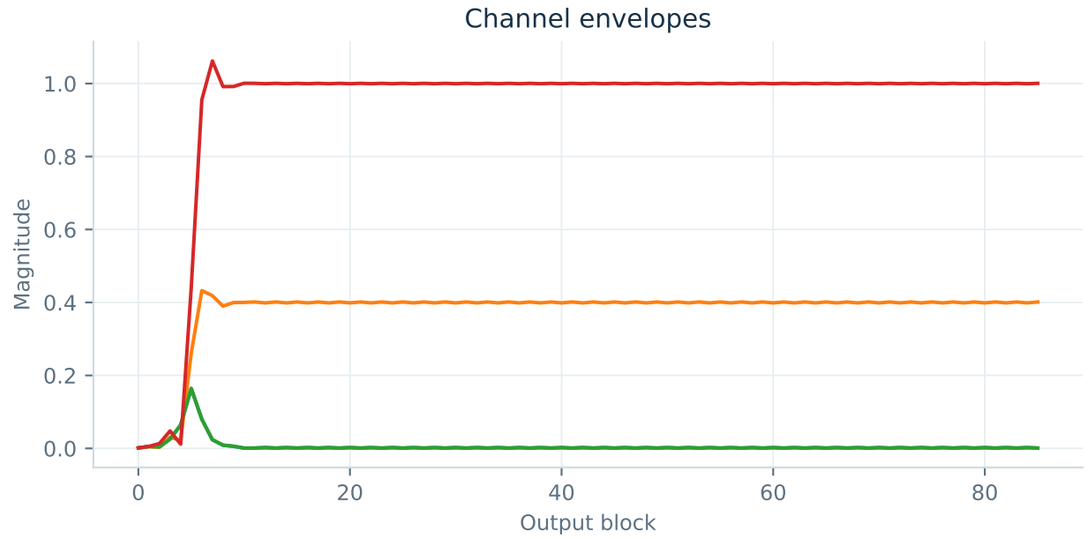

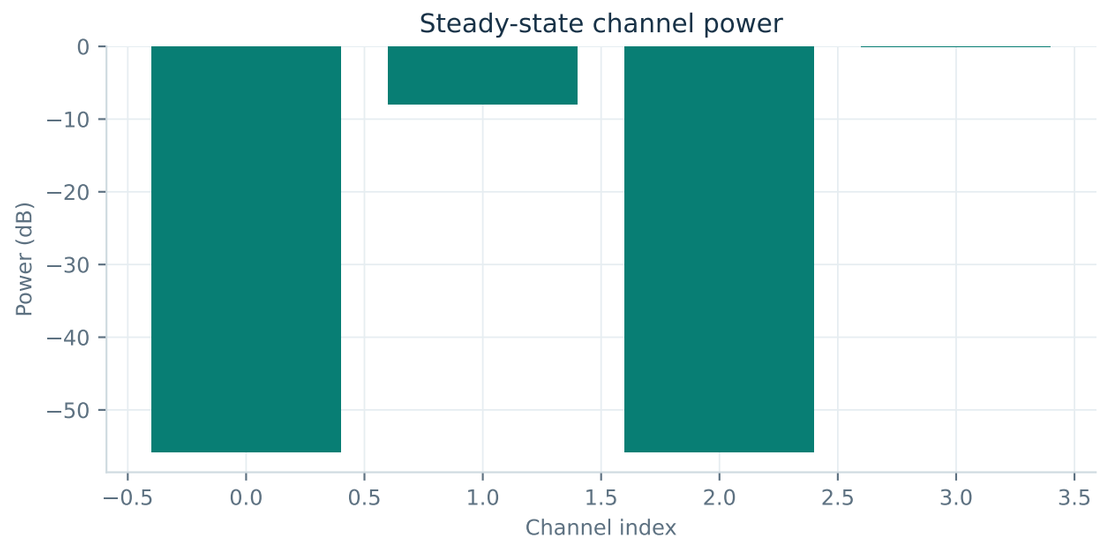

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 6.31e-30
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
desired to dc leakage db: 55.787


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

coding / ldpc

systematic_encode / operation: gf2_encode / PASS

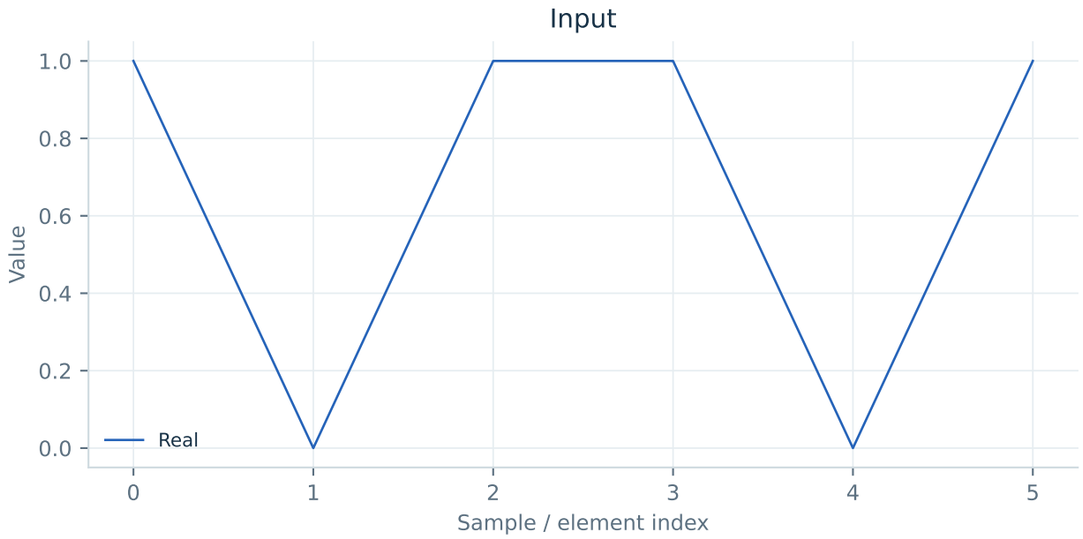

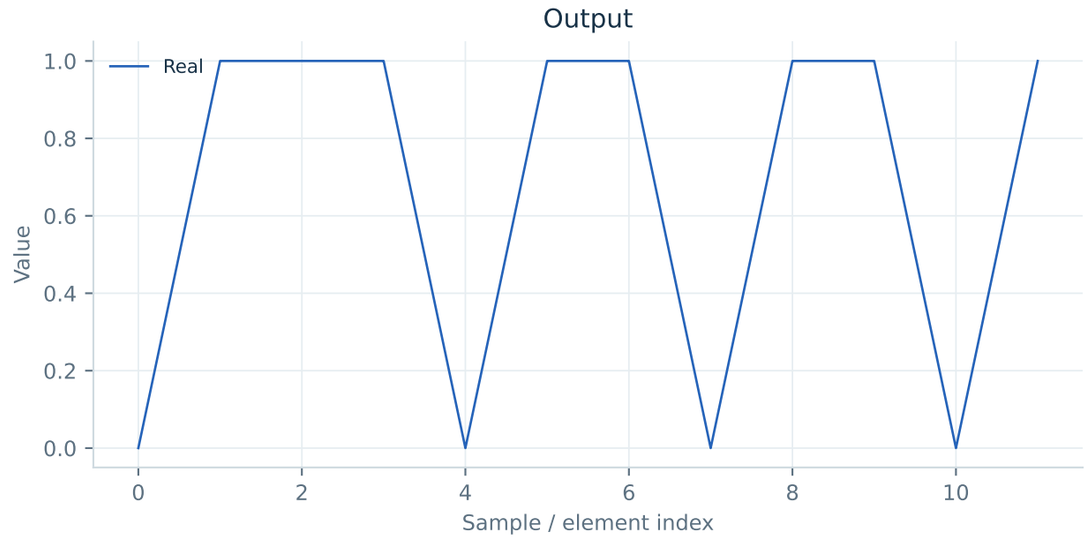

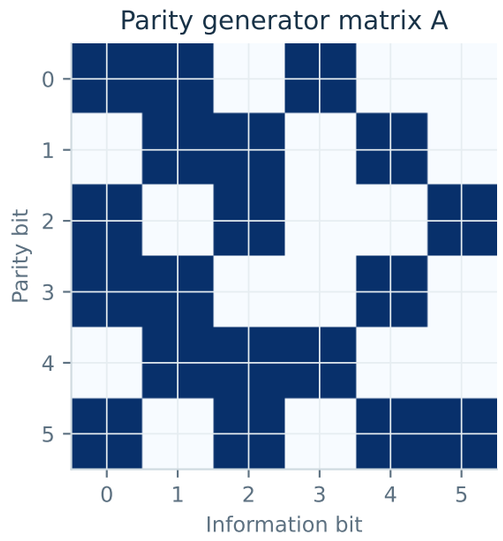

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 0
SystemVerilog (suite maximum): max |difference| = 2.51e-13

ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.

Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

coding / ldpc

sum_product / operation: ldpc / PASS

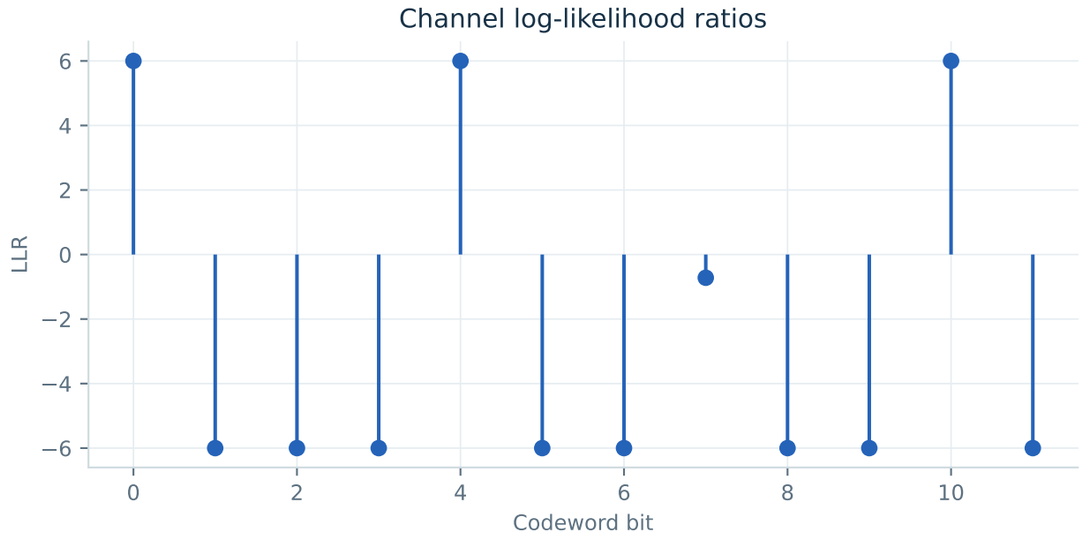





NUMERIC AGREEMENT


octave: max |difference| = 1.78e-15
matlab: max |difference| = 1.78e-15
SystemVerilog (suite maximum): max |difference| = 2.51e-13

ACCEPTANCE METRICS
uncoded errors: 1
decoded errors: 0
syndrome weight: 0
negative control detected: True
rejected mutations: ['flipped_decoded_bit', 'bypassed_decoder']


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

coding / ldpc

min_sum / operation: ldpc / PASS

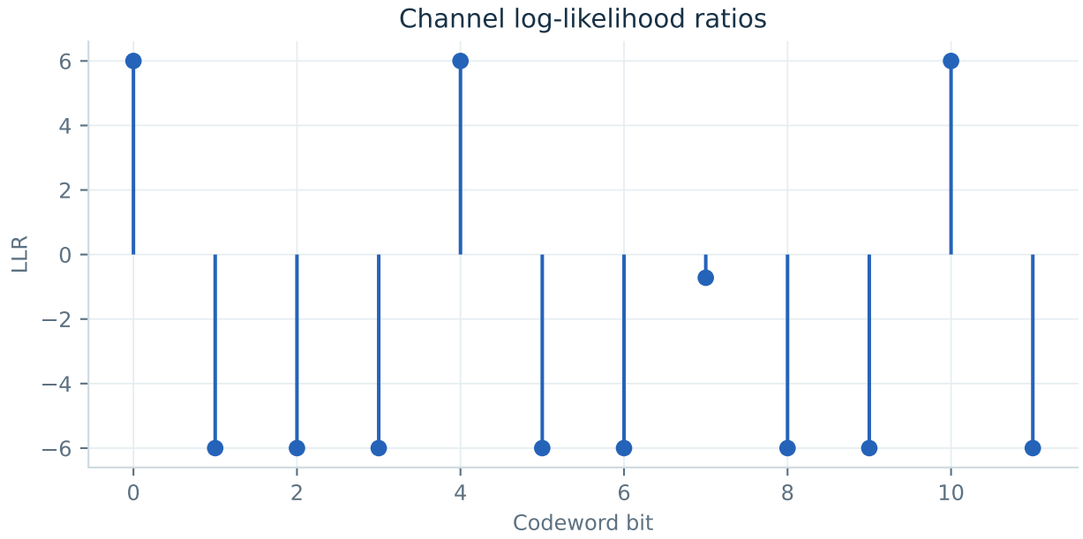



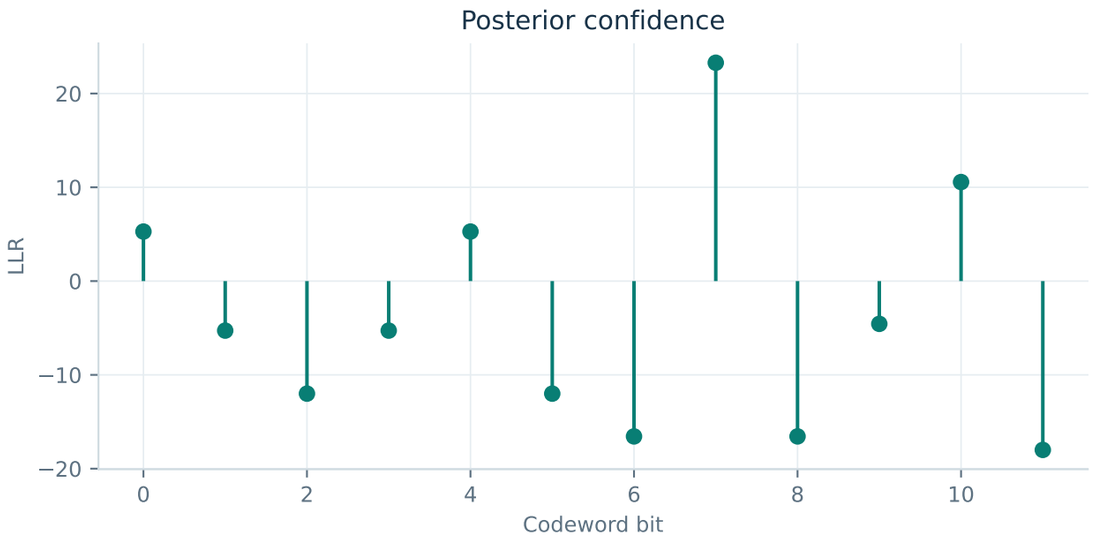

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 0
SystemVerilog (suite maximum): max |difference| = 2.51e-13

ACCEPTANCE METRICS
uncoded errors: 1
decoded errors: 0
syndrome weight: 0
negative control detected: True
rejected mutations: ['flipped_decoded_bit', 'bypassed_decoder']


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

coding / ldpc

normalized_min_sum / operation: ldpc / PASS

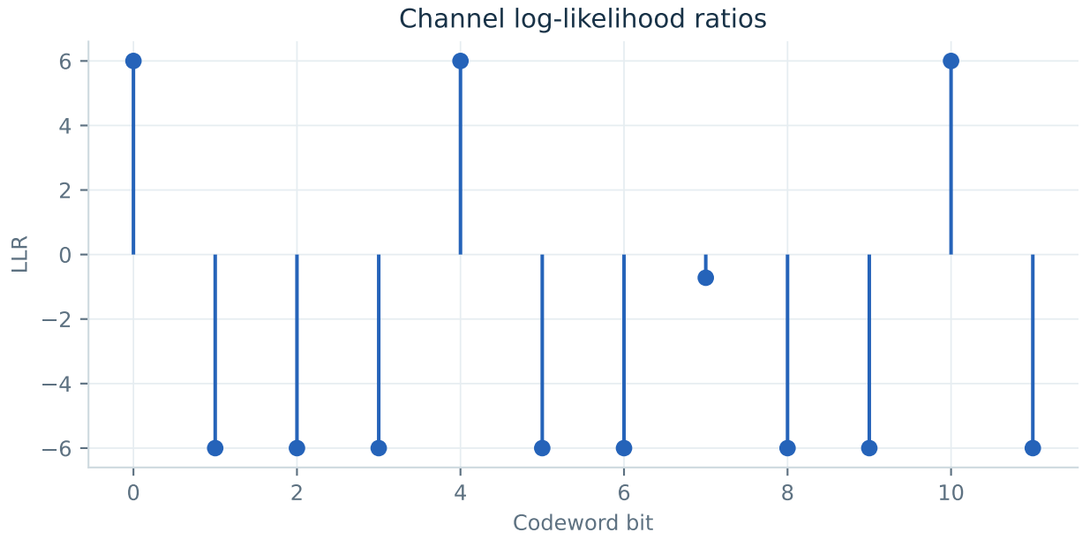



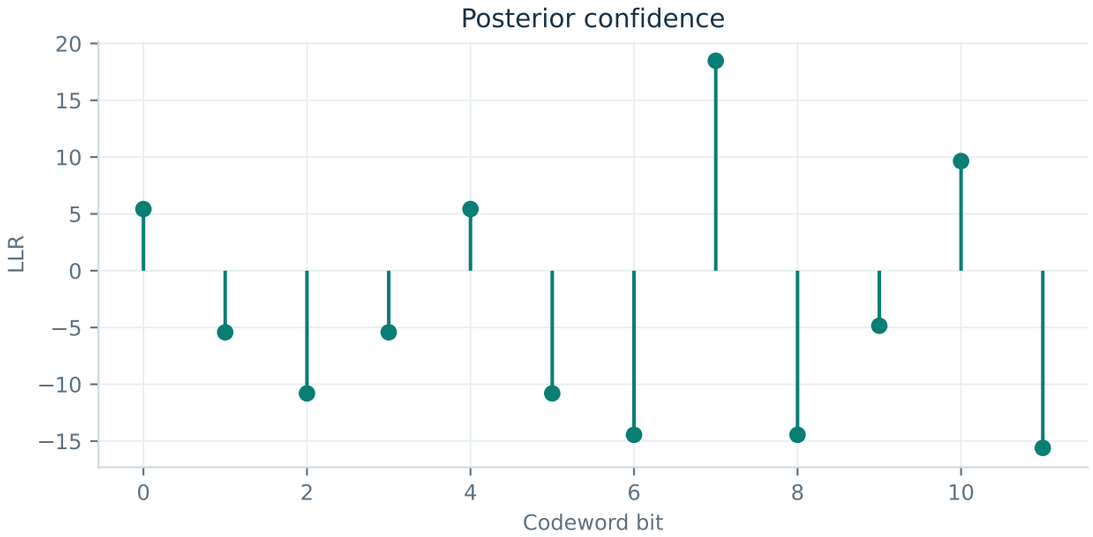

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 0
SystemVerilog (suite maximum): max |difference| = 2.51e-13

ACCEPTANCE METRICS
uncoded errors: 1
decoded errors: 0
syndrome weight: 0
negative control detected: True
rejected mutations: ['flipped_decoded_bit', 'bypassed_decoder']


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

coding / ldpc

offset_min_sum / operation: ldpc / PASS

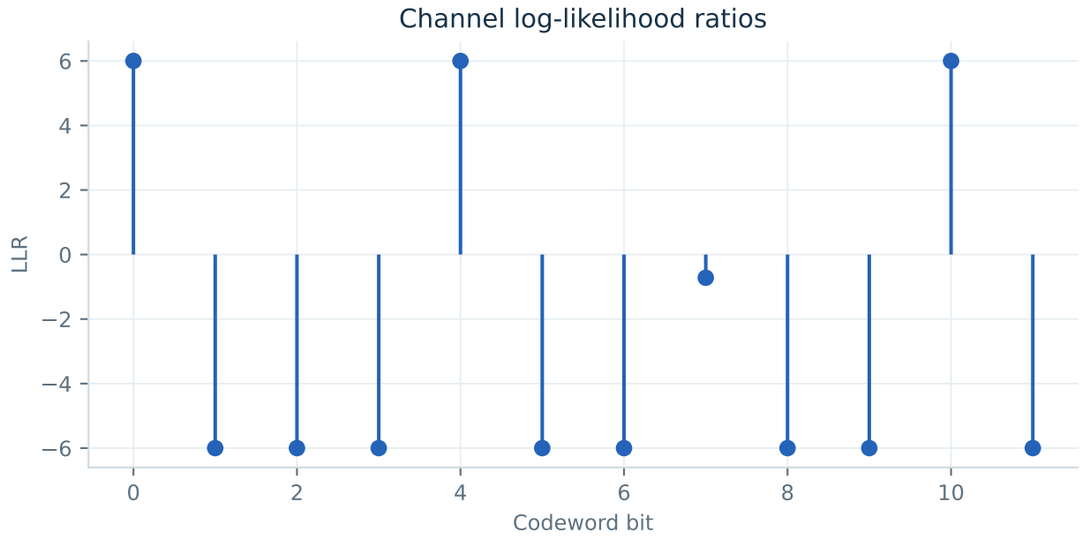



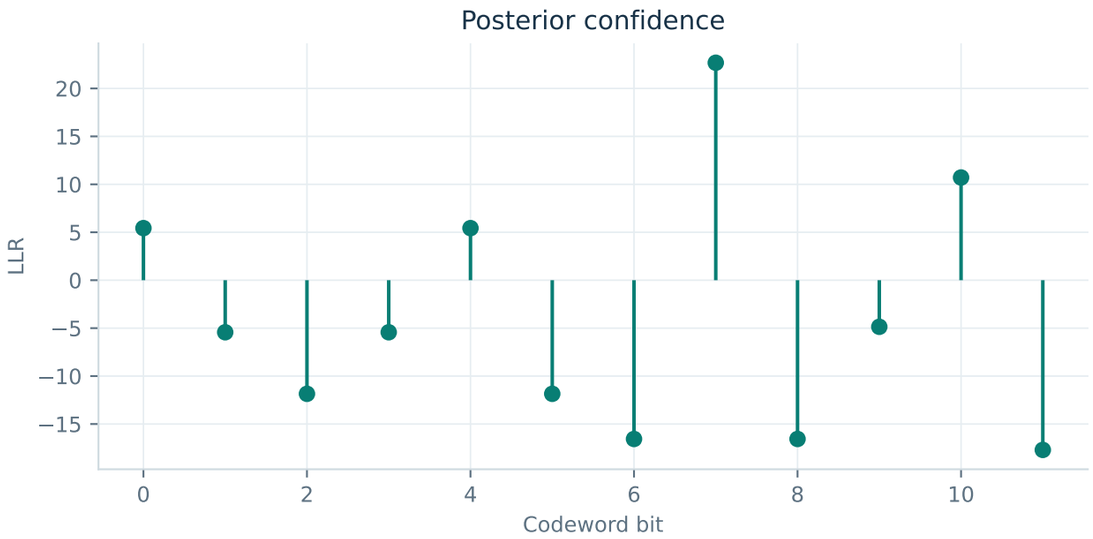

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 0
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
uncoded errors: 1
decoded errors: 0
syndrome weight: 0
negative control detected: True
rejected mutations: ['flipped_decoded_bit', 'bypassed_decoder']


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

audio / stft

analysis / operation: stft / PASS

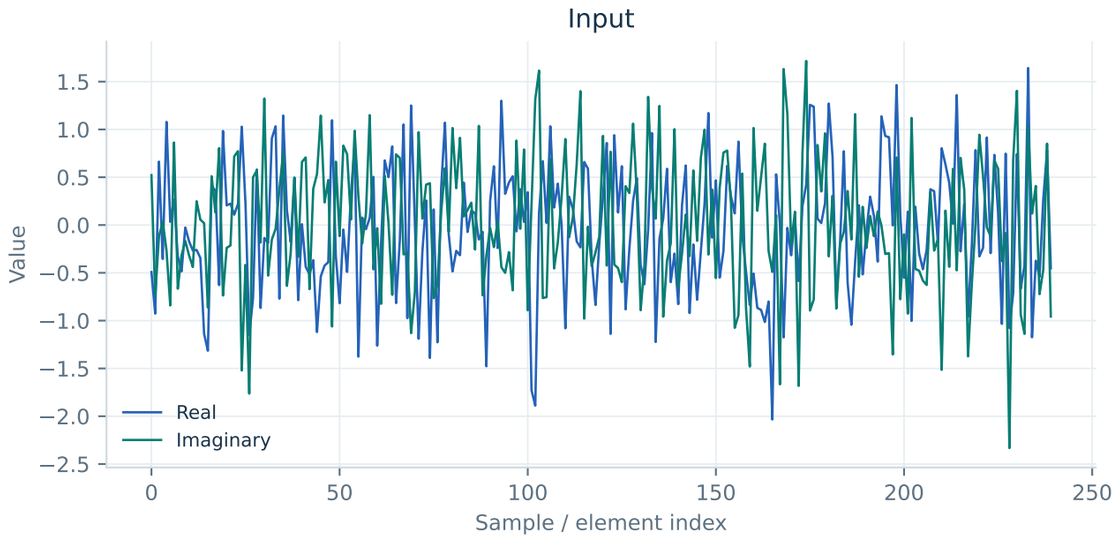

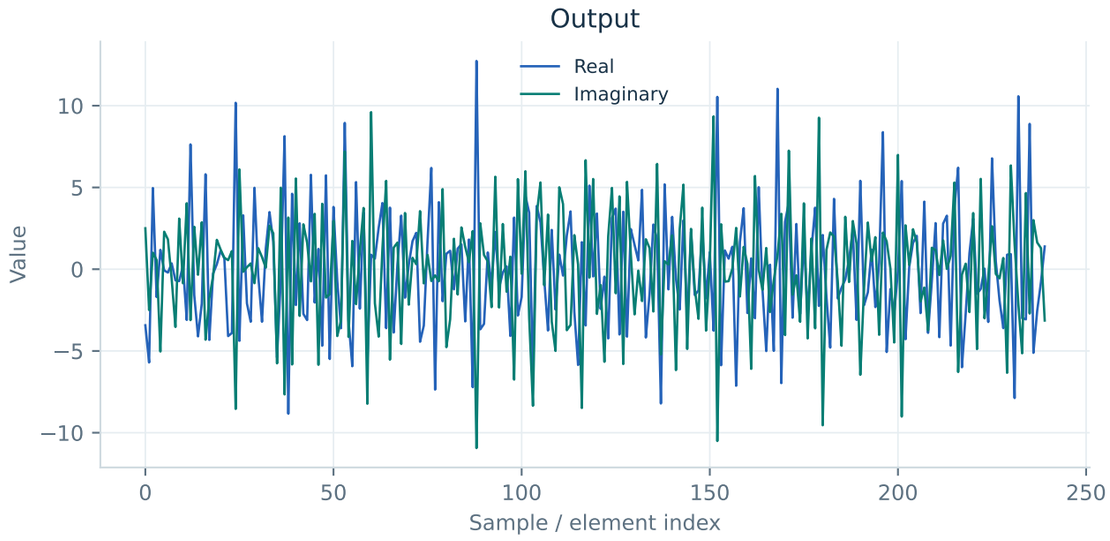

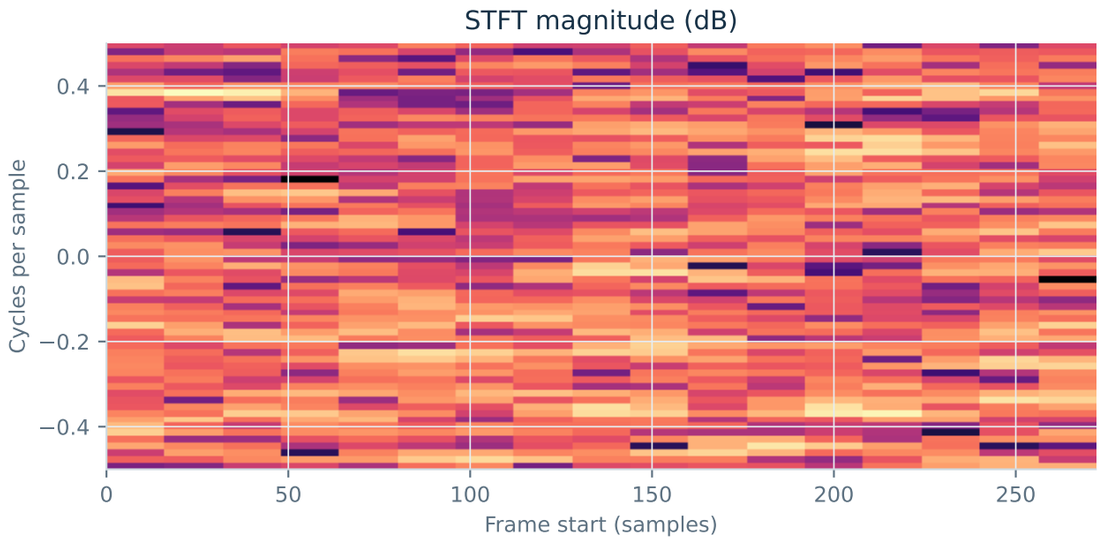

NUMERIC AGREEMENT


octave: max |difference| = 3.56e-15
matlab: max |difference| = 3.72e-15
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

audio / stft

reconstruction / operation: istft / PASS

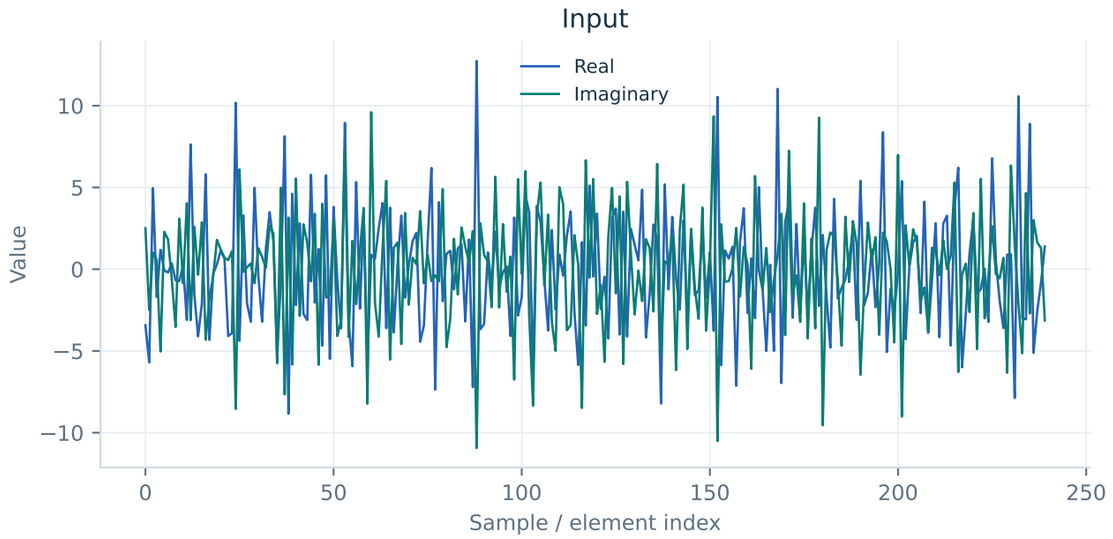

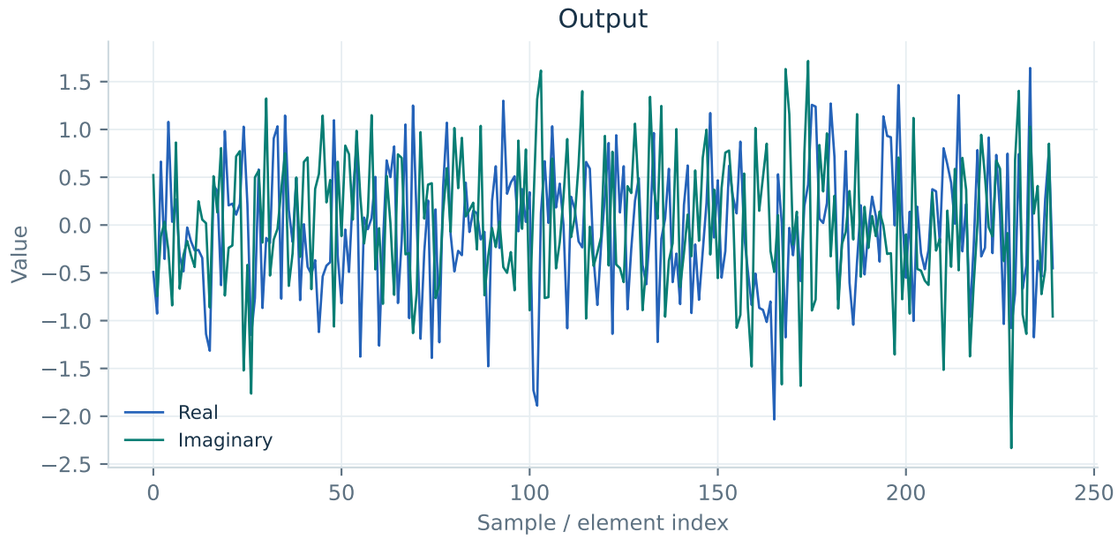

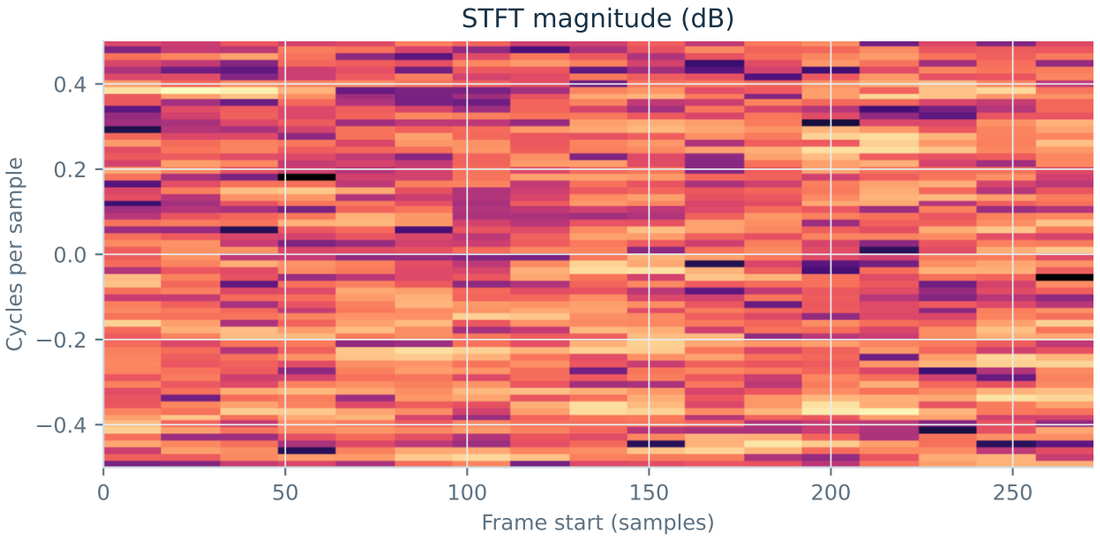

NUMERIC AGREEMENT


octave: max |difference| = 5.63e-15
matlab: max |difference| = 1.26e-15
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
reconstruction tolerance: 2e-10


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

audio / omlsa

calibrated_noise_reduction / operation: omlsa / PASS

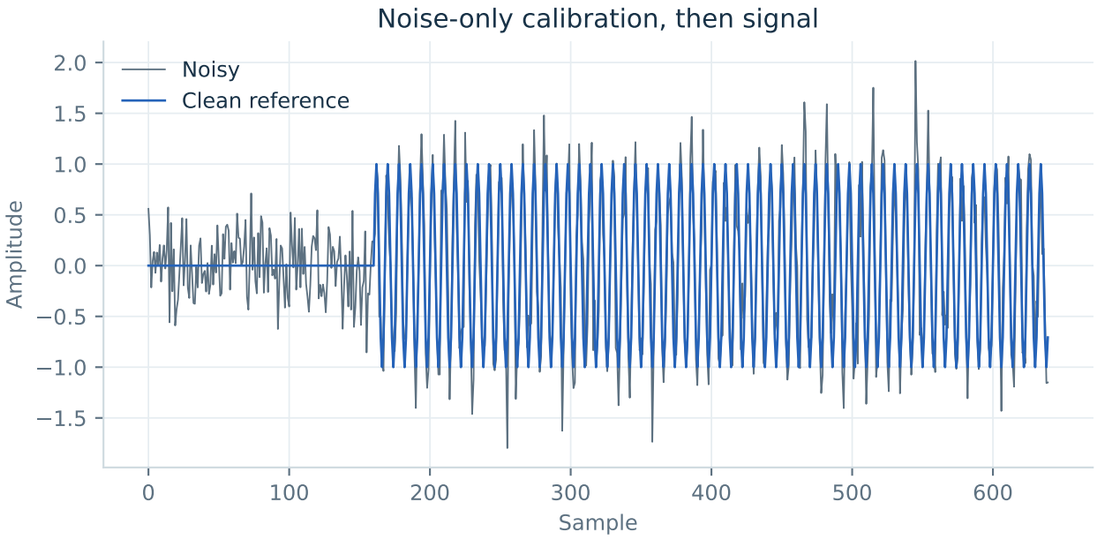

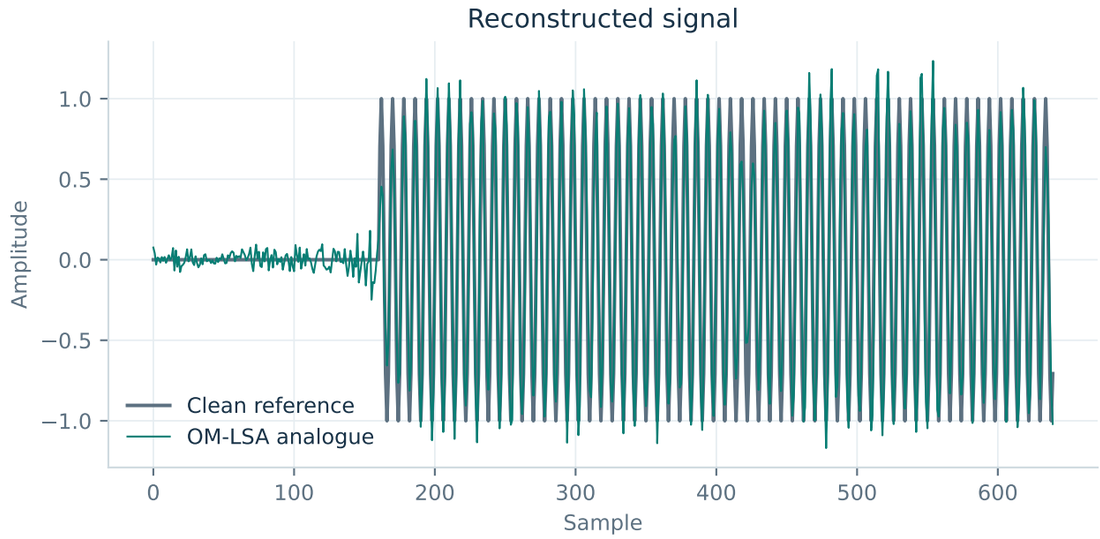

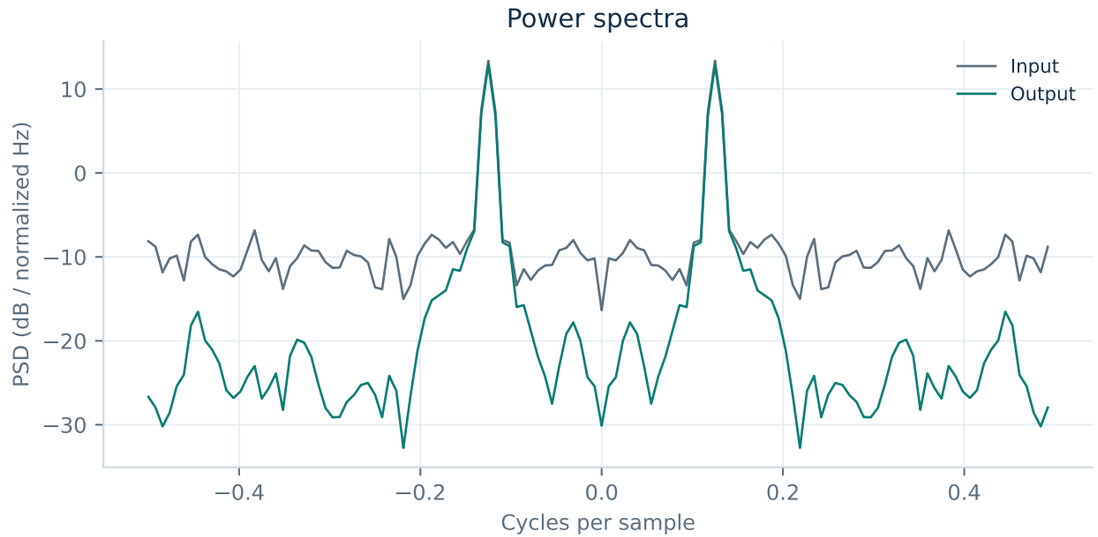

NUMERIC AGREEMENT


octave: max |difference| = 4.45e-16
matlab: max |difference| = 3.36e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
input mse: 0.10012
output mse: 0.022641
improvement db: 6.4564


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

arrays / beamforming

spatial_null / operation: beamform / PASS

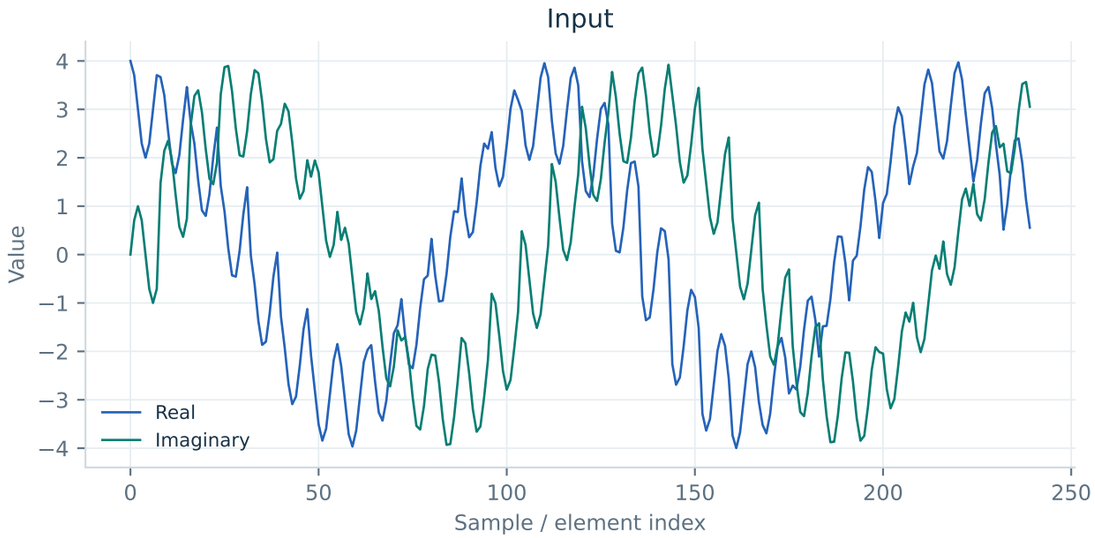

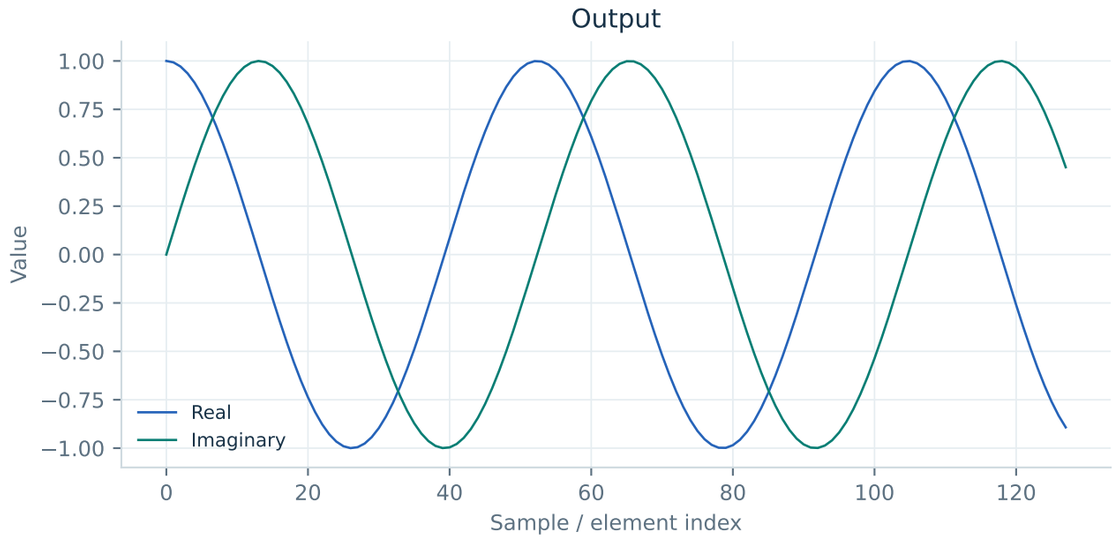

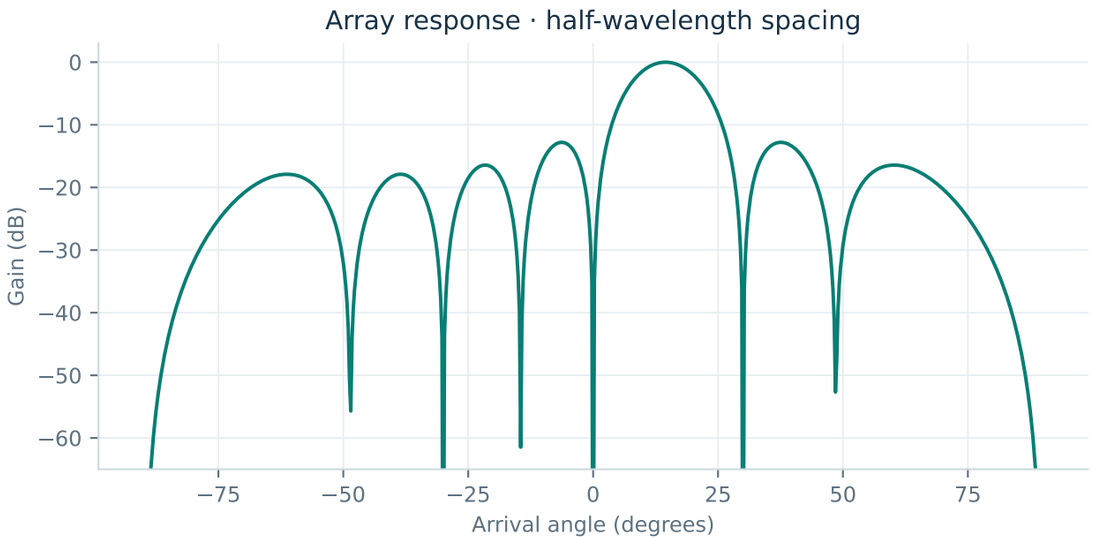

NUMERIC AGREEMENT


octave: max |difference| = 3.33e-16
matlab: max |difference| = 4.58e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
interferer amplitude: 3
output mse: 2.8232e-32

Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

mimo / dsplog

zero_forcing / operation: mimo / PASS

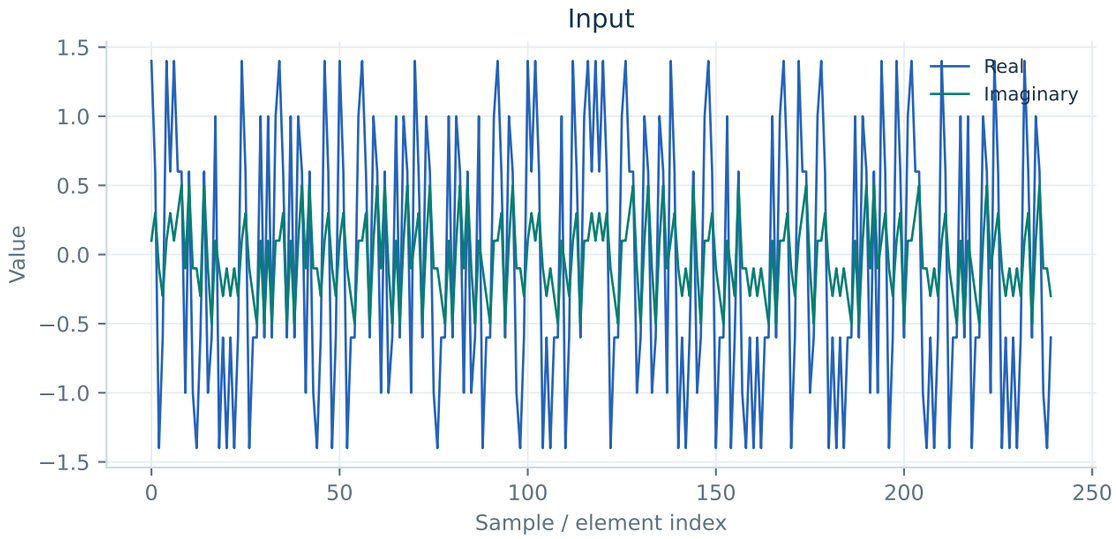

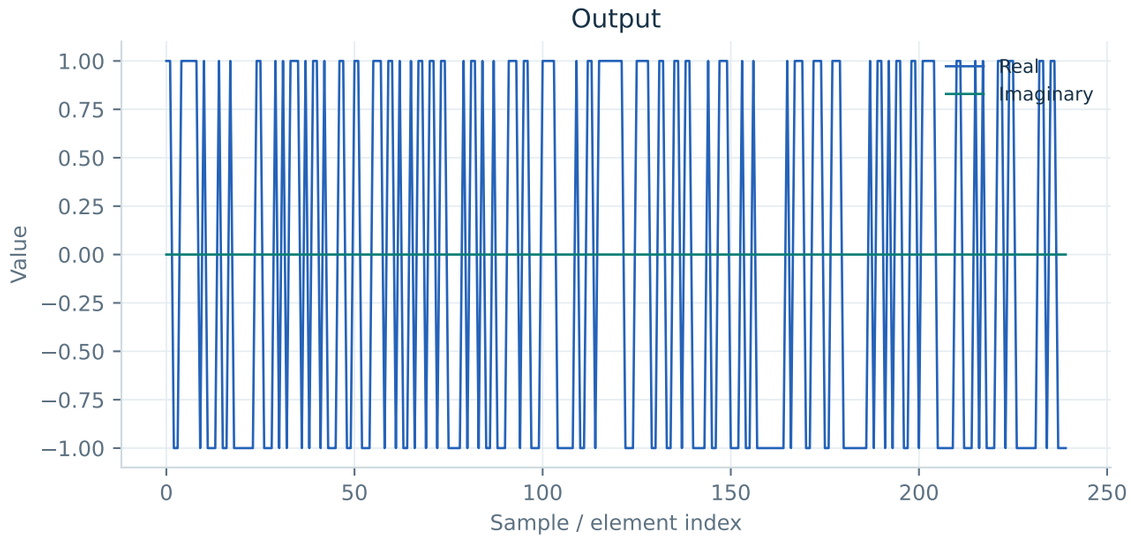



NUMERIC AGREEMENT


octave: max |difference| = 3.34e-16
matlab: max |difference| = 3.63e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
bit errors: 0
payload bits: 256


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

mimo / dsplog

mmse / operation: mimo / PASS

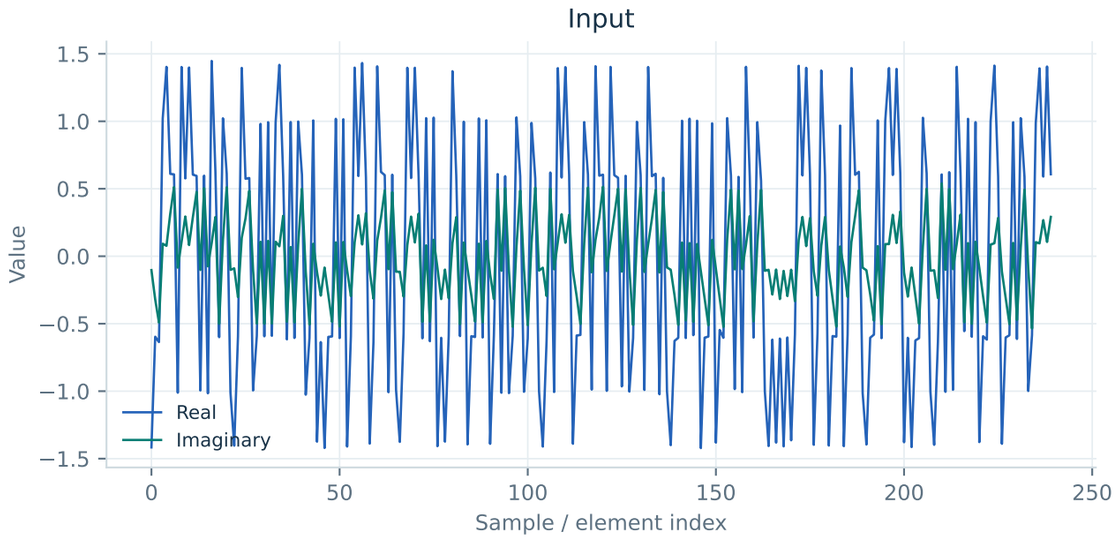

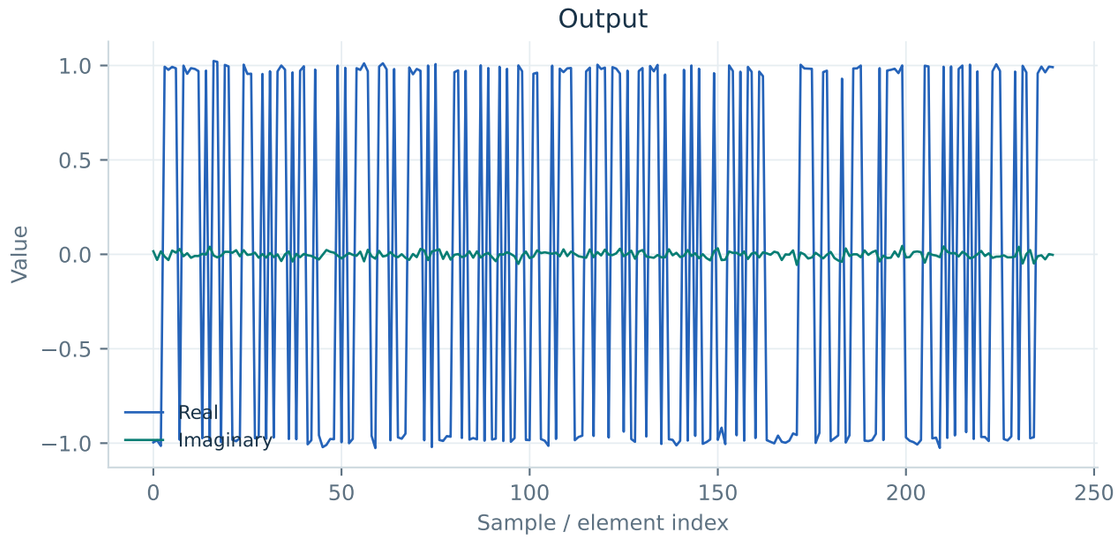

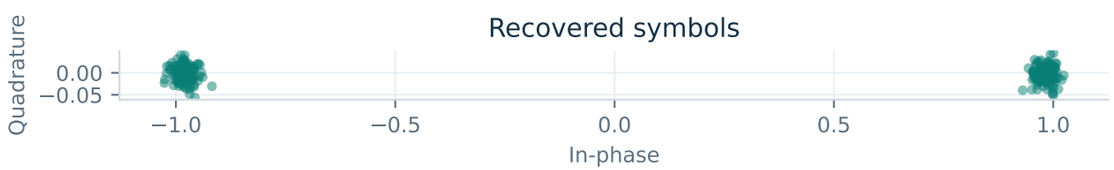

NUMERIC AGREEMENT


octave: max |difference| = 6.73e-16
matlab: max |difference| = 1.09e-15
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
bit errors: 0
payload bits: 256

Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

mimo / dsplog

alamouti / operation: alamouti / PASS

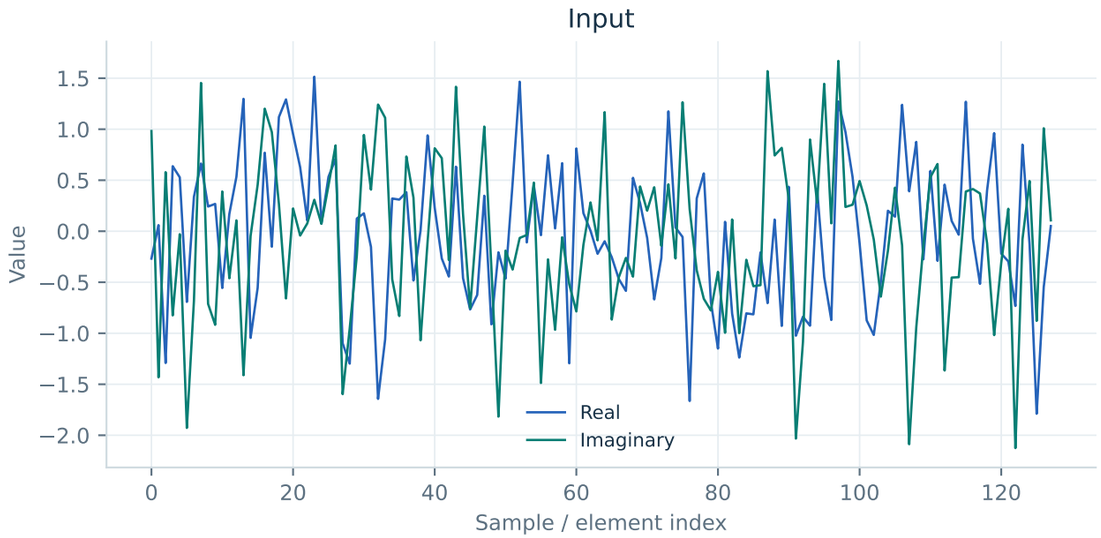

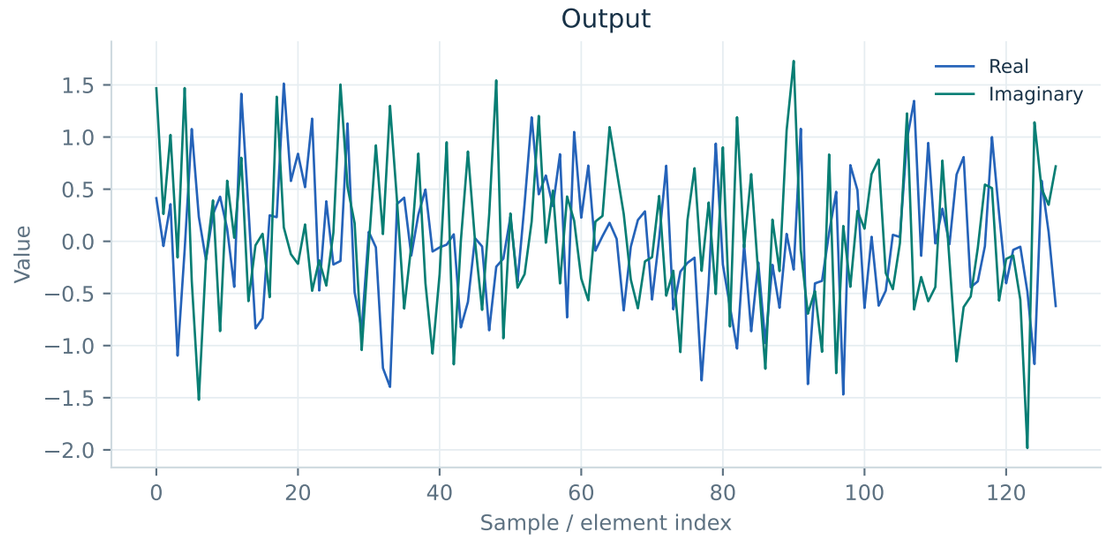



NUMERIC AGREEMENT


octave: max |difference| = 2.48e-16
matlab: max |difference| = 2.48e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

modems / ofdm_awgn

2_qam_tx / operation: ofdm_tx / PASS

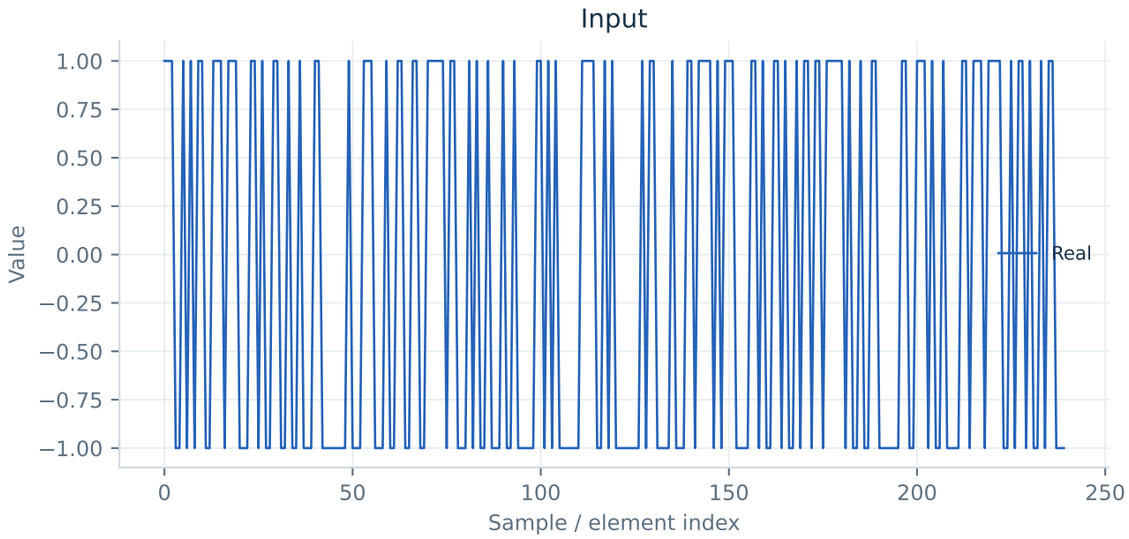

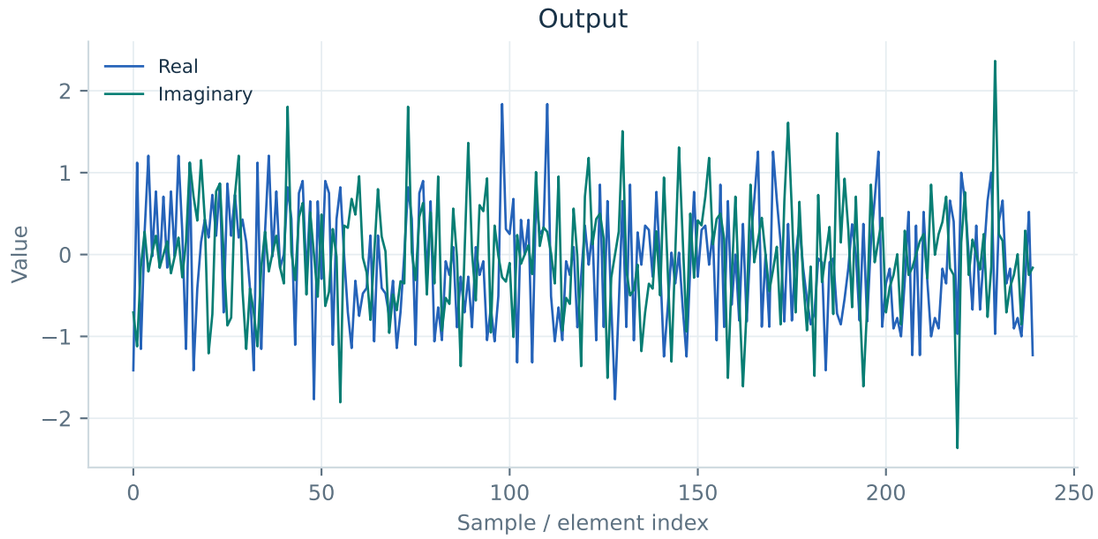

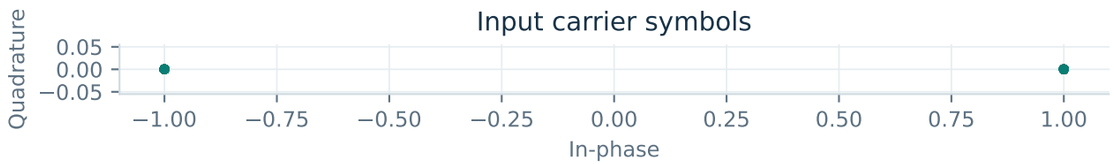

NUMERIC AGREEMENT


octave: max |difference| = 3.33e-16
matlab: max |difference| = 3.33e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.

Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

modems / ofdm_awgn

2_qam_rx / operation: ofdm_rx / PASS

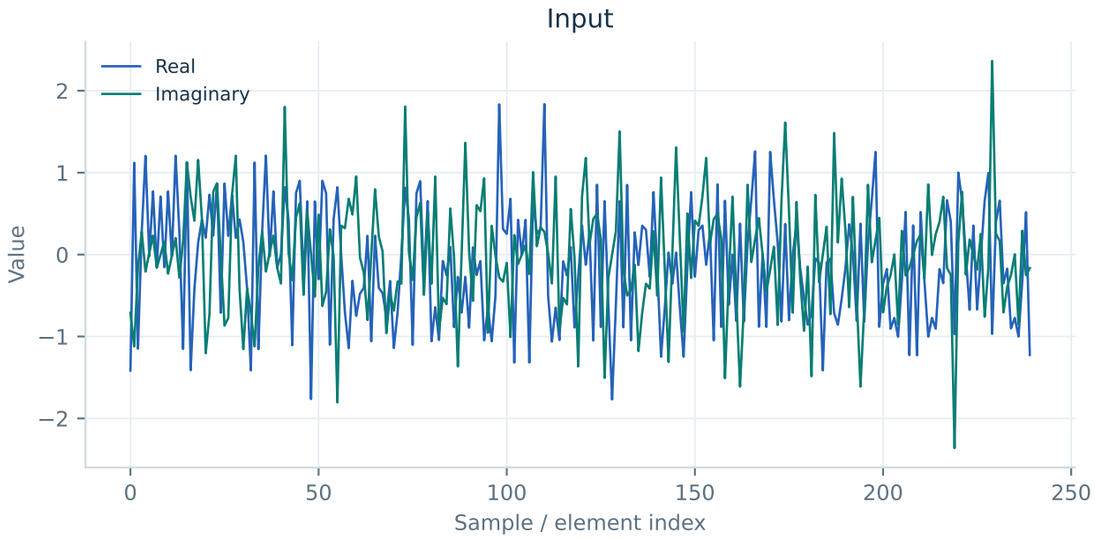

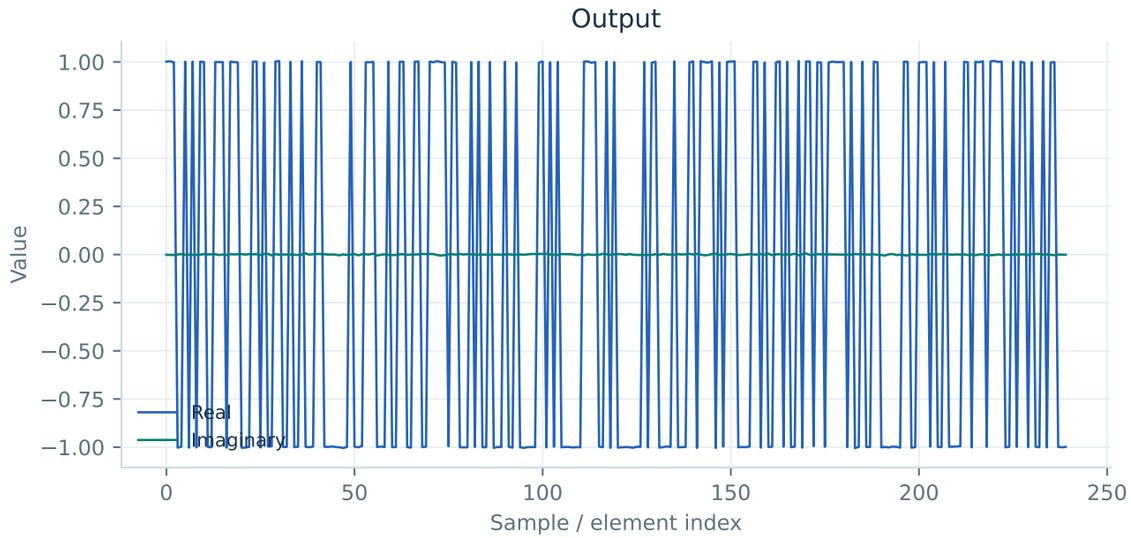



NUMERIC AGREEMENT


octave: max |difference| = 6.72e-16
matlab: max |difference| = 6.72e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
symbol errors: 0
payload symbols: 256
alphabet: 2
negative control detected: True


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

modems / ofdm_awgn

4_qam_tx / operation: ofdm_tx / PASS

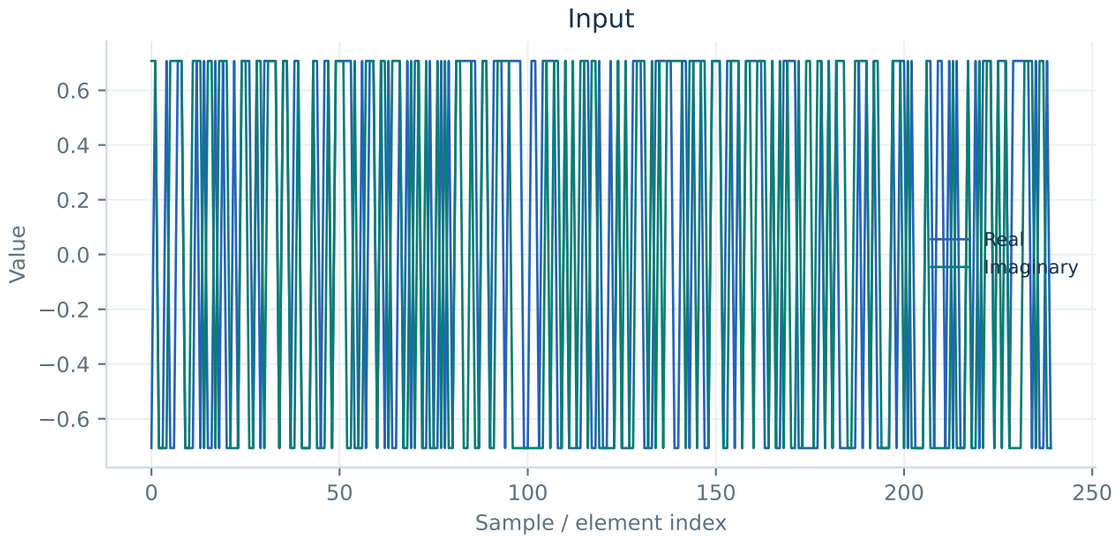

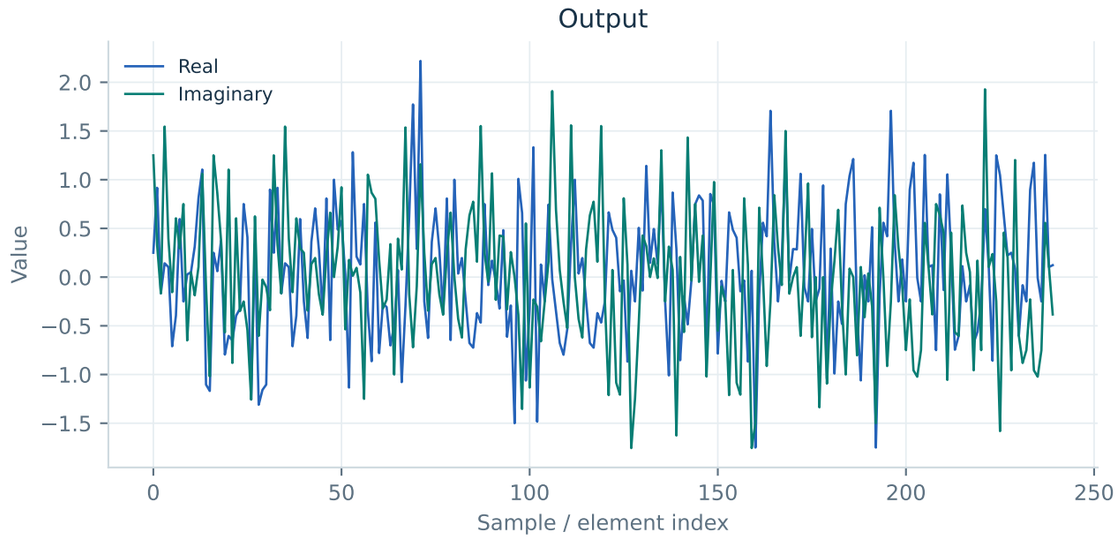

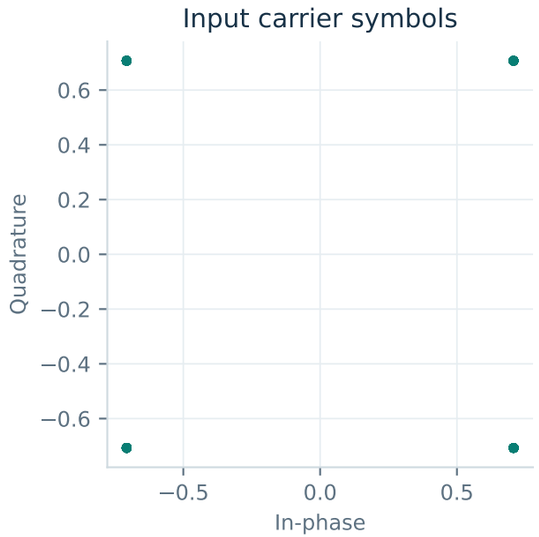

NUMERIC AGREEMENT


octave: max |difference| = 4.97e-16
matlab: max |difference| = 4.97e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

modems / ofdm_awgn

4_qam_rx / operation: ofdm_rx / PASS

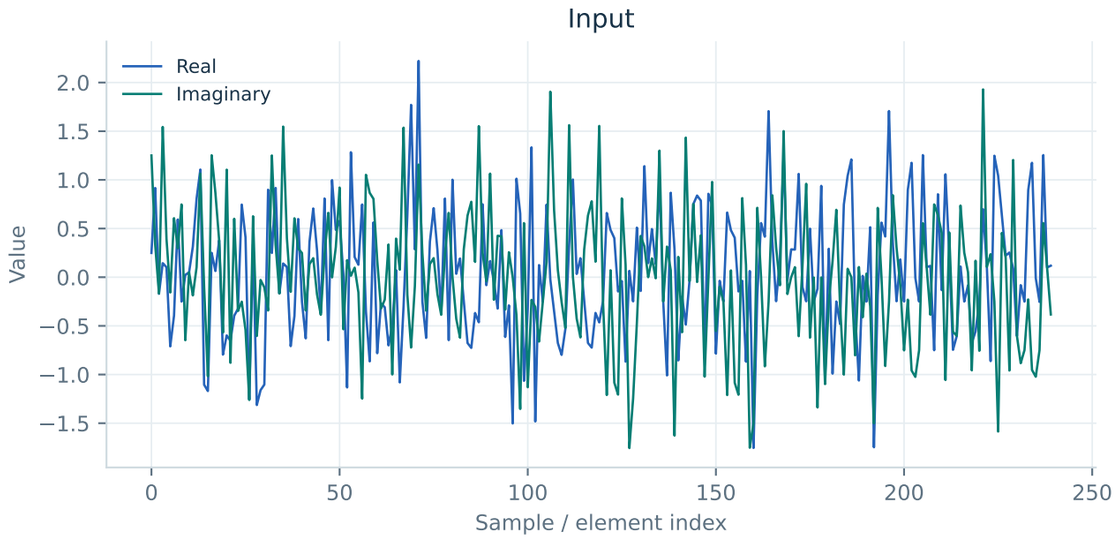

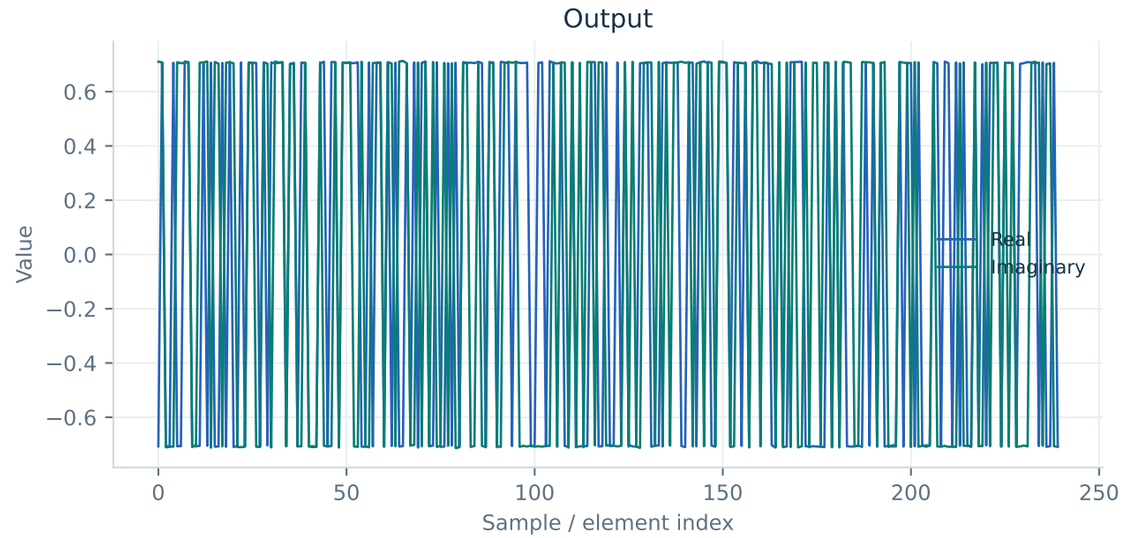

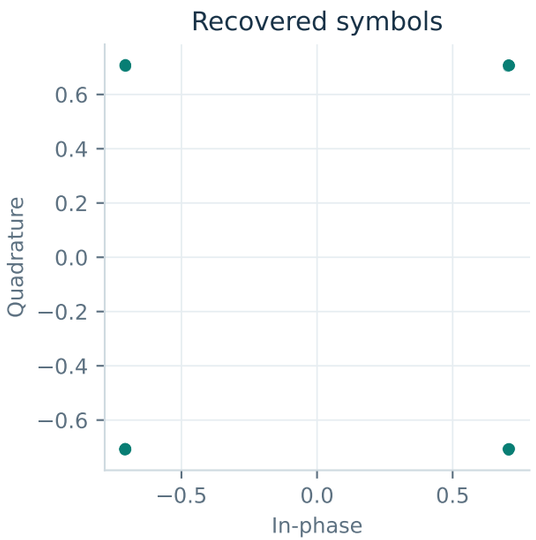

NUMERIC AGREEMENT


octave: max |difference| = 4.58e-16
matlab: max |difference| = 4.58e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
symbol errors: 0
payload symbols: 256
alphabet: 4
negative control detected: True


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

modems / ofdm_awgn

16_qam_tx / operation: ofdm_tx / PASS

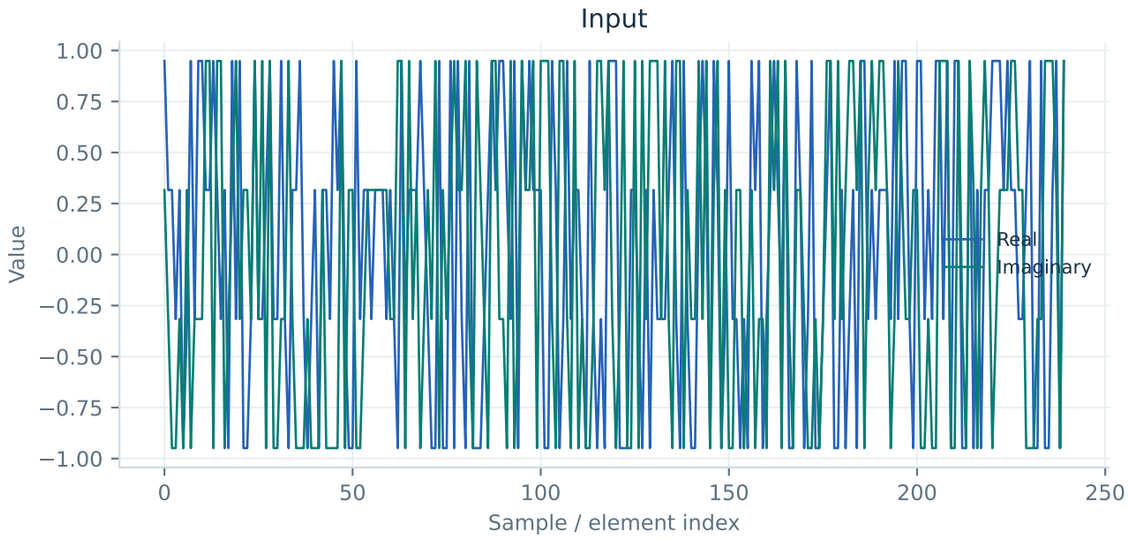

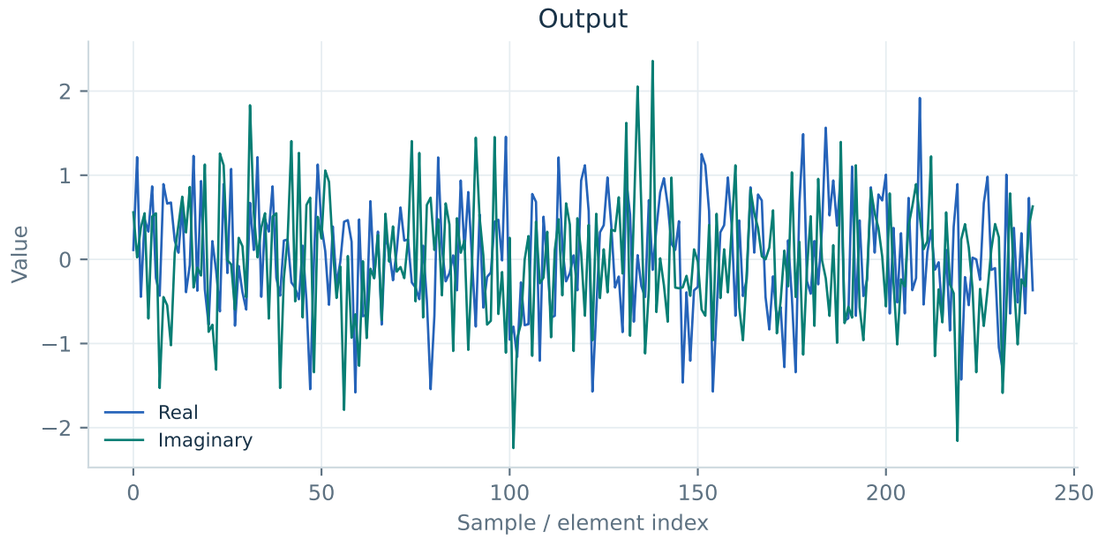

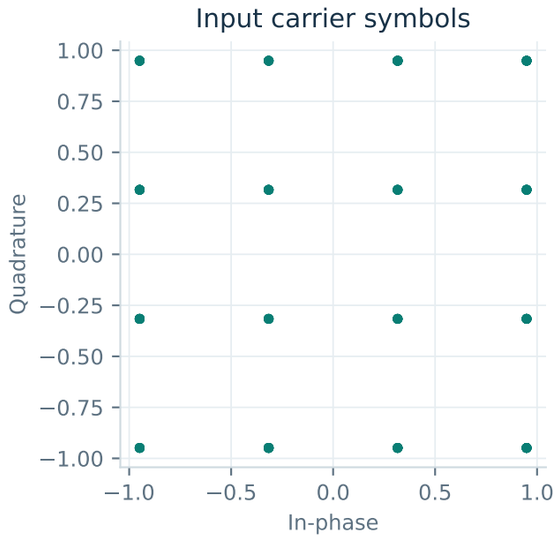

NUMERIC AGREEMENT


octave: max |difference| = 4.48e-16
matlab: max |difference| = 4.48e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

modems / ofdm_awgn

16_qam_rx / operation: ofdm_rx / PASS

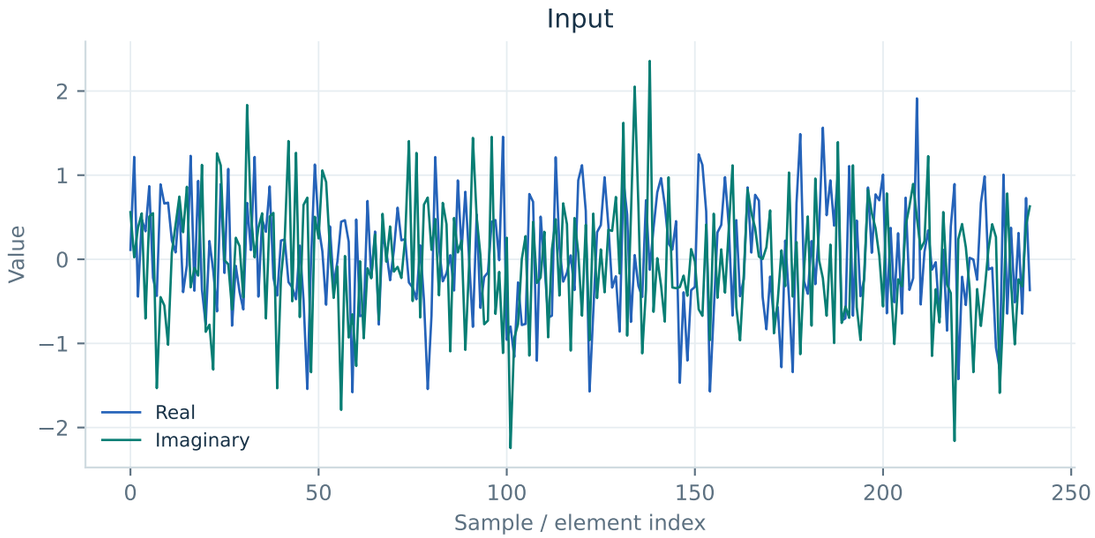

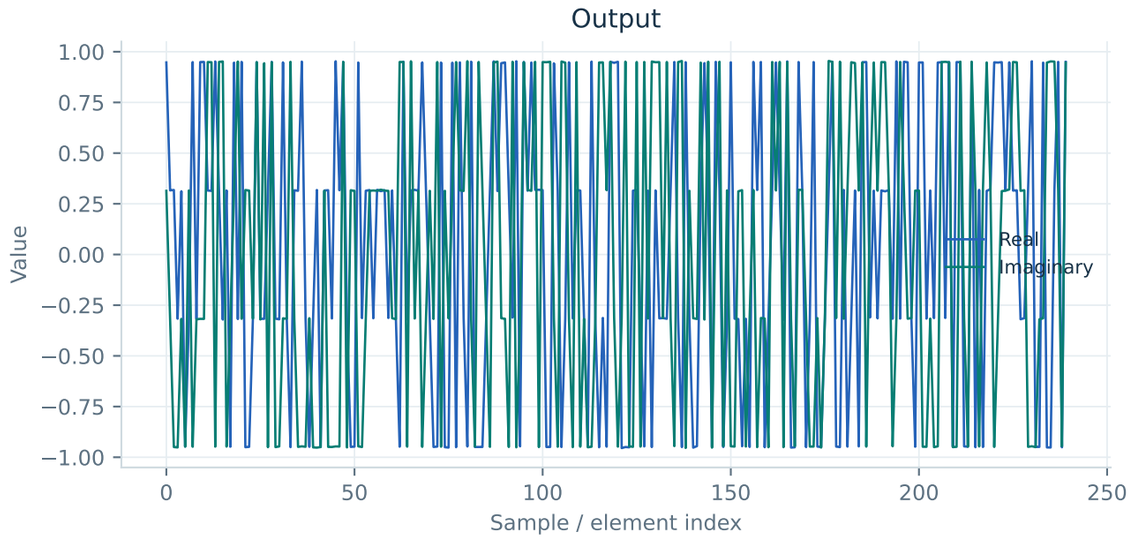

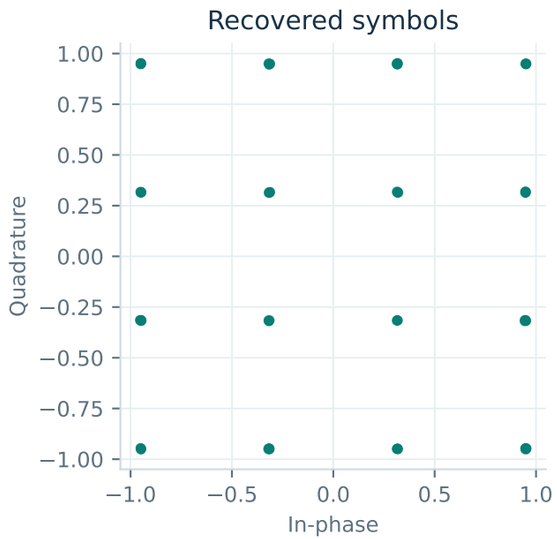

NUMERIC AGREEMENT


octave: max |difference| = 4.34e-16
matlab: max |difference| = 4.34e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
symbol errors: 0
payload symbols: 256
alphabet: 16
negative control detected: True


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

modems / ofdm_awgn

64_qam_tx / operation: ofdm_tx / PASS

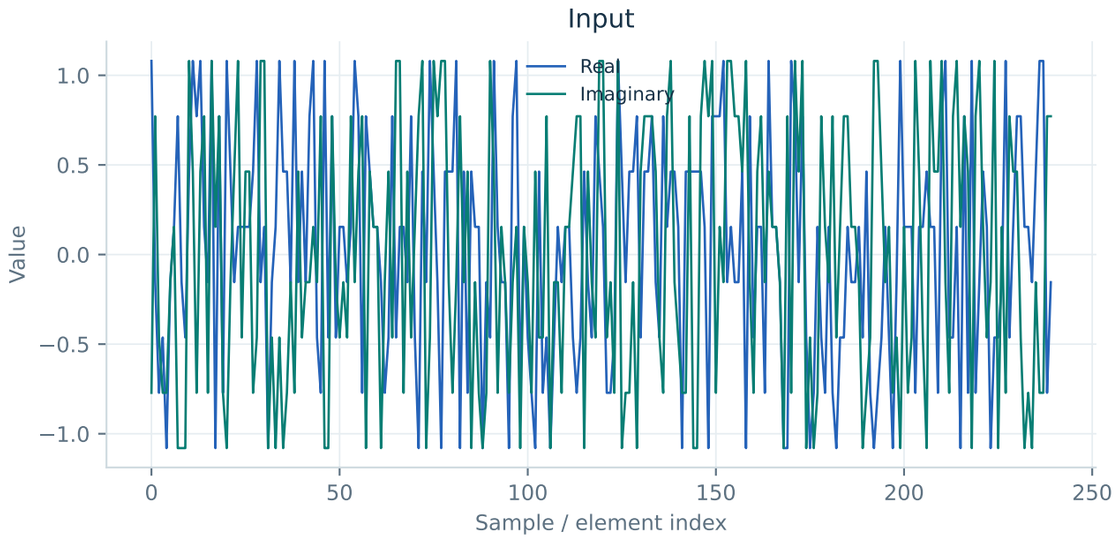

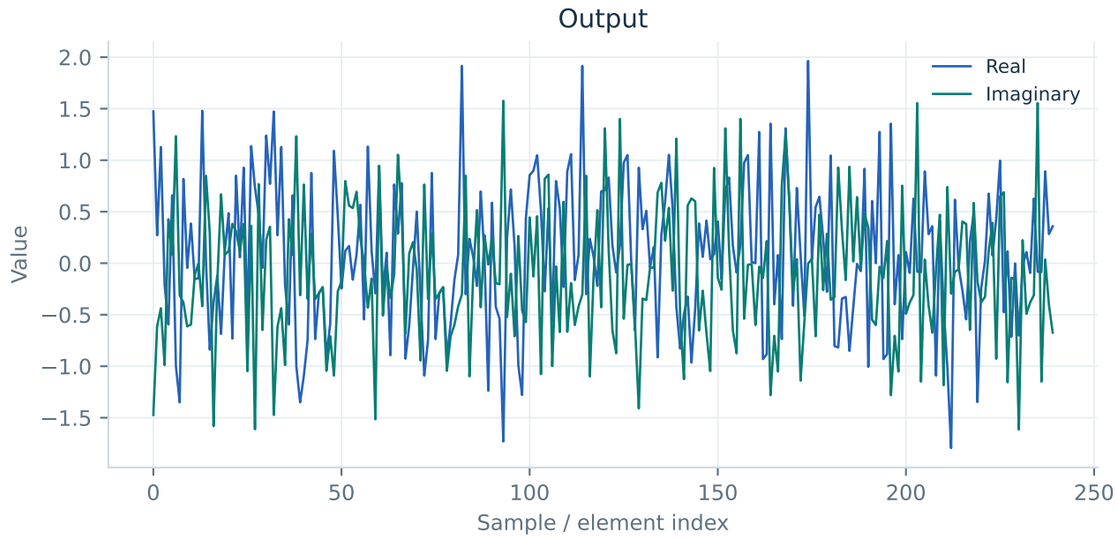

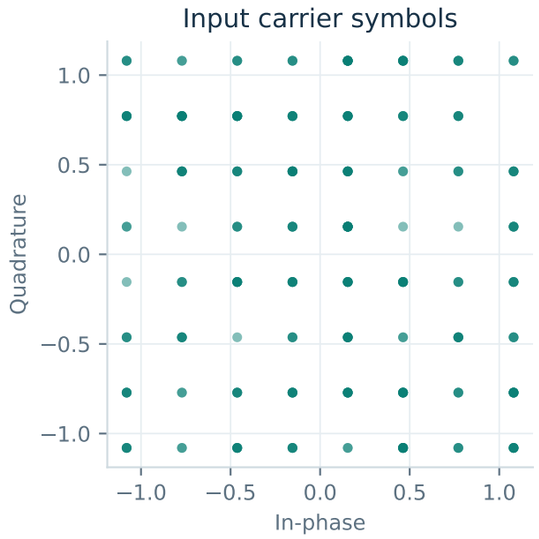

NUMERIC AGREEMENT


octave: max |difference| = 5.55e-16
matlab: max |difference| = 5.55e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

modems / ofdm_awgn

64_qam_rx / operation: ofdm_rx / PASS

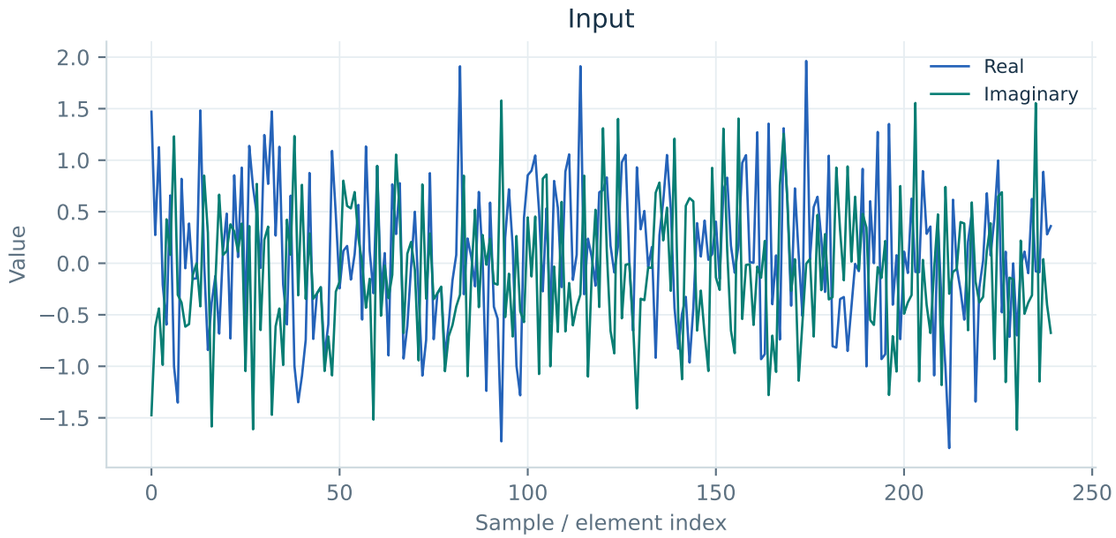

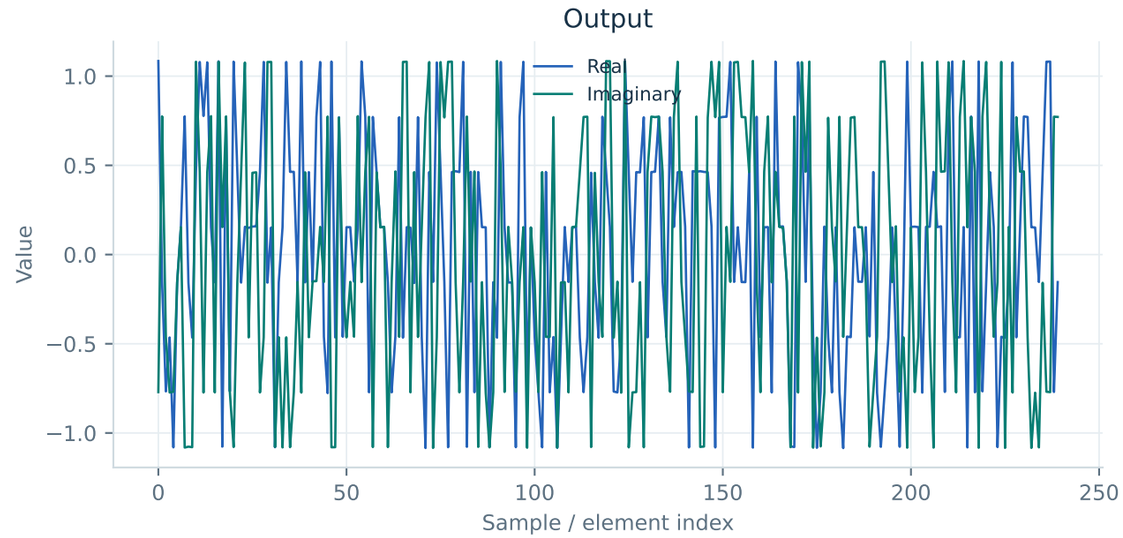

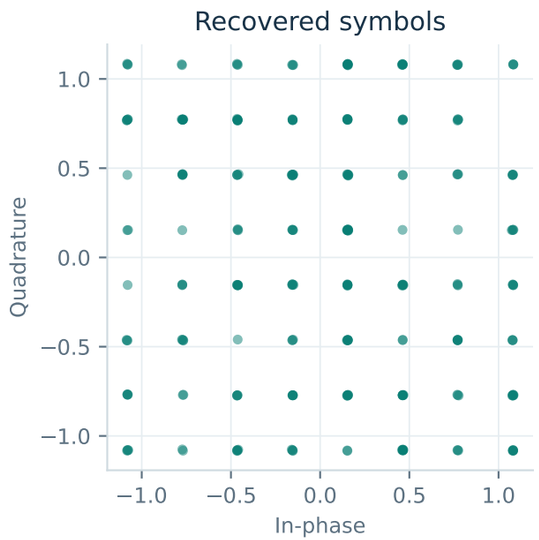

NUMERIC AGREEMENT


octave: max |difference| = 4.85e-16
matlab: max |difference| = 4.85e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
symbol errors: 0
payload symbols: 256
alphabet: 64
negative control detected: True


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

modems / fsk_text

four_fsk_tx / operation: fsk_tx / PASS

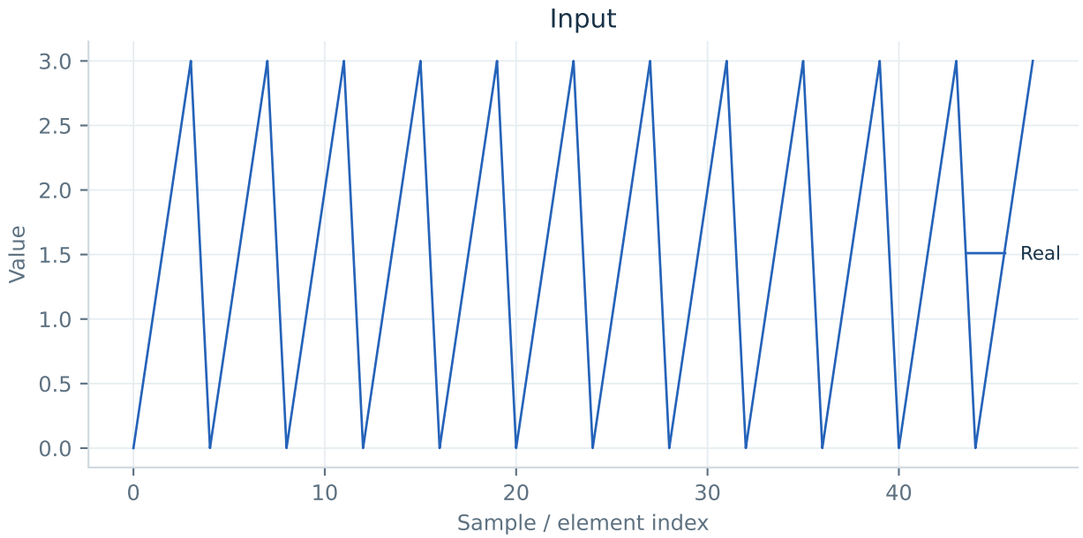

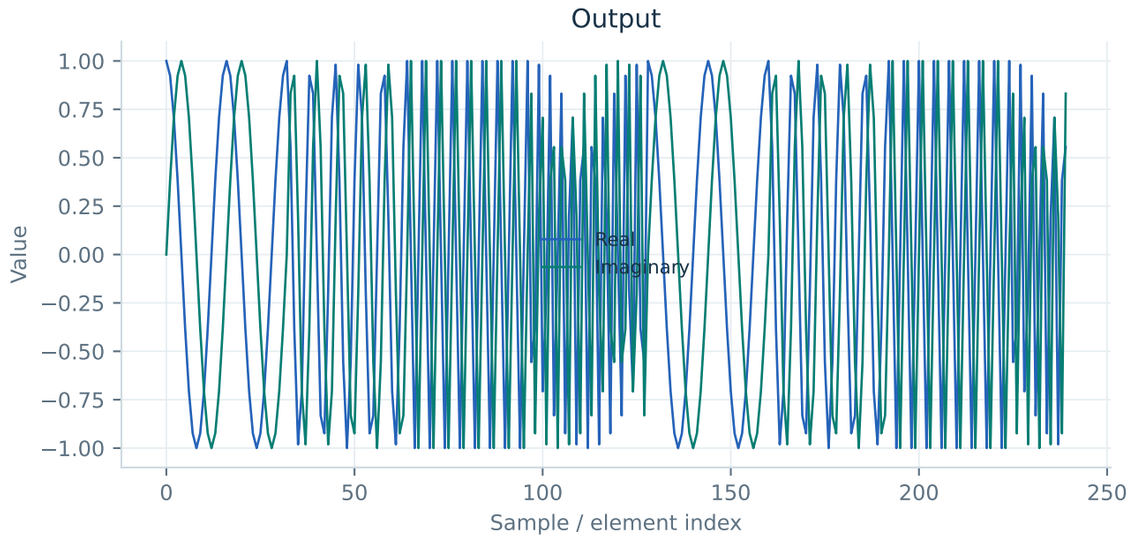

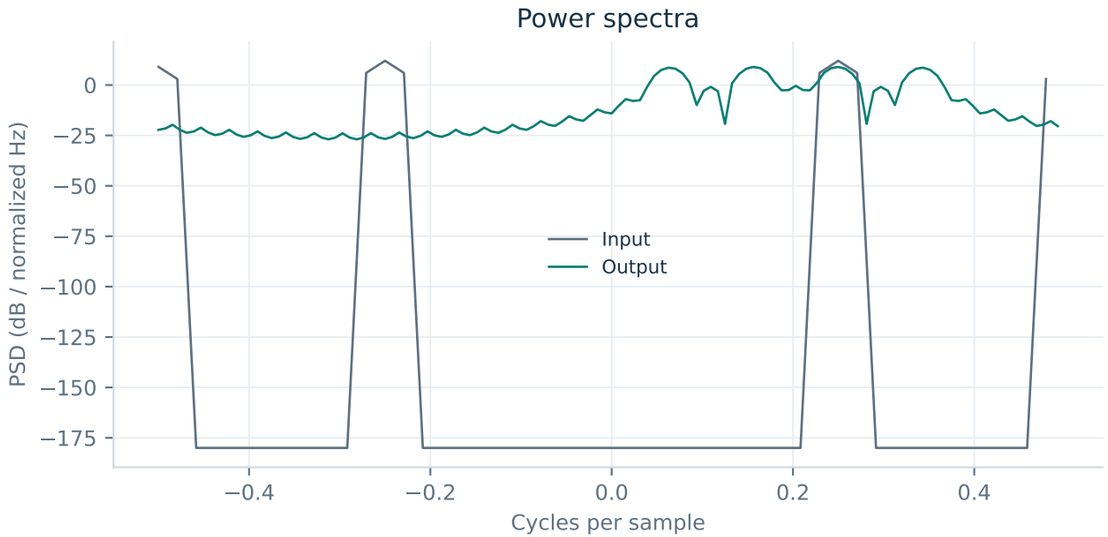

NUMERIC AGREEMENT


octave: max |difference| = 1.42e-14
matlab: max |difference| = 1.42e-14
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

modems / fsk_text

four_fsk_rx / operation: fsk_rx / PASS

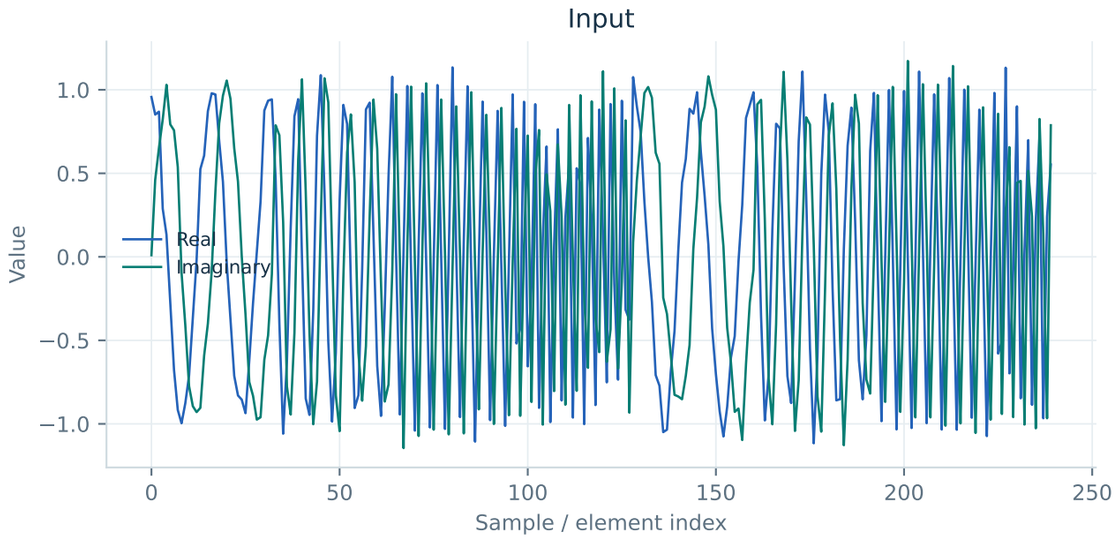

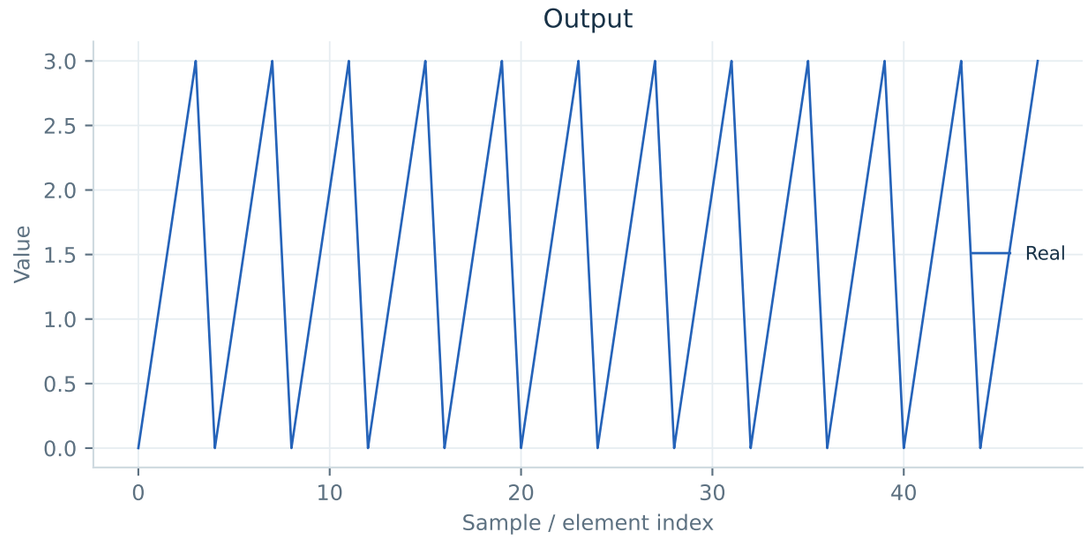

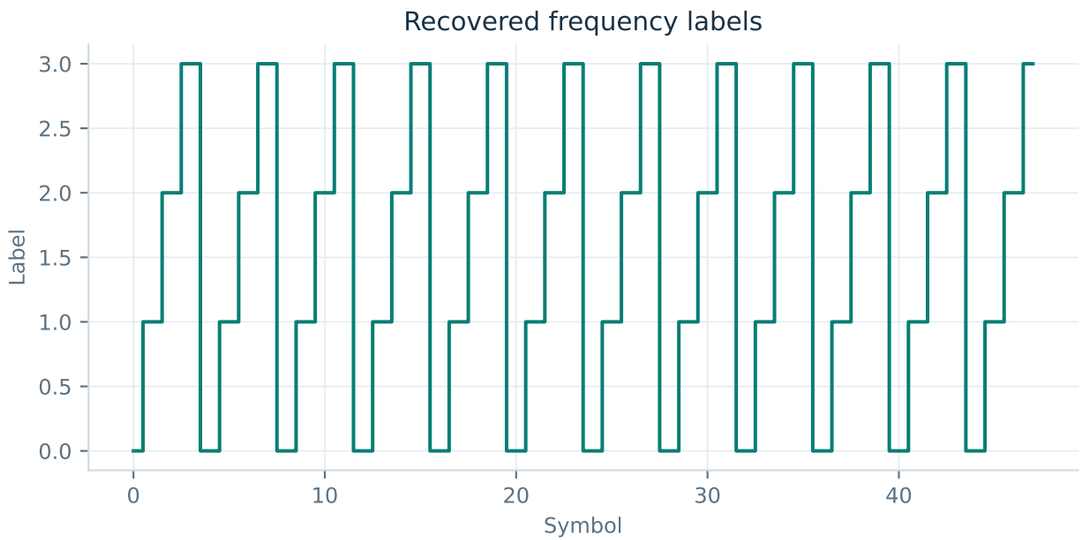

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 0
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
symbol errors: 0
payload symbols: 48


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

synchronization / symbol_timing

costas_tracking / operation: costas / PASS

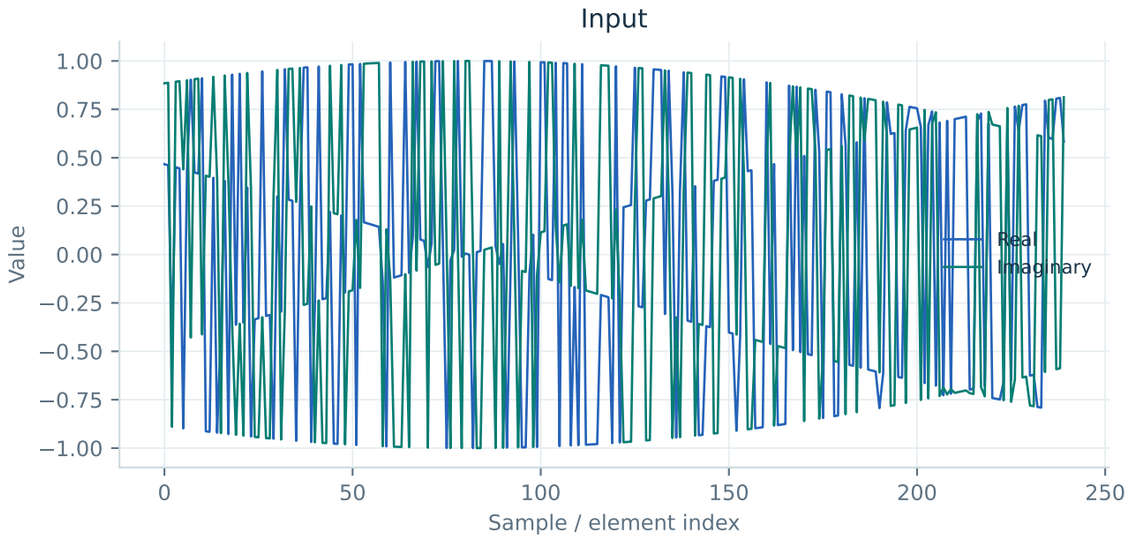

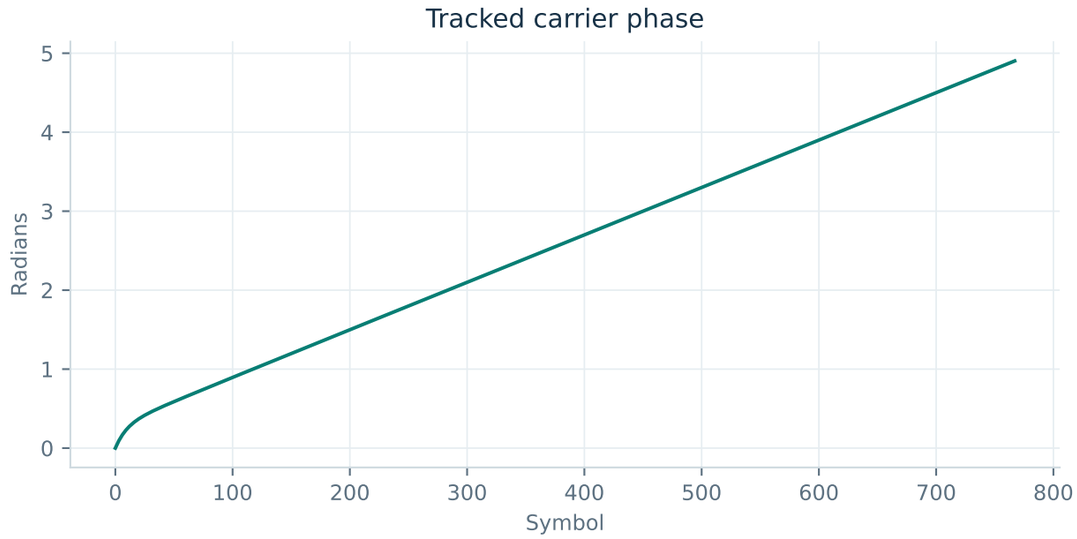

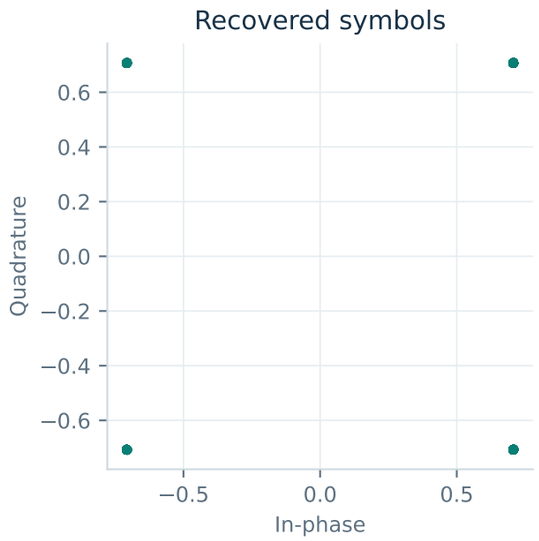

NUMERIC AGREEMENT


octave: max |difference| = 1.89e-15
matlab: max |difference| = 1.89e-15
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
uncorrected mse: 3.1613
corrected mse: 9.1513e-08


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

synchronization / symbol_timing

gardner_tracking / operation: timing / PASS

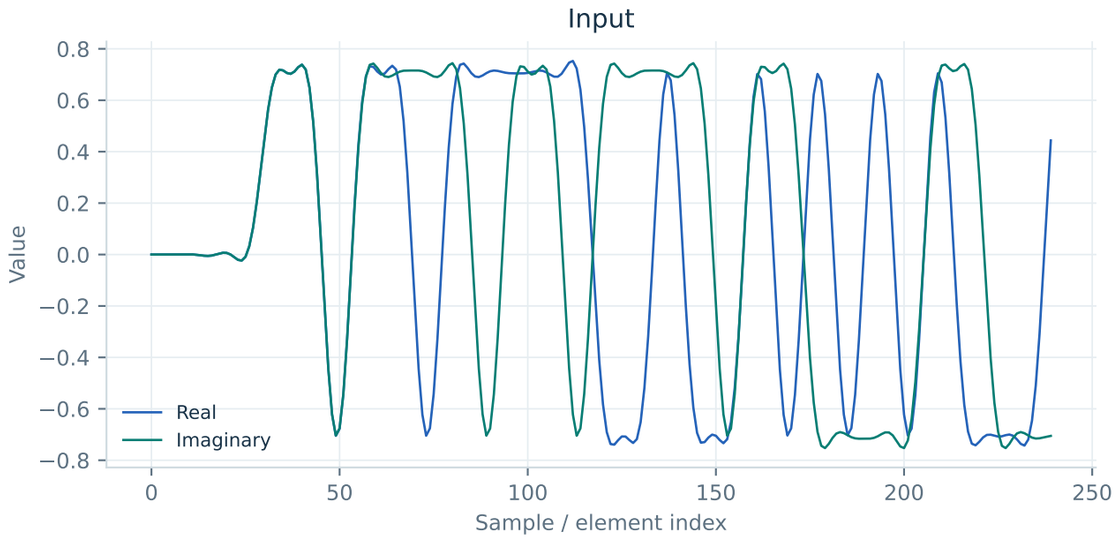

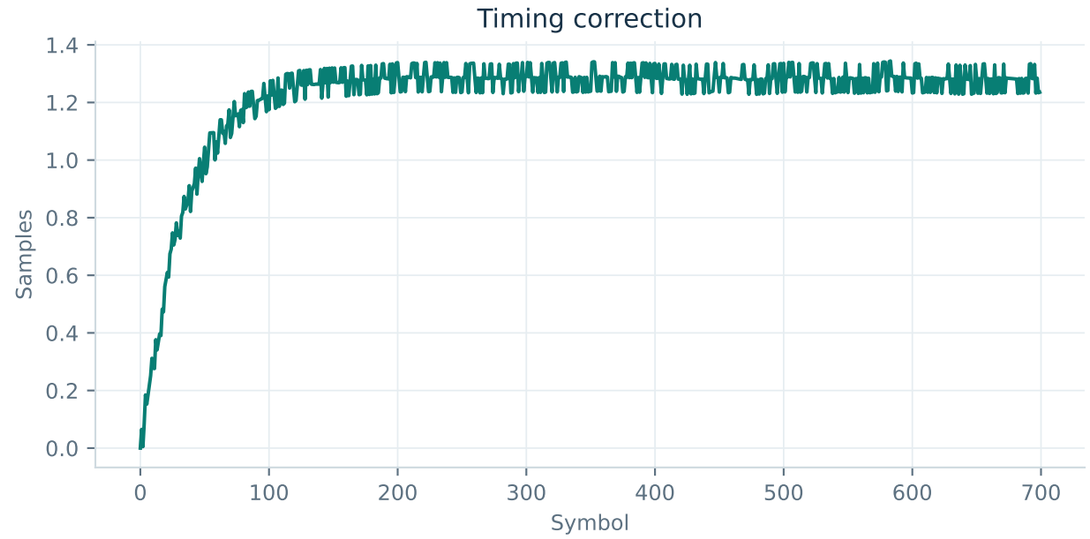

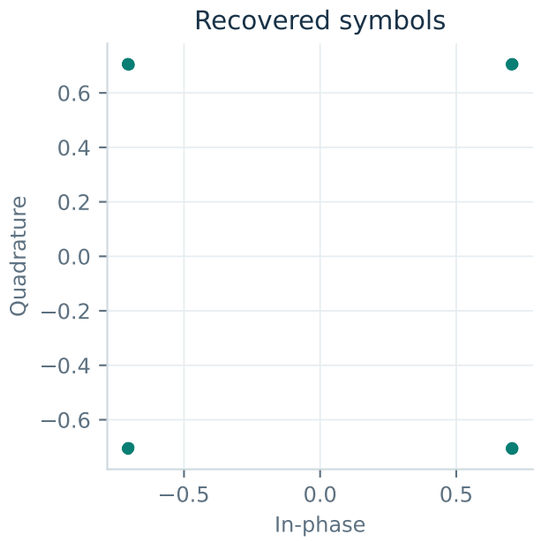

NUMERIC AGREEMENT


octave: max |difference| = 4.09e-12
matlab: max |difference| = 4.09e-12
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
uncorrected mse: 0.012206
corrected mse: 1.1169e-05


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

filters / oset

notch_interference / operation: notch / PASS

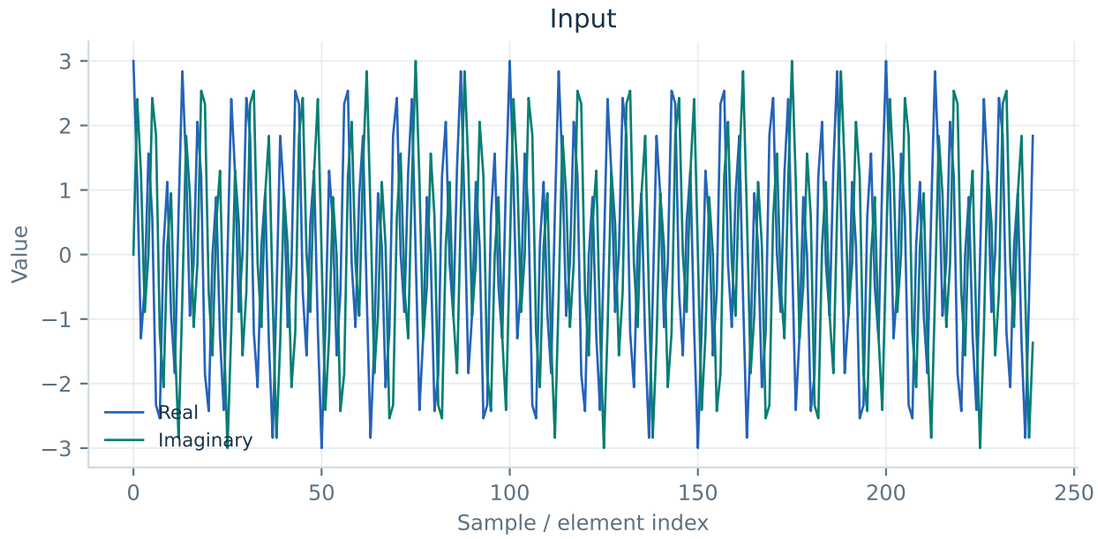

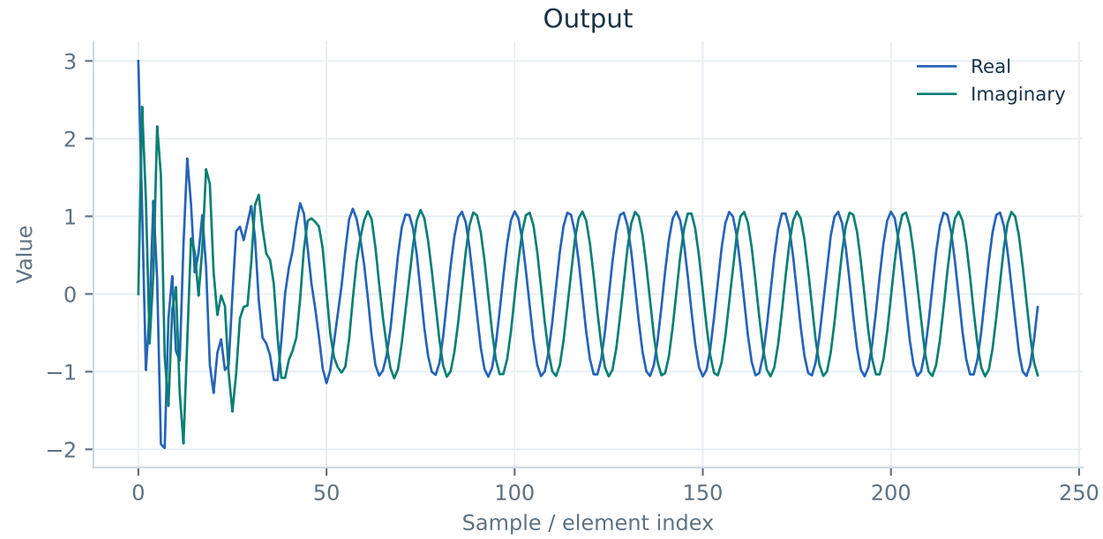

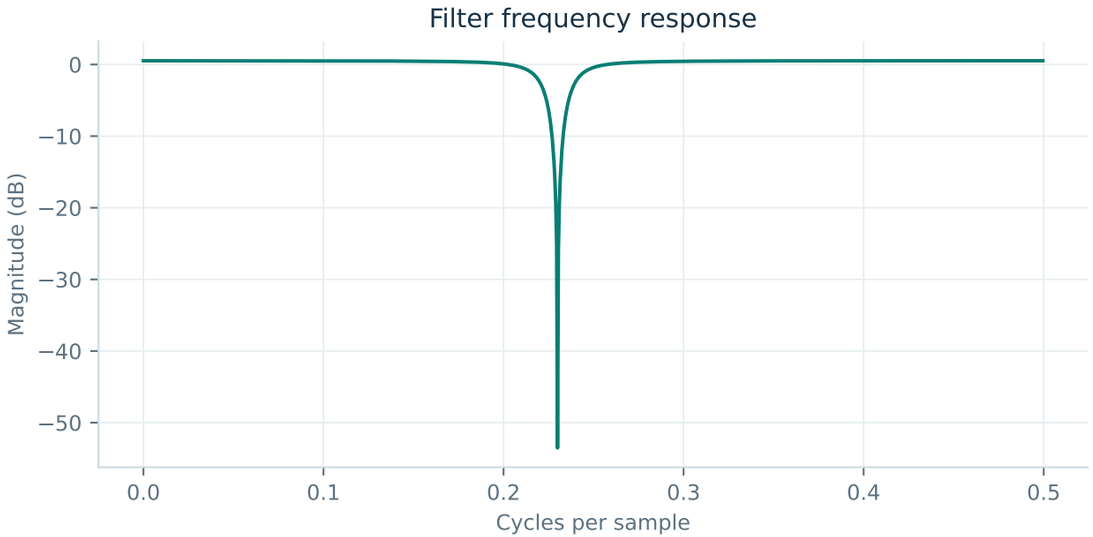

NUMERIC AGREEMENT


octave: max |difference| = 1.13e-15
matlab: max |difference| = 1.34e-15
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
residual interference amplitude: 0.0017549


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

filters / oset

scalar_kalman / operation: kalman / PASS

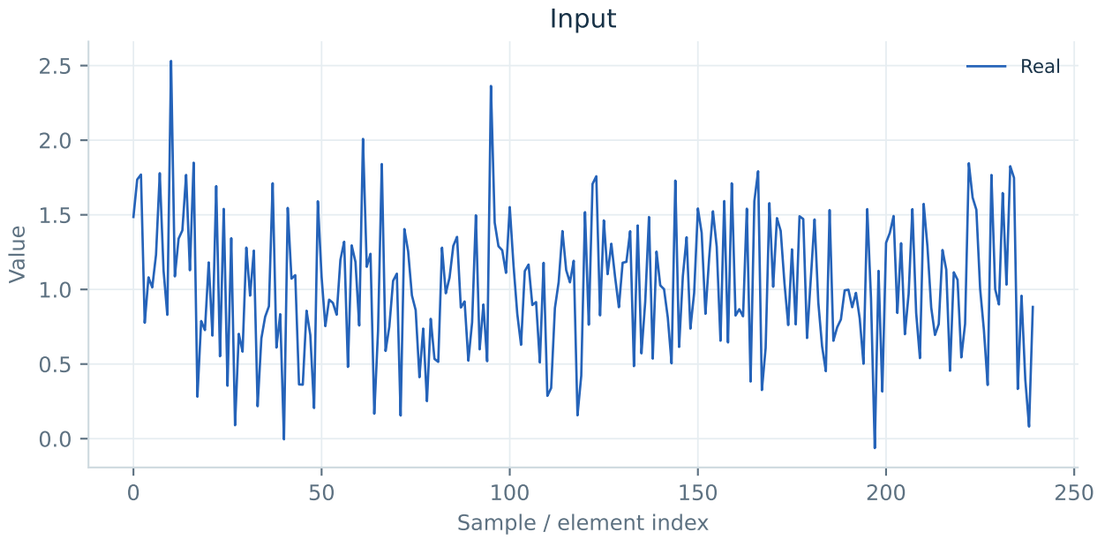

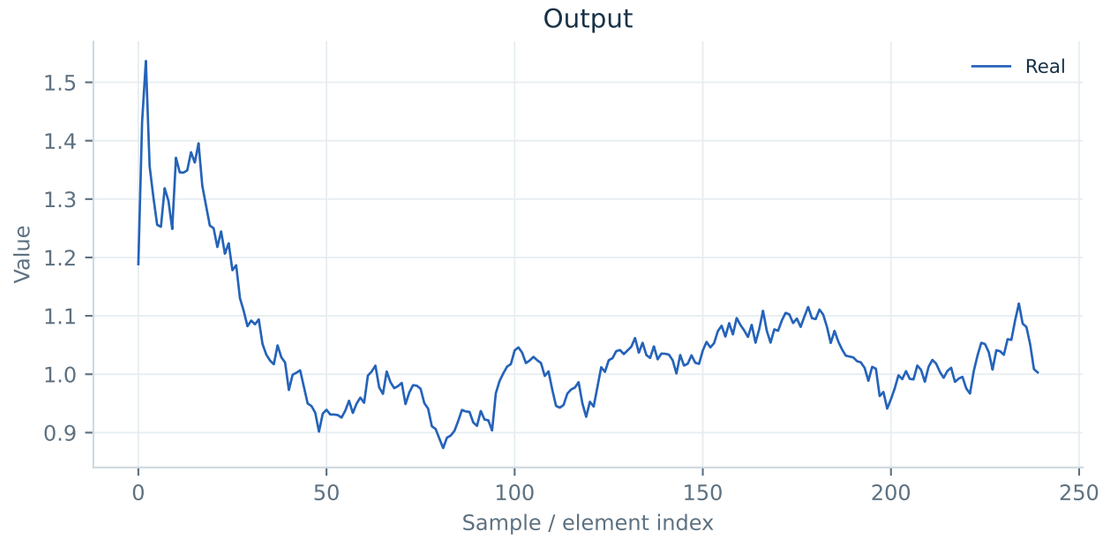

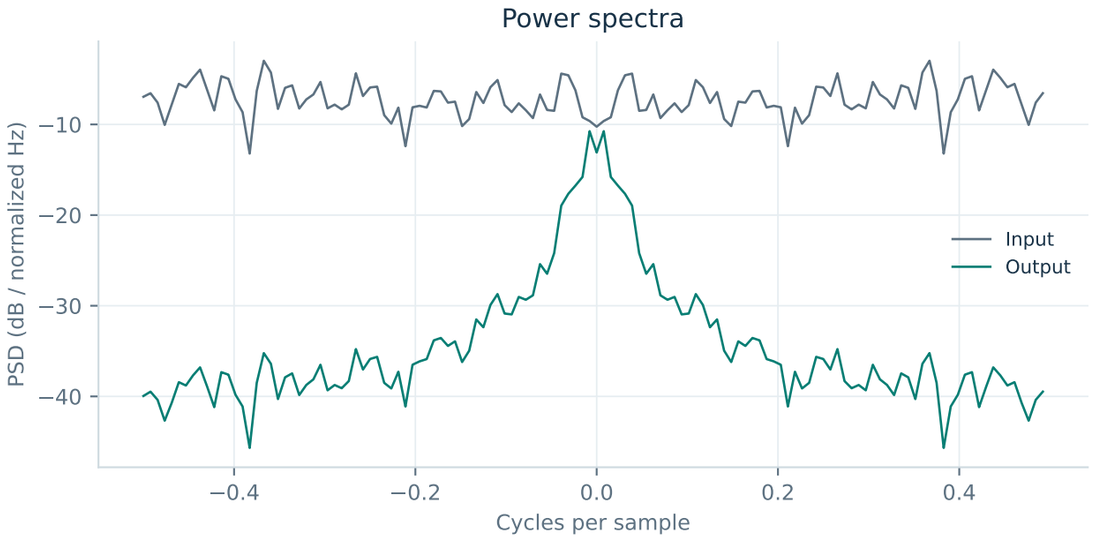

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 0
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
input mse: 0.20543
output mse: 0.0032208


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

teaching / harger

dft_single_bin / operation: dft / PASS

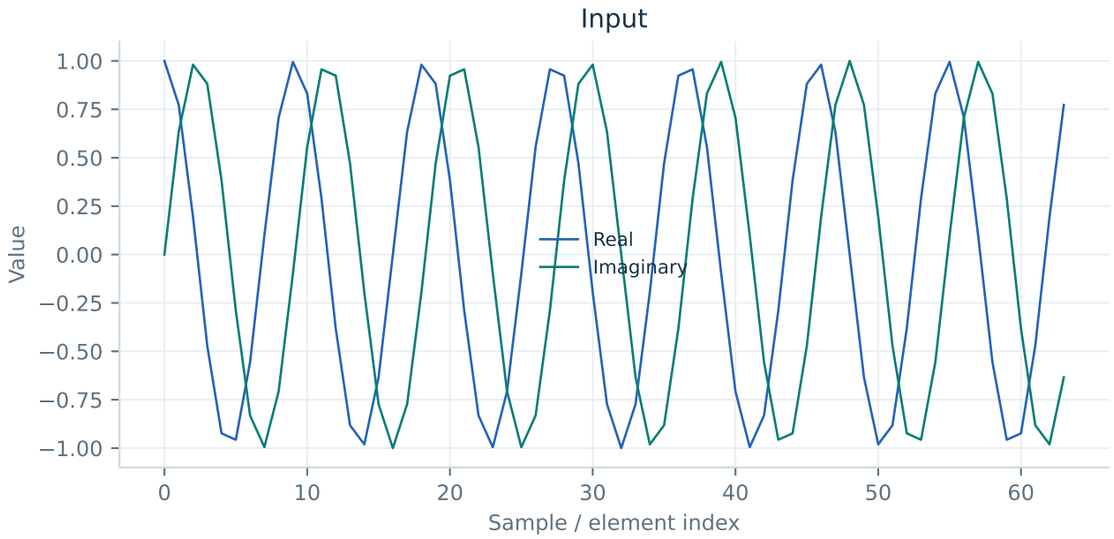

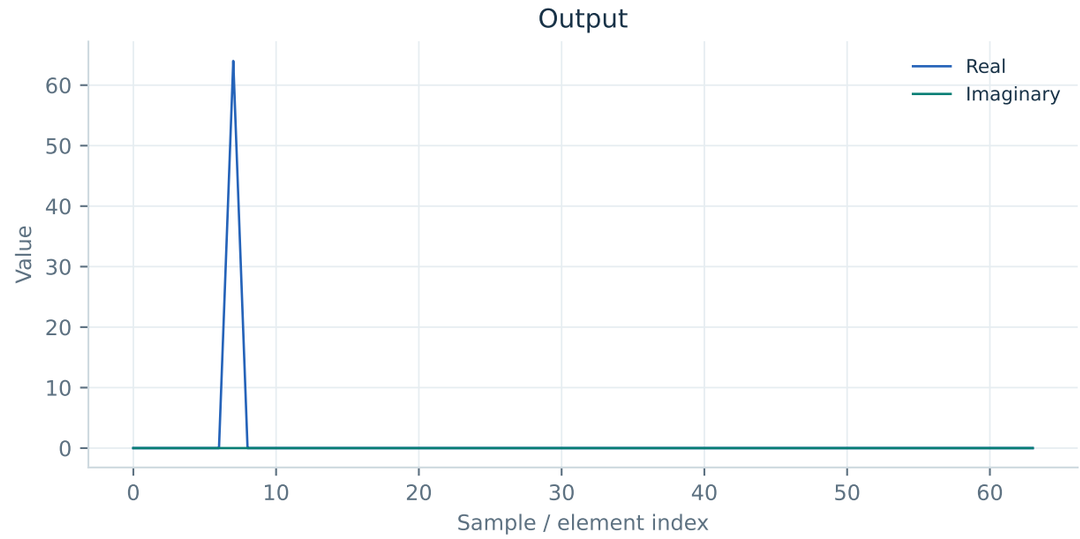

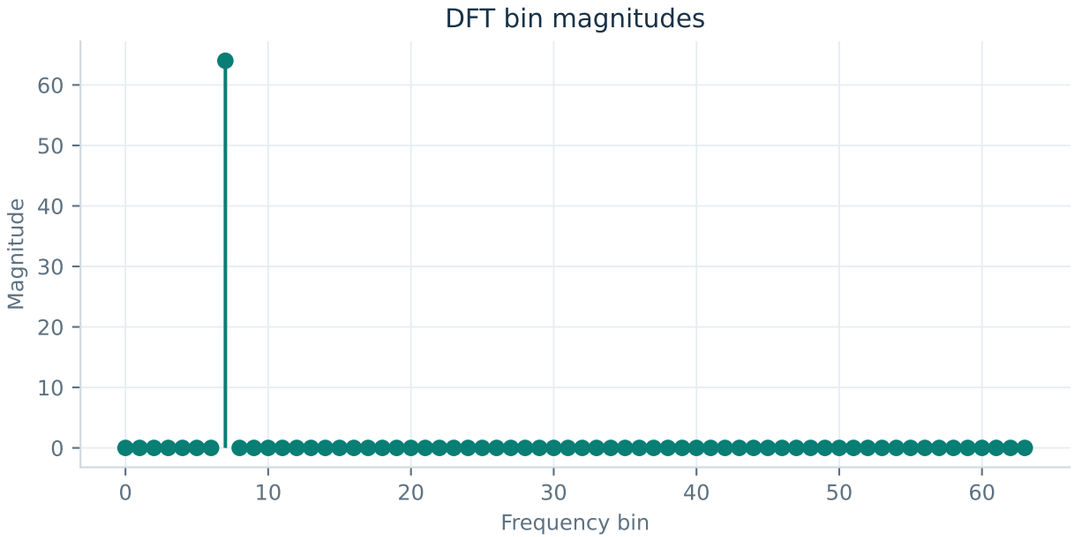

NUMERIC AGREEMENT


octave: max |difference| = 4.62e-15
matlab: max |difference| = 2.98e-15
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

teaching / harger

inverse_dft / operation: dft / PASS

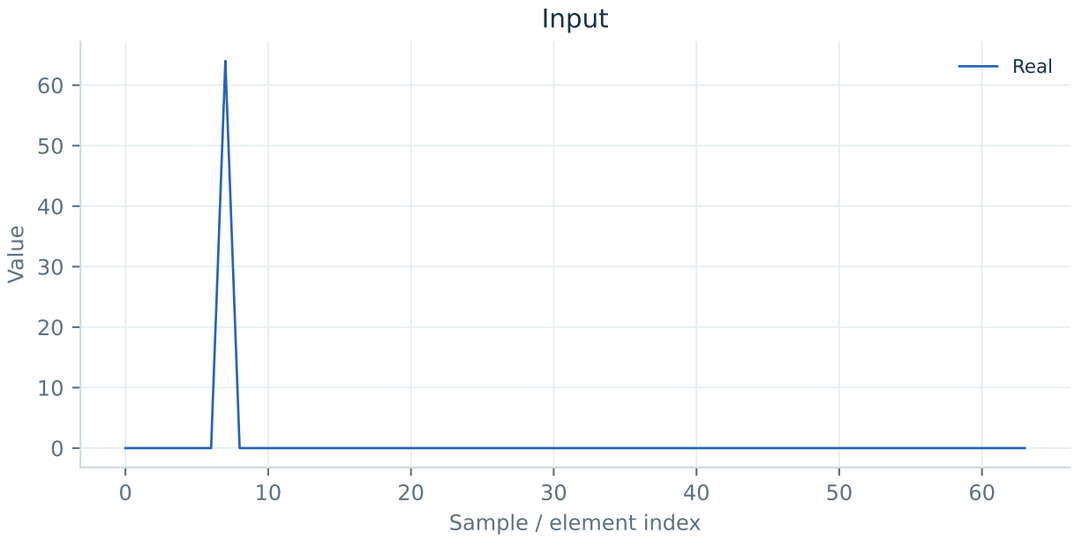

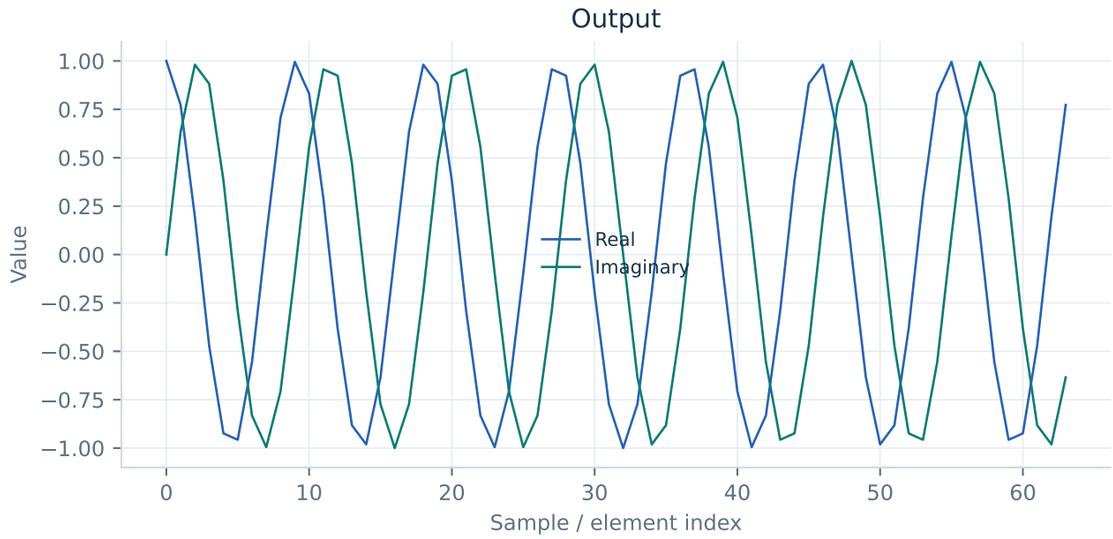

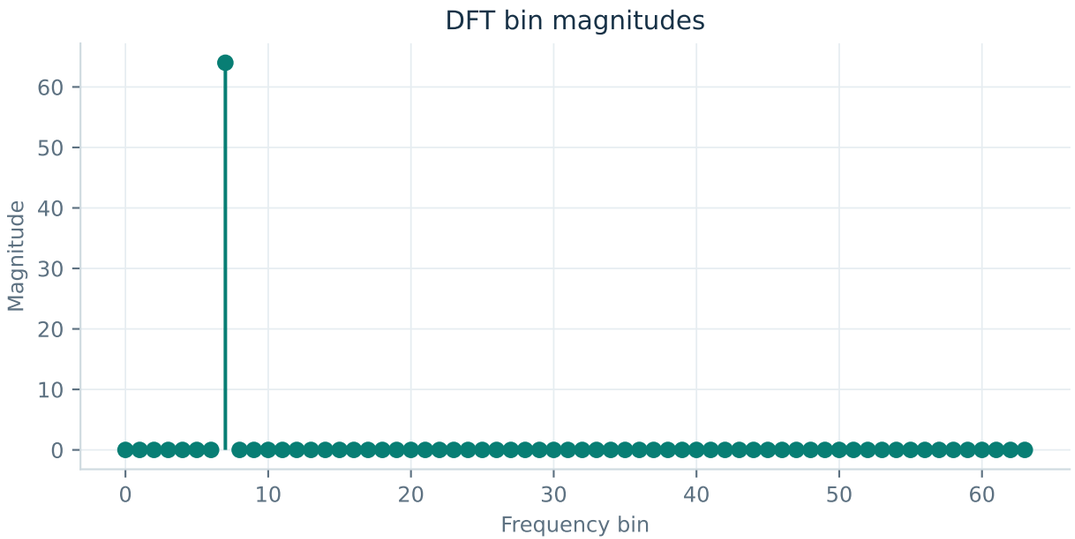

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 1.57e-16
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.

teaching / harger

filter_impulse / operation: fir / PASS

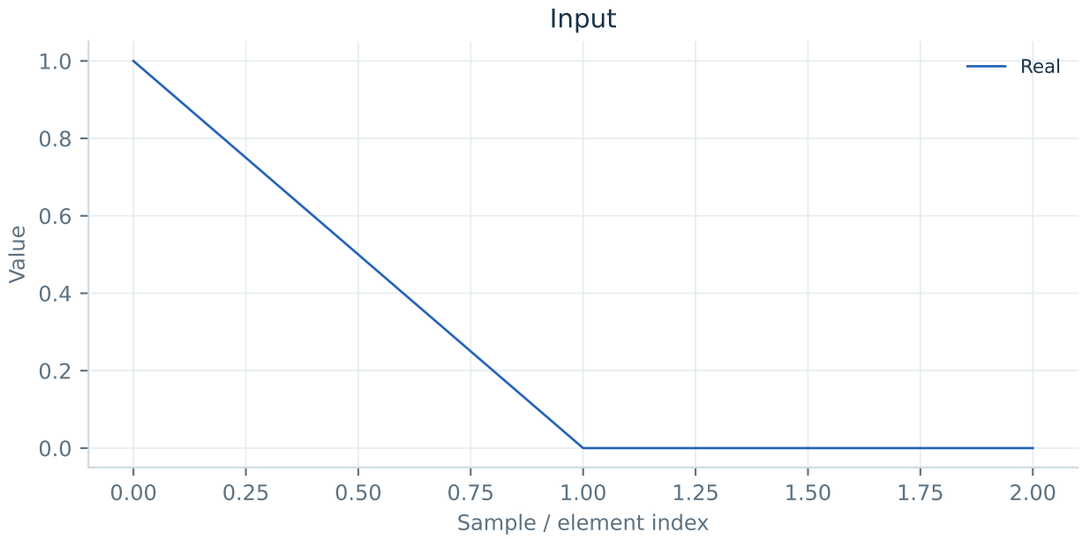

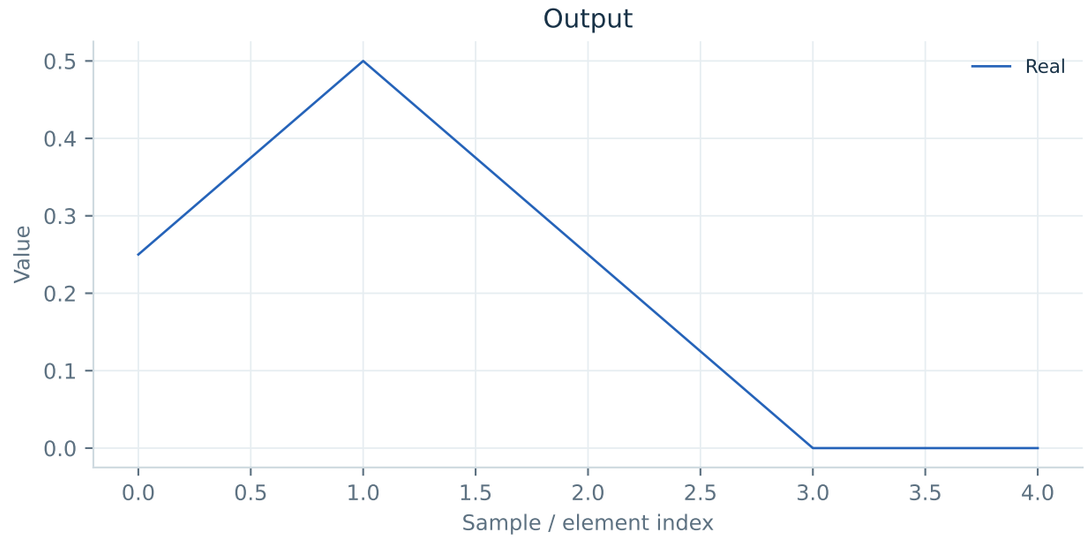

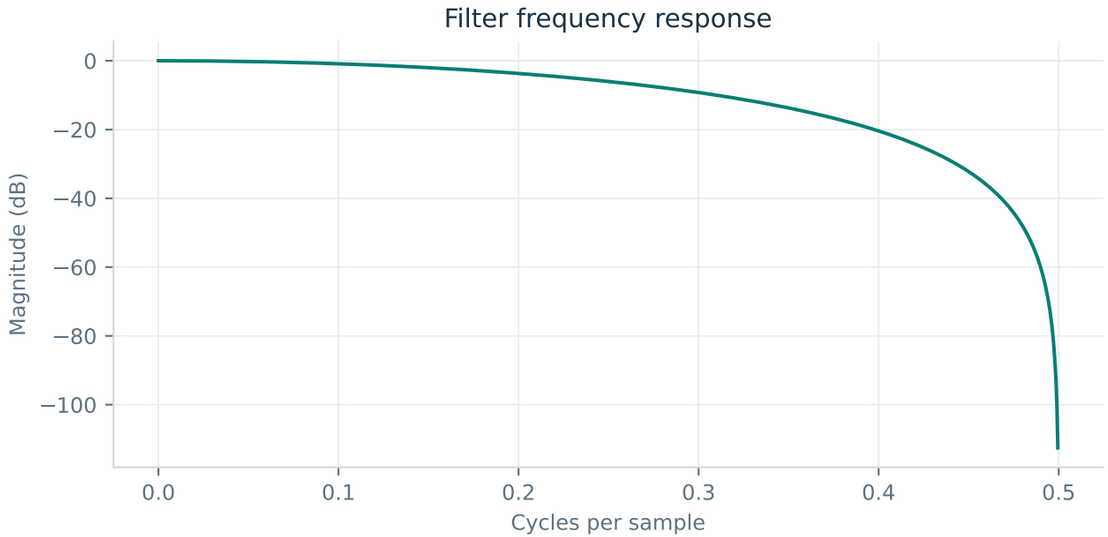

NUMERIC AGREEMENT


octave: max |difference| = 0
matlab: max |difference| = 0
SystemVerilog (suite maximum): max |difference| = 2.51e-13


ACCEPTANCE METRICS
Analytic oracle / stated transform contract passed.


Source: seeded test captures, replayed in Python. MATLAB, Octave and UVM compare the same transaction. PASS applies to the documented portable contract; original source equivalence is recorded separately.


oqpsk 2 sps timing recovery 2019 12 05


PORTABLE MODEL / Clean channel / 0 errors in 320 payload symbols

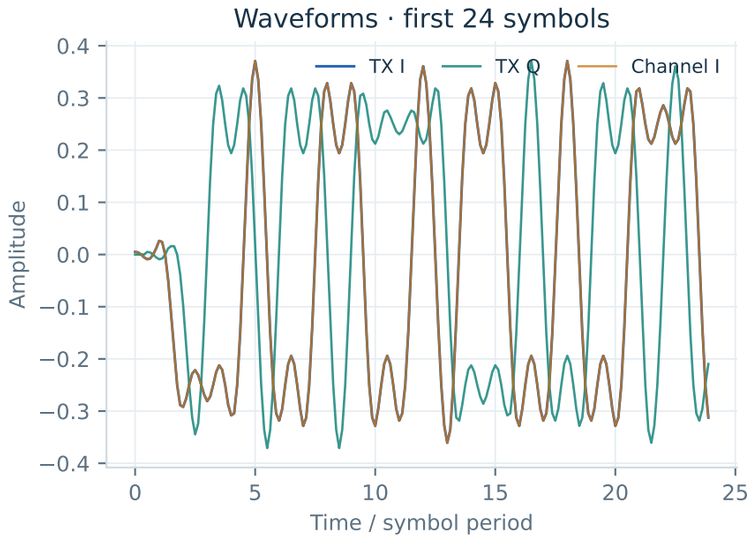


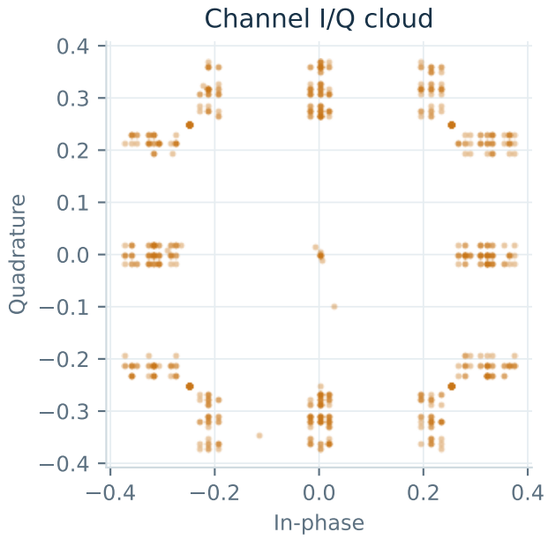

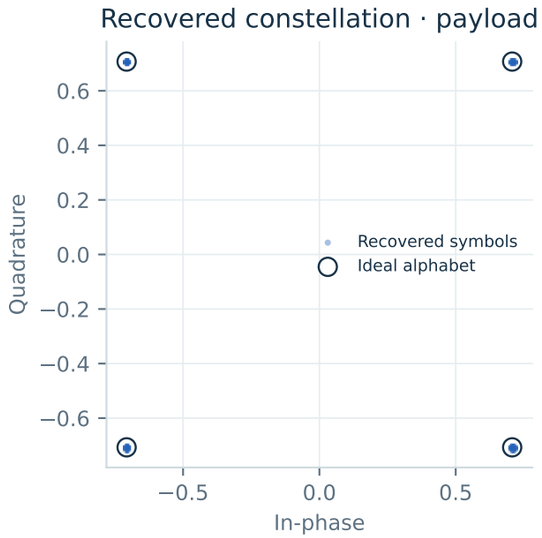

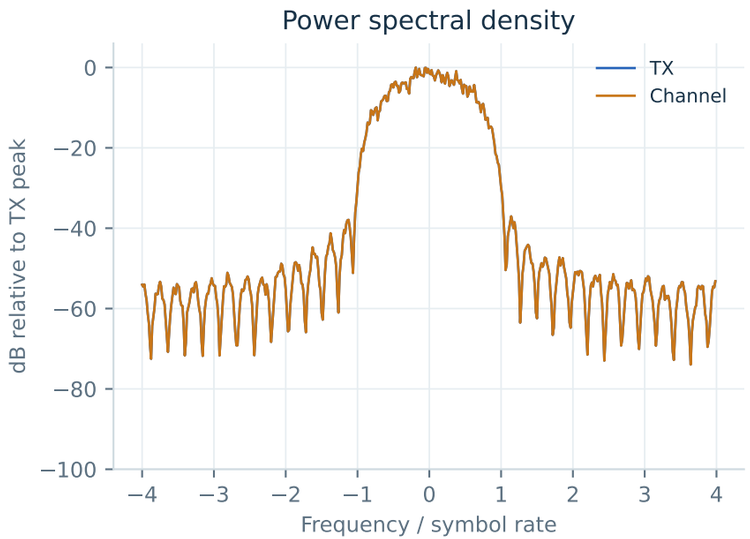

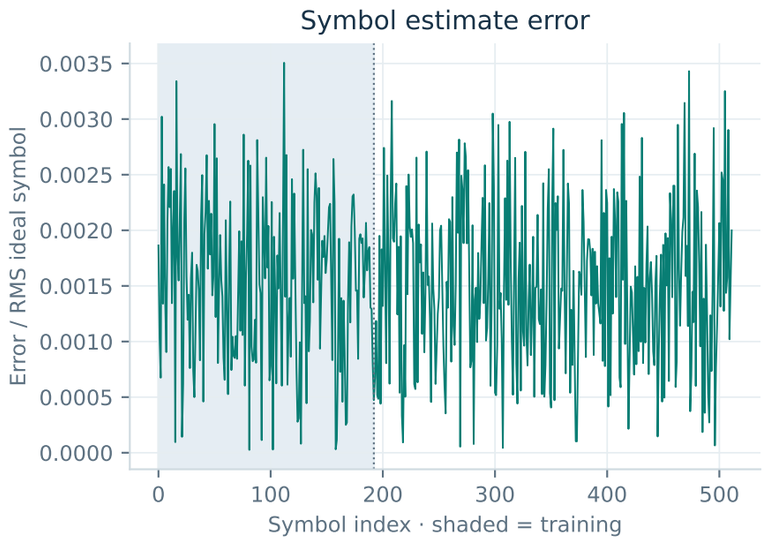


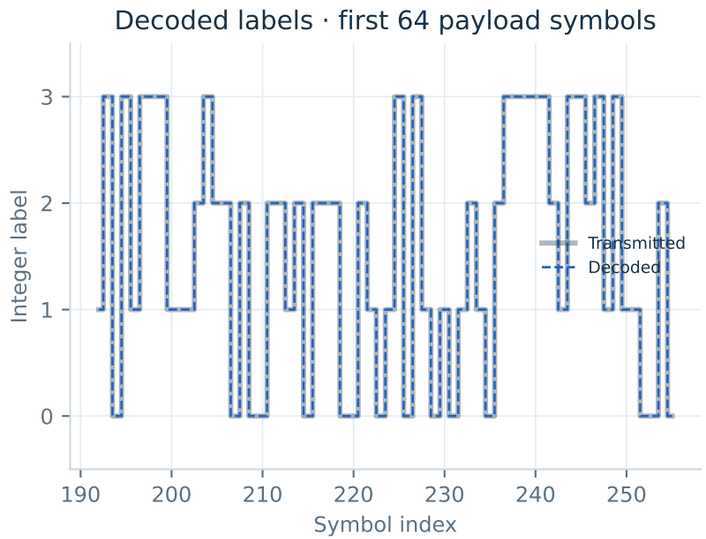



Source: saved portable regression vectors, replayed with the current Python core. The first 192 symbols are training and are excluded from BER/SER. Channel points are oversampled, not symbol decisions. Spectra share the TX peak reference. These figures do not establish original MATLAB receiver equivalence.


oqpsk 2 sps timing recovery 2019 12 05


PORTABLE MODEL / AWGN + carrier + delay / 0 errors in 320 payload symbols

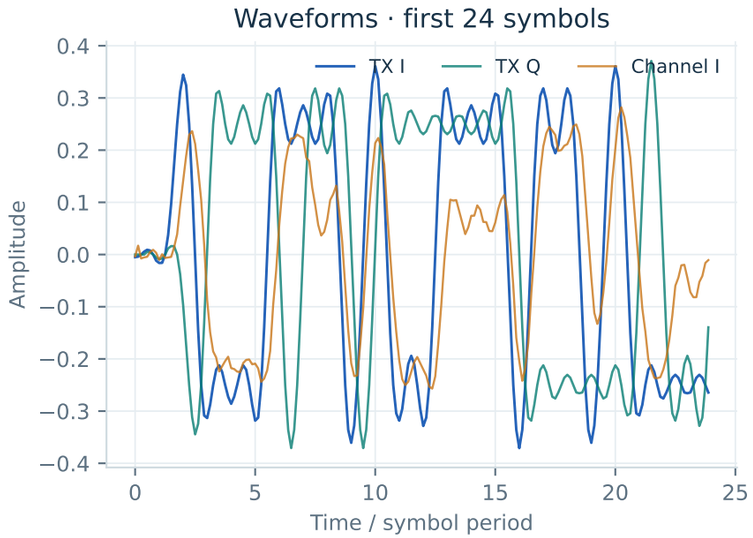


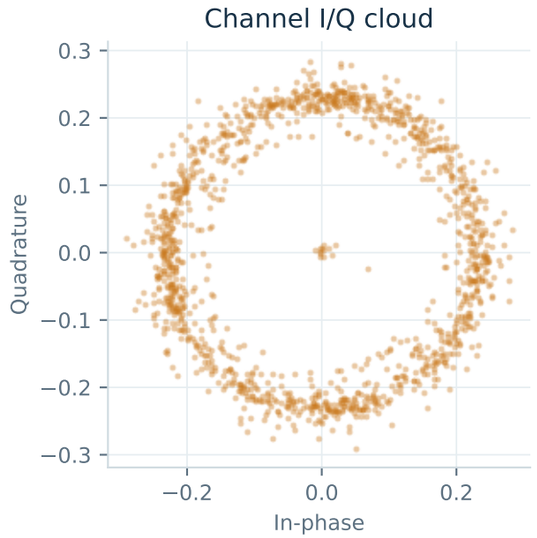

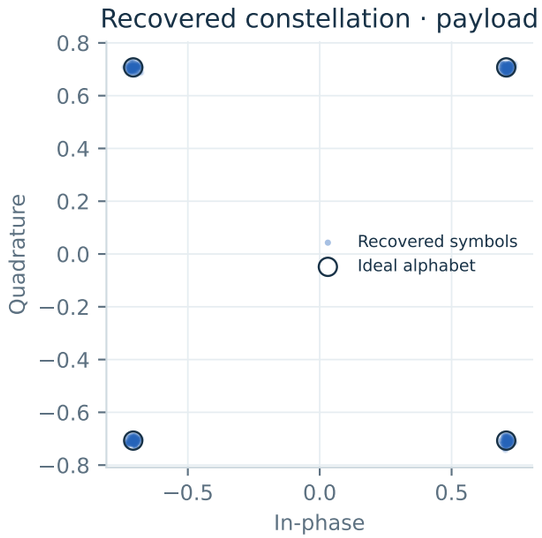

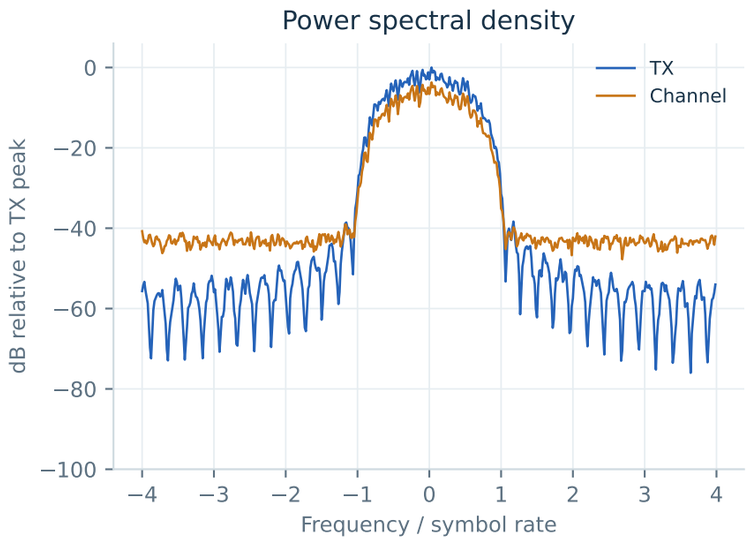

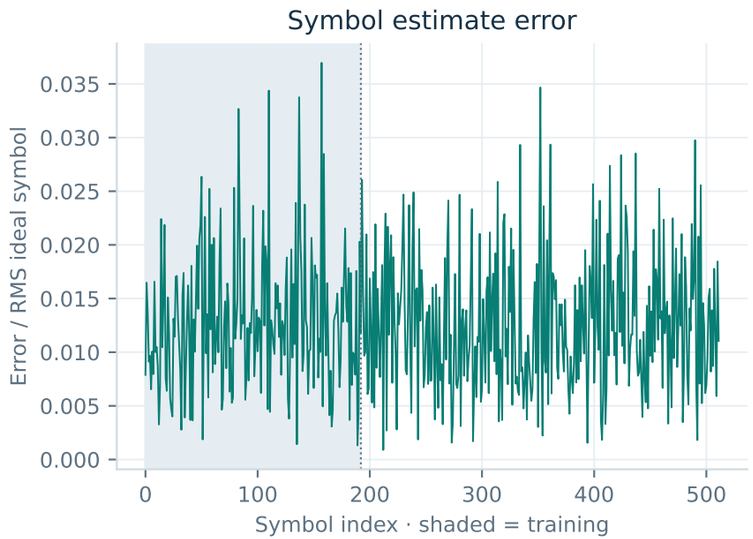


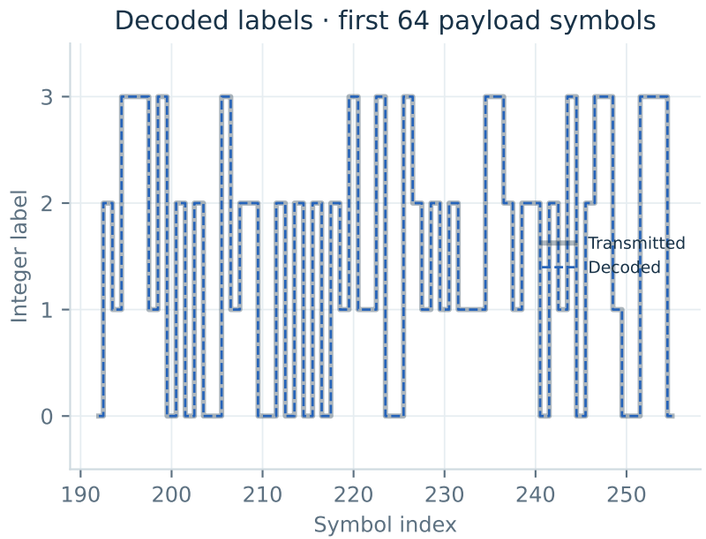



Source: saved portable regression vectors, replayed with the current Python core. The first 192 symbols are training and are excluded from BER/SER. Channel points are oversampled, not symbol decisions. Spectra share the TX peak reference. These figures do not establish original MATLAB receiver equivalence.


oqpsk 2 sps timing recovery 2019 12 05


PORTABLE MODEL / Stress channel / 0 errors in 320 payload symbols

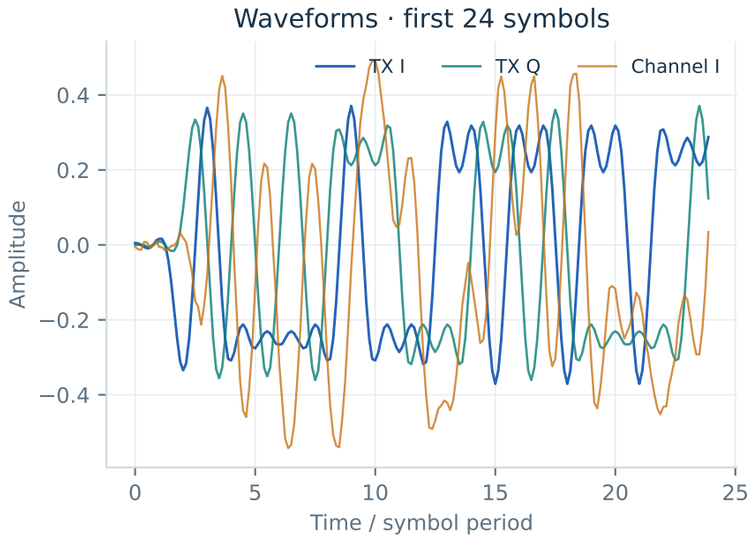


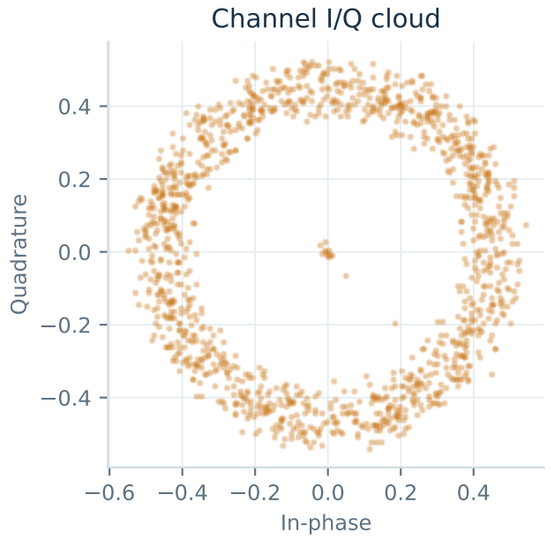

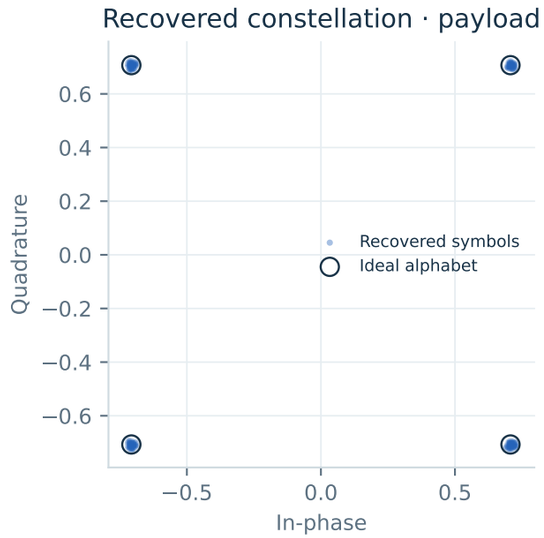

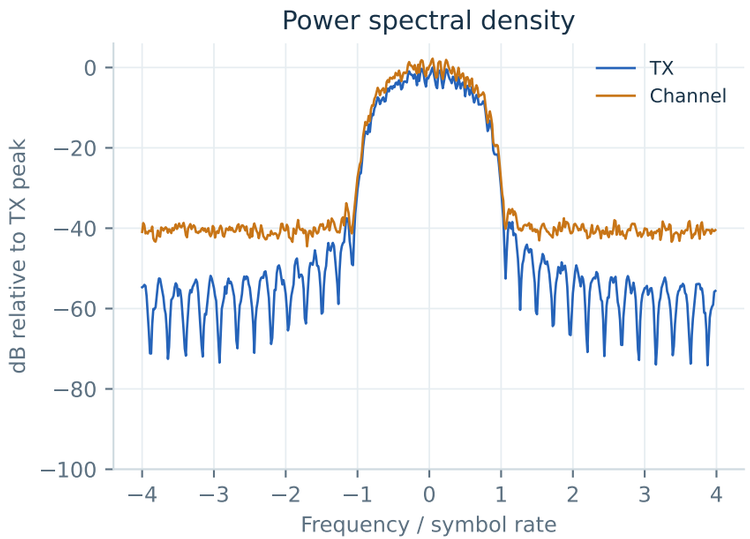

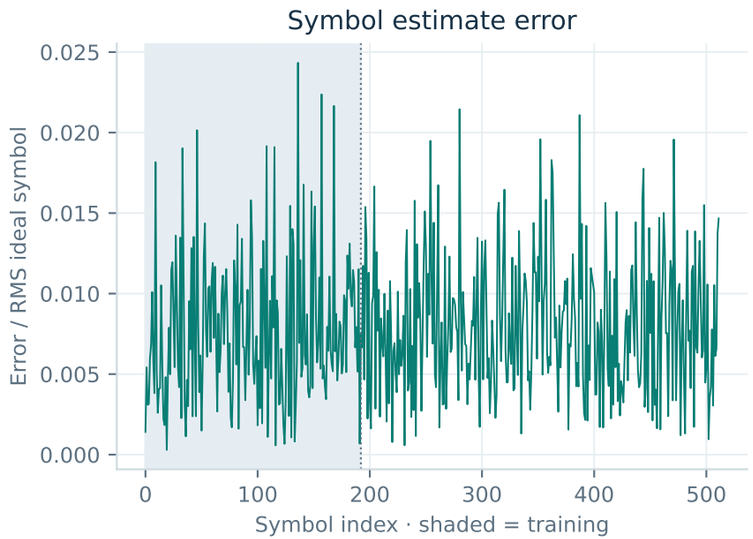


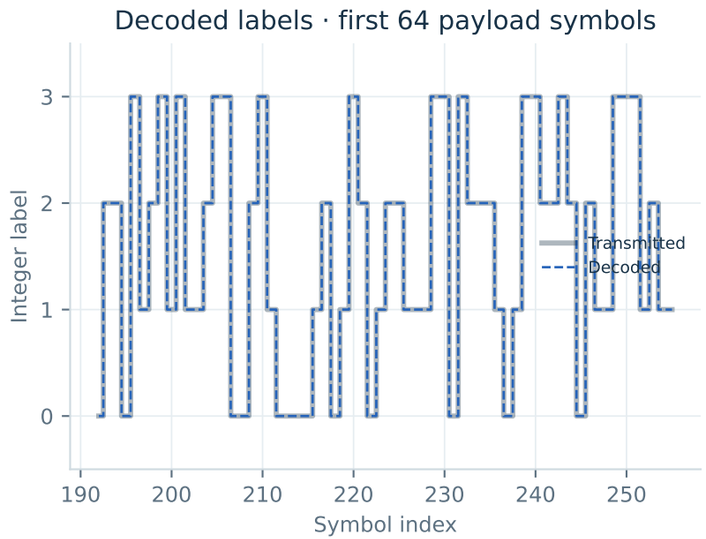



Source: saved portable regression vectors, replayed with the current Python core. The first 192 symbols are training and are excluded from BER/SER. Channel points are oversampled, not symbol decisions. Spectra share the TX peak reference. These figures do not establish original MATLAB receiver equivalence.


oqpsk 2 sps timing recovery 2019 12 05

ORIGINAL MATLAB CAPTURE / runtime PASS / exact repeat PASS / solver: FixedStepDiscrete

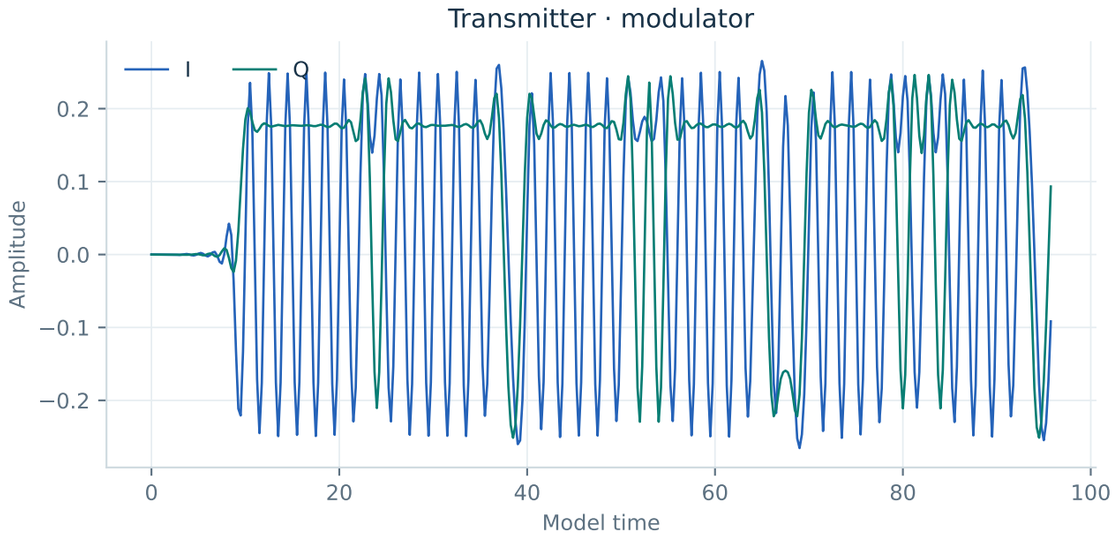

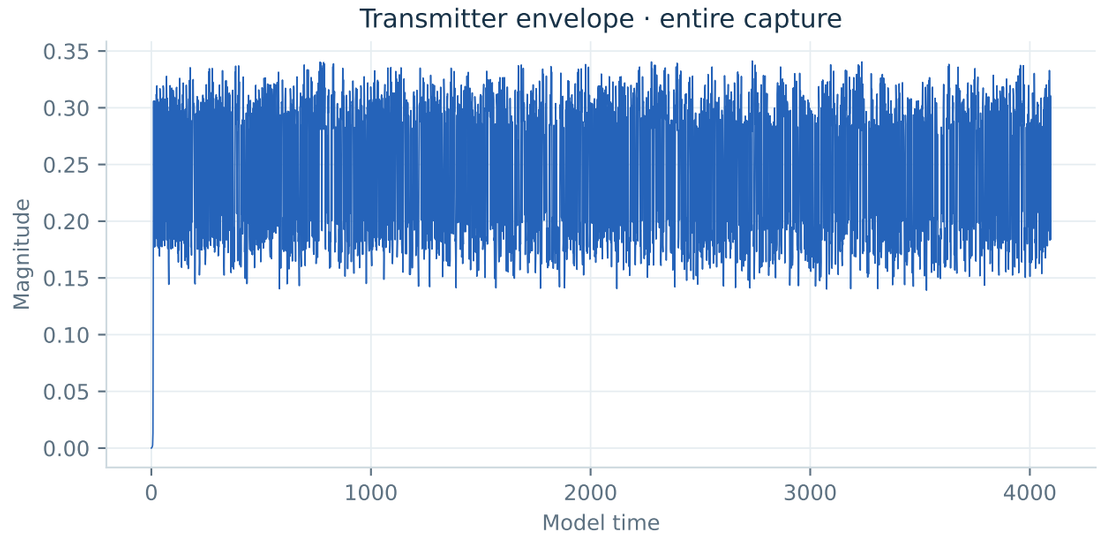

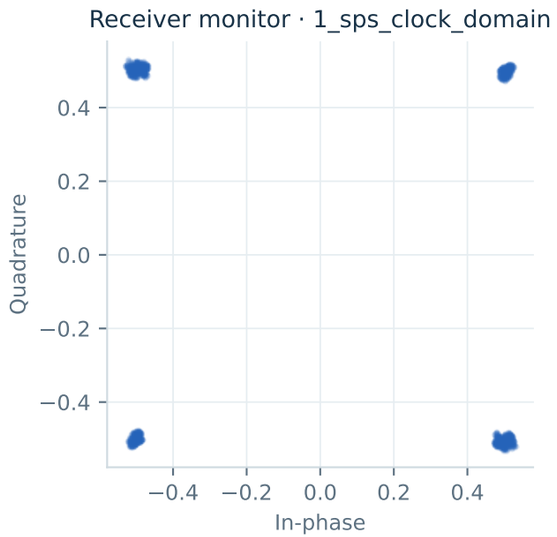


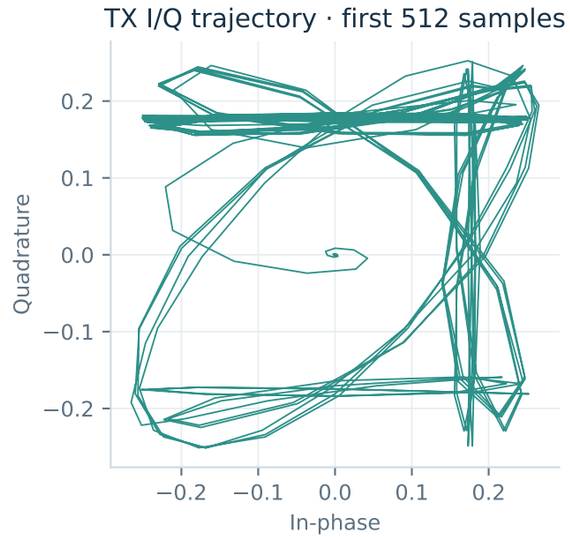



Actual R2020b signals with documented runtime settings. Native receiver monitors can contain held or oversampled values; their point clouds are not a BER measurement. Time is in the model's units. Simulation and repeatability do not establish receiver equivalence. Model: oqpsk_2_sps_timing_recovery_2019_12_05


qpsk 8 sps fb sync 2020 11 25


PORTABLE MODEL / Clean channel / 0 errors in 320 payload symbols

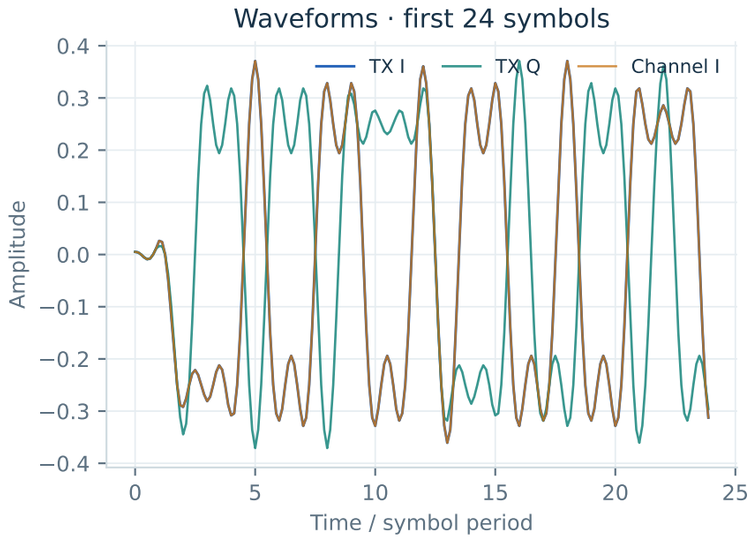


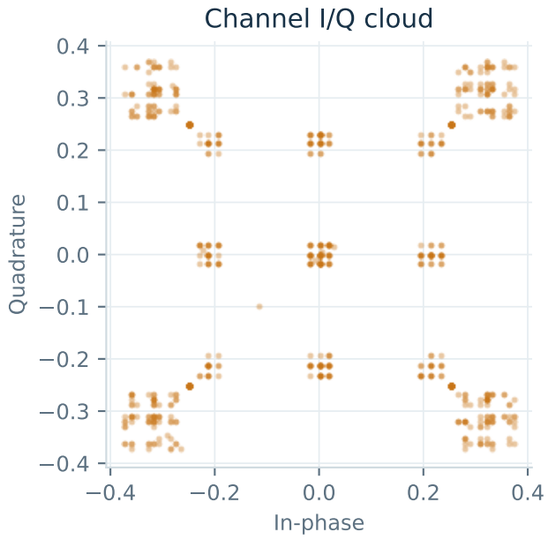

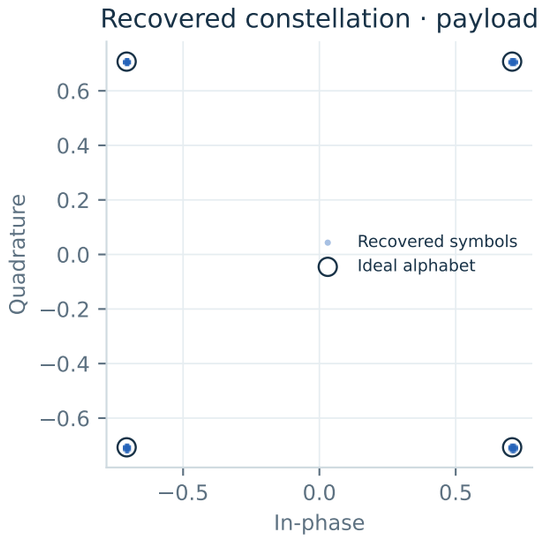

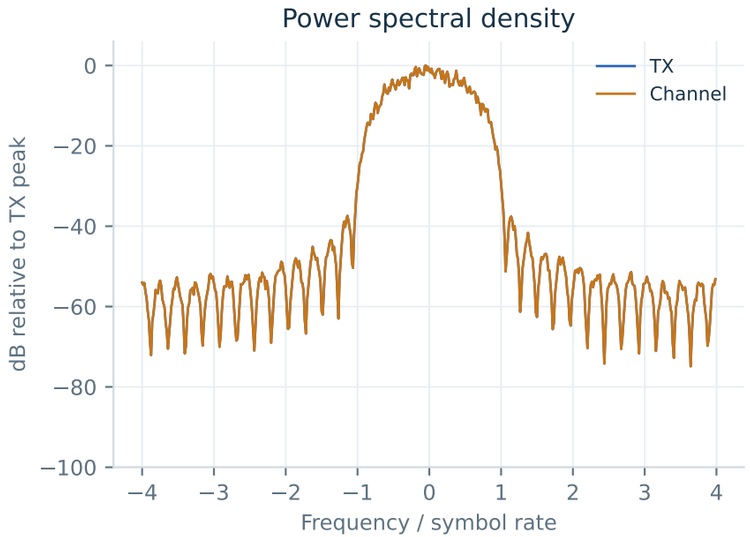

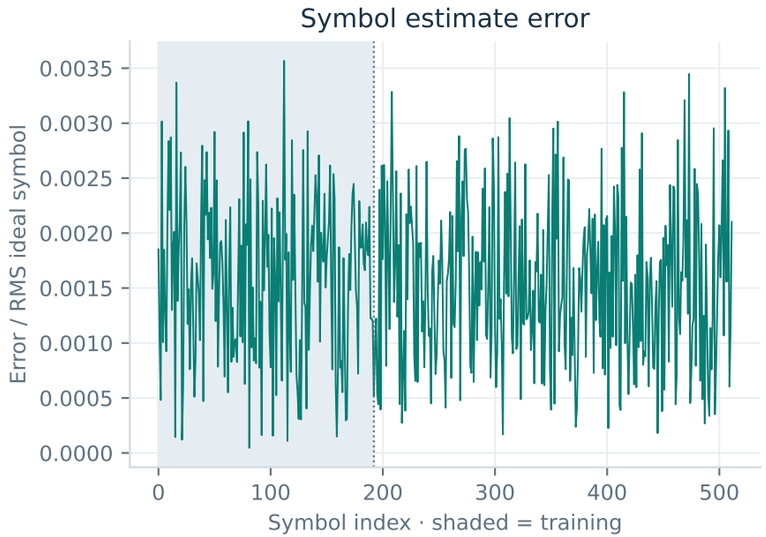


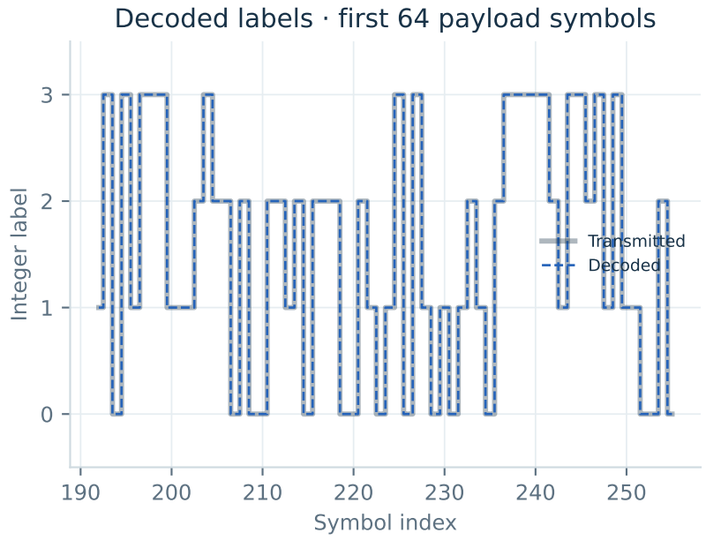



Source: saved portable regression vectors, replayed with the current Python core. The first 192 symbols are training and are excluded from BER/SER. Channel points are oversampled, not symbol decisions. Spectra share the TX peak reference. These figures do not establish original MATLAB receiver equivalence.


qpsk 8 sps fb sync 2020 11 25


PORTABLE MODEL / AWGN + carrier + delay / 0 errors in 320 payload symbols

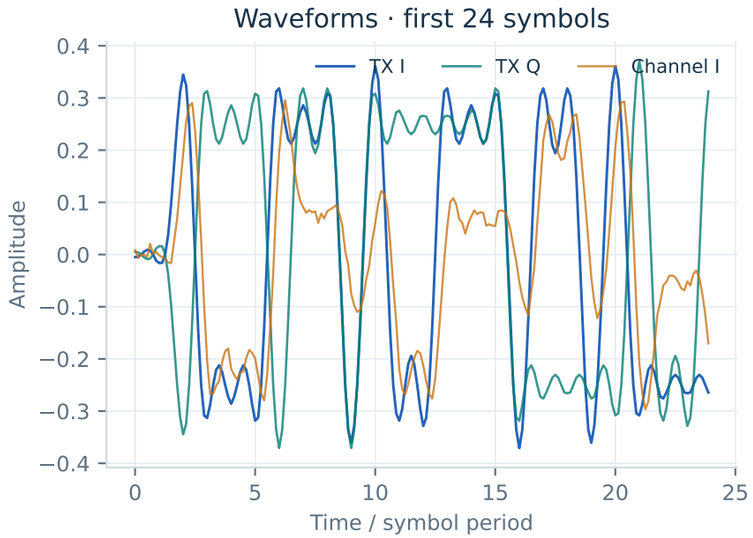


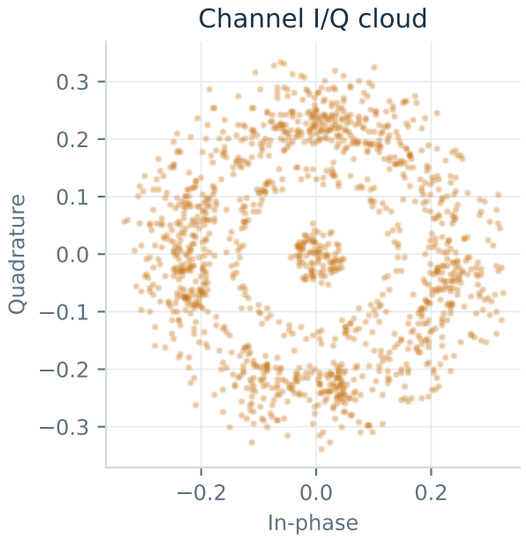

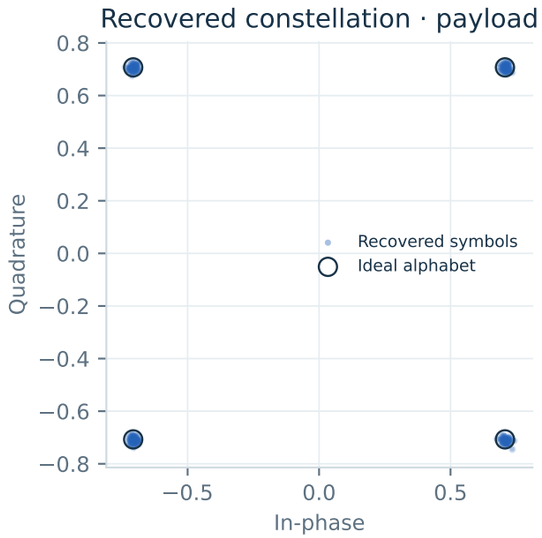

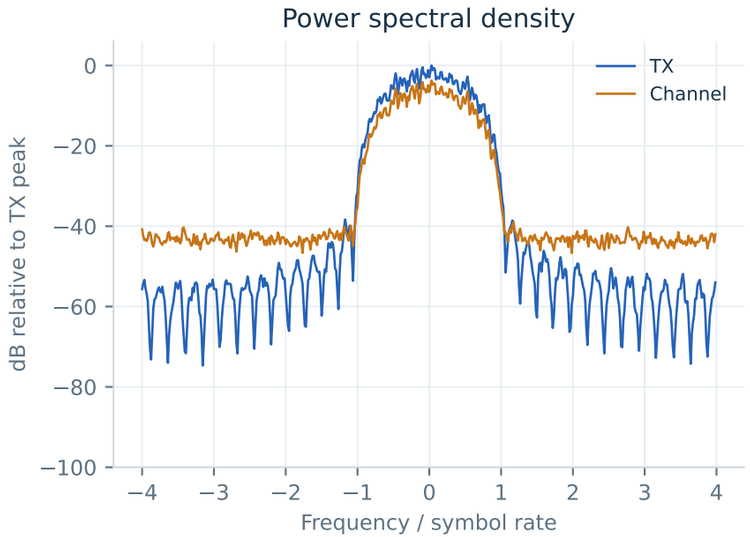

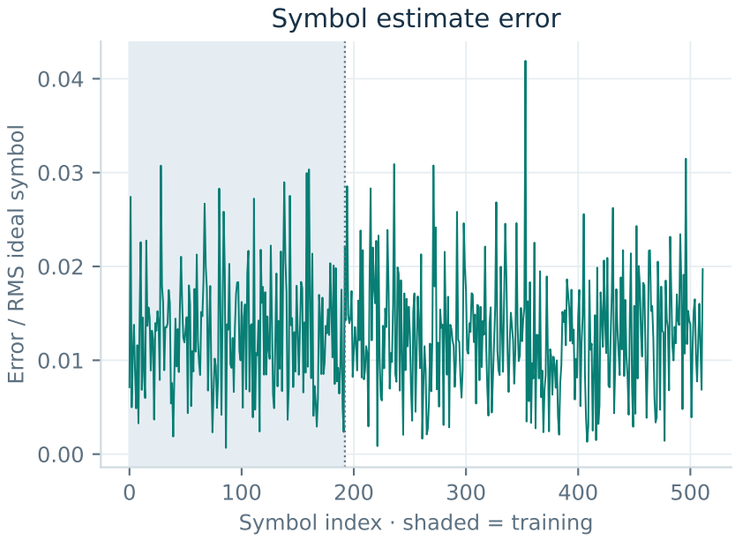


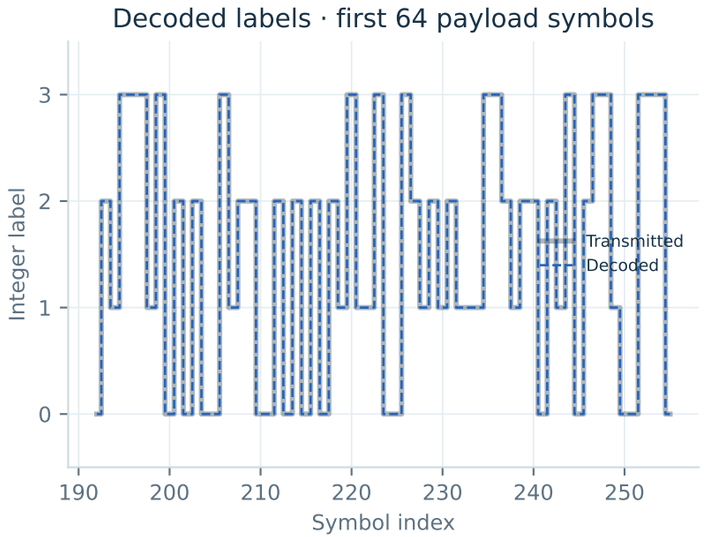



Source: saved portable regression vectors, replayed with the current Python core. The first 192 symbols are training and are excluded from BER/SER. Channel points are oversampled, not symbol decisions. Spectra share the TX peak reference. These figures do not establish original MATLAB receiver equivalence.


qpsk 8 sps fb sync 2020 11 25


PORTABLE MODEL / Stress channel / 0 errors in 320 payload symbols

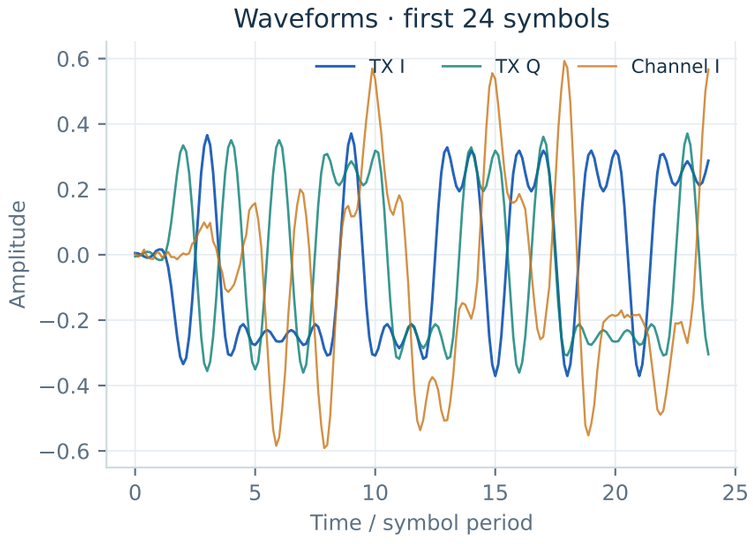


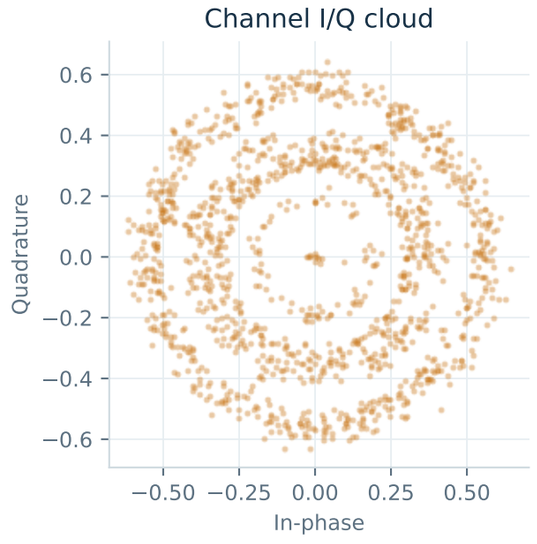

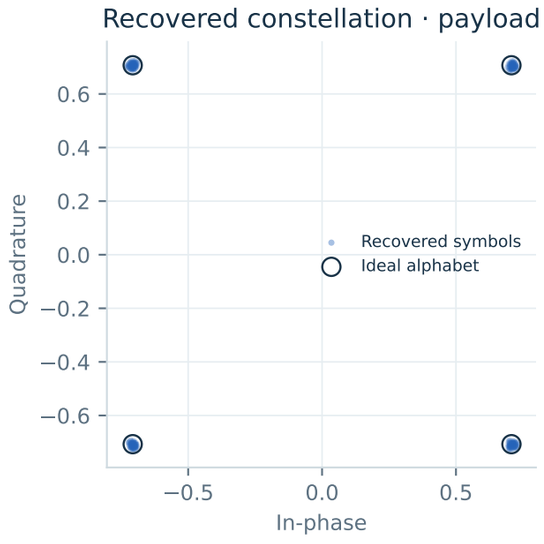

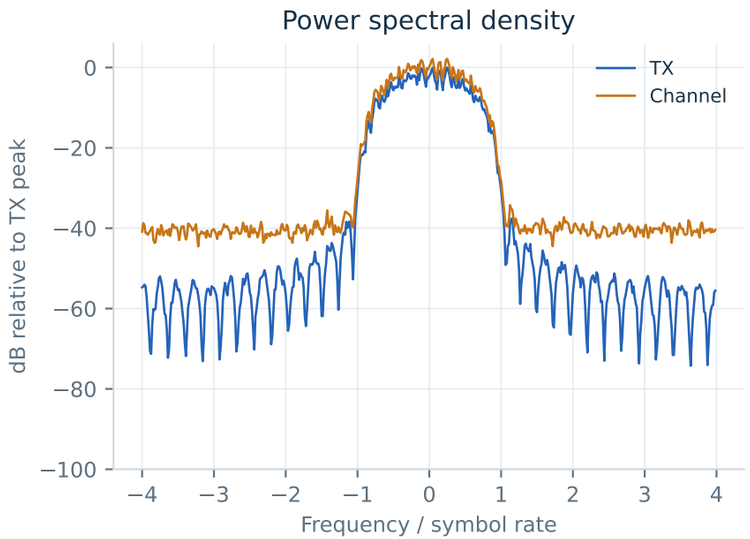

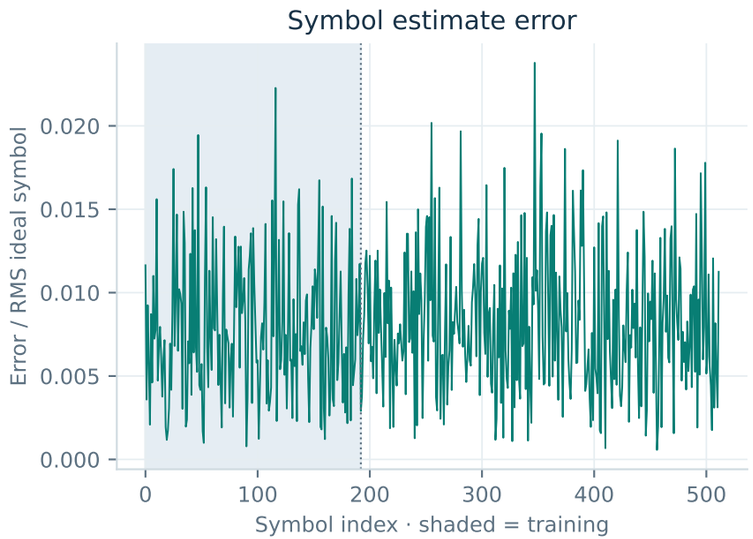


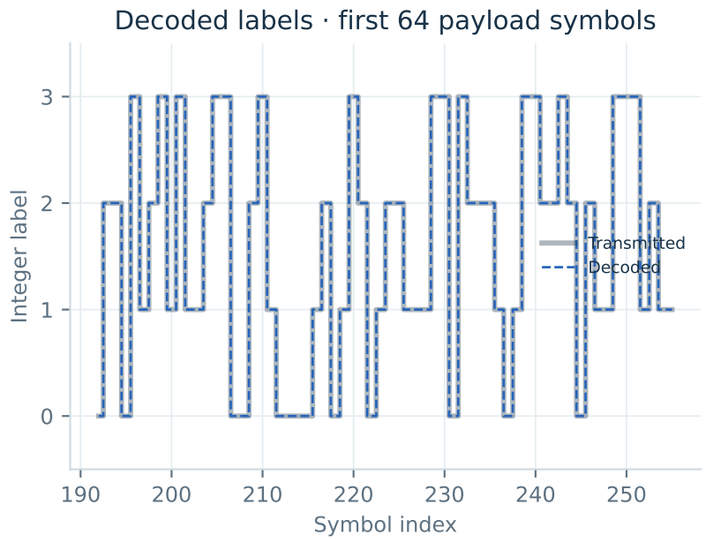



Source: saved portable regression vectors, replayed with the current Python core. The first 192 symbols are training and are excluded from BER/SER. Channel points are oversampled, not symbol decisions. Spectra share the TX peak reference. These figures do not establish original MATLAB receiver equivalence.


qpsk 8 sps fb sync 2020 11 25

ORIGINAL MATLAB CAPTURE / runtime PASS / exact repeat PASS / solver: FixedStepDiscrete

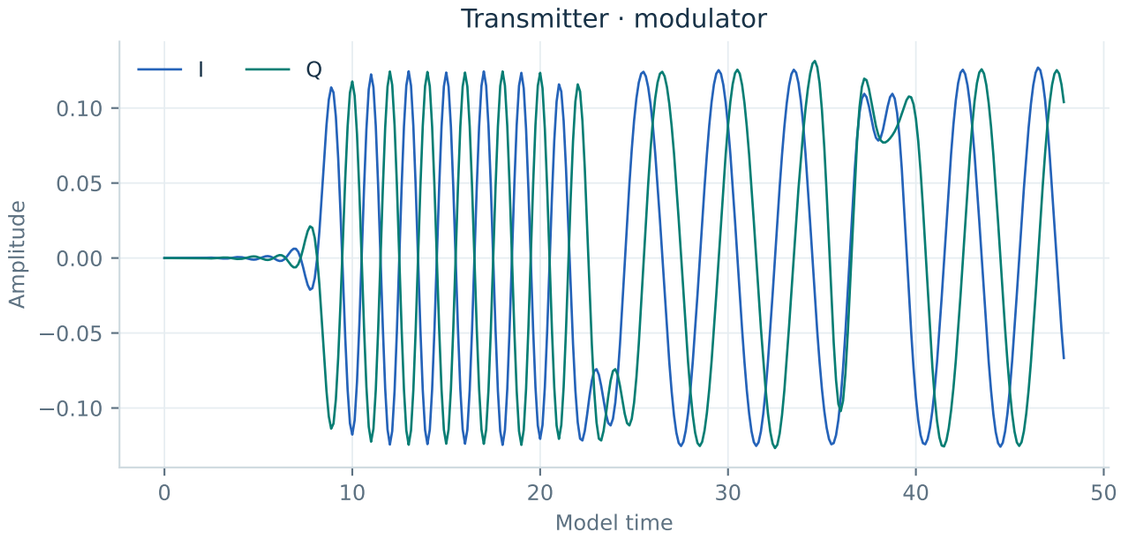

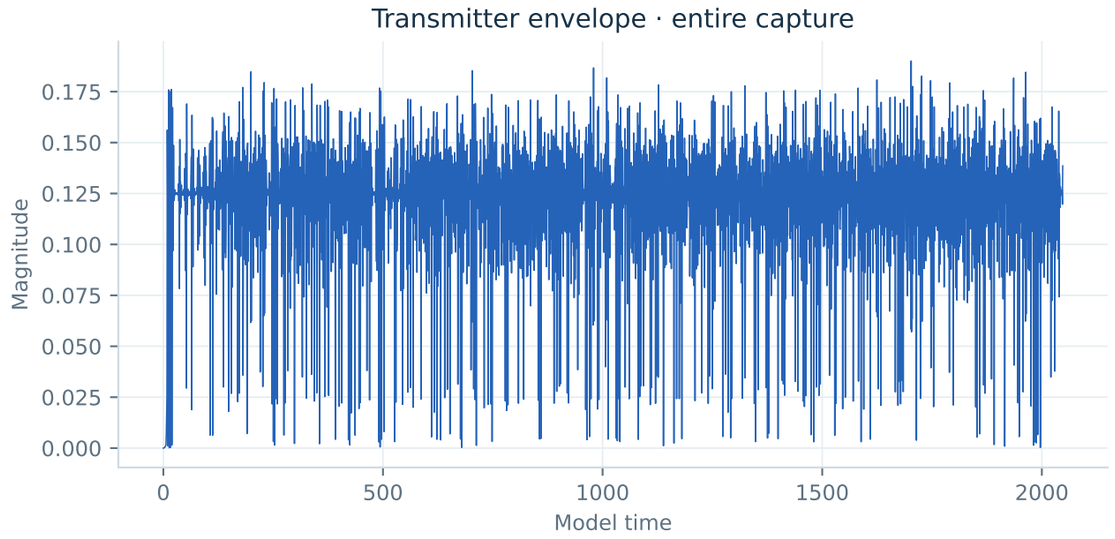

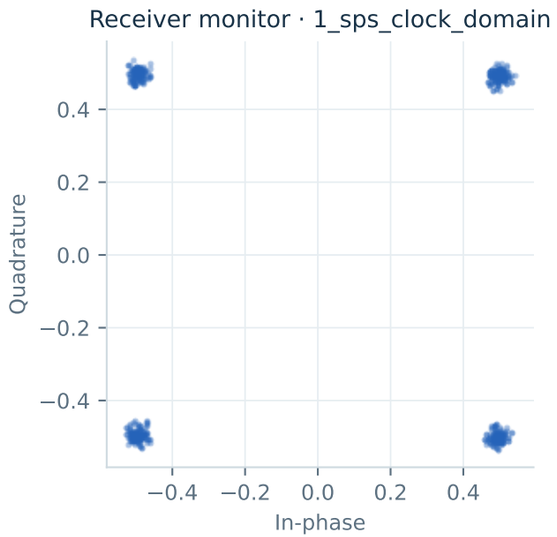


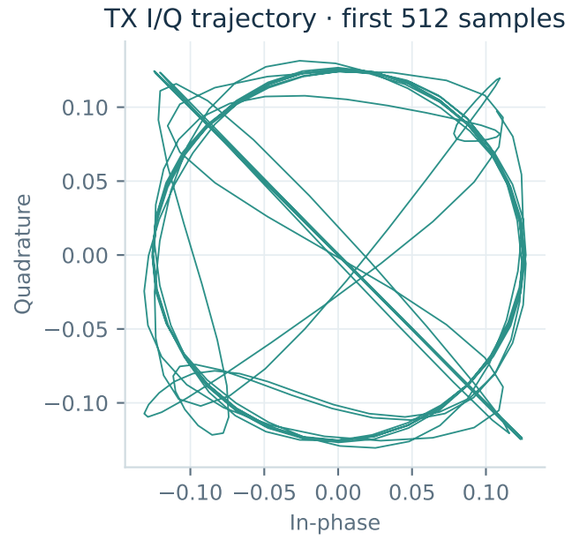



Actual R2020b signals with documented runtime settings. Native receiver monitors can contain held or oversampled values; their point clouds are not a BER measurement. Time is in the model's units. Simulation and repeatability do not establish receiver equivalence. Model: qpsk_8_sps_fb_sync_2020_11_25


qpsk script basic


PORTABLE MODEL / Clean channel / 0 errors in 320 payload symbols

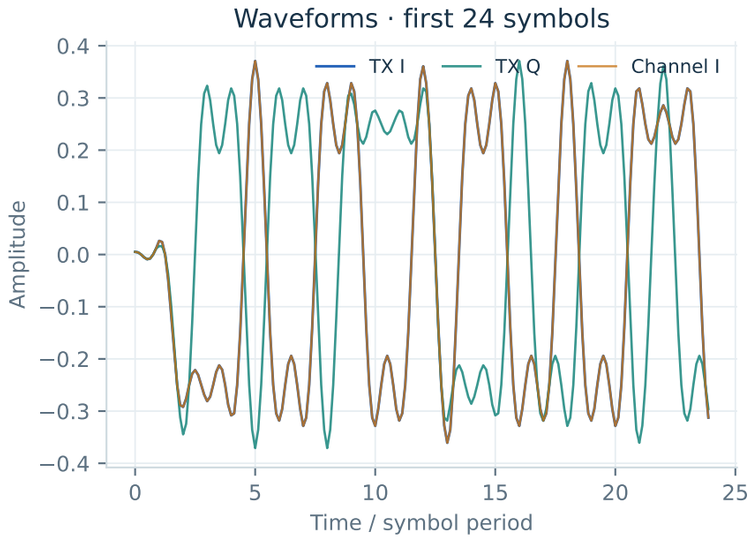


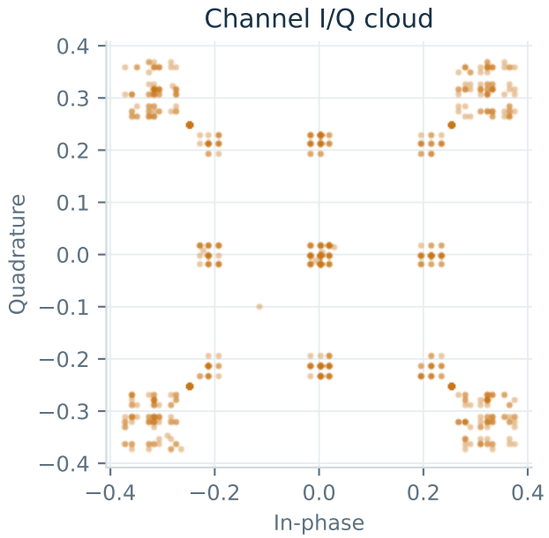

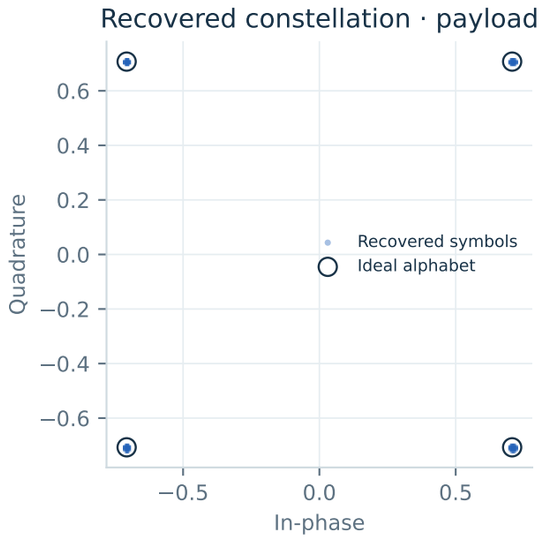

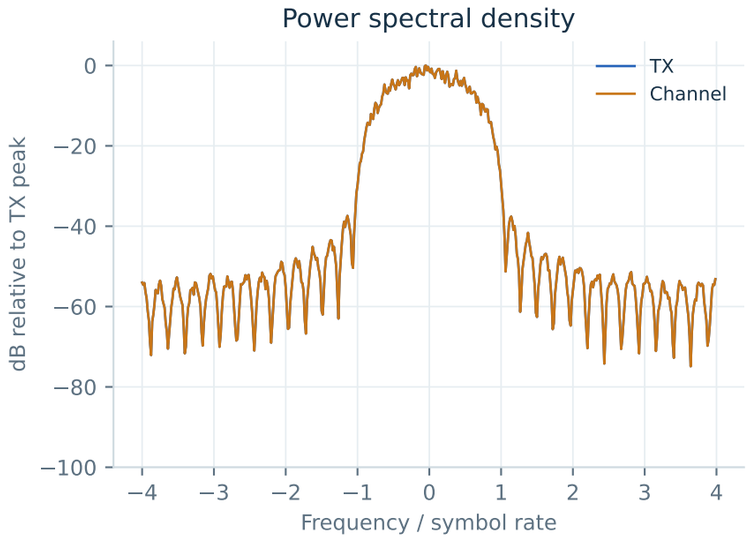

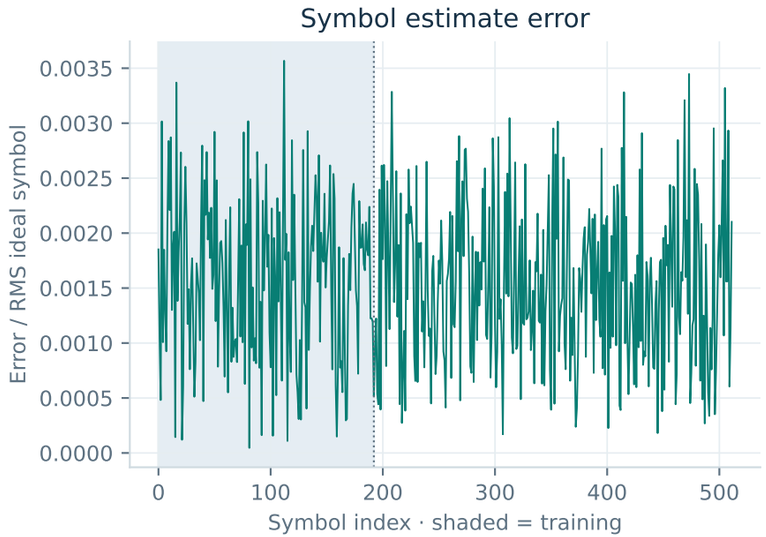


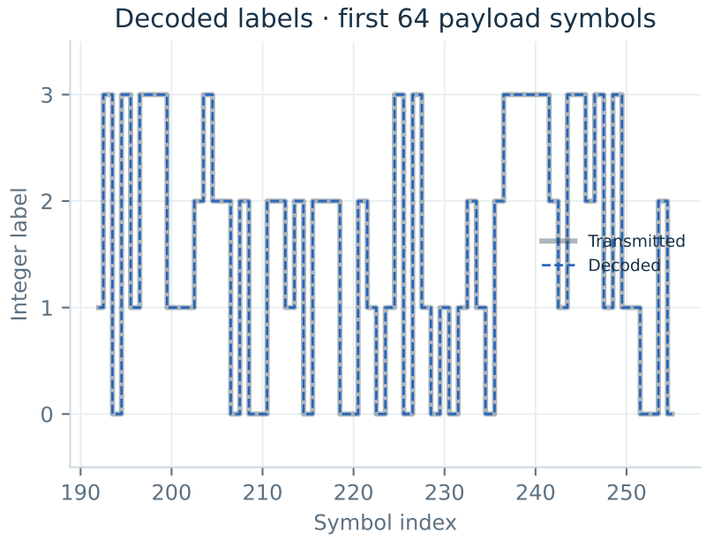



Source: saved portable regression vectors, replayed with the current Python core. The first 192 symbols are training and are excluded from BER/SER. Channel points are oversampled, not symbol decisions. Spectra share the TX peak reference. These figures do not establish original MATLAB receiver equivalence.


qpsk script basic


PORTABLE MODEL / AWGN + carrier + delay / 0 errors in 320 payload symbols

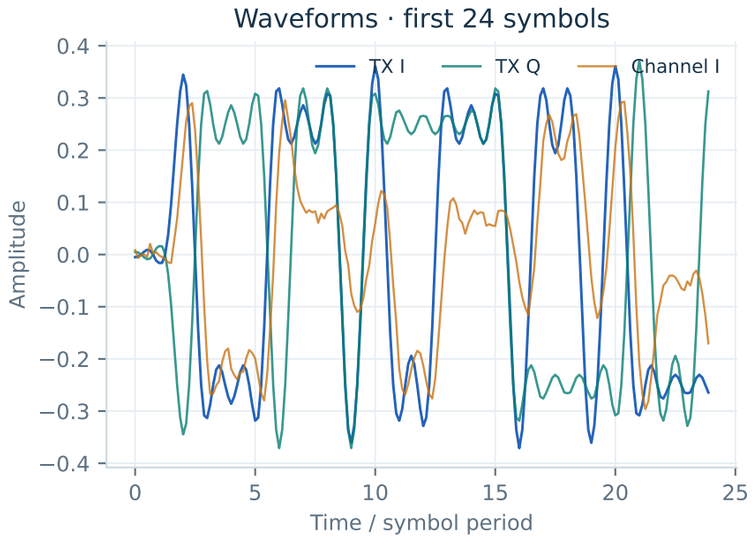


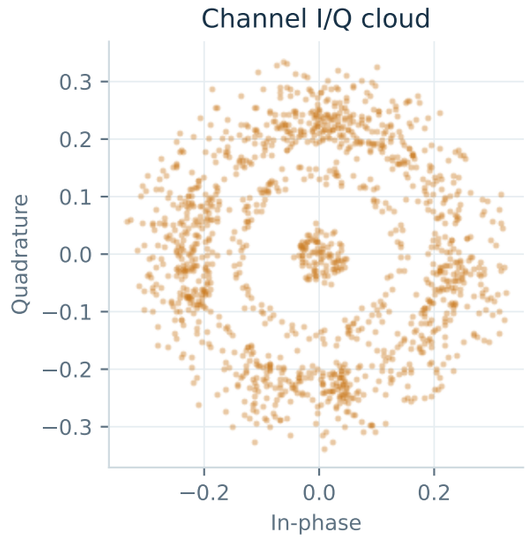

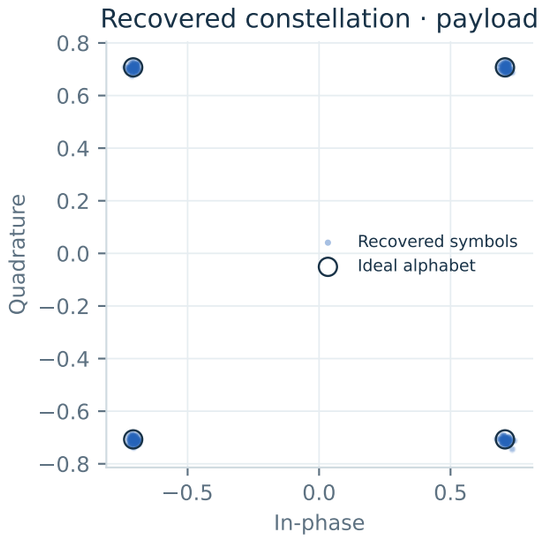

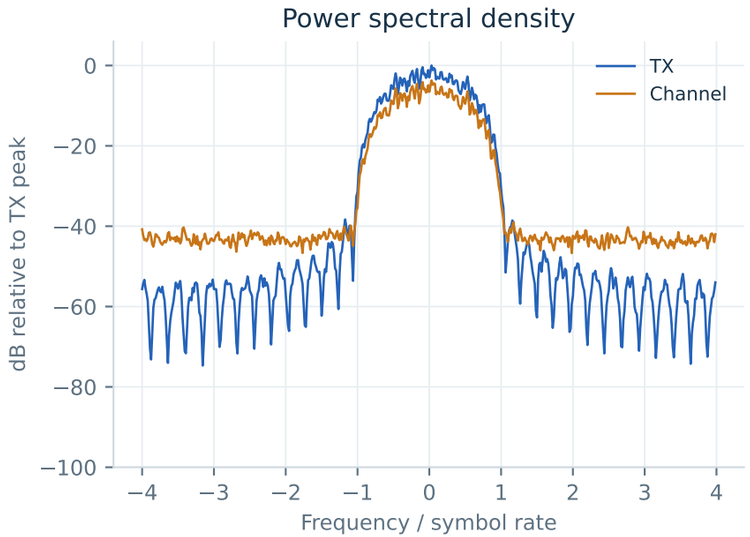

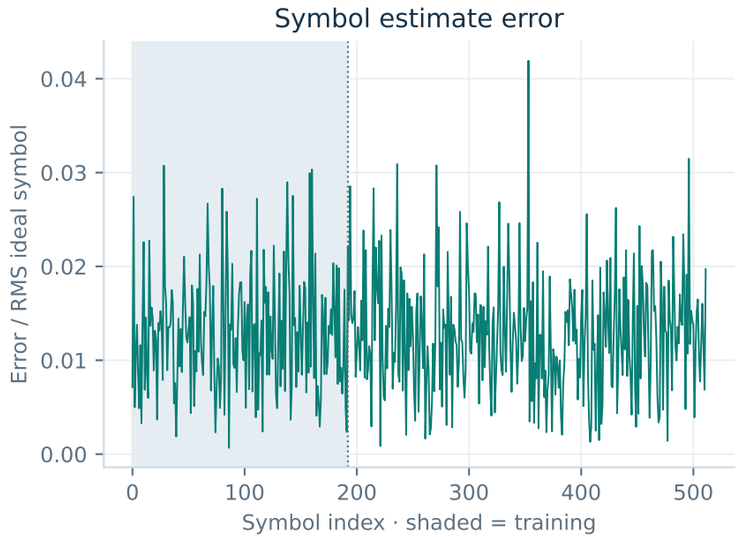


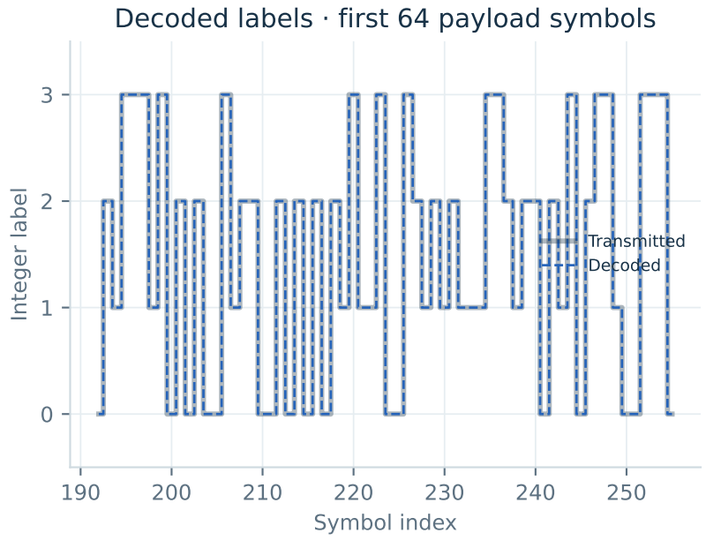



Source: saved portable regression vectors, replayed with the current Python core. The first 192 symbols are training and are excluded from BER/SER. Channel points are oversampled, not symbol decisions. Spectra share the TX peak reference. These figures do not establish original MATLAB receiver equivalence.


qpsk script basic


PORTABLE MODEL / Stress channel / 0 errors in 320 payload symbols

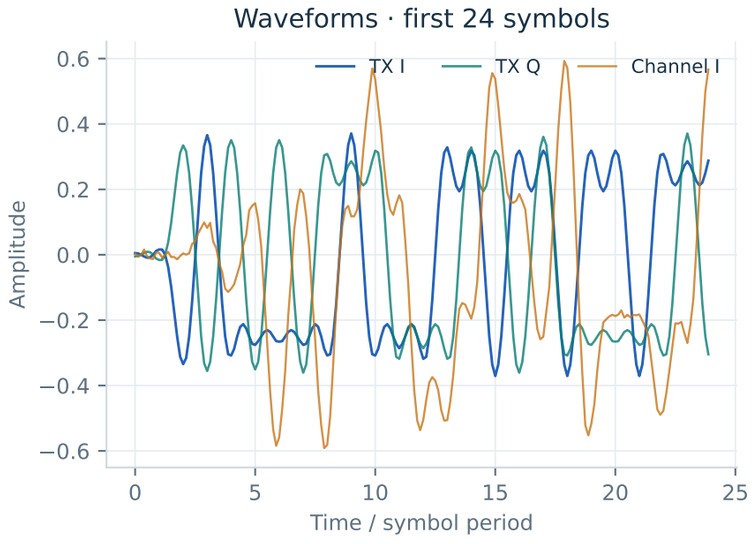


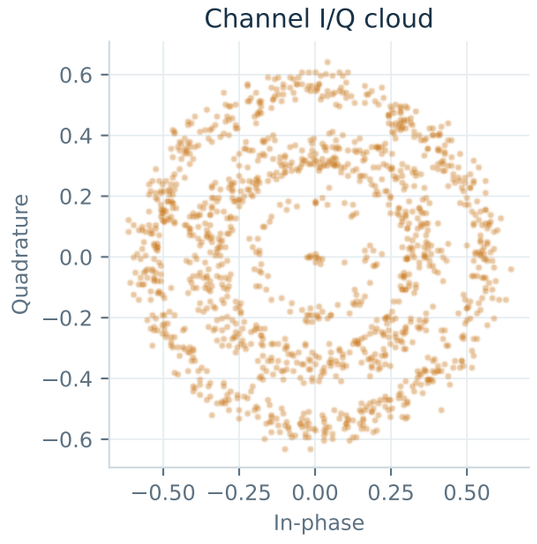

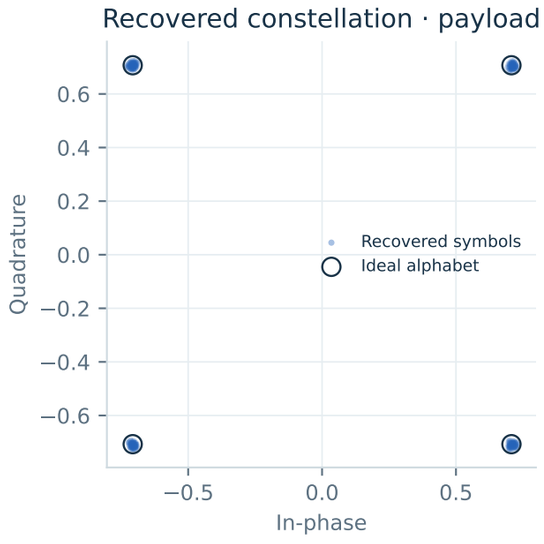

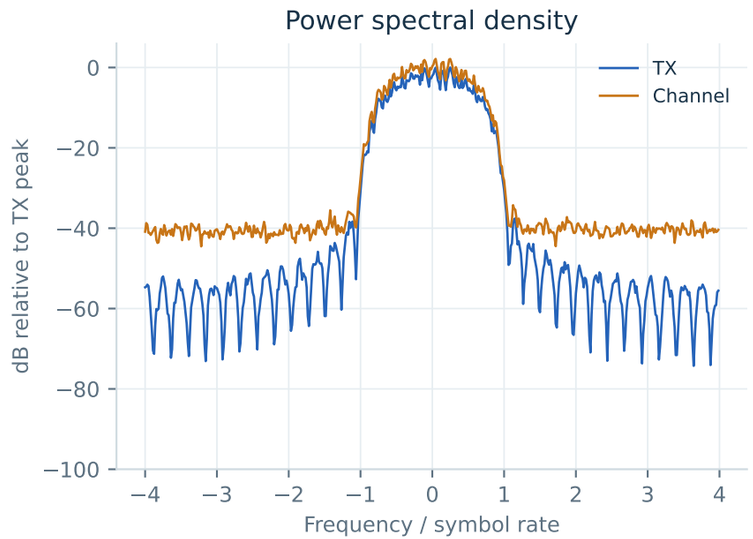

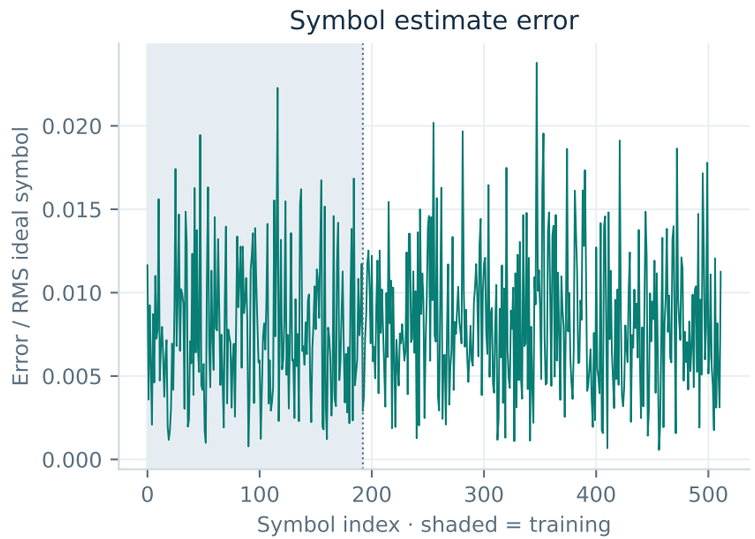


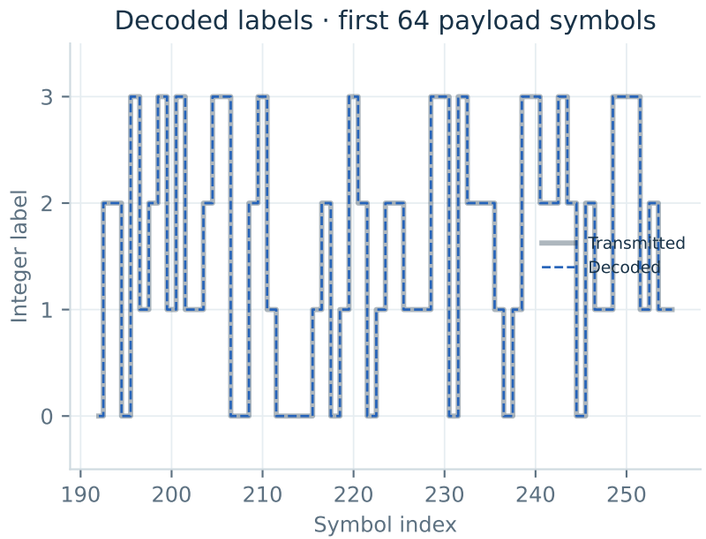



Source: saved portable regression vectors, replayed with the current Python core. The first 192 symbols are training and are excluded from BER/SER. Channel points are oversampled, not symbol decisions. Spectra share the TX peak reference. These figures do not establish original MATLAB receiver equivalence.


qpsk script costas


PORTABLE MODEL / Clean channel / 0 errors in 320 payload symbols

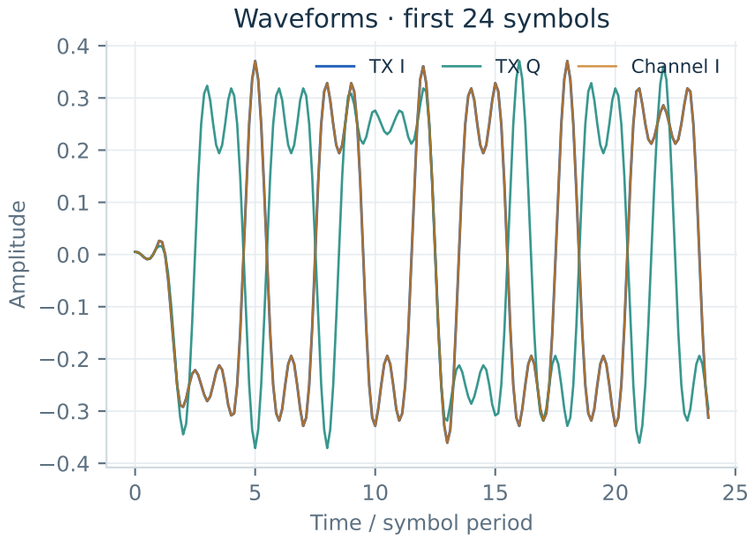


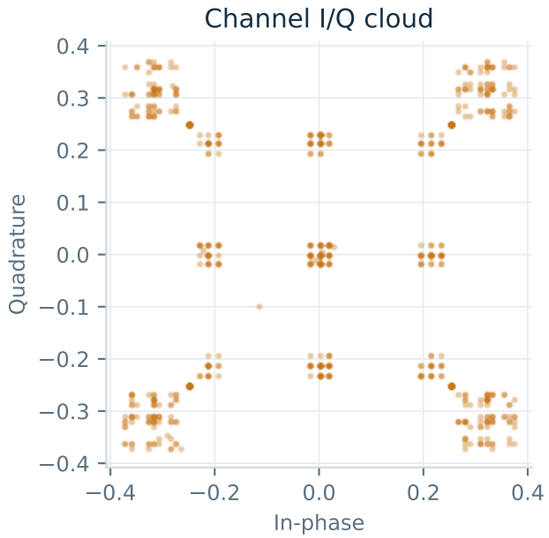

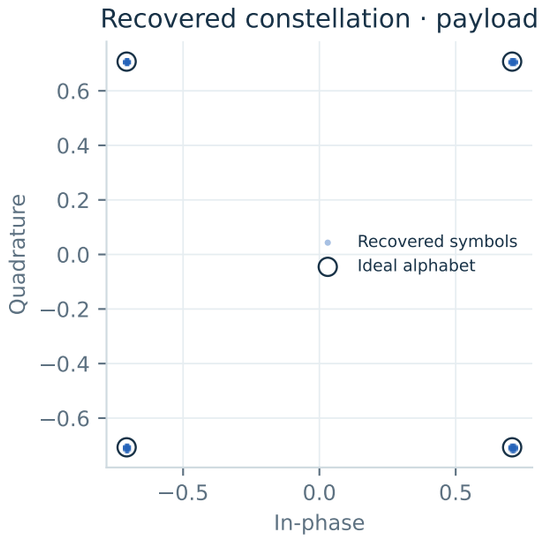

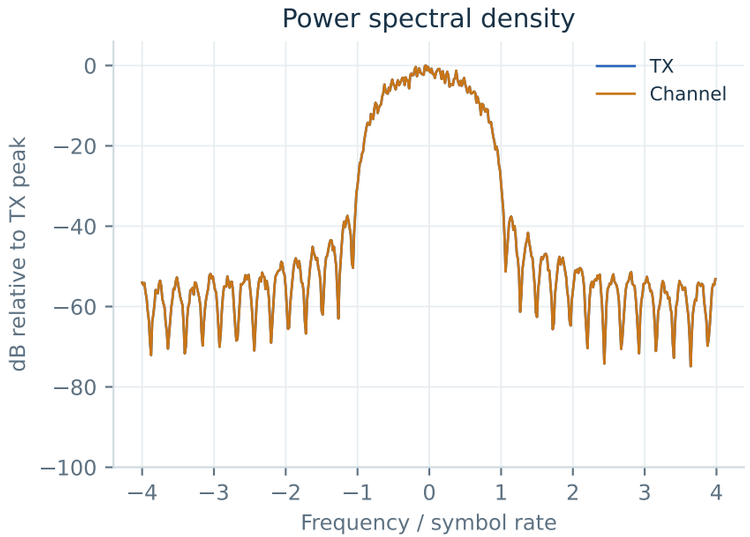

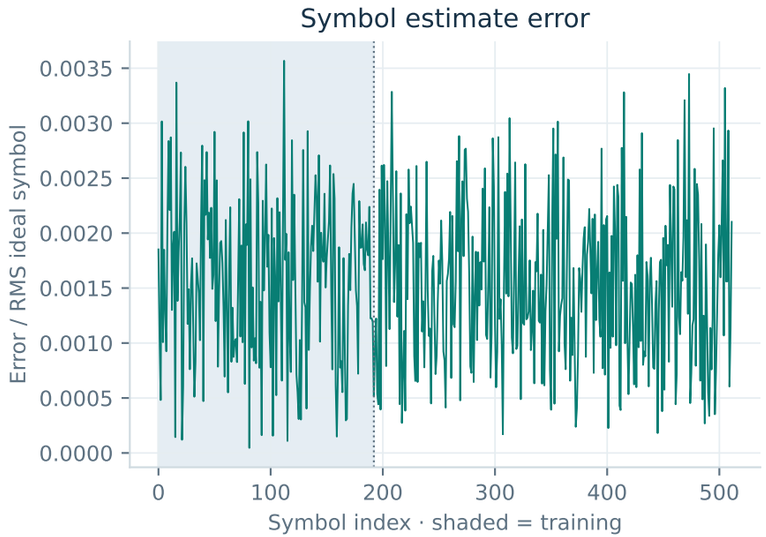


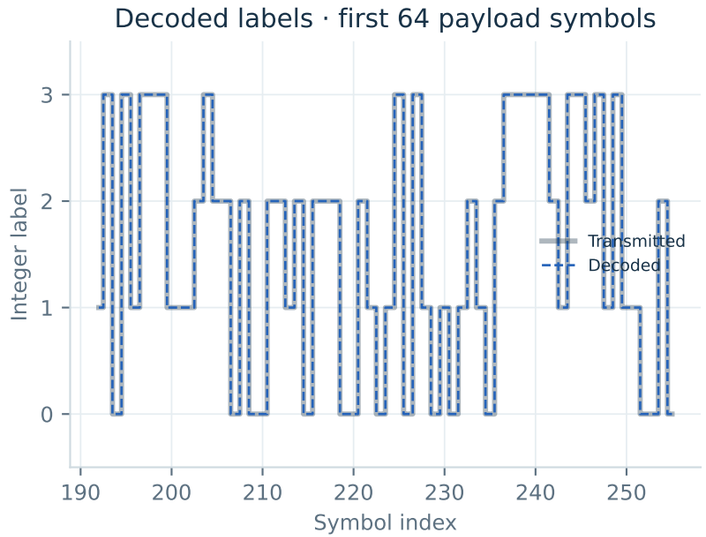



Source: saved portable regression vectors, replayed with the current Python core. The first 192 symbols are training and are excluded from BER/SER. Channel points are oversampled, not symbol decisions. Spectra share the TX peak reference. These figures do not establish original MATLAB receiver equivalence.


qpsk script costas


PORTABLE MODEL / AWGN + carrier + delay / 0 errors in 320 payload symbols

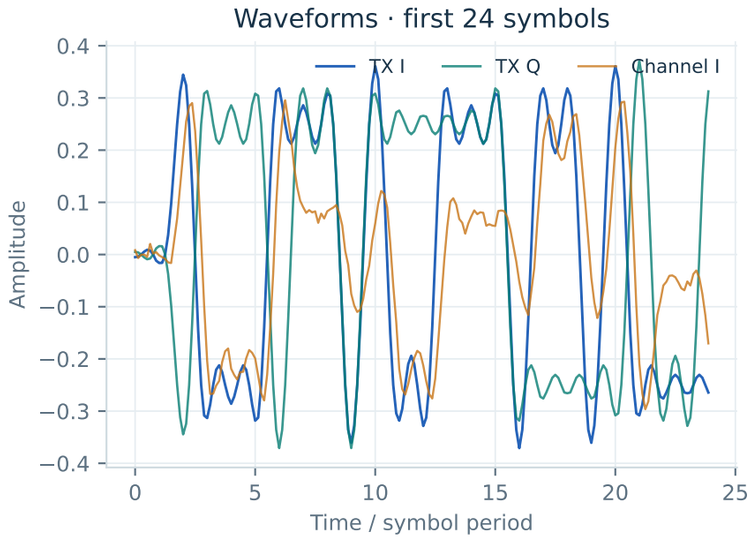


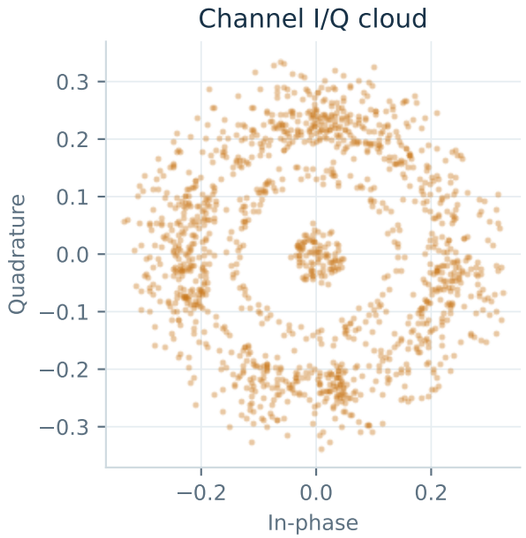

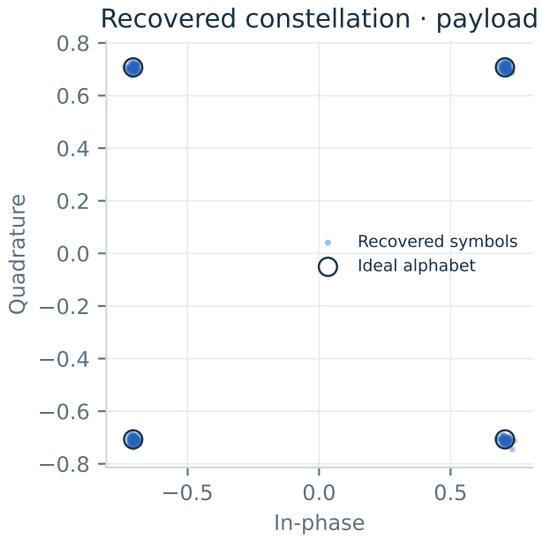

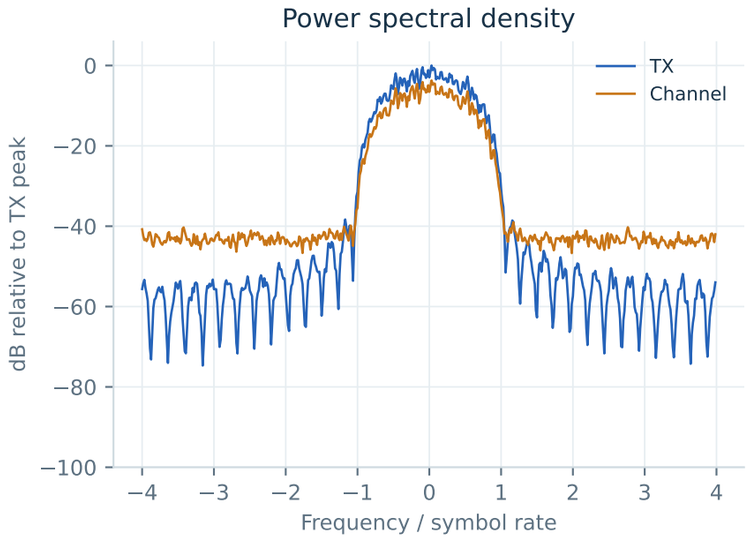

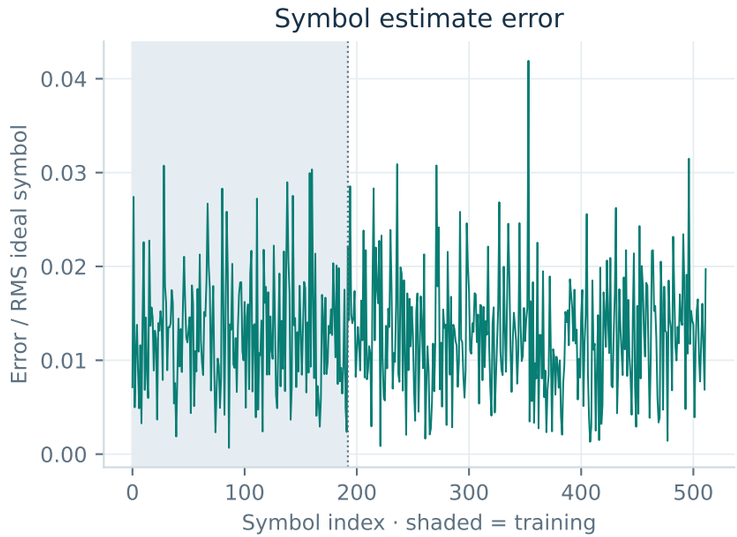


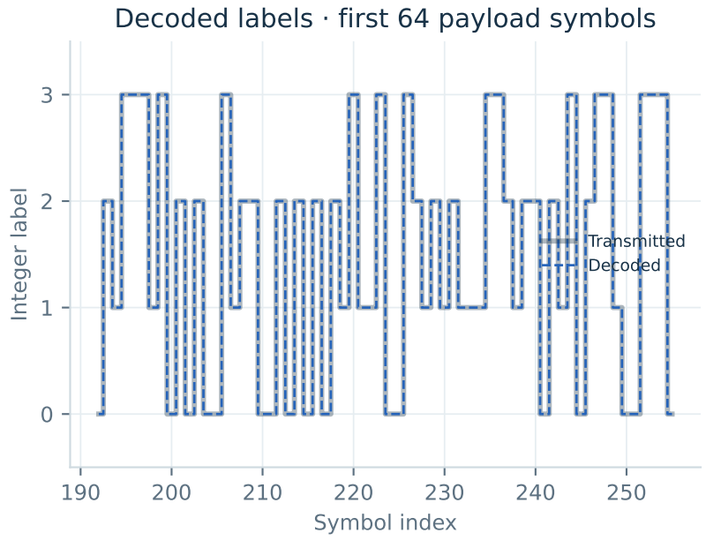



Source: saved portable regression vectors, replayed with the current Python core. The first 192 symbols are training and are excluded from BER/SER. Channel points are oversampled, not symbol decisions. Spectra share the TX peak reference. These figures do not establish original MATLAB receiver equivalence.


qpsk script costas


PORTABLE MODEL / Stress channel / 0 errors in 320 payload symbols

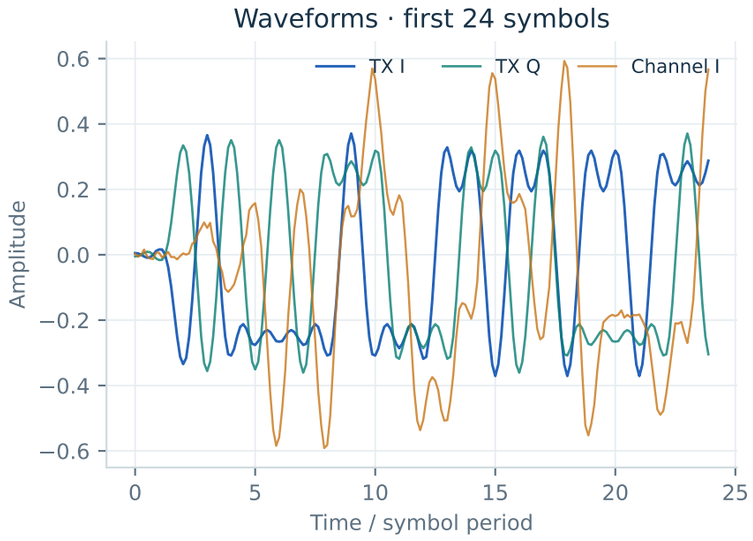


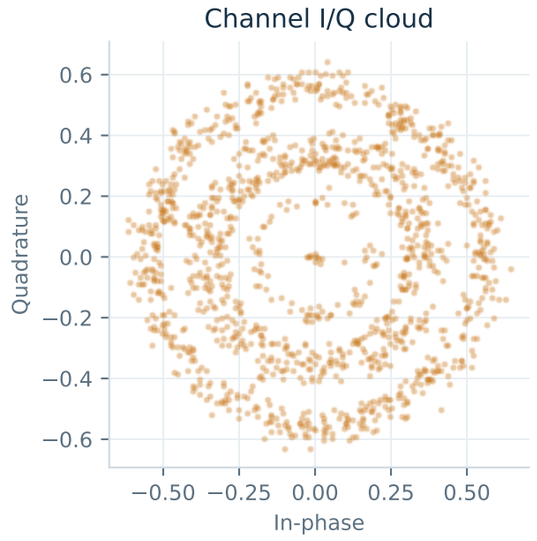

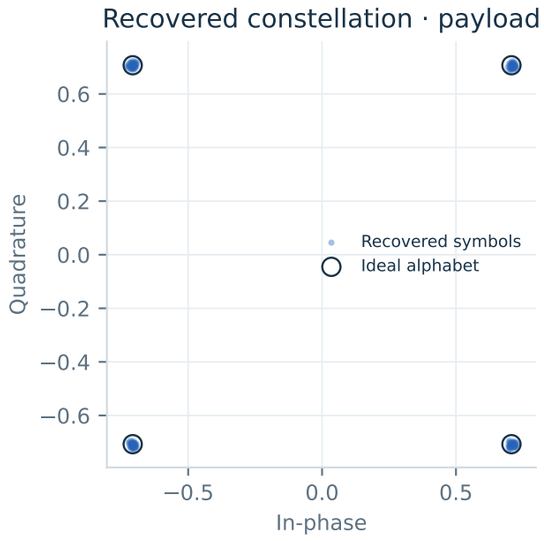


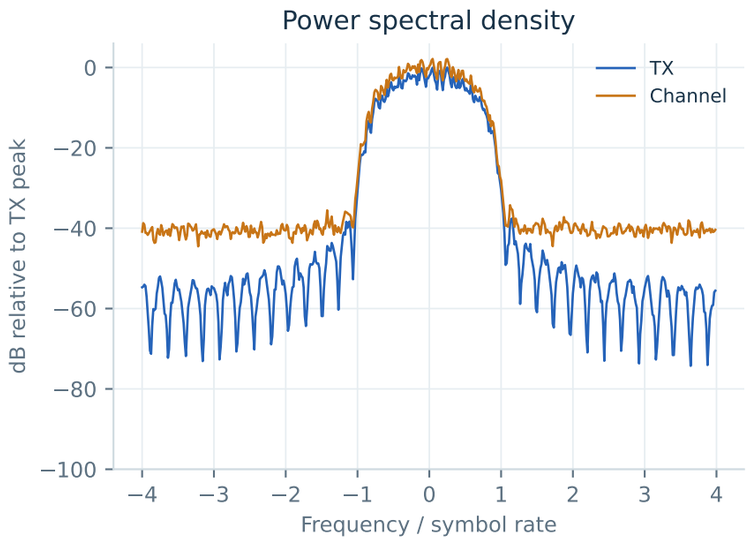

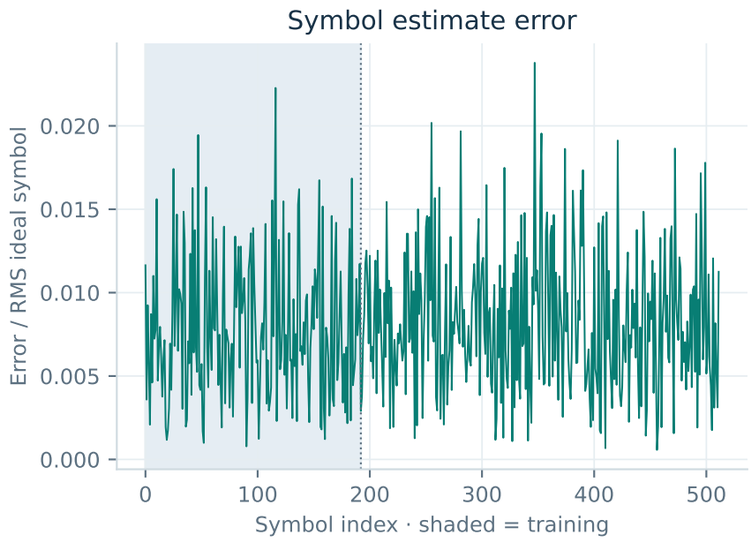

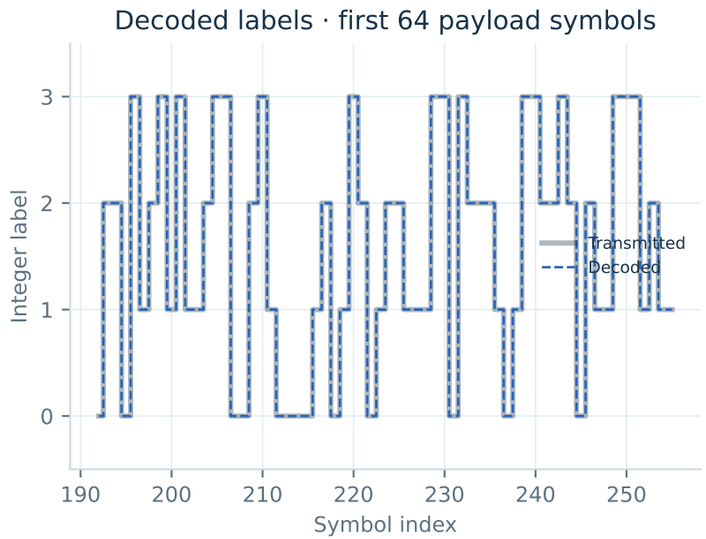

Source: saved portable regression vectors, replayed with the current Python core. The first 192 symbols are training and are excluded from BER/SER. Channel points are oversampled, not symbol decisions. Spectra share the TX peak reference. These figures do not establish original MATLAB receiver equivalence.

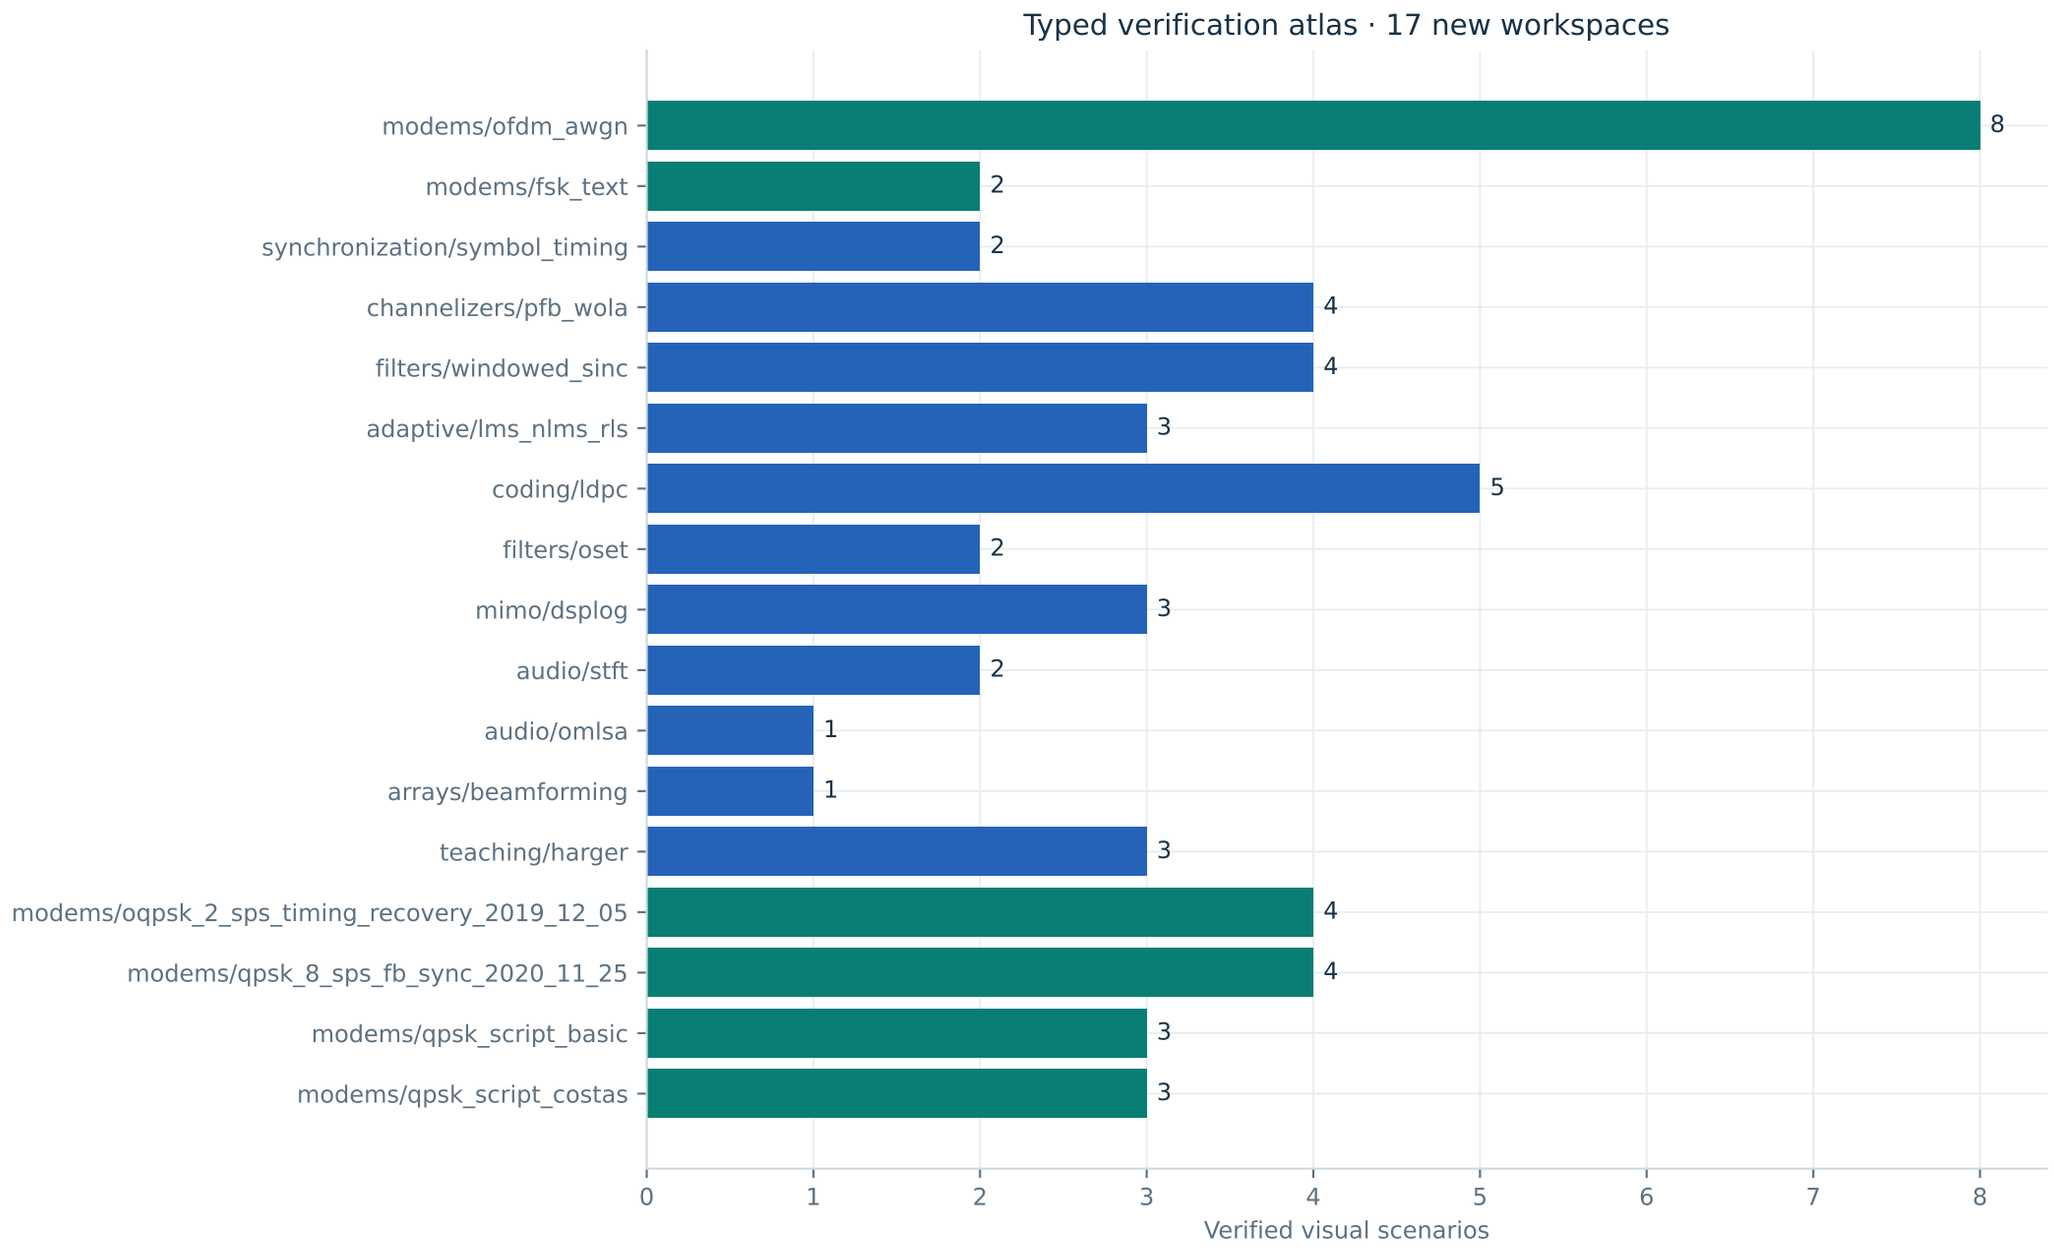

Source preservation covers 295 MATLAB/Simulink files. Group analogues do not reproduce every historical script or book figure.