

**LAPORAN PRAKTIKUM
APLIKASI BERBASIS PLATFORM**

MODUL 9

PHP



Disusun oleh:

VALISHA ATTHALIA NAURA IRFAN

2311102160

S1 IF-11-04

Dosen Pengampu:

Cahyo Prihantoro, S.Kom., M.Eng

PROGRAM STUDI S1 TEKNIK INFORMATIKA


FAKULTAS INFORMATIKA

TELKOM UNIVERSITY PURWOKERTO


2025/2026

1. Web Server dan Server Side Scripting

Web Server merupakan sebuah perangkat lunak dalam server yang berfungsi menerima permintaan (request) berupa halaman web melalui HTTP atau HTTPS dari client yang dikenal dengan web browser dan mengirimkan kembali (response) hasilnya dalam bentuk halaman-halaman web yang umumnya berbentuk dokumen HTML.

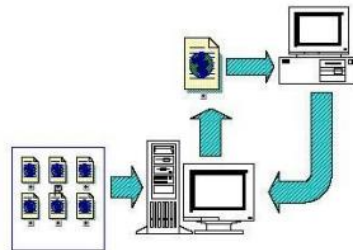

Gambar 9-1. Arsitektur web standar

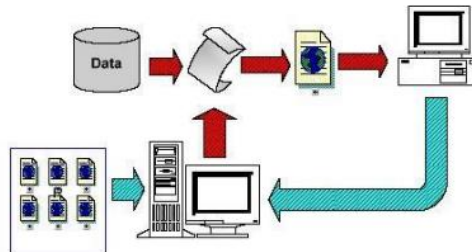

Gambar 9-2. Arsitektur web dinamis

Beberapa web server yang
antara lain seperti berikut:

1. Apache Web Server (<https://httpd.apache.org/>)
2. Internet Information Service, IIS (<https://www.iis.net/>)
3. Xitami Web Server
4. Sun Java System Web Server

ServerSide Scripting merupakan sebuah teknologi scripting atau pemrograman web dimana script (program) dikompilasi atau diterjemahkan di server. Dengan serverside scripting, memungkinkan untuk menghasilkan halaman web yang dinamis.

Beberapa contoh Server Side Scripting (Programming):

1. ASP (Active Server Page) dan ASP.NET
2. ColdFusion (<http://www.adobe.com/products/coldfusion-family.html>)
3. Java Server Pages (<http://www.oracle.com/technetwork/java/javaee/jsp/index.html>)
4. erl (<https://www.perl.org/>)
5. Python (<https://www.python.org/>)
6. PHP (<http://www.php.net/>)

banyak digunakan

Keistimewaan PHP sebagai bahasa pemrograman berbasis web adalah :

1. Cepat
2. Free
3. Mudah dipelajari
4. Multi-platform
5. Dukungan technical support
6. Banyaknya komunitas PHP
7. Aman

2. Instalasi Apache, PHP dan MySQL dengan XAMPP

Proses instalasi Apache, PHP dan MySQL terkadang menjadi kendala tersendiri bagi yang ingin memulai belajar pemrograman web. Namun saat ini sudah tersedia banyak aplikasi paket yang mencakup ketiga aplikasi tersebut. Beberapa diantaranya adalah sebagai berikut:

1. XAMPP (versi windows) dan LAMPP (versi linux) yang dapat diunduh di <https://www.apachefriends.org/download.html>
2. WAMP Server
3. APPServ
4. PHPTriad

Pada modul ini, akan digunakan aplikasi paket XAMPP sebagai sarana pendukung dan pembelajaran pemrograman web.

a. Persiapan Instalasi

1. Pastikan komputer anda tidak terinstall web server lain seperti IIS atau PWS karena dapat menyebabkan bentrok dengan web server Apache yang akan dipasang. Namun jika anda tetap ingin mempertahankannya, setelah installasi web server Apache selesai, anda dapat mengkonfigurasinya secara manual untuk mengganti nomor port yang akan digunakan oleh Apache.
2. Download source XAMPP versi 5.6.32 (yang akan digunakan di modul ini) pada <https://www.apachefriends.org/download.html> dan tersedia untuk sistem operasi Windows, Linux dan Mac.

1. XAMPP


```
Administrator: Command Prompt

Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.


C:\WINDOWS\system32>php -v
PHP 8.2.12 (cli) (built: Oct 24 2023 21:15:15) (ZTS Visual C++ 2019 x64)
Copyright (c) The PHP Group
Zend Engine v4.2.12, Copyright (c) Zend Technologies

C:\WINDOWS\system32>
```

Xampp sudah terinstal

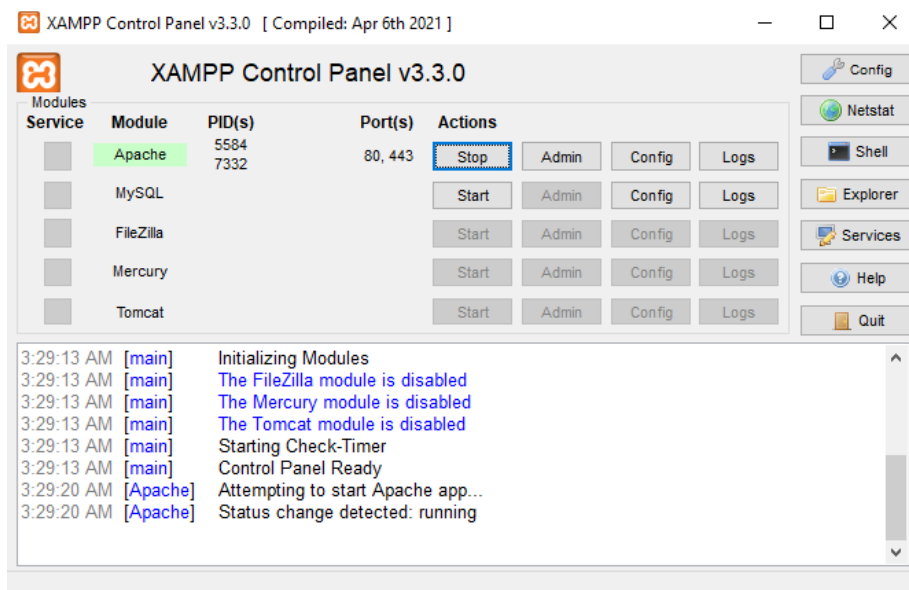

Misal ingin menjalankan web server maka klik “Start” pada Apache

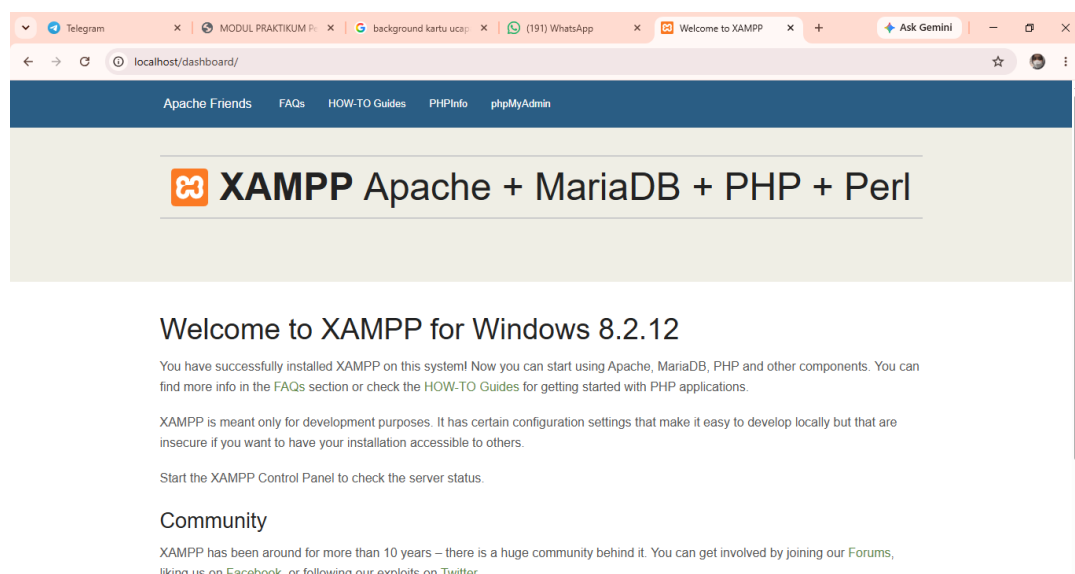


Lalu buka localhost pada browser dan akan muncul tampilan seperti diatas


2. Laragon

Download laragon installer pada <https://laragon.org/download>


Klik 2x kemudian tentukan lokasi instalasi

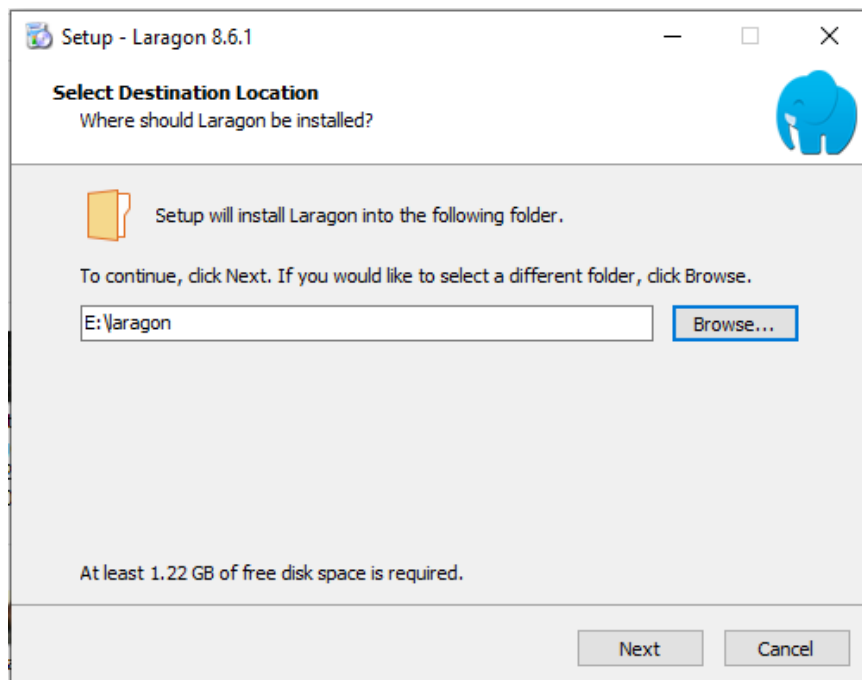


Klik 'next'

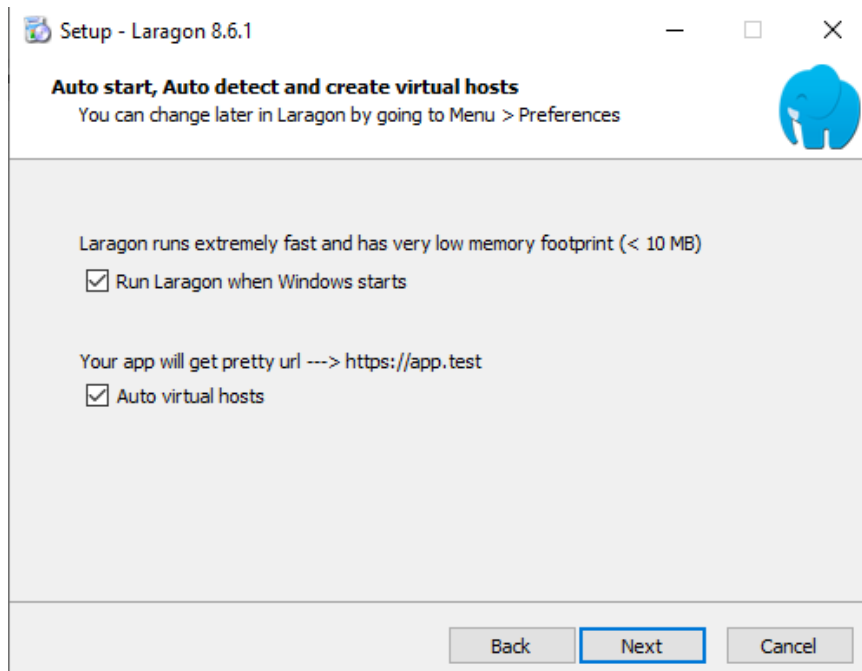


Klik 'install'

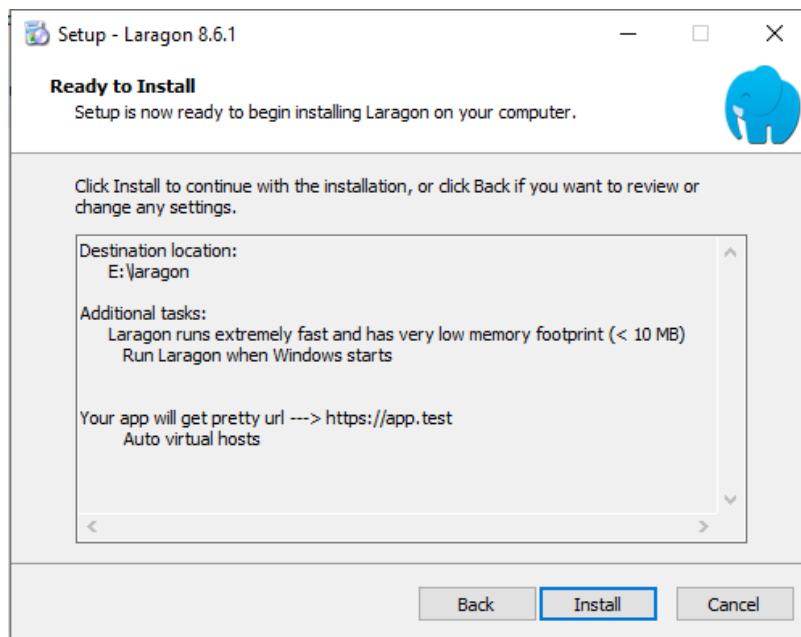


Tunggu sampai selesai

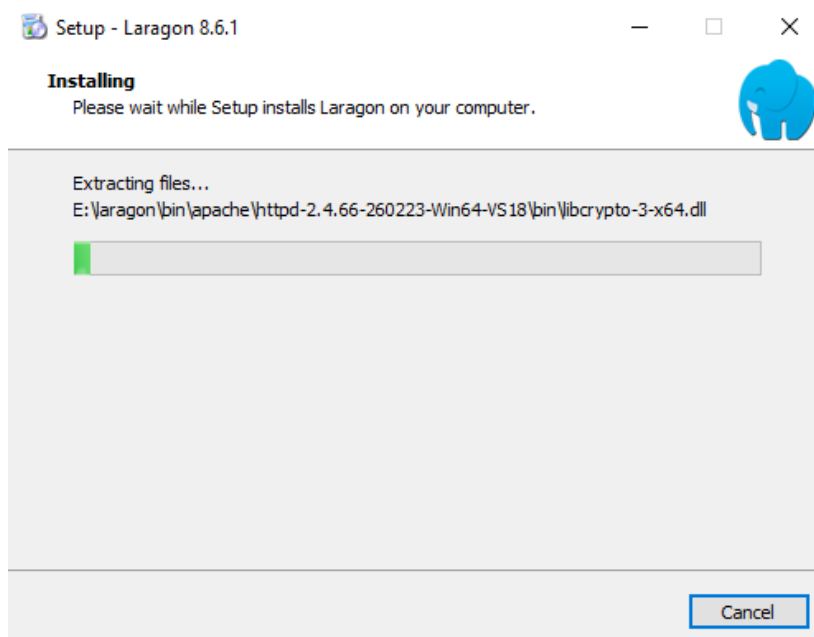


Klik 'finish'

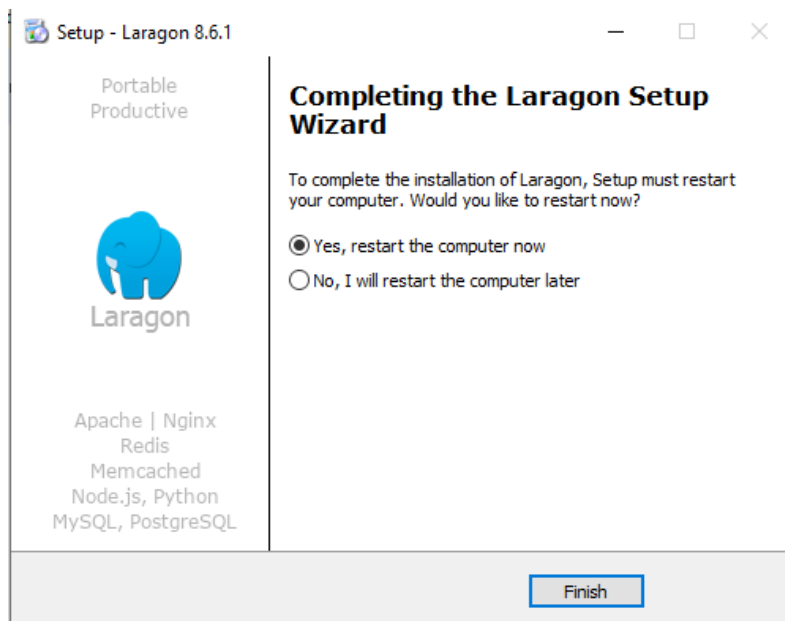

Klik pada service yang ingin digunakan (misal web server/apache)

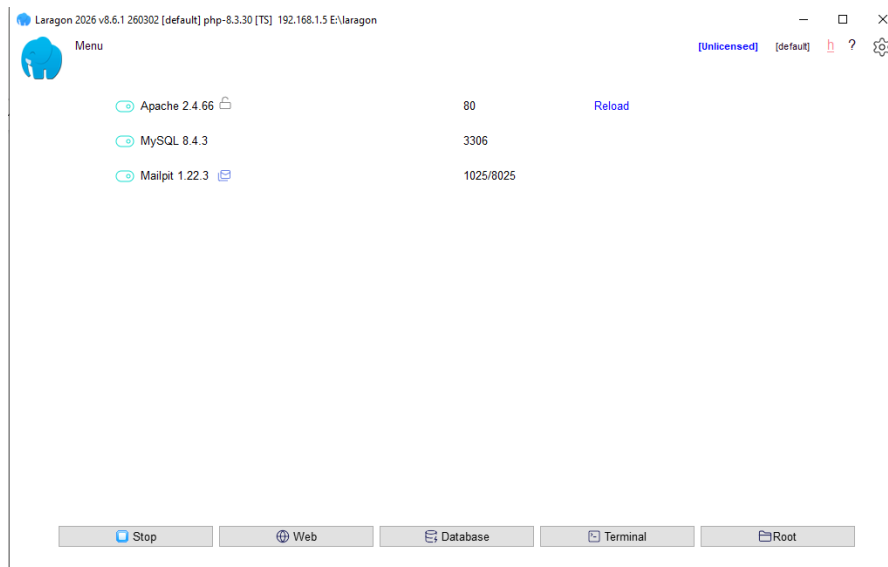

Akses web server pada <http://localhost:80>

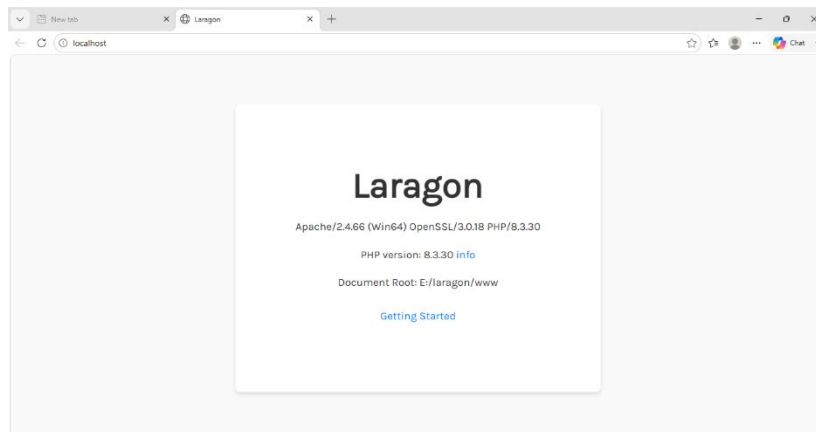

3. Composer

Download installer composer pada <https://getcomposer.org/download/>

```
C:\WINDOWS\system32>composer -v

Composer version 2.9.7 2026-04-14 13:31:52

Usage:
  command [options] [arguments]

Options:
  -h, --help                Display help for the given command. When no command is given display help for the list command
  -q, --quiet               Do not output any message
  -V, --version              Display this application version
  --ansi|--no-ansi          Force (or disable --no-ansi) ANSI output
  -n, --no-interaction       Do not ask any interactive question
  --profile                 Display timing and memory usage information
  --no-plugins               Whether to disable plugins.
  --no-scripts               Skips the execution of all scripts defined in composer.json file.
  -d, --working-dir=WORKING-DIR If specified, use the given directory as working directory.
  --no-cache                Prevent use of the cache
  -v|vv|vvv, --verbose      Increase the verbosity of messages: 1 for normal output, 2 for more verbose output and 3 for debug

Available commands:
  about                Shows a short information about Composer
  archive               Creates an archive of this composer package
  audit                 Checks for security vulnerability advisories for installed packages
  browse               [home] Opens the package's repository URL or homepage in your browser
  bump                 Increases the lower limit of your composer.json requirements to the currently installed versions
  check-platform-reqs  Check that platform requirements are satisfied
  clear-cache           [clearcache|cc] Cleans composer's internal package cache
  completion           Dump the shell completion script
  config               Sets config options
  create-project        Creates new project from a package into given directory
  depends              [why] Shows which packages cause the given package to be installed
  diagnose             Diagnoses the system to identify common errors
  dump-autoload         [dumpautoload] Dumps the autoloader
  exec                 Executes a vendored binary/script
  fund                 Discover how to help fund the maintenance of your dependencies
  global               Allows running commands in the global composer dir ($COMPOSER_HOME)
```

Composer sudah terinstall

UNGUIDED

1. Cmd: php -v

```
E:\laragon\www>php -v
PHP 8.2.12 (cli) (built: Oct 24 2023 21:15:15) (ZTS Visual C++ 2019 x64)
Copyright (c) The PHP Group
Zend Engine v4.2.12, Copyright (c) Zend Technologies

E:\laragon\www>
```

Command melihat versi php berapa yang sekarang terinstall pada device.

2. Cmd: mkdir nama-folder

```
E:\laragon\www>md laprak 5

E:\laragon\www>ls
'ls' is not recognized as an internal or external command,
operable program or batch file.

E:\laragon\www>cd laprak5

E:\laragon\www\laprak5>
```

This PC > ICHA (E:) > laragon > www				
Name	Date modified	Type	Size	
laprak5	6/18/2026 4:21 AM	File folder		
index	1/16/2026 3:07 PM	PHP Source File	4 KB	

Command ini berfungsi untuk membuat folder/direktori baru.

3. Cmd: rmdir nama-folder

```
E:\laragon\www\laprak5>cd ..

E:\laragon\www>rmdir laprak5
```

This PC > ICHA (E:) > laragon > www				
Name	Date modified	Type	Size	
index	1/16/2026 3:07 PM	PHP Source File	4 KB	

Command menghapus folder/direktori yang ingin di hapus.

4. Cmd: ping


```
E:\laragon\www>ping

Usage: ping [-t] [-a] [-n count] [-l size] [-f] [-i TTL] [-v TOS]
          [-r count] [-s count] [[-j host-list] | [-k host-list]]
          [-w timeout] [-R] [-S srcaddr] [-c compartment] [-p]
          [-4] [-6] target_name

Options:
  -t          Ping the specified host until stopped.
              To see statistics and continue - type Control-Break;
              To stop - type Control-C.
  -a          Resolve addresses to hostnames.
  -n count    Number of echo requests to send.
  -l size     Send buffer size.
  -f          Set Don't Fragment flag in packet (IPv4-only).
  -i TTL      Time To Live.
  -v TOS      Type Of Service (IPv4-only. This setting has been deprecated
              and has no effect on the type of service field in the IP
              Header).
  -r count    Record route for count hops (IPv4-only).
  -s count    Timestamp for count hops (IPv4-only).
  -j host-list Loose source route along host-list (IPv4-only).
  -k host-list Strict source route along host-list (IPv4-only).
  -w timeout  Timeout in milliseconds to wait for each reply.
  -R          Use routing header to test reverse route also (IPv6-only).
              Per RFC 5095 the use of this routing header has been
              deprecated. Some systems may drop echo requests if
              this header is used.
  -S srcaddr  Source address to use.
  -c compartment Routing compartment identifier.
  -p          Ping a Hyper-V Network Virtualization provider address.
  -4          Force using IPv4.
  -6          Force using IPv6.
```

Command berfungsi untuk mengeteks koneksi ke suatu server.

5. Cmd: php -S localhost:8000

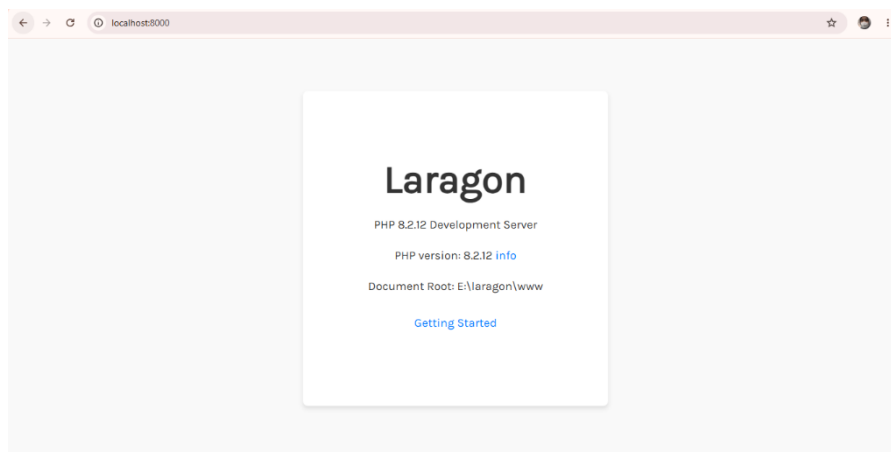

```
E:\laragon\www>php -S localhost:8000
[Thu Jun 18 04:36:13 2026] PHP 8.2.12 Development Server (http://localhost:8000) started
[Thu Jun 18 04:36:21 2026] [::1]:50145 Accepted
[Thu Jun 18 04:36:21 2026] [::1]:50146 Accepted
[Thu Jun 18 04:36:21 2026] [::1]:50145 [200]: GET /
[Thu Jun 18 04:36:21 2026] [::1]:50145 Closing
[Thu Jun 18 04:36:21 2026] [::1]:50146 [404]: GET /favicon.ico - No such file or directory
[Thu Jun 18 04:36:21 2026] [::1]:50146 Closing
```

Berfungsi untuk menjalankan server secara local menggunakan PHP.

6. Cmd: echo>file.txt

```
E:\laragon\www>echo>file.txt

E:\laragon\www>cat file.txt
'cat' is not recognized as an internal or external command,
operable program or batch file.
```


This PC > ICHA (E:) > laragon > www

Name	Date modified	Type	Size
file	6/18/2026 4:39 AM	Text Document	1 KB
index	1/16/2026 3:07 PM	PHP Source File	4 KB


Command berfungsi untuk membuat file txt baru kosong dengan nama file tersebut.

Bukti Instalasi Extention Laravel & Web Server


1. PHP Intelephense

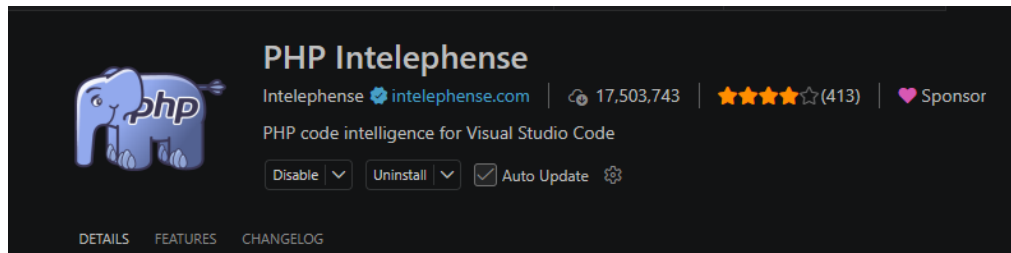


2. PHP Namespace Resolver

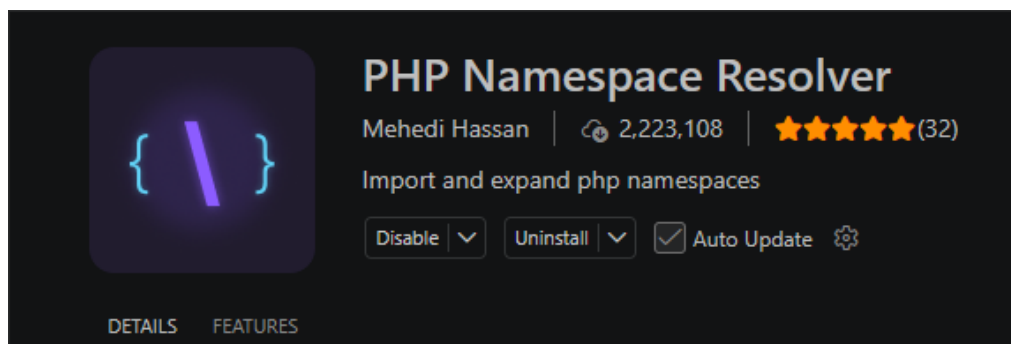


3. Laravel Blade Formatter

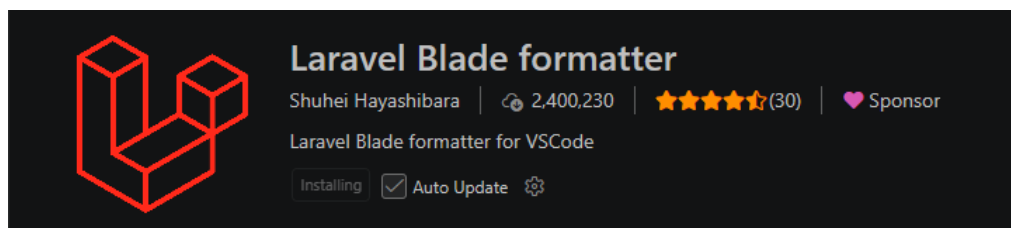

4. Laravel Blade Snippets

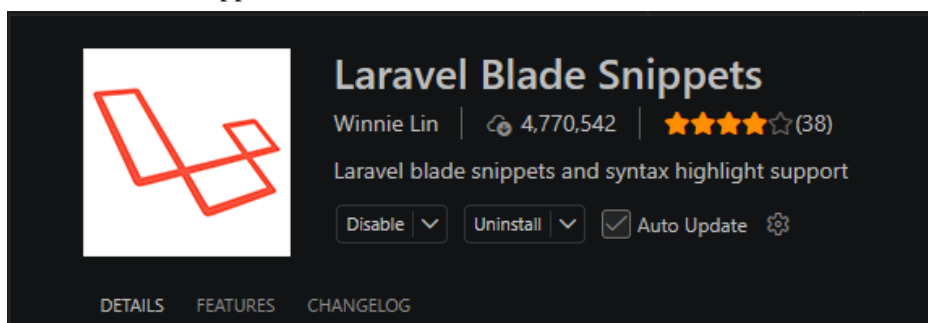

5. Laravel Blade Spacer

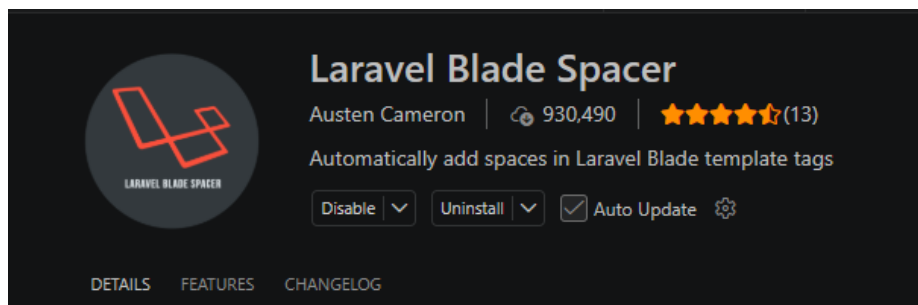

Link github: <https://github.com/valishaatthalia/2311102160-Valisha-Webpro.git>