Git — Branques i tags.

Ejercicio0.

```
osboxes@osboxes:~$ mkdir git
osboxes@osboxes:~$ cd git/
osboxes@osboxes:~/git$ mkdir web
osboxes@osboxes:~/git$ cd web/
osboxes@osboxes:~/git/web$ git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
Initialized empty Git repository in /home/osboxes/git/web/.git/
✔ ~/git/web [master L|✔]
20:22 $ nano README.md
```

```
✘-1 ~/git/web [master L|…1]
20:24 $ git add README.md
✔ ~/git/web [master L|● 1]
20:24 $ git commit -m "Primer commit: agregar Readme"
[master (root-commit) 516efe3] Primer commit: agregar Readme
 1 file changed, 1 insertion(+)
 create mode 100644 README.md
✔ ~/git/web [master L|✔]
20:25 $
```

```
✔ ~/git/web [master L|✔]
20:25 $ git branch --show-current
master
```

Ejercicio1.

```
✔ ~/git/web [master L|✔]
20:27 $ git branch
* master
```

```
✔ ~/git/web [master L|✔]
20:31 $ git switch -c contacte
Switched to a new branch 'contacte'
✔ ~/git/web [contacte L|✔]
20:31 $ git branch
* contacte
  master
```

Ejercicio2.

```
✔ ~/git/web [contacte L|✔]
07:00 $ nano index.html
✔ ~/git/web [contacte L|…1]
07:01 $ git add index.html
✔ ~/git/web [contacte L|● 1]
07:01 $ git commit -m "Agregar index.html base"
[contacte e7652c0] Agregar index.html base
 1 file changed, 7 insertions(+)
 create mode 100644 index.html
✔ ~/git/web [contacte L|✔]
07:02 $
```

```
✔ ~/git/web [contacte L|✔]
07:02 $ nano index.html
✔ ~/git/web [contacte L|+ 1]
07:11 $ git add index.html
✔ ~/git/web [contacte L|● 1]
07:11 $ git commit -m "Agregar seccion de contacto"
[contacte c67b27c] Agregar seccion de contacto
 1 file changed, 4 insertions(+)
✔ ~/git/web [contacte L|✔]
07:12 $
```

```
✔ ~/git/web [contacte L|✔]
07:12 $ nano index.html
✔ ~/git/web [contacte L|+ 1]
07:13 $ git add index.html
✔ ~/git/web [contacte L|● 1]
07:13 $ git commit -m "Agregar enlace de contacto"
[contacte 21e0e69] Agregar enlace de contacto
 1 file changed, 2 insertions(+), 1 deletion(-)
✔ ~/git/web [contacte L|✔]
07:13 $ git log --oneline
21e0e69 (HEAD -> contacte) Agregar enlace de contacto
c67b27c Agregar seccion de contacto
e7652c0 Agregar index.html base
516efe3 (master) Primer commit: agregar Readme
```

Ejercicio3.

```
✔ ~/git/web [contacte L|✔]
11:37 $ git switch
contacte   master
✔ ~/git/web [contacte L|✔]
11:37 $ git switch master
Switched to branch 'master'
✔ ~/git/web [master L|✔]
11:38 $ nano new.html
✔ ~/git/web [master L|…1]
11:40 $ git add new.html
✔ ~/git/web [master L|● 1]
11:40 $ git commit -m "Agregar new.html con meta description"
[master a933fca] Agregar new.html con meta description
 1 file changed, 1 insertion(+)
 create mode 100644 new.html
```

```
✔ ~/git/web [master L|✔]
11:41 $ git log --oneline --graph --all
* a933fca (HEAD -> master) Agregar new.html con meta description
| * 21e0e69 (contacte) Agregar enlace de contacto
| * c67b27c Agregar seccion de contacto
| * e7652c0 Agregar index.html base
|/
* 516efe3 Primer commit: agregar Readme
```

Ejercicio4.

```
✔ ~/git/web [master L|✔]
11:43 $ git merge contacte
Merge made by the 'ort' strategy.
 index.html | 12 ++++++++++++
 1 file changed, 12 insertions(+)
 create mode 100644 index.html
✔ ~/git/web [master L|✔]
11:44 $ git log --oneline --graph --all
*   7267491 (HEAD -> master) Merge branch 'contacte'
|\
| * 21e0e69 (contacte) Agregar enlace de contacto
| * c67b27c Agregar seccion de contacto
| * e7652c0 Agregar index.html base
* | a933fca Agregar new.html con meta description
|/
* 516efe3 Primer commit: agregar Readme
```

Ejercicio5.

```
✔ ~/git/web [master L|✔]
11:44 $ ls
index.html  new.html  README.md
```

```
✔ ~/git/web [contacte L|✔]
11:46 $ ls
index.html  README.md
```

Ejercicio6.

```
✔ ~/git/web [contacte L|✔]
11:48 $ git switch master
Switched to branch 'master'
```

```
✘-1 ~/git/web [master L|✔]
11:50 $ git tag -a entrega-Laia -m "Entrega prova branques i tags - Laia"
✔ ~/git/web [master L|✔]
11:53 $ git show entrega-Laia
tag entrega-Laia
Tagger: Laia <laimorman@alu.edu.gva.es>
Date:   Sun Sep 27 11:53:07 2026 -0400

Entrega prova branques i tags - Laia

commit 7267491e4758dabd14512483bf16301c8d5c9579 (HEAD -> master, tag: entrega-Laia)
Merge: a933fca 21e0e69
Author: Laia <laimorman@alu.edu.gva.es>
Date:   Sun Sep 27 11:44:08 2026 -0400

    Merge branch 'contacte'
```

Ejercicio7.


```
✔ ~/git/web [master L|✔]
11:55 $ git branch -d contacte
Deleted branch contacte (was 21e0e69).
✔ ~/git/web [master L|✔]
11:55 $ git branch
* master
```

Ejercicio8.
PRIMERO CREAMOS EL TOKEN EN GITHUB

```
✔ ~/git/web [master L|✔]
11:55 $ git remote add origin https://github.com/laia-moreno/web.git
```


```
✘-2 ~/git/web [master L|✔]
13:00 $ git remote add origin https://laia-moreno:github_pat_11COSUIRI0nZuCibTJeBN3_Xcg
cg367ZVKxDC5jNONKgGoaZrKbOUojm9J2xeue0MW7FSYG7GYtaY7Bof@github.com/laia-moreno/web.git✔
~/git/web [master L|✔]
13:01 $ git remote set-url origin https://laia-moreno:github_pat_11COSUIRI0nZuCibTJeBN3_
XcgScg367ZVKxDC5jNONKgGoaZrKbOUojm9J2xeue0MW7FSYG7GYtaY7Bof@github.com/laia-moreno/web.g
it
```

```
✘-128 ~/git/web [master L|✔]
13:01 $ git push -u origin master
Enumerating objects: 17, done.
Counting objects: 100% (17/17), done.
Delta compression using up to 2 threads
Compressing objects: 100% (15/15), done.
Writing objects: 100% (17/17), 1.75 KiB | 199.00 KiB/s, done.
Total 17 (delta 3), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (3/3), done.
To https://github.com/laia-moreno/web.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.
```

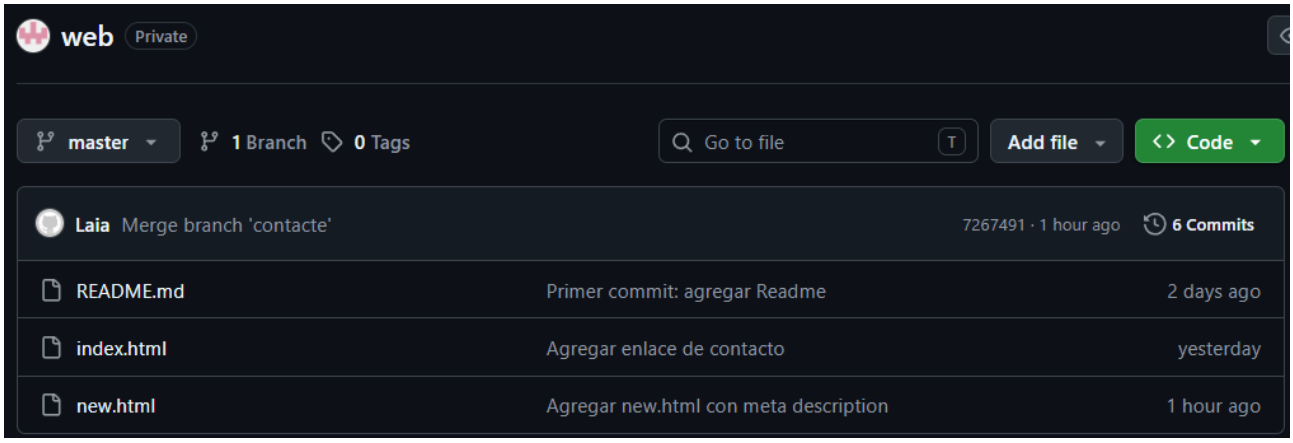


```
✔ ~/git/web [master|✔]
13:09 $ git log --oneline --graph --all --decorate
*   7267491 (HEAD -> master, tag: entrega-Laia, origin/master) Merge branch 'contacte'
|\
| * 21e0e69 Agregar enlace de contacto
| * c67b27c Agregar seccion de contacto
| * e7652c0 Agregar index.html base
* | a933fca Agregar new.html con meta description
|/
* 516efe3 Primer commit: agregar Readme
```

```
✔ ~/git/web [master|✔]
13:10 $ git push origin entrega-Laia
Enumerating objects: 1, done.
Counting objects: 100% (1/1), done.
Writing objects: 100% (1/1), 182 bytes | 60.00 KiB/s, done.
Total 1 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/laia-moreno/web.git
 * [new tag]         entrega-Laia -> entrega-Laia
```

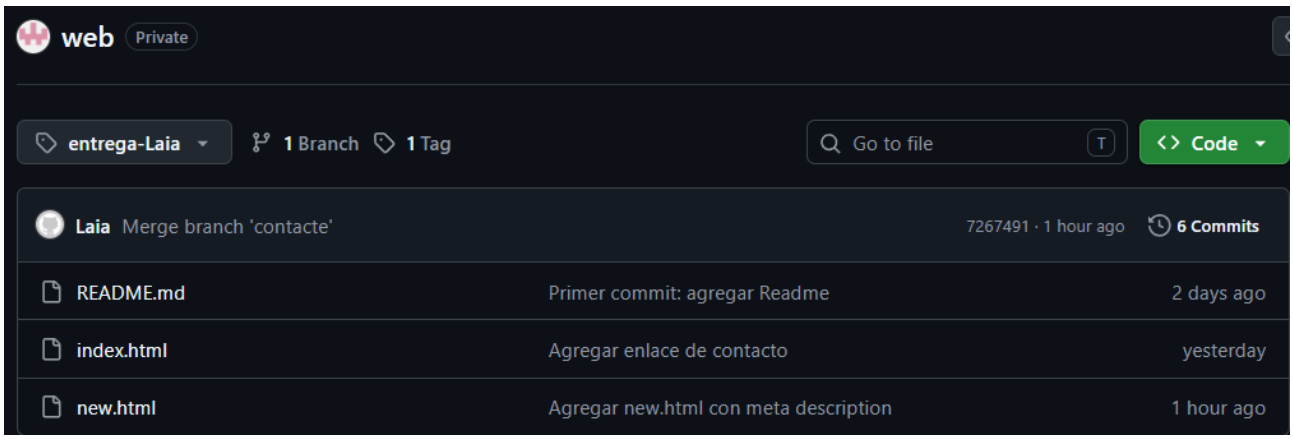

No es necesario hacer el set-url porque en el add ya hemos puesto el enlace correcto, si nos hubiésemos equivocado sí que habría que utilizarlo.

TOKEN:
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