

Plant Health monitoring with Sensors

Nnaemeka Valentine Eze
Electronic Engineering Department
Hochschule Hamm-Lippstadt
Lippstadt, Germany
Nnaemeka-valentine.eze@stud.hshl.de

Abstract—Commings soon.....

Index Terms—Precision farming, plant phenotyping, smart Agriculture, Neural network, Algorithm

I. INTRODUCTION

Human beings depend on plant and animals primarily for food, just as plant depends on soil and environmental nutrients to be alive. By derived meaning, overall life generally depends on plant. And for a plant to be alive, there must be need to prioritise its health. Plant health monitoring with sensors and machine learning(ML) is a novel method of analyzing plant health in agricultural and environmental settings for overall safety of man and animals. It leverages the power of cutting-edge technology using deep learning algorithms, to interpret the detailed data that is gathered by a variety of sensors. As a result, an accurate and timely assessment of the health and welfare of plants could be reliably made [?]. This innovative technology has the potential to fundamentally enhance further how we think about and approach plant health, when fully utilized. Hence, farming techniques that are more sustainable and productive.

When sensors and deep learning(DL) work together to monitor plant health; it could provide an efficient tool that can improve farming practices, cut down on resource waste, and eventually contribute to the efficient and sustainable production of crops. This approach has the capacity to fundamentally alter how we tend to and care for plants in many different contexts, for commercial farmers and peasants in accordance with the SDG (sustainable development goal) vision.

Deep learning and sensor-based plant health monitoring are important for a number of principal reasons: Early Detection of Stress and Disease in plant promotes prompt intervention, thereby minimizing damage and loss. With detailed, real-time information about plant health known, farmers can implement targeted interventions capable of enhancing efficient use of resources like water, fertilizers, and pesticides, reducing waste and environmental impact. Farmers can increase crop yields and quality by altering irrigation, illumination, and nutritional requirements in response to real-time data simply by adequate monitoring. In the face of growing global environmental concerns, it is essential to minimize the use of chemicals, this can be achieved by effective monitoring. Finally, Deep learning and sensor integration in plant health monitoring encourages continued study and advancement in the fields of

technology and agriculture. It promotes the creation of new ideas and technology to improve plant health even more.

Farmers used to keep an eye on the health of their plants by just observing them. Since the eye can only identify the condition after it has begun to harm plants, it has been noted that most of the time this is caused by late detection. Even among specialists, the accuracy of detection and diagnosis based only on visual observation is compromised by subjective impressions.[REALTIME DET OF APPLE D..] Therefore, using these methods in the face of mounting concerns about plant health is counterproductive.

This work aims at investigating how deep learning methods and sensors can be combined to effectively monitor plant health. This study tends to develop a thorough and effective approach for evaluating the health of plants in agricultural and environmental settings, as well as to evaluate the efficacy of this approach, identify potential applications, and assess its impact on agricultural practices and sustainability. It does this by combining sophisticated algorithms with advanced technology on neural networks. The study also aims to further the conversation on using technology to maximize crop yield and environmental responsibility.

II. RELATED WORK

When we talk about plant health, we often limit it to plant diseases and pest. However, these are tiny part of what makes a plant unhealthy, and as such the resultant effect of health conditions. It is a common knowledge that illnesses, particularly those that affect plants, always have a window of infection during which they typically exhibit chemical or biological symptoms.[A SURVEY ON USING DL..] At what stage these changes were observed makes a lot of difference in the disease severity estimation. The term "infection window" describes a certain stage of a plant's growth when it is vulnerable to infection by a given pathogen. Several factors, such as the plant's maturation stage and the surrounding environmental conditions such as temperature, humidity, nutrients, light intensity affect this window. Hence the need to learn these pattern, in other to be able to observe the changes. Observable morphological changes in the plant, such as wilting, discolouration, lesions, or the appearance of aberrant growths, might be considered biological signals. Chemical indicators could be changes in biochemical markers or signaling molecules released by the plant in reaction to a

disease invasion. For instance, alterations in the concentrations of particular metabolites or the initiation of compounds linked to defense.

Therefore, plant health monitoring involves observing the chances of a disease, the changes that may suggest unfavorable plant condition with a view to eliminate them or reduce the level of damage. So, it is important to employ a mechanism capable of getting these biological, environmental or chemical indicators.

In this chapter, we aim to examine several studies that identify and forecast these changes, along with the sensor technologies that are employed.

It is crucial to note that various plant diseases manifest at different phases and target distinct plant organs. There may also be differences in the methods used to find them. Plant diseases that manifest as symptoms on leaves have the most distinctive characteristic for identification out of all the diseases.[A SURVEY ON USING DL..] The most common of them is the photo-based approach using imaging devices like cameras. The prevalence of sensors became necessary for its precision.

One of such is the work recently carried out by "Sefali Acharya of College of Life Sciences and Agriculture, University of New Hampshire, Durham, NH, United States" in his paper "Plant monitoring using nanosensors.[PLANT MONITORING USING NANOSENSORS] Analytical tools called nano-biosensors were created especially to track the health of plants. They function by identifying modifications in the pathways and metabolism of plants without interfering with their inherent activities. Throughout his work, he emphasized that the information obtained can also be used to evaluate the extent of the plant's harm or overall welfare phytohormones and microRNAs.

For a variety of uses, such as medical diagnostics and environmental monitoring, numerous biosensors have been developed for use. A sensor based on optical, magnetic, chemical, electrochemical, vibrational, or optical signals may be used to detect the analytes, depending on the sensor's working principle. Biorecognition components like DNA, antibodies, and enzymes can be used to increase specificity and increase the limit of detection by acting as transducers made of nano-material matrices giving rise to different types of biosensors. Affinity biosensors are created with extremely specialized biorecognition components, such as DNA and/or antibodies. Others may include; Antibody-based biosensors, Nucleic acid-based affinity biosensors, Enzymatic-based biosensors and bacteriophage-based biosensors.

Broadly speaking, biosensors based on nanotechnology, also known as nano-biosensors, provide an advanced way to track the health of plants. Their capacity to transform biological impulses into electrical signals, along with their categorization according to transducer kinds and dependence on particular biorecognition components, renders them invaluable instruments for the instantaneous assessment of plant stress and comprehensive health management in the agricultural sector.

As earlier highlighted, plant health can easily be identified

on their leaves. The use of image for analysis has become the de-facto approach for obtaining data for training deep learning model and severity estimation. This is because of availability of dataset needed for this. Then evolution of picture-based has transitioned from ordinary image capturing devices like camera, to a precision sensor devices. One advantage of sensors is that it can be helpful in detecting signs when they are yet to be picked by conventional picture-base devices.

Some biotic and abiotic factors could lead to stress on the plant. Plant stress could be one parameter to monitor plant health, and can best be captured using various sensors. Plant stress could be in varied form; water stress, environmental stress, mechanical stress[INTRO TO PLANT STRESS],[PLANT R TO MECH. STRESS] In previous work, multispectral sensors has been one of the imaging sensors used to track the health of plants. Stress makes plants more visible, which makes it easier for multispectral sensors to identify and detect high stress levels in plants across a variety of wavelengths, including red, green, red-edge, and near-infrared.[DL APP IN PLANT STRESS IMAGING]. In this review work done by "Zhang, L.; Zhang, H.; Niu, Y.; Han, W.", these sensors were used in Mapping maize water stress based on UAV multispectral remote sensing. One of the first applications of deep learning to the analysis of plant stress photos was image classification. To achieve this, one or more photos are often utilized as input data in crop stress image classification, and an output is used to make a diagnosis. These output could be healthy or unhealthy plant. In contrast to computer vision, where thousands or millions of samples are available, each diagnosis in this scenario is a sample, and the dataset size is typically less. Thus, researchers ought to find the transfer learning useful for these kinds of applications.[DL APP IN PLANT STRESS IMAGING] In order to determine the suitability of the data for mapping the water stress status of maize under various levels of deficit irrigation at the late vegetative, reproductive, and maturation growth stages, the researchers employed high-resolution multispectral images taken from an unmanned aerial vehicle (UAV). The UAV multispectral imagery yielded nine vegetation indices (VIs) associated with crop water stress, which were then utilized to create CWSI inversion models. This was carefully observed and reported. The findings indicated that significant differences in non-water-stressed baselines were observed during the reproductive and maturation stages. The study also identified specific vegetation indices, such as TCARI/RDVI and TCARI/SAVI, that exhibited the best correlations with CWSI at different growth stages. Good correlations with CWSI values were shown by regression models based on TCARI/RDVI and TCARI/SAVI. The R² results demonstrated how strongly the chosen vegetation indices and CWSI were correlated. The CWSI values calculated by on-site measurements when compared with those retrieved by VI-CWSI regression models suggested that CWSI values from the regression models had better abilities to assess the field variability of both crops and soil. The study shows that mapping maize water stress at various growth stages may be accomplished with high-

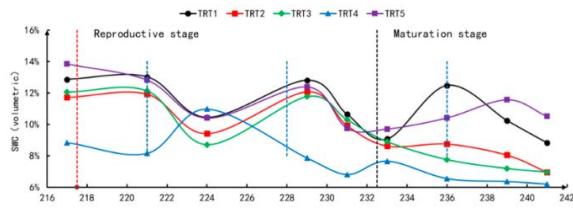


Fig. 1.
[[[MAPPING MAIZE WATER..]]

resolution UAV multispectral sensors.

Although multispectral sensors offer benefits in terms of affordability, simplicity, and readability, they might not be able to accurately detect and discriminate between various illnesses in various crops. One explanation for this might be the small number of bands.[A SURVEY ON DL..] Hyperspectral sensors, which can detect more bands, are better suited to reduce that problem and may be more helpful in differentiating between various illnesses.

The use of classic machine learning solutions is restricted because of the requirements for feature extraction and definition, despite the fact that these techniques might accurately identify diseases. Consequently, because Deep learning models enable automatic feature extraction, deep learning can aid in enhancing generalization.

III. DEEP LEARNING

Deep Learning is a subset of machine learning, which is a subset of Artificial Intelligence . It is about using different convolutions to create "deeper" neural networks that give a hierarchical representation of the data which enables greater learning capacities, which in turn enable improved accuracy and performance.[DEEP LEARNING IN AGRI..] Simply put, artificial intelligence (AI) is the broad field that includes the creation of intelligent machines. A branch of artificial intelligence called machine learning (AI) is dedicated to creating systems that can learn from data. Deep learning, on the other hand, is a subset of machine learning that focuses on using deep neural networks to model and solve complicated problems. Within the more general topic of artificial intelligence, each level in this hierarchy denotes a more focused and specialized area of study.

About 20 years ago, interest started to grow in machine learning applications for tracking plant health and diagnosing diseases.[A SURVEY ON DEEP LEARNING] Conventional machine learning methods such as Naïve Bayes, Random Forests, K-Nearest Neighbors (KNN), and Support Vector Machines (SVM) were frequently utilized. Traditional machine learning methods, however, have certain drawbacks that make them less practical. In order to train a model, traditional machine learning algorithms needed to extract significant features, which was a laborious procedure.[RICE PLANT DISEASE CLASSIFICATION USING COLOR FEATURES] Furthermore, conventional image processing and machine learning had limitations, and success was frequently restricted to par-




Fig. 2.
[[[PLANT DISEASES AND PEST DETECTION BASED ON DL]]

ticular circumstances.[PLANT DISEASE ID USING DEEP LEARNING] Thus, there has been a trend in the past ten years toward the use of deep learning approaches.[A SURVEY ON DEEP LEARNING] The automatic feature extraction that deep learning conducts by default removes the need for human feature engineering. Higher accuracy has since been achieved with the use of deep learning techniques in contrast to conventional methods. Convolutional Neural Network(CNN) is the most widely used deep learning framework. Another framework that has gained application is the Recurrent Neural Network(RNN).

A. Convolutional Neural Network(CNN)

CNNs are a particular class of neural network architecture that are intended for the processing and analysis of visual input, including pictures and videos. Compared with standard fully connected neural networks, the architecture of a CNN is more complicated. Usually, it is composed of a number of layers, such as input layer, fully connected, pooling, convolutional layers and output layer.[PLANT DISEASES AND PEST DETECTION BASED ON DL]

Convolution is a mathematical process that creates feature maps by combining input data with a kernel or filter. Convolutional layers in CNNs employ a variety of filters to look for patterns in the input data (picture), such as edges, textures, or higher-level features. The network may automatically learn hierarchical representations of the input by to this mechanism. CNNs' capacity to automatically learn structural characteristics is one of their advantages.[PLANT DISEASES AND PEST DETECTION BASED ON DL] This is because while higher layers in the network often capture more complicated and abstract elements, the lower layers typically catch simple features like edges and textures. For applications like picture recognition, where patterns at many levels of abstraction help recognize objects, hierarchical feature learning is essential. In a typical CNN platform, features are extracted by convolutional layers, spatial dimensions are decreased by pooling layers, while the final classification or regression is carried out by fully connected layers. Fig below shows the basic Architecture of a Convolutional Neural Network.

1) —Input Layer: Each neuron in the input layer, which is in charge of receiving and representing the raw input data, is associated with a particular pixel in the input image for the purposes of computer vision. In the forward-pass phase of the neural network, it serves as the beginning point for information flow. After then, the network's later layers will

gradually learn hierarchical representations of the input data, which will bring the network to its final output layer, which is where the predictions or classifications are made.

2) —*Convolutional Layer*: Convolutional operations with filters or kernels are applied to the input data at the Convolutional Layer, a crucial part of CNNs. This layer is very good at capturing elements such as textures, edges, and intricate patterns. It learns several features simultaneously by using numerous filters. The network learns to extract hierarchical features from the input data and can comprehend and depict complex patterns as it moves through successive convolutional layers. The convolution core slides on the feature map during data processing in order to extract a portion of the feature information. This results in a pixel matrix that bears the manipulated or multiplied object pixel. Then, the neurons are fed into the pooling layer to retrieve the feature once more following the convolution layer's feature extraction.[PLANT DISEASES AND PEST DETECTION BASED ON DL]

3) —*Pooling Layer*: The main goal of the pooling layer is to reduce the width and height of the input volume by using the input feature maps that were acquired from the previous Convolutional Layer. This helps to improve efficiency and control computing complexity. Typical pooling techniques consist of: Max Pooling; where the maximum value is kept and the remaining values are deleted, within a predetermined zone that is usually a 2x2 window. It works well to keep the most significant features intact when using max pooling.[DETECTION OF PLANT DISEASES AND PEST]

Average pooling; by calculating the mean value across a given area, thereby producing smoothed representation of the input..[STOCHASTIC POOLING]

Additionally, pooling facilitates the achievement of certain translation invariance. That is, the pooled representation stays mostly unaltered even if a feature or object in the input is moved significantly. Overfitting, the situation where a model performs well on training data but is unable to generalize to new, unknown data, is another issue that pooling helps to control. By imposing a kind of spatial hierarchy and lowering the spatial dimensions, pooling helps to prevent overfitting by lowering the number of parameters in the layers that follow. By lowering the quantity of data that must be processed while keeping the crucial elements, pooling improves overall computational efficiency.

4) —*Fully connected Layer*: Particularly in the last phases, the Fully Connected Layer is an essential part of neural network topologies. Every neuron is linked to every activation in the layer before it. The activations in the previous layer and all of the neurons in the present layer are therefore densely or fully connected. Flattening the high-level filtered input acquired from the preceding layers is the purpose of the layer. For example, the early layers of convolutional neural networks (CNNs) learn hierarchical elements including textures, edges, and intricate patterns. These high-level properties are transformed into a vector form via the Fully Connected Layer. The fully connected layer in a network fills the space between the final output layer and the convolutional or recurrent layers.

B. Recurrent Neural Network(RNN)

Recurrent Neural Network (RNN) is a specialized type of artificial neural network capable of handling sequential data. It does so by maintaining a hidden state or memory of previous inputs. No doubt why this architecture are effective for a range of tasks where understanding the temporal dependencies in the data is essential. A network with the same set of weights reproduced for every time step is what an RNN is. The network can handle sequences of any length because to this stretching over time.

We may discuss some few features of RNN, to understand its uniqueness. This may include;

1) *Long Short-Term Memory(LSTM)*: In LSTMs Information flow is regulated by gating mechanisms , which have a more intricate structure. They can learn from sequences with long-range dependencies because they have a memory cell that has the capacity to store and retrieve information for extended periods of time.

By adding gating mechanisms, LSTMs overcome the drawbacks of conventional RNNs and enable them to recognize and retain long-range dependencies in sequential data. This makes them especially helpful for tasks involving time-series or sequential data.

2) *Gate Recurrent Unit(GRU)*: Gated Recurrent Unit (GRU) is another form of recurrent neural network (RNN) architecture that is used in the field of deep learning for its own purpose. Long short-term memory (LSTM) networks and gate recurrent units are comparable, although the former has fewer parameters and is typically easier and faster to train. The GRU is notable for lacking an output gate and only having two gates: an update gate and a reset gate.[LEARNING PHRASE REP USING RNN].

IV. SENSOR BASED PLANT HEALTH MONITORING

The capacity of plants to develop and yield successfully in the face of environmental stressors, pests, and competition is referred to as plant health. Water stress can affect many physiological and biochemical processes in plants, including photosynthetic capability, reactive oxygen species (ROS)[RESPONSE OF PLANTS TO WATER STRESS], stomatal response, and metabolic modification, etc. These impacts can have a substantial impact on the health of plants. Also Plants' metabolic processes alter in response to drought stress, which has an impact on both the plants' growth and resilience.

In tomato plant, the root development and nutrient uptake can be impacted by water stress. Additionally, it might cause notable drops in chlorophyll content, which would impair the plant's capacity for effective photosynthesis. This is capable of affecting the overall health of the plant, hence the need for monitoring. These stress when combined together, brings about the unhealthy plant characterised by pest and diseases. For the purpose of a wider scope, we would consider the case of a collection of plants to analyse the processes involved in plant health monitoring using deep learning. These data

were made to undergo augmentation, indexing as well as normalization before feeding them into the model.

- 1) *Data Collection:*
- 2) *Data Preprocessing:*
- 3) *Data Augmentation:*
- 4) *Model Training:*

V. PLANT HEALTH MONITORING WITH SENSOR BASED ON DEEP LEARNING

1) *Dataset acquisition:* A dataset in deep learning is an organized group of data that is typically connected to a single body of work. It can either be used for training, or testing and validation. Sensor datasets can be obtained from various sources, such as public repositories like Kaggle, Plant Village etc or by collecting data yourself using sensors. In this work, we obtained dataset from Kaggle database which was slightly engineered by Nasser and et al. The data consist of about 87K RGB images of healthy and some diseased plants of different varieties sourced from different places. About 56236 were used for training using the generally accepted 80:20 ratio for training and validation respectively.

A. Implementation

- 1) *Deep Learning techniques and algorithm:*
- 2) :

ACKNOWLEDGMENT

REFERENCES