



MIDDLEWARE PARA LOGGING GLOBAL

Valeria Hernández Cortés

Grupo IDGS17



SEGG-U2-P3G-3 Middleware para Logging Global

CorrelationId

```
var cid=Guid.NewGuid().ToString();
context.Response.Headers["X-Correlation-ID"]=cid;
await _next(context);
```

- Implementar el middleware e integrarlo al pipeline.

Exception Middleware

```
try{await _next(context);}catch(Exception
ex){_logger.LogError(ex,"Unhandled");context.Response.StatusCode=500;
```

- ```
} • Registrar todas las excepciones no controladas.
```

### Request Logging

```
var sw=Stopwatch.StartNew(); await _next(context);
```


- ```
sw.Stop(); • Registrar método HTTP, ruta, código y tiempo.
```

Pruebas

- Validar CorrelationId.

The screenshot displays a web application interface on the left and the Chrome DevTools Network tab on the right. The web application, titled 'VulnerableApp', features a 'Login' form with a text input field containing 'user1', a password input field with masked characters, and an 'Entrar' button. The Network tab shows a list of resources, with 'X-Correlation-Id' selected. The 'Headers' sub-tab is active, showing the 'X-Correlation-Id' header with the value '3b9e7ec2-5a72-4ca8-aa78-a48cebc5413b'. The 'Request Headers' section shows various headers like 'Accept-Encoding', 'Accept-Language', and 'Cache-Control'.

- Provocar excepciones.

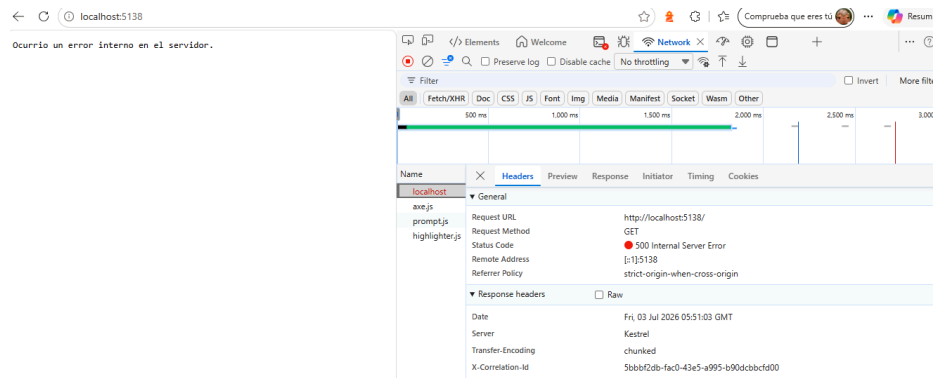

- Verificar logs en Seq.

