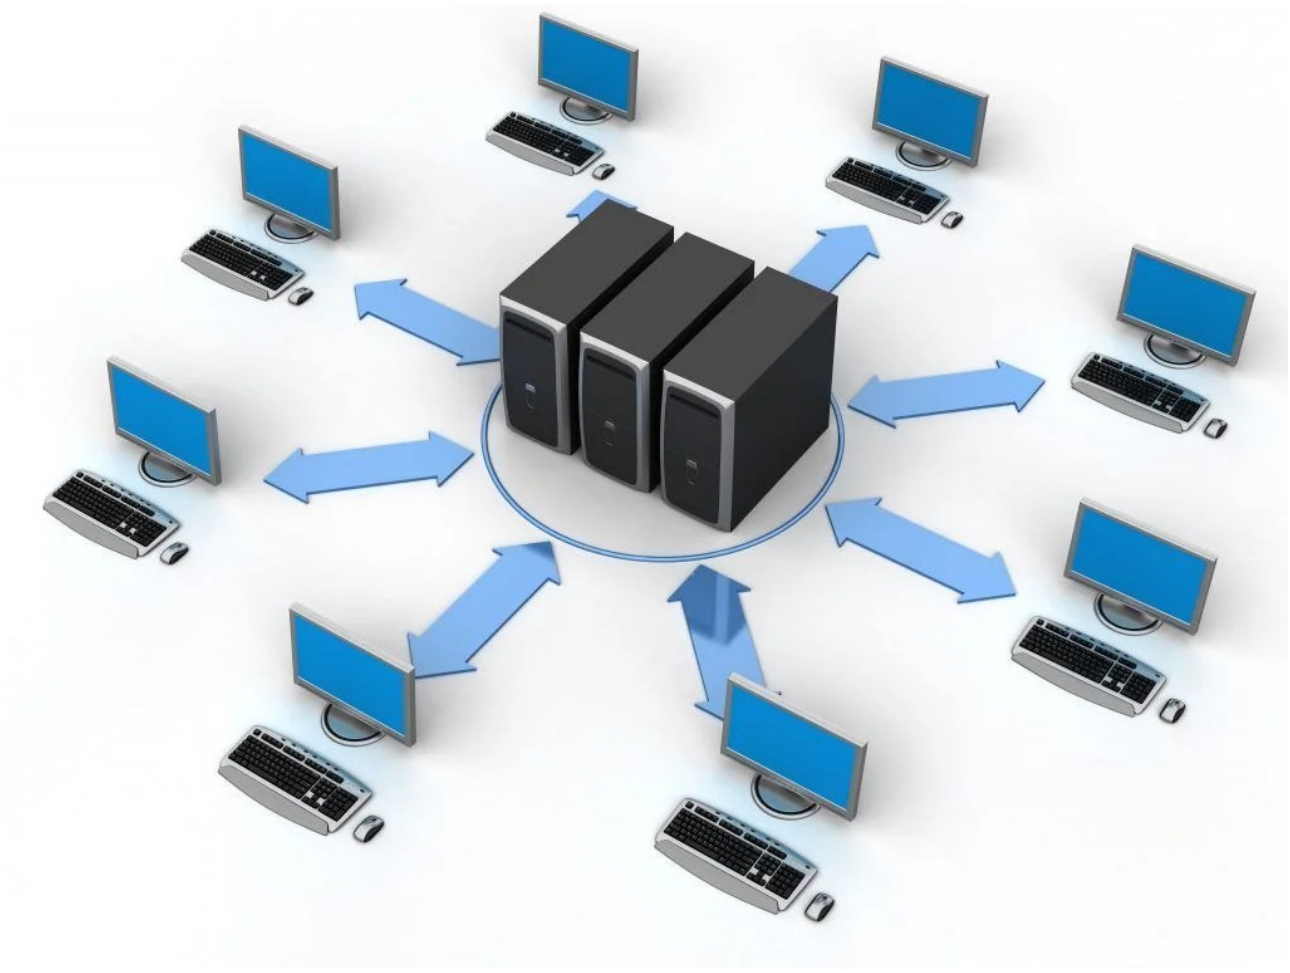
# EXERCICI 2

# SERVIDOR WEB



**Fet per Victor Alvarez Calvo 2n SMX B1**
**M07-UF3-ServidorWeb-Activitat2**
**Professor: Oscar López**

## 1-Primer configurarem el netplan

```
  GNU nano 7.2                    /etc/netplan/50-cloud-init.yaml
# This file is generated from information provided by the datasource.  Changes
# to it will not persist across an instance reboot.  To disable cloud-init's
# network configuration capabilities, write a file
# /etc/cloud/cloud.cfg.d/99-disable-network-config.cfg with the following:
# network: {config: disabled}
network:
 ethernets:
   enp0s3:
     dhcp4: no
     addresses:
       - 172.16.23.206/24
 version: 2
```

## 2- Despres instal·larem el apache fent = sudo apt install apache2

```
user@vm-server:~$ sudo apt install apache2
S'està llegint la llista de paquets… Fet
S'està construint l'arbre de dependències… Fet
S'està llegint la informació de l'estat… Fet
S'instal·laran els següents paquets extres:
  apache2-bin apache2-data apache2-utils libapr1t64 libaprutil1-dbd-sqlite3 libaprutil1-ldap
  libaprutil1t64 liblua5.4-0 ssl-cert
Paquets suggerits:
  apache2-doc apache2-suexec-pristine | apache2-suexec-custom www-browser
S'instal·laran els paquets NOUS següents:
  apache2 apache2-bin apache2-data apache2-utils libapr1t64 libaprutil1-dbd-sqlite3
  libaprutil1-ldap libaprutil1t64 liblua5.4-0 ssl-cert
0 actualitzats, 10 nous a instal·lar, 0 a suprimir i 0 no actualitzats.
S'ha d'obtenir 2.084 kB d'arxius.
Després d'aquesta operació s'utilitzaran 8.094 kB d'espai en disc addicional.
Voleu continuar? [S/n]
```

```
user@vm-server: /etc/apache2
user@vm-server:~$ cd /etc/apache2/
user@vm-server:/etc/apache2$
```

## 3- nomclasse.smx.local

## Al servidor

```
user@vm-server:/etc/apache2$ sudo cp sites-available/000-default.conf sites-available/ex1.conf
user@vm-server:/etc/apache2$
```

```
 GNU nano 7.2                    sites-available/ex1.conf *
<VirtualHost *:80>
        ServerName www.b1.smx.local

        ServerAdmin webmaster@localhost
        DocumentRoot /var/www/html/victor1

        ErrorLog ${APACHE_LOG_DIR}/error-victor1.log
        CustomLog ${APACHE_LOG_DIR}/access-victor1.log combined

</VirtualHost>
```

```
user@vm-server:/etc/apache2$ sudo mkdir /var/www/html/victor1
user@vm-server:/etc/apache2$
```

```
 GNU nano 7.2                    /var/www/html/victor1/index.html
Primera pagina
```

```
user@vm-server:/etc/apache2$ sudo a2ensite ex1.conf
Enabling site ex1.
To activate the new configuration, you need to run:
  systemctl reload apache2
user@vm-server:/etc/apache2$
```

```
user@vm-server:/etc/apache2$ sudo a2dissite 000-default.conf
Site 000-default disabled.
To activate the new configuration, you need to run:
  systemctl reload apache2
user@vm-server:/etc/apache2$
```

```
user@vm-server:/etc/apache2$ sudo systemctl reload apache2
user@vm-server:/etc/apache2$
```

## A la maquina fisica

```
  GNU nano 7.2                                  /etc/hosts
# 172.16.23.204 acme.com mail.acme.com

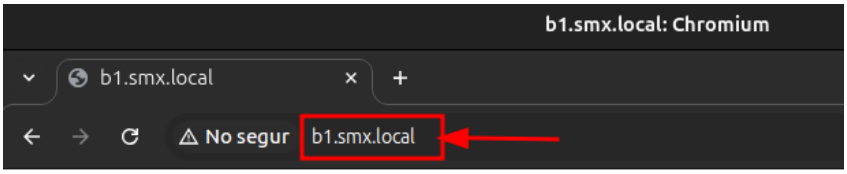
#Examen
#172.16.26.209 cobra.kai mail.cobra.kai

# CONFIGURACIONS PARA SERVEI WEB

# Exercici 1
#172.16.26.209 www.victor.local
#172.16.26.59 www.alvarez.local

# Exercici 2
172.16.23.206 www.b1.smx.local

# The following lines are desirable for IPv6 capable hosts
::1     ip6-localhost ip6-loopback
fe00::0 ip6-localnet
ff00::0 ip6-mcastprefix
ff02::1 ip6-allnodes
ff02::2 ip6-allrouters
```




Primera pagina

```
user@vm-server:/etc/apache2$ sudo a2enmod ssl
Considering dependency mime for ssl:
Module mime already enabled
Considering dependency socache_shmcb for ssl:
Enabling module socache_shmcb.
Enabling module ssl.
See /usr/share/doc/apache2/README.Debian.gz on how to configure SSL and create self-signed cer
tificates.
To activate the new configuration, you need to run:
  systemctl restart apache2
user@vm-server:/etc/apache2$ sudo systemctl restart apache2
user@vm-server:/etc/apache2$
```

```
user@vm-server:/etc/apache2$ sudo openssl req -x509 -nodes -newkey rsa:2048 -keyout /etc/ssl/p
rivate/victor.key -out /etc/ssl/certs/victor.pem -days 365
.+.+.....+....+.....+.+.....+.........++++++++++++++++++++++++++++++++++++++++++++++++++++++++
+++++++++*....+...+...+..+...+.++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++
++*.+.........+.+............+..+............+......+..+...+.........+............+.+.....+..
..+........+..........++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++
..+........+..+...+.....................+.+...+...+.....+.......+..+...................+.....
.++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++*....++++++++++++++++++++++++
++++++++++++++++++++++++++++++++++++++++*..+......+..........+........+..........+..........
.....+............+.....++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++
-----
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [AU]:
State or Province Name (full name) [Some-State]:
Locality Name (eg, city) []:
Organization Name (eg, company) [Internet Widgits Pty Ltd]:
Organizational Unit Name (eg, section) []:
Common Name (e.g. server FQDN or YOUR name) []:
Email Address []:
user@vm-server:/etc/apache2$
```

```
user@vm-server:/etc/apache2$ sudo a2ensite default-ssl.conf
Enabling site default-ssl.
To activate the new configuration, you need to run:
  systemctl reload apache2
user@vm-server:/etc/apache2$ sudo systemctl reload apache2
user@vm-server:/etc/apache2$
```

```
user@vm-server: /etc/apache2
user@vm-server:/etc/apache2$ sudo cp sites-available/default-ssl.conf sites-available/ex1-SSL.conf
user@vm-server:/etc/apache2$
```

```
 GNU nano 7.2                    sites-available/ex1-SSL.conf
<VirtualHost *:443>
        ServerName www.b1.smx.local

        DocumentRoot /var/www/html/victor1

        ErrorLog ${APACHE_LOG_DIR}/error-victorssl.log
        CustomLog ${APACHE_LOG_DIR}/access-victorssl.log combined

        SSLEngine on
        SSLCertificateFile      /etc/ssl/certs/victor.pem
        SSLCertificateKeyFile   /etc/ssl/private/victor.key
</VirtualHost>
```

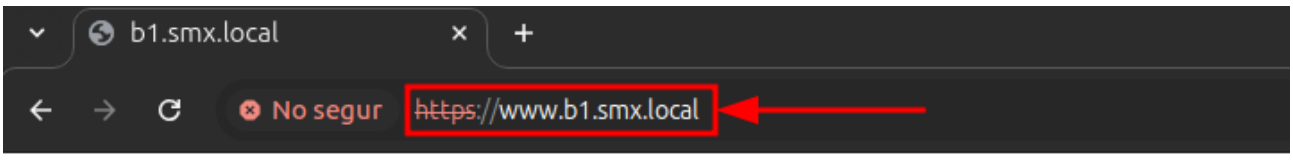
```
 GNU nano 7.2                    sites-available/ex1.conf
<VirtualHost *:80>
#       ServerName www.b1.smx.local

        <IfModule mod_rewrite.c>
          RewriteEngine On
          RewriteCond %{HTTPS} off
          RewriteRule (.*) https://%{HTTP_HOST}%{REQUEST_URI}
        </IfModule>

        ErrorLog ${APACHE_LOG_DIR}/error-victor1.log
        CustomLog ${APACHE_LOG_DIR}/access-victor1.log combined

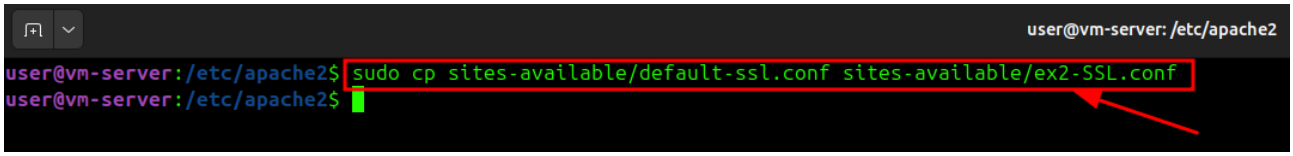
</VirtualHost>
```

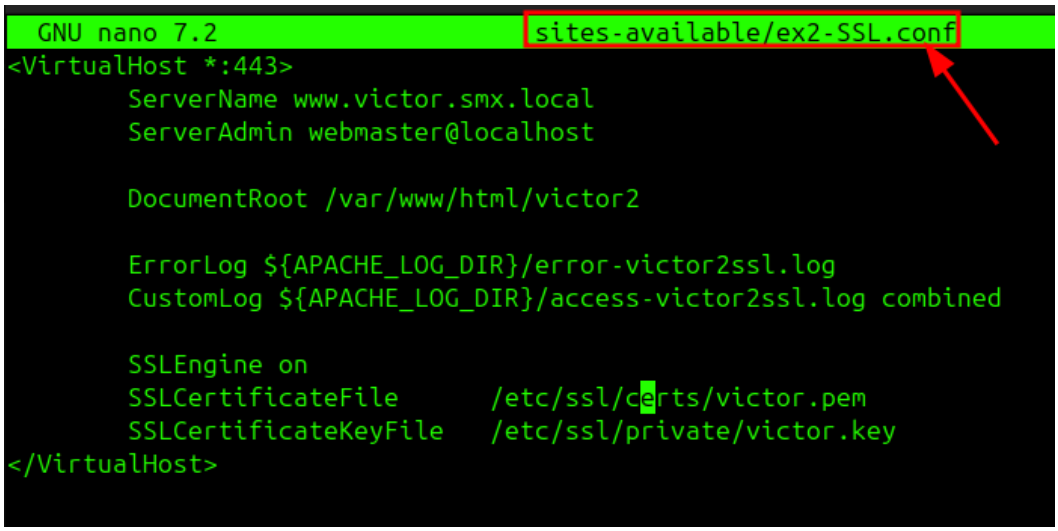
```
user@vm-server:/etc/apache2$ sudo a2enmod rewrite
Enabling module rewrite.
To activate the new configuration, you need to run:
  systemctl restart apache2
user@vm-server:/etc/apache2$ ^C
user@vm-server:/etc/apache2$ sudo systemctl restart apache2
user@vm-server:/etc/apache2$
```

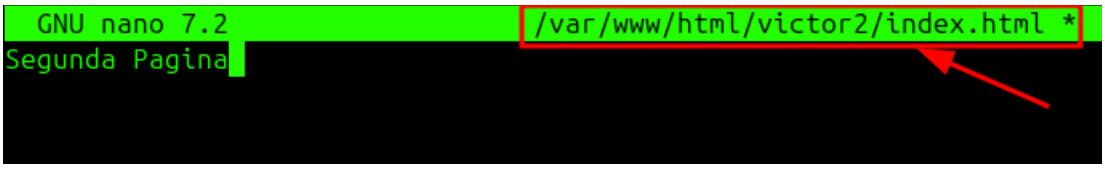


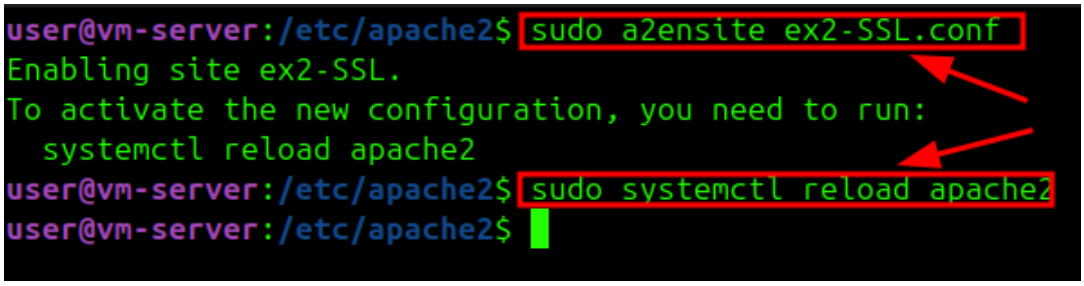

Primera pagina

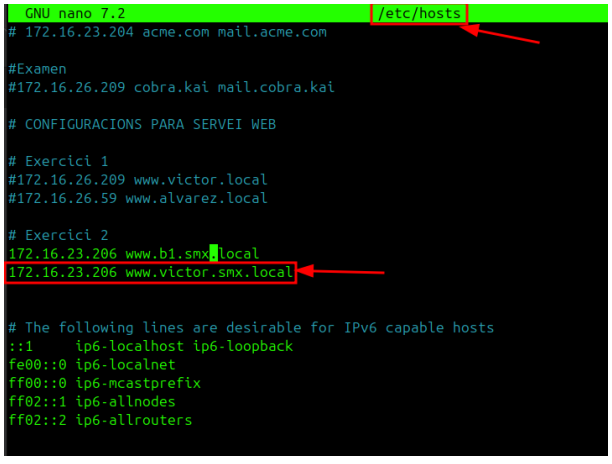
## 4- elteunom.smx.local





Segunda Pagina