

Tasks on Jenkins-02

1. Configure 2 slave machines in the Jenkins master.

Implementation steps:

1. Login to the **Slave-01** machine.
2. Switch to root user: `sudo su -`
3. Install JDK 11: `sudo yum install java-21-amazon-corretto -y`
4. Verify Java: `java -version`
5. Generate SSH key: `ssh-keygen`
6. Navigate to the SSH directory: `cd ~/.ssh`
7. Add the public key to authorized_keys: `cat id_rsa.pub >> authorized_keys`
8. Set permissions: `chmod 700 authorized_keys`
9. Repeat the same steps for **Slave-02**.


Steps on Jenkins Master

10. Login to the Jenkins Master.
11. Switch to root: `sudo su -`
12. Create the Jenkins SSH directory: `mkdir -p /var/lib/jenkins/.ssh`
13. Navigate to the directory: `cd /var/lib/jenkins/.ssh`
14. Add Slave-01 to known_hosts: `ssh-keyscan -H <SLAVE-01-IP> >> /var/lib/jenkins/.ssh/known_hosts`
15. Add Slave-02 to known_hosts: `ssh-keyscan -H <SLAVE-02-IP> >> /var/lib/jenkins/.ssh/known_hosts`
16. Change ownership: `chown jenkins:jenkins known_hosts`
17. Set permissions: `chmod 700 known_hosts`

Steps in Jenkins GUI

18. Login to Jenkins.
19. Go to **Manage Jenkins → Nodes**.
20. Click **New Node**.
21. Enter the node name as **Slave-01**.
22. Select **Permanent Agent** and click **Create**.

23. Enter the remote root directory: `/home/ec2-user`
24. Set the number of executors to **1**.
25. Enter the label: Java
26. Under **Launch method**, select **Launch agents via SSH**.
27. Enter the **public IP of Slave-01**.
28. Under **Credentials**, select **SSH Username with private key**.
29. Enter the username: `ec2-user`
30. Paste the EC2 `.pem` private key.
31. Select **Known hosts file** as the host key verification strategy.
32. Click **Save**.
33. Verify that **Slave-01** is **Online**.
34. Repeat the same process for **Slave-02**.
35. Use the label: Python
36. Enter the public IP of Slave-02.
37. Configure the SSH credentials and private key.
38. Click **Save**.
39. Verify that both **Slave-01** and **Slave-02** are **Online**.
40. Jenkins Master can now execute jobs on both slave machines.

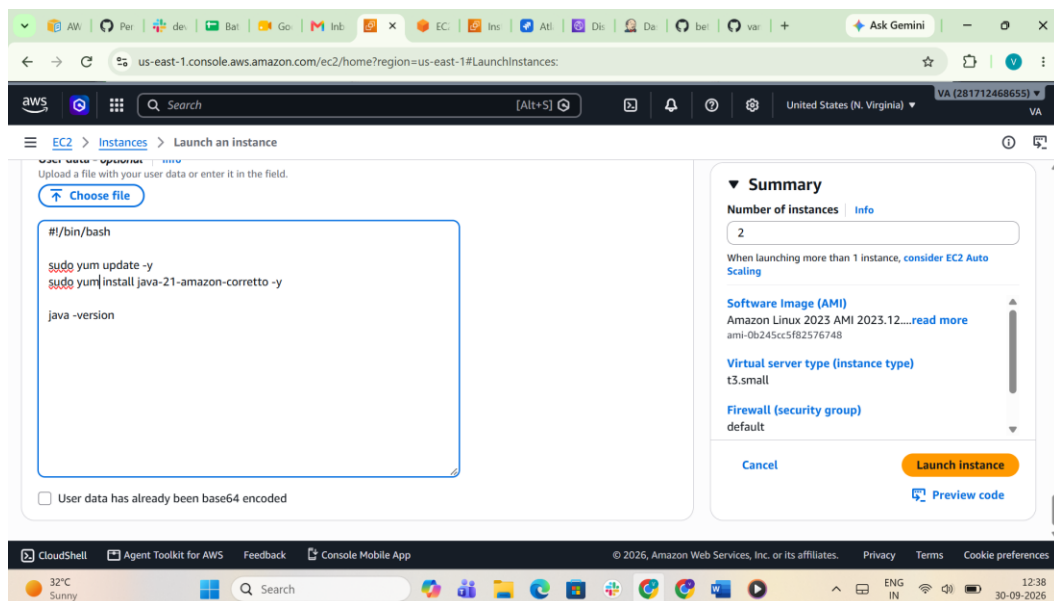

Instances (3) Info less than a minute ago Cancel Instance state Actions Launch instances

Saved filter sets
Running

Instance state = running Clear filters

☐	Name	Instance ID	Instance state	Instance type	Status check	Availability
☐	Jenkins-Master	i-0abca851a71ffa378	Running	t3.small	3/3 checks passed	us-east-1c
☐	Slave-01	i-0f8ae86d88d32b748	Running	t3.small	3/3 checks passed	us-east-1c
☐	Slave-02	i-03a5d2fab01c78a91	Running	t3.small	3/3 checks passed	us-east-1c

```
[root@ip-172-31-26-204 ~]# java -version
openjdk version "21.0.12.1" 2026-08-18 LTS
OpenJDK Runtime Environment Corretto-21.0.12.9.1 (build 21.0.12.1+9-LTS)
OpenJDK 64-Bit Server VM Corretto-21.0.12.9.1 (build 21.0.12.1+9-LTS, mixed mode, sharing)
[root@ip-172-31-26-204 ~]# ssh-keygen
Generating public/private rsa key pair.
Enter file in which to save the key (/root/.ssh/id_rsa):
Enter passphrase for "/root/.ssh/id_rsa" (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /root/.ssh/id_rsa
Your public key has been saved in /root/.ssh/id_rsa.pub
The key fingerprint is:
SHA256:DKgeMLEZGfBvZMAOPGSFPLGwiBGyxiTtTDLqXJ+t4hQ root@ip-172-31-26-204.ec2.internal
The key's randomart image is:
+--[RSA 3072]-----+
|
|  .
| *o.o.
|
| *B* +.
|
|+E =+.o
|o +.. S
| * o
|o o
|
```

i-0f8ae86d88d32b748 (Slave-01)

```

-----[SHA256]-----+
[root@ip-172-31-26-204 ~]# cd .ssh/
[root@ip-172-31-26-204 .ssh]# ls
authorized_keys  id_rsa  id_rsa.pub
[root@ip-172-31-26-204 .ssh]# cat id_rsa.pub > authorized_keys
[root@ip-172-31-26-204 .ssh]# cat authorized_keys
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQGCQoeq/Ob4iccnz6ZIVqBVdem2KA1gg3Y62AeEATxQdHQscnHJXmgBF4XF2JoXwZh2gXGArjbptjnlRiueXl9j
90v24iAIIlAkG/znFGlAmSnSfd60IX/R0siSPfLwYk9ctqhrbrcsUuxOWldwflvN/JC+id+XnRaOuIG+YwJn/YhZ9iM7+wxEn25+gbFG0N5u4eFg8m68ckG1c2ec
QT2vUBGDsQsQxEW8ao7d0kkHEA5OASpXTsiQvgfsRPOwVg0JO74D7x8nufa4HdtZmwyC/vsn4QDzrDbFsz9k5kPQNA1lnuqXYZJytrueIzRC2i1rrmKdFM0V7HkiY
pzhE1+beUxwH921ljM/Istc/QTtcOiEMr6WA6ggotS9zrID08F+QhsQLTDbrBo7ppnsAc1QkYfGhvprrm35QFarkm7ULDAaqLUe0J4ZiYxuVW5hVpfv0CPwfyb
-172-31-26-204.ec2.internal
[root@ip-172-31-26-204 .ssh]# chmod 700 authorized_keys
[root@ip-172-31-26-204 .ssh]#

```

i-0f8ae86d88d32b748 (Slave-01)

```

ec2-user@ip-172-31-19-52 ~]$ sudo su -
[root@ip-172-31-19-52 ~]# java -version
openjdk version "21.0.12.1" 2026-08-18 LTS
OpenJDK Runtime Environment Corretto-21.0.12.9.1 (build 21.0.12.1+9-LTS)
OpenJDK 64-Bit Server VM Corretto-21.0.12.9.1 (build 21.0.12.1+9-LTS; mixed mode, sharing)
[root@ip-172-31-19-52 ~]# ssh-keygen
Generating public/private rsa key pair.
Enter file in which to save the key (/root/.ssh/id_rsa):
Enter passphrase for "/root/.ssh/id_rsa" (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /root/.ssh/id_rsa
Your public key has been saved in /root/.ssh/id_rsa.pub
The key's fingerprint is:
SHA256:1J7gg5txJpyqw0QM/HdKohM2WfM2b970AajzpeqbSJjE root@ip-172-31-19-52.ec2.internal
The key's randomart image is:
+---[RSA 3072]-----+
| . . . |
|.. o . |
|o + . |
| + = = o |
| . . O * S |
| o E = B |
|o = X = o . |
|.o O + *o.. |

```

i-03a53dfab01c78a91 (Slave-02)

```
10 = x = 0. |
|.o O + *o.. |
|+.+=oB. ... |
+----[SHA256]-----+
[root@ip-172-31-19-52 .ssh]# cd .ssh/
[root@ip-172-31-19-52 .ssh]# ls
authorized_keys id_rsa id_rsa.pub
[root@ip-172-31-19-52 .ssh]# cat id_rsa.pub > authorized_keys
[root@ip-172-31-19-52 .ssh]# cat authorized_keys
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQgODP7qERZb/iauaQrs6R+jHjrA6B5m/WXyvc9Ru5d+vRk9JgFO3fhyhxCuG+KTrXpfPkF0zysQ7+ni jXS3kA9
MKMz80/g7/fiHybVSPjuN47s5DjH2AbkHRVW9EGSdFc9CdOURUXmvlY/3Cc20f17041rW40LfiNCKPO4WHTXLncnX+5+NM/EIIgcZ+kCXY0X2I32cd2tzT9nw
CzYlitR30UrPry5F4Uku9MQfZ6f2vwFQSG/eTJ3clHmtZlht/YGi4h7MJYvmqgmJxsdbkgFNsASvoUfNVQwW0o4u+Wy7KlFvcRbn4UQ+fr4ZISNAQd36u5fIG
DBQa9TO3Ri0B6lnoc8QNxf4RyR83mMk2C/fsKKAfrXlHuo6SQ7eWtuC0eUUqbVHyd0EKKQeVCKMAFUSnMdUm/yssy3jIG8FoSWMa/v1Ll8//5rpvq9uY9Qqlp
-172-31-19-52.ec2.internal
[root@ip-172-31-19-52 .ssh]# chmod 700 authorized_keys
[root@ip-172-31-19-52 .ssh]#
```

i-03a53dfab01c78a91 (Slave-02)


```
[root@ip-172-31-16-190 jenkins]# mkdir .ssh
[root@ip-172-31-16-190 jenkins]# ls
config.xml                                jobs
hudson.model.UpdateCenter.xml            nodeMonitors.xml
hudson.plugins.emailxt.ExtendedEmailPublisher.xml  org.jenkinsci.plugins.gitclient.GitHostKeyVerificationConfiguration.
hudson.plugins.git.GitTool.xml          plugins
identity.key.enc                        queue.xml.bak
io.jenkins.plugins.prim.PrismConfiguration.xml  scriptApproval.xml
jenkins.install.InstallUtil.lastExecVersion  secret.key
jenkins.install.UpgradeWizard.state        secret.key.not-so-secret
jenkins.model.JenkinsLocationConfiguration.xml  secrets
jenkins.plugins.git.GitHooksConfiguration.xml  updates
jenkins.security.QueueItemAuthenticatorConfiguration.xml  userContent
jenkins.security.UpdateSiteWarningsConfiguration.xml  users
jenkins.security.apitoken.ApiTokenPropertyConfiguration.xml  workspace
jenkins.telemetry.Correlator.xml
[root@ip-172-31-16-190 jenkins]# ls -a
.
..
.cache
.groovy
.java
.lastStarted
.owner
jenkins.security.QueueItemAuthenticatorConfiguration.xml
jenkins.security.UpdateSiteWarningsConfiguration.xml
jenkins.security.apitoken.ApiTokenPropertyConfiguration.xml
jenkins.telemetry.Correlator.xml
jobs
nodeMonitors.xml
org.jenkinsci.plugins.gitclient.GitHostKeyVerificationConfiguration.xml
```

i-0abca851a71ffa378 (Jenkins-Master)

```
[root@ip-172-31-16-190 jenkins]# cd .ssh/
[root@ip-172-31-16-190 .ssh]# ls
[root@ip-172-31-16-190 .ssh]# ls -a
.
..
[root@ip-172-31-16-190 .ssh]# ssh-keyscan -H 54.144.48.173 >> /var/lib/jenkins/.ssh/known_hosts
[root@ip-172-31-16-190 .ssh]# ll
total 4
-rw-r--r--. 1 root root 559 Sep 30 07:32 known_hosts
[root@ip-172-31-16-190 .ssh]# chown jenkins:jenkins known_hosts
[root@ip-172-31-16-190 .ssh]# ll
total 4
-rw-r--r--. 1 jenkins jenkins 559 Sep 30 07:32 known_hosts
[root@ip-172-31-16-190 .ssh]# chmod 700 known_hosts
[root@ip-172-31-16-190 .ssh]# ll
total 4
-rwx-----. 1 jenkins jenkins 559 Sep 30 07:32 known_hosts
[root@ip-172-31-16-190 .ssh]#
```

i-0abca851a71ffa378 (Jenkins-Master)

Public IP: 34.230.86.47 Private IP: 172.31.16.190

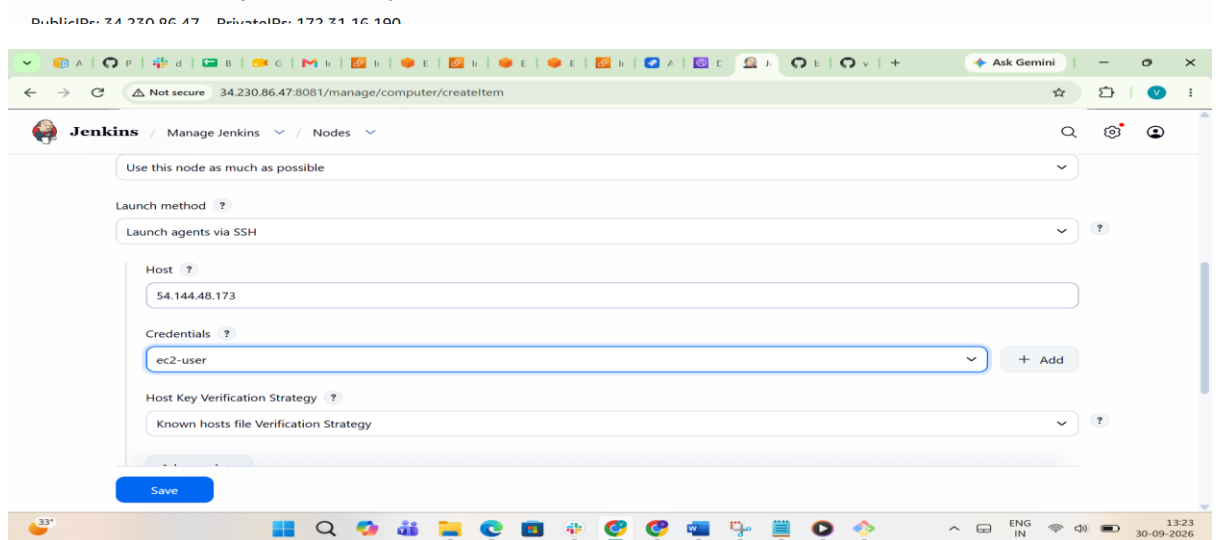

Jenkins / Manage Jenkins / Nodes

Use this node as much as possible


Launch method ?
Launch agents via SSH

Host ?
54.144.48.173

Credentials ?
ec2-user + Add

Host Key Verification Strategy ?
Known hosts file Verification Strategy

Save

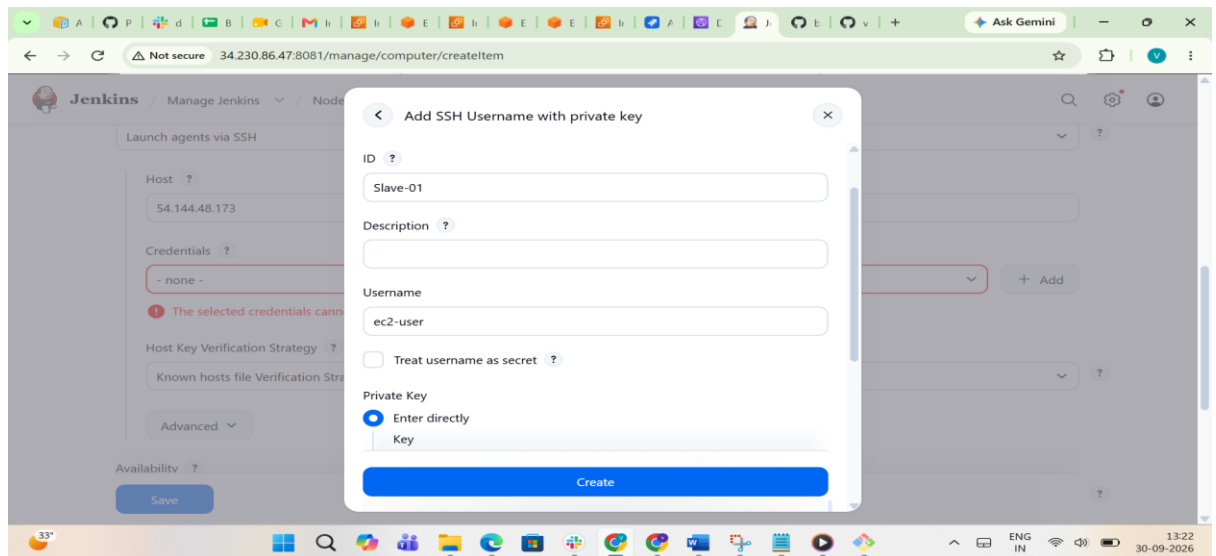

Jenkins

+ New Item

Build History

Project Relationship

Check File Fingerprint

Build Queue

No builds in the queue.

Build Executor Status

Built-In Node 0/2


Slave-01 0/2

S	W	Name	Last Success	Last Failure	Last Duration
✓	☀	first_job	16 hr #1	N/A	15 sec

Icon: S M L

```
[root@ip-172-31-16-190 jenkins]# cd .ssh/
[root@ip-172-31-16-190 .ssh]# ls
known_hosts
[root@ip-172-31-16-190 .ssh]# ll
total 4
-rwx-----. 1 jenkins jenkins 559 Sep 30 07:32 known_hosts
[root@ip-172-31-16-190 .ssh]# ssh-keyscan -H 54.173.242.220 >> /var/lib/jenkins/.ssh/known_hosts
[root@ip-172-31-16-190 .ssh]# ll
total 4
-rwx-----. 1 jenkins jenkins 1123 Sep 30 07:56 known_hosts
[root@ip-172-31-16-190 .ssh]#
```

i-0abca851a71ffa378 (Jenkins-Master)

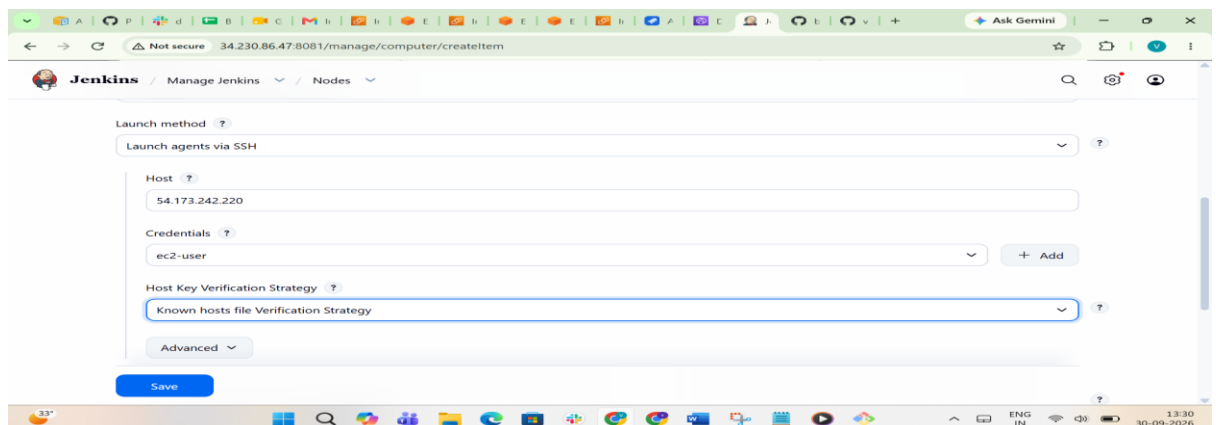


Nodes

Add, remove, control and monitor the various nodes that Jenkins runs jobs on.

S	Name	Architecture	Clock Difference	Free Disk Space	Free S
	Built-In Node	Linux (amd64)	In sync	17.31 GiB	
	Slave-01	Linux (amd64)	In sync	17.91 GiB	
	Slave-02	Linux (amd64)	In sync	17.91 GiB	
Data obtained		12 sec	12 sec	12 sec	

Icon: S M **L**

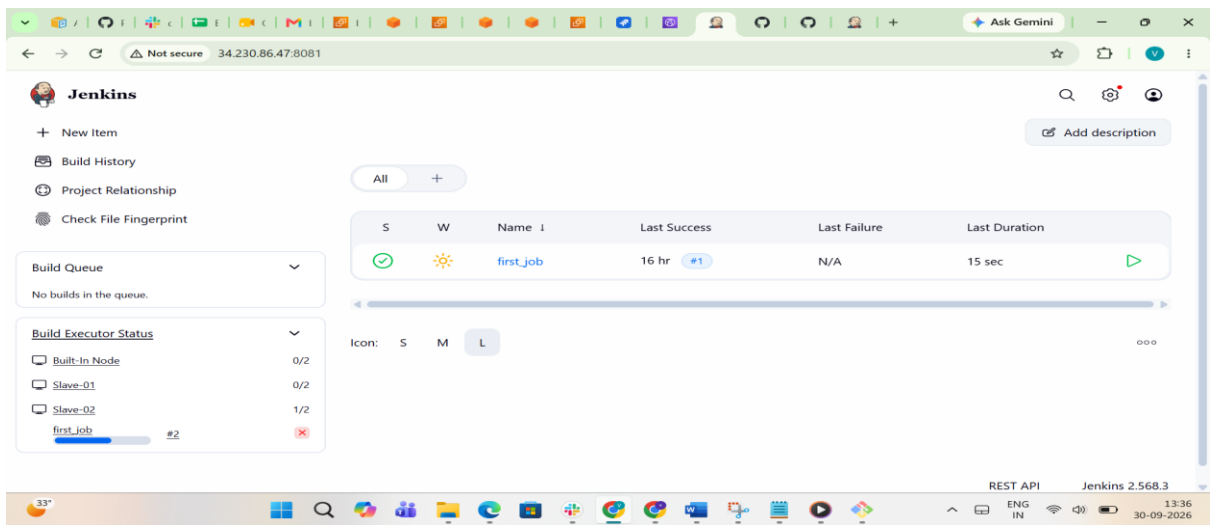

The screenshot shows the Jenkins web interface. On the left, there's a sidebar with links: New Item, Build History, Project Relationship, and Check File Fingerprint. Below these are sections for 'Build Queue' (No builds in the queue) and 'Build Executor Status' (showing Built-In Node at 0/2, Slave-01 at 0/2, and Slave-02 at 1/2). The main area displays a table for the 'first_job' build, which is currently in progress (yellow sun icon). The table has columns for S, W, Name, Last Success, Last Failure, and Last Duration. Below the table, there's a filter for 'Icon: S M **L**'. The bottom of the page shows the REST API and Jenkins version 2.568.3.

2. Configure webhooks to the Jenkins job.

Implementation steps:

1. Login to Jenkins.
2. Open the required Jenkins job.
3. Go to Configure → Build Triggers.
4. Enable:
5. GitHub hook trigger for GITScm polling
6. Click Save.
7. Open the GitHub repository.
8. Go to Settings → Webhooks → Add webhook.
9. Enter the Jenkins webhook URL:
10. `http://<JENKINS-IP>:8081/github-webhook/`
11. Select application/json as the content type.
12. Select all changes.
13. Enable Active.
14. Click Add webhook.
15. Push a new commit to the GitHub repository.


16. Verify that Jenkins automatically starts a build.

The first screenshot shows the GitHub 'Webhooks / Add webhook' page. The 'Payload URL' is set to 'http://34.230.86.47:8081/github-webhook/'. The 'Content type' is 'application/json'. The 'Secret' field is empty. The 'SSL verification' is set to 'Disable (not recommended)'. The 'Which events would you like to trigger this webhook?' section is partially visible.

The second screenshot shows the GitHub 'Webhooks' page. A webhook is listed with the URL 'http://34.230.86.47:8081/github-we...' and the status 'Last delivery was successful'. The 'Add webhook' button is visible in the top right corner.

The third screenshot shows the Jenkins 'Configure' page for the 'first_job'. The 'Triggers' section is expanded, and the 'GitHub hook trigger for GITScm polling' checkbox is checked. The 'Environment' section is also visible, with options for workspace management and secret text.

The fourth screenshot shows the Jenkins 'new-file' page. The file name is 'new-file' and the branch is 'master'. The 'Edit' tab is selected, and the content of the file is 'this is updated'.

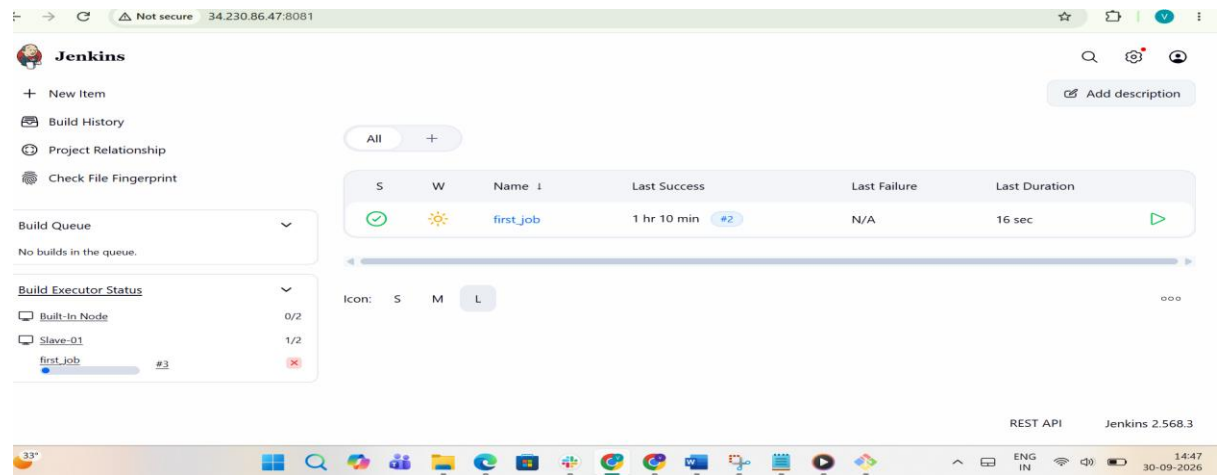

3. Configure Poll SCM and Build Periodically options in the Jenkins job.




Implementation steps:

Poll SCM

1. Open the Jenkins job.
2. Go to Configure → Build Triggers.
3. Enable Poll SCM.
4. Enter: * * * * *
5. This checks the Git repository approximately every minutes.
6. Jenkins triggers a build when it detects a source-code change.

Build Periodically

7. Enable Build periodically.
8. Enter: H/2 * * * *
9. This checks the Git repository approximately every 2 minutes.
10. Click Save.
11. Verify the scheduled build in Build History.

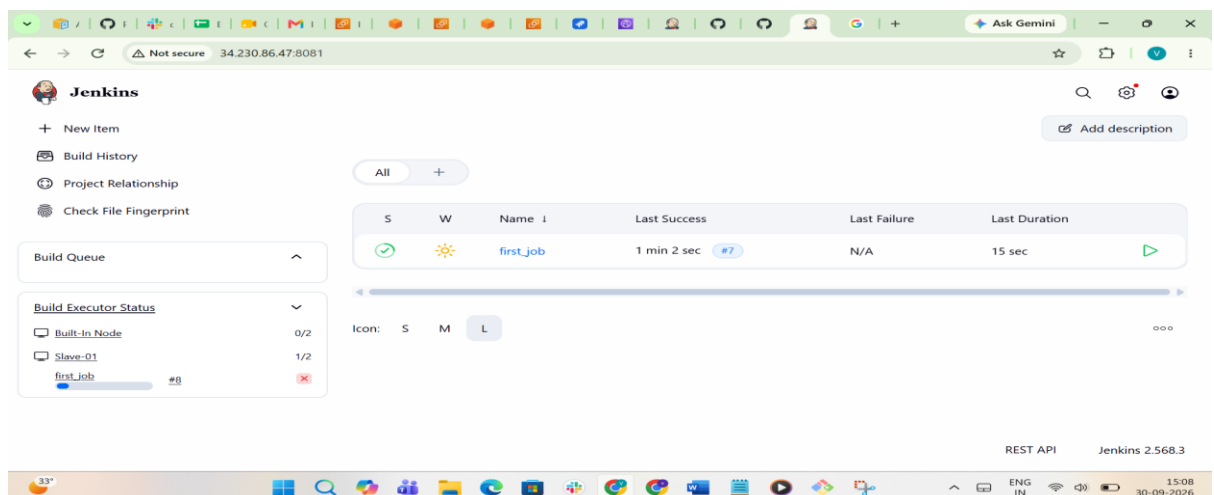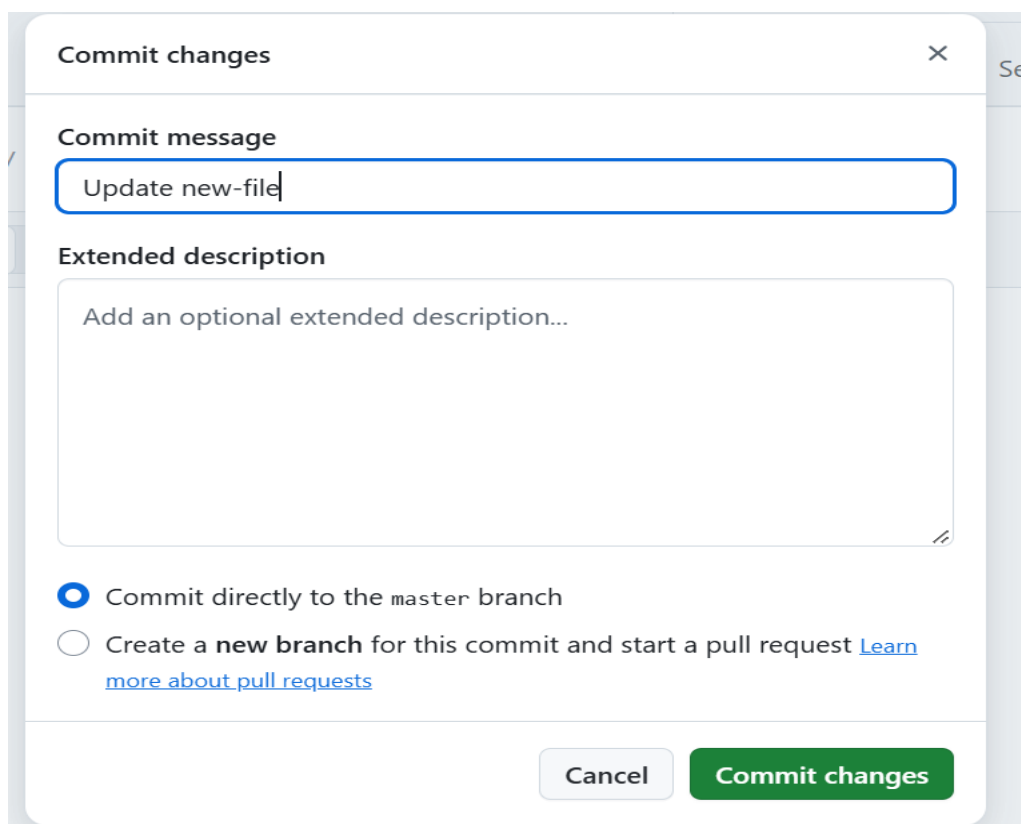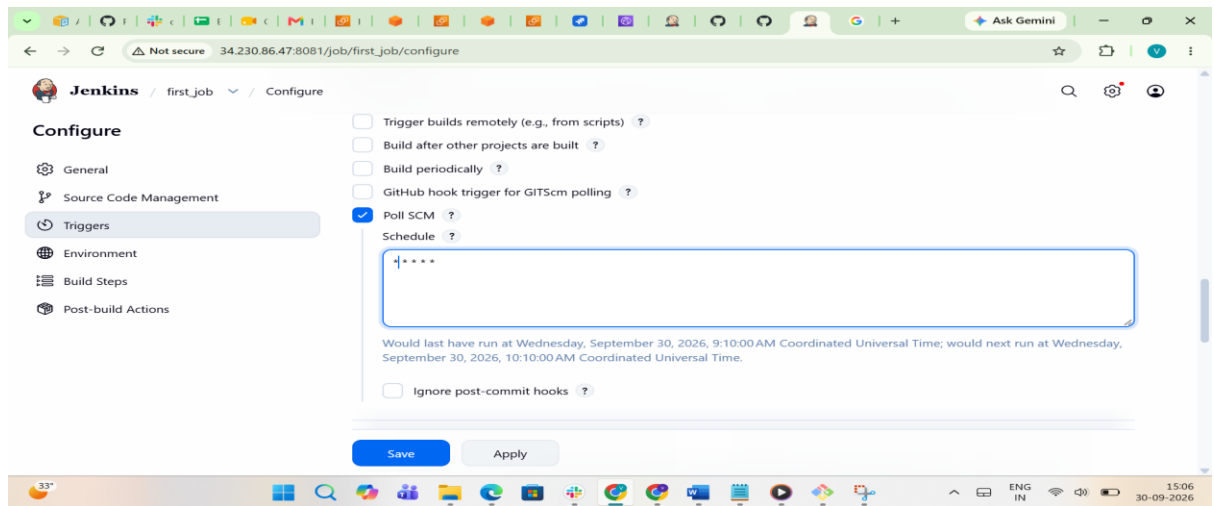

The top screenshot shows the Jenkins 'Build Time Trend' page for 'first_job'. The graph displays build times in minutes for builds #6 through #8. Build #8 is the most recent, completed at 9:38 AM. Below the graph, a table shows build details for build #8:

Build	Time Since	Duration	Agent
#8	49 sec	15 sec	Slave-01

The bottom screenshot shows the AWS Management Console terminal for an EC2 instance. The terminal output includes the Amazon Linux 2023 logo, the AWS URL, the last login time, and the output of the 'ls -l' command:

```

Amazon Linux 2023
https://aws.amazon.com/linux/amazon-linux-2023
Last login: Wed Sep 30 09:13:46 2026 from 18.206.107.29
[ec2-user@ip-172-31-26-204 ~]$ pwd
/home/ec2-user
[ec2-user@ip-172-31-26-204 ~]$ ll
total 1388
drwxrwxr-x. 4 ec2-user ec2-user      34 Sep 30 07:53 remoting
-rw-rw-r--. 1 ec2-user ec2-user 1418560 Sep 30 11:31 remoting.jar
drwxrwxr-x. 3 ec2-user ec2-user      23 Sep 30 09:17 workspace
[ec2-user@ip-172-31-26-204 ~]$

```

The instance ID is i-0f8ae86d88d32b748 (Slave-01). The public IP is 54.144.48.173 and the private IP is 172.31.26.204.

4. Take a backup of the Jenkins server using a bash-script.

Implementation steps:

1. Create a backup directory:
2. `sudo mkdir -p /backup/Jenkins`
3. Create a Bash script:
4. `sudo vi /usr/local/bin/jenkins_backup.sh`
5. Add the following:


```
#!/bin/bash
BACKUP_DIR="/backup/Jenkins"
JENKINS_HOME="/var/lib/jenkins"
BACKUP_FILE="$BACKUP_DIR/jenkins_backup.tar.gz"
mkdir -p "$BACKUP_DIR"
tar -czf "$BACKUP_FILE" "$JENKINS_HOME"
if [ $? -eq 0 ]; then
```

```

echo "Jenkins backup completed successfully."
echo "Backup file: $BACKUP_FILE"
else
echo "Jenkins backup failed."
exit 1
fi

```

6. Save and exit the file.
7. Give execute permission:
8. `sudo chmod +x /usr/local/bin/jenkins_backup.sh`
9. Run the backup: `sudo /usr/local/bin/jenkins_backup.sh`
10. Verify the backup: `sudo ls -lh /backup/Jenkins/`

```

[root@ip-172-31-16-190 ~]# sudo ls /var/lib/jenkins
config.xml          jenkins.plugins.git.GitHooksConfiguration.xml      queue.xml
credentials.xml     jenkins.security.QueueItemAuthenticatorConfiguration.xml  queue.xml.bak
fingerprints        jenkins.security.UpdateSiteWarningsConfiguration.xml  scriptApproval.xml
hudson.model.UpdateCenter.xml  jenkins.security.ApiToken.ApiTokenPropertyConfiguration.xml  secret.key
hudson.plugins.email.ExtendedEmailPublisher.xml  jenkins.telemetry.Correlator.xml          secret.key.not-so-secret
hudson.plugins.git.GitTool.xml          jobs                                           secrets
identity.key.enc    logs                                           updates
io.jenkins.plugins.prism.PrismConfiguration.xml  nodeMonitors.xml          userContent
jenkins.install.InstallUtil.LastExecVersion     nodes                                           users
jenkins.install.UpgradeWizard.state             org.jenkinsci.plugins.gitclient.GitHostKeyVerificationConfiguration.xml  workspace
jenkins.model.JenkinsLocationConfiguration.xml  plugins
[root@ip-172-31-16-190 ~]# sudo mkdir -p /backup/jenkins
[root@ip-172-31-16-190 ~]# sudo ls -ld /backup/jenkins
drwxr-xr-x. 2 root root 6 Sep 30 09:45 /backup/jenkins
[root@ip-172-31-16-190 ~]# sudo nano /usr/local/bin/jenkins-backup.sh
[root@ip-172-31-16-190 ~]# cat /usr/local/bin/jenkins-backup.sh
#!/bin/bash

JENKINS_HOME="/var/lib/jenkins"
BACKUP_DIR="/backup/jenkins"

BACKUP_FILE="$BACKUP_DIR/jenkins_backup.tar.gz"

echo "Starting Jenkins backup..."

sudo systemctl stop jenkins

sudo tar -czf "$BACKUP_FILE" \
  --exclude="$JENKINS_HOME/workspace" \
  --exclude="$JENKINS_HOME/logs" \
  "$JENKINS_HOME"

sudo systemctl start jenkins

if [ -f "$BACKUP_FILE" ]; then
  echo "Jenkins backup completed successfully."
  echo "Backup file: $BACKUP_FILE"
  ls -lh "$BACKUP_FILE"
else
  echo "Jenkins backup failed."
  exit 1
fi
[root@ip-172-31-16-190 ~]#

```

```

[root@ip-172-31-16-190 ~]# sudo chmod +x /usr/local/bin/jenkins-backup.sh
[root@ip-172-31-16-190 ~]# ls -l /usr/local/bin/jenkins-backup.sh
-rwxr-xr-x. 1 root root 546 Sep 30 09:47 /usr/local/bin/jenkins-backup.sh
[root@ip-172-31-16-190 ~]# sudo /usr/local/bin/jenkins-backup.sh
Starting Jenkins backup...
tar: Removing leading '/' from member names
Jenkins backup completed successfully.
Backup file: /backup/jenkins/jenkins_backup.tar.gz
-rw-r--r--. 1 root root 145M Sep 30 09:49 /backup/jenkins/jenkins_backup.tar.gz
[root@ip-172-31-16-190 ~]# cd /backup/jenkins/
[root@ip-172-31-16-190 jenkins]# ls
jenkins_backup.tar.gz
[root@ip-172-31-16-190 jenkins]# ll
total 148016
-rw-r--r--. 1 root root 151564460 Sep 30 09:49 jenkins_backup.tar.gz
[root@ip-172-31-16-190 jenkins]#

```

```
root@ip-172-31-16-190:/backup/jenkins
Starting Jenkins backup...
tar: Removing leading '/' from member names
Jenkins backup completed successfully.
Backup file: /backup/jenkins/jenkins_backup.tar.gz
-rw-r--r-- 1 root root 145W Sep 30 09:49 /backup/jenkins/jenkins_backup.tar.gz
[root@ip-172-31-16-190 ~]# cd /backup/jenkins/
[root@ip-172-31-16-190 jenkins]# ls
jenkins_backup.tar.gz
[root@ip-172-31-16-190 jenkins]# ll
total 148016
-rw-r--r-- 1 root root 151564460 Sep 30 09:49 jenkins_backup.tar.gz
[root@ip-172-31-16-190 jenkins]# sudo tar -tzf /backup/jenkins/jenkins_backup*.tar.gz | head -30
tar (child): /backup/jenkins/jenkins_backup*.tar.gz: Cannot open: No such file or directory
tar (child): Error is not recoverable: exiting now
tar: Child returned status 2
tar: Error is not recoverable: exiting now
[root@ip-172-31-16-190 jenkins]# sudo tar -tzf /backup/jenkins/jenkins_backup.tar.gz | head -30
var/lib/jenkins/
var/lib/jenkins/.java/
var/lib/jenkins/.java/fonts/
var/lib/jenkins/.java/fonts/21.0.12.1/
var/lib/jenkins/.java/fonts/21.0.12.1/fcinfo-1-ip-172-31-16-190.ec2.internal-amzn-2023-en-.properties
var/lib/jenkins/secret.key
var/lib/jenkins/plugins/
var/lib/jenkins/plugins/commons-lang3-api-jpi
var/lib/jenkins/plugins/commons-lang3-api/META-INF/
var/lib/jenkins/plugins/commons-lang3-api/META-INF/MANIFEST.MF
var/lib/jenkins/plugins/commons-lang3-api/META-INF/maven/
var/lib/jenkins/plugins/commons-lang3-api/META-INF/maven/io.jenkins.plugins/
var/lib/jenkins/plugins/commons-lang3-api/META-INF/maven/io.jenkins.plugins/commons-lang3-api/
var/lib/jenkins/plugins/commons-lang3-api/META-INF/maven/io.jenkins.plugins/commons-lang3-api/pom.xml
var/lib/jenkins/plugins/commons-lang3-api/META-INF/maven/io.jenkins.plugins/commons-lang3-api/pom.properties
var/lib/jenkins/plugins/commons-lang3-api/WEB-INF/
var/lib/jenkins/plugins/commons-lang3-api/WEB-INF/lib/
var/lib/jenkins/plugins/commons-lang3-api/WEB-INF/lib/commons-lang3-3.20.0.jar
var/lib/jenkins/plugins/commons-lang3-api/WEB-INF/lib/commons-lang3-api.jar
var/lib/jenkins/plugins/commons-lang3-api/WEB-INF/licenses.xml
var/lib/jenkins/plugins/commons-lang3-api/.timestamp2
var/lib/jenkins/plugins/ionicons-api-jpi
var/lib/jenkins/plugins/ionicons-api/META-INF/
var/lib/jenkins/plugins/ionicons-api/META-INF/MANIFEST.MF
var/lib/jenkins/plugins/ionicons-api/META-INF/maven/
var/lib/jenkins/plugins/ionicons-api/META-INF/maven/io.jenkins.plugins/
var/lib/jenkins/plugins/ionicons-api/META-INF/maven/io.jenkins.plugins/ionicons-api/
[root@ip-172-31-16-190 jenkins]#
```

5. Take a backup of Jenkins using the ThinBackup plugin.

Implementation steps:

1. Login to Jenkins.
2. Go to Manage Jenkins → Plugins.
3. Search for ThinBackup.
4. Install the ThinBackup plugin.
5. Create a backup directory:
6. `sudo mkdir -p /backup/Jenkins-thinBackup`
7. Give Jenkins ownership:
8. `sudo chown -R jenkins:jenkins /backup/thinbackup`
9. Go to Manage Jenkins → system.
10. Set the backup directory:
11. `/ backup/thinbackup/`
12. Configure the full backup schedule, for example:
13. `H/5 * * * *`
14. Save the configuration.
15. Go to Manage Jenkins → ThinBackup.
16. Click Backup now.
17. Verify the backup:
18. `sudo ls -lh /backup/thinbackup/`

```
[root@ip-172-31-16-190 ~]# sudo mkdir -p /backup/thinbackup
[root@ip-172-31-16-190 ~]# cd /backup
[root@ip-172-31-16-190 backup]# ls
jenkins  thinbackup
[root@ip-172-31-16-190 backup]# sudo chown -R jenkins:jenkins /backup/thinbackup
[root@ip-172-31-16-190 backup]# ll
total 0
drwxr-xr-x. 2 root    root    35 Sep 30 09:49 jenkins
drwxr-xr-x. 2 jenkins jenkins  6 Sep 30 09:57 thinbackup
[root@ip-172-31-16-190 backup]# pwd
/backup
```

Not secure 34.230.86.47:8081/manage/pluginManager/updates/

Jenkins / Manage Jenkins / Plugins

Plugins

- Updates
- Available plugins
- Installed plugins
- Advanced settings
- Download progress

Download progress

Preparation

- Checking internet connectivity
- Checking update center connectivity
- Success

ThinBackup Success

Loading plugin extensions Success

[Go back to the top page](#)
(you can start using the installed plugins right away)

☐ Restart Jenkins when installation is complete and no jobs are running

REST API Jenkins 2.568.3

33°

Not secure 34.230.86.47:8081/manage/pluginManager/installed

Jenkins / Manage Jenkins / Plugins

Plugins

- Updates
- Available plugins
- Installed plugins
- Advanced settings
- Download progress

thinb

Name ↓	Health	Enabled
ThinBackup 2.1.5 Backups the most important global and job specific configuration files. Report an issue with this plugin	100	☒

https://plugins.jenkins.io/cloudbees-folder

REST API Jenkins 2.568.3

33°

Jenkins / Manage Jenkins / System

Backup directory ?
/backup/thinbackup

Backup schedule for full backups ?
H/5 ****

Backup schedule for differential backups ?

Max number of backup sets ?
5

Files excluded from backup (regular expression) ?

Save Apply

Jenkins / Manage Jenkins / ThinBackup

+ New Item

Build History

Project Relationship

Check File Fingerprint

ThinBackup

Settings are now integrated in global configuration.

Backup now Restore

Build Queue ^

Build Executor Status v

Built-In Node	0/2
Slave-01	0/2


Jenkins 2.568.3

```
[root@ip-172-31-16-190 ~]# sudo mkdir -p /backup/thinbackup
[root@ip-172-31-16-190 ~]# cd /backup
[root@ip-172-31-16-190 backup]# ls
jenkins thinbackup
[root@ip-172-31-16-190 backup]# sudo chown -R jenkins:jenkins /backup/thinbackup
[root@ip-172-31-16-190 backup]# ll
total 0
drwxr-xr-x. 2 root root 35 Sep 30 09:49 jenkins
drwxr-xr-x. 2 jenkins jenkins 6 Sep 30 09:57 thinbackup
[root@ip-172-31-16-190 backup]# pwd
/backup
[root@ip-172-31-16-190 backup]# cd thinbackup/
[root@ip-172-31-16-190 thinbackup]# ll
total 16
drwxr-xr-x. 7 jenkins jenkins 16384 Sep 30 10:11 FULL-2026-09-30_10-11
[root@ip-172-31-16-190 thinbackup]#
```

6. Set up a new Jenkins server and restore the backup taken in task 4.

Implementation steps:

1. Launch a new EC2 instance for the Jenkins server.
2. Install Java: `sudo dnf install java-21-amazon-corretto -y`
3. Add the Jenkins repository.
4. Install Jenkins: `sudo dnf install jenkins -y`
5. Start Jenkins: `sudo systemctl start jenkins`
6. Enable Jenkins at system startup: `sudo systemctl enable jenkins`
7. Stop Jenkins before restoring the backup: `sudo systemctl stop jenkins`
8. Transfer the Bash backup from the old server to the new server:
`scp -i test.pem /backup/jenkins/jenkins_backup.tar.gz ec2-user@<NEW-JENKINS-IP>:/tmp/`
9. Verify the backup file: `ls -lh /tmp/`
10. Copy tar file into `/var/lib` : `cp jenkins_backup.tar.gz /var/lib/`
11. Extract the tar file : `tar xvf jenkins_backup.tar.gz`
12. Verify Jenkins files: `sudo ls -la /var/lib/jenkins/`
13. Verify the jobs: `sudo ls -la /var/lib/jenkins/jobs/`
14. Change ownership: `sudo chown -R jenkins:jenkins /var/lib/jenkins`
15. Start Jenkins: `sudo systemctl start jenkins`
16. Check Jenkins status: `sudo systemctl status jenkins`
17. Open Jenkins using: `http://<NEW-JENKINS-IP>:8080`
18. Verify that the old jobs, configuration, users, plugins, and nodes have been restored.

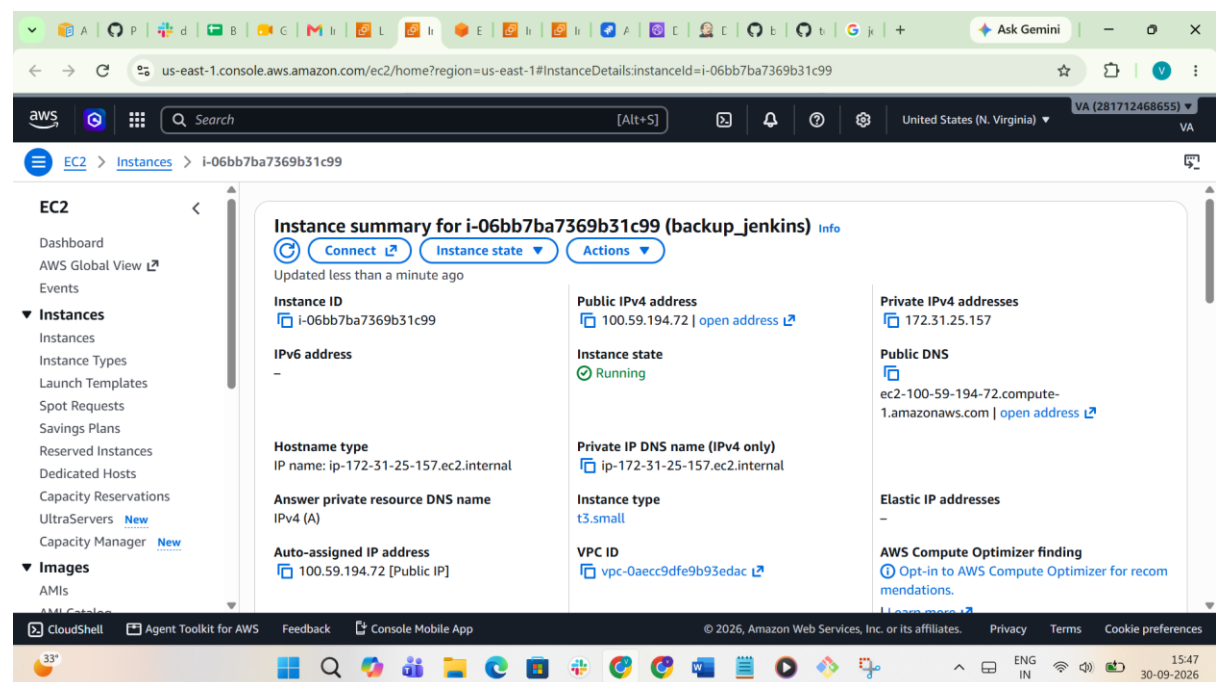

[illegible]

<https://aws.amazon.com/linux/amazon-linux-2023>

Package	Architecture	Version
Installing:		
java-21-amazon-corretto	x86_64	1:21.0.12+9-1.amzn2023.1
Installing dependencies:		
alsa-lib	x86_64	1.2.7.2-1.amzn2023.0.4
cairo	x86_64	1.18.0-4.amzn2023.0.3
dejavu-sans-fonts	noarch	2.37-16.amzn2023.0.2
dejavu-sans-mono-fonts	noarch	2.37-16.amzn2023.0.2
dejavu-serif-fonts	noarch	2.37-16.amzn2023.0.2

```
[root@ip-172-31-25-157 ~]# java -version
openjdk version "21.0.12.1" 2026-08-18 LTS
OpenJDK Runtime Environment Corretto-21.0.12.9.1 (build 21.0.12.1+9-LTS)
OpenJDK 64-Bit Server VM Corretto-21.0.12.9.1 (build 21.0.12.1+9-LTS, mixed mode, sharing)
[root@ip-172-31-25-157 ~]# java wget -O /etc/yum.repos.d/jenkins.repo https://pkg.jenkins.io/redhat-stable/jenkins.repo
--2026-09-30 10:49:17-- https://pkg.jenkins.io/redhat-stable/jenkins.repo
Resolving pkg.jenkins.io [pkg.jenkins.io]... 146.75.38.133, 2a04:4e42:77::645
Connecting to pkg.jenkins.io [pkg.jenkins.io]:146.75.38.133:443... connected.
HTTP request sent, awaiting response... 301 Moved Permanently
Location: https://pkg.jenkins.io/rpm-stable/jenkins.repo [following]
--2026-09-30 10:49:17-- https://pkg.jenkins.io/rpm-stable/jenkins.repo
Reusing existing connection to pkg.jenkins.io:443.
HTTP request sent, awaiting response... 200 OK
Length: 267 [application/octet-stream]
Saving to: '/etc/yum.repos.d/jenkins.repo'

/etc/yum.repos.d/jenkins.repo      100%[=====] 267 --.-KB/s  in 0s

2026-09-30 10:49:17 (19.4 MB/s) = '/etc/yum.repos.d/jenkins.repo' saved [267/267]

[root@ip-172-31-25-157 ~]# sudo rpm --import https://pkg.jenkins.io/redhat-stable/jenkins.io-2023.key
[root@ip-172-31-25-157 ~]# sudo dnf install jenkins -y
jenkins-stable
jenkins-stable
Importing GPG key 0x14ABFC68:
  Userid : "Jenkins Project <jenkinsci-board@googlegroups.com>"
  Fingerprint: 5E38 6EAD B55F 0150 4CAE 8BCF 7198 F487 14AB FC68
  From     : https://pkg.jenkins.io/rpm-stable/repodata/repomd.xml.key
jenkins-stable
Dependencies resolved.
49 kB/s | 3.0 kB 00:00
14 kB/s | 833 B 00:00
404 kB/s | 1.6 kB 00:00
```

The screenshot shows the Jenkins web interface. The browser's address bar displays the URL '100.59.194.72:8080'. The Jenkins logo is visible in the top left corner. The left sidebar contains several navigation options: 'New Item', 'Build History', 'Build Queue' (which is currently empty), 'Build Executor Status' (showing 0/2), and 'Built-In Node' (marked as offline). The main content area features a 'Welcome to Jenkins!' message, followed by a paragraph explaining that this is where Jenkins jobs are displayed and providing instructions on how to get started. Below this, there are three prominent buttons: 'Create a job', 'Set up a distributed build', and 'Learn more about distributed builds'.

```
[root@ip-172-31-16-190 ~]# vi test.pem
[root@ip-172-31-16-190 ~]# chmod 600 test.pem
[root@ip-172-31-16-190 ~]# cd backup/jenkins/
-bash: cd: backup/jenkins/: No such file or directory
[root@ip-172-31-16-190 ~]# cd /backup/jenkins/
[root@ip-172-31-16-190 jenkins]# ls
jenkins_backup.tar.gz
[root@ip-172-31-16-190 jenkins]# pwd
/backup/jenkins
[root@ip-172-31-16-190 jenkins]# ^C
[root@ip-172-31-16-190 jenkins]# ^C
[root@ip-172-31-16-190 jenkins]# cd -
[root@ip-172-31-16-190 ~]# ll
total 4
-rw-r----- 1 root root 1679 Sep 30 11:00 test.pem
[root@ip-172-31-16-190 ~]# scp -i test.pem /backup/jenkins/jenkins_backup.tar.gz ec2-user@100.59.194.72:/tmp
scp: stat local "/backup/jenkins/jenkins_backup.tar.gz": No such file or directory
[root@ip-172-31-16-190 ~]# ^C
[root@ip-172-31-16-190 ~]# ls -lh /backup/jenkins/
ls: cannot access '/backup/jenkins/': No such file or directory
[root@ip-172-31-16-190 ~]# scp -i test.pem /backup/jenkins/jenkins_backup.tar.gz ec2-user@100.59.194.72:/tmp
The authenticity of host '100.59.194.72 (100.59.194.72)' can't be established.
ED25519 key fingerprint is SHA256:XAMHTKYkrGF53ZPbCCQu+yb01WAl4fN1XtJAAjYwXI.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
warning: Permanently added '100.59.194.72' (ED25519) to the list of known hosts.
jenkins_backup.tar.gz                               100% 145MB 244.5MB/s   00:00
[root@ip-172-31-16-190 ~]# |
```

```
[root@ip-172-31-25-157 ~]# cd /tmp
[root@ip-172-31-25-157 tmp]# ll
total 152848
drwxr-xr-x. 2 jenkins jenkins      60 Sep 30 10:52 hsperrdata_jenkins
drwxr-xr-x. 2 root    root          40 Sep 30 10:49 hsperrdata_root
-rw-r--r--. 1 ec2-user ec2-user    151564460 Sep 30 11:07 jenkins_backup.tar.gz
drwxr-xr-x. 2 jenkins jenkins      40 Sep 30 10:52 jerry-0.0.0-8080-war-_-any-13151406300216322528
drwxr----- 3 root    root          60 Sep 30 10:17 systemd-private-25e87aef18af494287b3ef94d83c3c0d-chronydn.service-1cyBBT
drwx----- 3 root    root          60 Sep 30 10:17 systemd-private-25e87aef18af494287b3ef94d83c3c0d-dbus-broker.service-F1nuvK
drwx----- 3 root    root          60 Sep 30 10:17 systemd-private-25e87aef18af494287b3ef94d83c3c0d-policy-routesens5.service-2ESwxI
drwx----- 3 root    root          60 Sep 30 10:17 systemd-private-25e87aef18af494287b3ef94d83c3c0d-systemd-logind.service-gA6sKn
drwx----- 3 root    root          60 Sep 30 10:17 systemd-private-25e87aef18af494287b3ef94d83c3c0d-systemd-resolved.service-6PHGqa
-rw-r--r--. 1 jenkins jenkins      4944177 Sep 30 10:52 winstone12103924059344608462.jar
[root@ip-172-31-25-157 tmp]# cp jenkins_backup.tar.gz /var/lib/
[root@ip-172-31-25-157 tmp]# cd /var/lib/
[root@ip-172-31-25-157 lib]# ll
total 148032
drwxr-xr-x. 2 root    root          136 Sep 30 10:48 alternatives
drwxr-xr-x. 3 root    root           17 Sep 24 07:47 amazon
drwxr-xr-x. 2 chrony   chrony        6 Jan 22 2026 chrony
drwxr-xr-x. 8 root    root           109 Sep 30 10:17 cloud
drwxr-xr-x. 2 root    root           80 Sep 30 10:50 dnf
drwxr-xr-x. 2 root    root           6 Jan 30 2023 games
drwxr-xr-x. 4 root    root           55 Sep 24 07:46 gssproxy
drwxr-xr-x. 2 root    root           6 Aug 20 09:19 hibinit-agent
drwxr-xr-x. 2 root    root           6 Aug 21 14:06 initramfs
drwxr-xr-x. 11 jenkins jenkins     16384 Sep 30 10:56 jenkins
-rw-r--r--. 1 root    root          151564460 Sep 30 11:16 jenkins_backup.tar.gz
drwxr-xr-x. 2 root    root           6 May 8 10:22 kpatch
drwxr-xr-x. 2 root    root           6 Jan 31 2023 logrotate
drwxr-xr-x. 2 root    root           6 Jan 30 2023 misc
drwxr-xr-x. 5 root    root           80 Sep 24 07:47 nfs
drwxr-xr-x. 2 root    root           6 Feb 1 2023 os-prober
drwx----- 2 root    root           6 Sep 24 07:46 portables
drwx----- 2 root    root           6 Sep 24 07:46 private
drwxr-xr-x. 2 root    root           91 Sep 24 07:48 rpm
drwxr-xr-x. 3 root    root           24 Sep 24 07:47 rpm-state
drwxr-xr-x. 2 root    root           46 Sep 24 07:46 selinux
drwxr-xr-x. 9 root    root          109 Sep 24 07:46 sss
drwxr-xr-x. 9 root    root          125 Sep 30 10:17 systemd
drwxr-xr-x. 2 root    root           18 Sep 30 10:17 update-motd
drwxr-xr-x. 3 root    root           23 Sep 24 07:47 xfsdump
drwxr-xr-x. 2 root    root           6 Sep 24 07:45 yum
[root@ip-172-31-25-157 lib]# |
```

```
[root@ip-172-31-25-157 lib]# tar xvf jenkins_backup.tar.gz
var/lib/jenkins/
var/lib/jenkins/.java/
var/lib/jenkins/.java/fonts/
var/lib/jenkins/.java/fonts/21.0.12.1/
var/lib/jenkins/.java/fonts/21.0.12.1/fcinfo-1-ip-172-31-16-190.ec2.internal-amzn-2023-en-.properties
var/lib/jenkins/secret.key
var/lib/jenkins/secret.key.not-so-secret
var/lib/jenkins/plugins/
var/lib/jenkins/plugins/commons-lang3-api.jar
var/lib/jenkins/plugins/commons-lang3-api/
var/lib/jenkins/plugins/commons-lang3-api/META-INF/
var/lib/jenkins/plugins/commons-lang3-api/META-INF/MANIFEST.MF
var/lib/jenkins/plugins/commons-lang3-api/META-INF/maven/
var/lib/jenkins/plugins/commons-lang3-api/META-INF/maven/io.jenkins.plugins/
var/lib/jenkins/plugins/commons-lang3-api/META-INF/maven/io.jenkins.plugins/commons-lang3-api/
var/lib/jenkins/plugins/commons-lang3-api/META-INF/maven/io.jenkins.plugins/commons-lang3-api/pom.xml
var/lib/jenkins/plugins/commons-lang3-api/META-INF/maven/io.jenkins.plugins/commons-lang3-api/pom.properties
var/lib/jenkins/plugins/commons-lang3-api/WEB-INF/
var/lib/jenkins/plugins/commons-lang3-api/WEB-INF/lib/commons-lang3-3.20.0.jar
var/lib/jenkins/plugins/commons-lang3-api/WEB-INF/licenses.xml
var/lib/jenkins/plugins/commons-lang3-api/.timestamp2
var/lib/jenkins/plugins/ionicons-api.jar
var/lib/jenkins/plugins/ionicons-api/
var/lib/jenkins/plugins/ionicons-api/META-INF/
var/lib/jenkins/plugins/ionicons-api/META-INF/MANIFEST.MF
var/lib/jenkins/plugins/ionicons-api/META-INF/maven/
var/lib/jenkins/plugins/ionicons-api/META-INF/maven/io.jenkins.plugins/ionicons-api/
```

```

root@ip-172-31-25-157:/var/lib/jenkins
[root@ip-172-31-25-157 ~]# sudo mv /var/lib/jenkins_old /var/lib/jenkins
[root@ip-172-31-25-157 ~]# sudo mkdir /var/lib/jenkins
[root@ip-172-31-25-157 ~]# sudo tar -xzf /var/lib/jenkins_backup.tar.gz -C /var/lib/jenkins
[root@ip-172-31-25-157 ~]# ll
total 148032
drwxr-xr-x. 2 root root    136 Sep 30 10:48 alternatives
drwxr-xr-x. 3 root root    17 Sep 24 07:47 amazon
drwxr-xr-x. 2 chorny chorny 19 Sep 30 11:17 chorny
drwxr-xr-x. 8 root root   105 Sep 30 10:17 cloud
drwxr-xr-x. 2 root root    80 Sep 30 10:50 dnf
drwxr-xr-x. 2 root root    6 Jan 30 2023 games
drwxr-xr-x. 4 root root    55 Sep 24 07:46 gssproxy
drwxr-xr-x. 2 root root    6 Aug 20 09:19 hibinit-agent
drwxr-xr-x. 6 root root    6 Aug 21 14:06 initramfs
drwxr-xr-x. 17 sep root    17 Sep 30 11:27 jenkins
drwxr-xr-x. 1 root root   151564460 Sep 30 11:16 jenkins_backup.tar.gz
drwxr-xr-x. 11 jenkins jenkins 16384 Sep 30 11:25 jenkins_old
drwxr-xr-x. 2 root root    6 May 8 10:22 kpatch
drwxr-xr-x. 6 Jan 31 2023 logrotate
drwxr-xr-x. 2 root root    6 Jan 30 2023 misc
drwxr-xr-x. 5 root root    80 Sep 24 07:47 nfs
drwxr-xr-x. 6 Feb 1 2023 os-prober
drwxr-xr-x. 2 root root    6 Sep 24 07:46 portables
drwxr-xr-x. 2 root root    6 Sep 24 07:46 private
drwxr-xr-x. 7 root root    91 Sep 24 07:48 rpm
drwxr-xr-x. 3 root root   24 Sep 24 07:47 rpm-state
drwxr-xr-x. 2 root root   46 Sep 24 07:46 selinux
drwxr-xr-x. 9 root root   105 Sep 24 07:46 sss
drwxr-xr-x. 9 root root   125 Sep 30 10:17 systemd
drwxr-xr-x. 2 root root   18 Sep 30 10:17 update-motd
drwxr-xr-x. 3 root root   17 Sep 30 11:19 var
drwxr-xr-x. 3 root root   23 Sep 24 07:47 xfsdump
drwxr-xr-x. 2 root root    6 Sep 24 07:43 yum
[root@ip-172-31-25-157 ~]# sudo chown -R jenkins:jenkins /var/lib/jenkins
root@ip-172-31-25-157 ~]# ll
total 148032
drwxr-xr-x. 2 root root    136 Sep 30 10:48 alternatives
drwxr-xr-x. 3 root root    17 Sep 24 07:47 amazon
drwxr-xr-x. 2 chorny chorny 19 Sep 30 11:17 chorny
drwxr-xr-x. 8 root root   105 Sep 30 10:17 cloud
drwxr-xr-x. 2 root root    80 Sep 30 10:50 dnf
drwxr-xr-x. 2 root root    6 Jan 30 2023 games
drwxr-xr-x. 4 root root    55 Sep 24 07:46 gssproxy
drwxr-xr-x. 2 root root    6 Aug 20 09:19 hibinit-agent
drwxr-xr-x. 6 root root    6 Aug 21 14:06 initramfs
drwxr-xr-x. 17 sep root    17 Sep 30 11:27 jenkins
drwxr-xr-x. 1 root root   151564460 Sep 30 11:16 jenkins_backup.tar.gz
drwxr-xr-x. 11 jenkins jenkins 16384 Sep 30 11:25 jenkins_old

```

```
[root@ip-172-31-25-157 jenkins]# sudo chown -R jenkins:jenkins /var/lib/jenkins
[root@ip-172-31-25-157 jenkins]# sudo systemctl restart jenkins
[root@ip-172-31-25-157 jenkins]# sudo systemctl status jenkins
● jenkins.service - Jenkins Continuous Integration Server
   Loaded: loaded (/usr/lib/systemd/system/jenkins.service; disabled; preset: disabled)
   Active: active (running) since Wed 2026-09-30 11:31:47 UTC; 4s ago
     Main PID: 29140 (java)
        Tasks: 56 (limit: 2255)
       Memory: 426.2M
          CPU: 30.933s
      CGroup: /system.slice/jenkins.service
              └─29140 /usr/bin/java -Djava.awt.headless=true -jar /usr/share/java/jenkins.war --webroot=/var/cache/jenkins/war --httpPort=8080

Sep 30 11:31:44 ip-172-31-25-157.ec2.internal jenkins[29140]: 2026-09-30 11:31:44.611+0000 [id=37] INFO jenkins.InitReactor
Sep 30 11:31:45 ip-172-31-25-157.ec2.internal jenkins[29140]: 2026-09-30 11:31:45.393+0000 [id=38] INFO h.p.b.g.GlobalTimeO
Sep 30 11:31:46 ip-172-31-25-157.ec2.internal jenkins[29140]: 2026-09-30 11:31:46.893+0000 [id=37] INFO hudson.slaves.Slave
Sep 30 11:31:46 ip-172-31-25-157.ec2.internal jenkins[29140]: 2026-09-30 11:31:46.910+0000 [id=37] INFO jenkins.InitReactor
Sep 30 11:31:46 ip-172-31-25-157.ec2.internal jenkins[29140]: 2026-09-30 11:31:46.913+0000 [id=37] INFO jenkins.InitReactor
Sep 30 11:31:47 ip-172-31-25-157.ec2.internal jenkins[29140]: 2026-09-30 11:31:47.178+0000 [id=38] INFO jenkins.InitReactor
Sep 30 11:31:47 ip-172-31-25-157.ec2.internal jenkins[29140]: 2026-09-30 11:31:47.181+0000 [id=37] INFO jenkins.InitReactor
Sep 30 11:31:47 ip-172-31-25-157.ec2.internal jenkins[29140]: 2026-09-30 11:31:47.347+0000 [id=39] INFO jenkins.InitReactor
Sep 30 11:31:47 ip-172-31-25-157.ec2.internal jenkins[29140]: 2026-09-30 11:31:47.414+0000 [id=30] INFO hudson.lifecycle.Li
Sep 30 11:31:47 ip-172-31-25-157.ec2.internal systemd[1]: Started jenkins.service - Jenkins Continuous Integration Server.

[root@ip-172-31-25-157 jenkins]# sudo ls -la /var/lib/jenkins/jobs/
total 16
drwxr-xr-x. 3 jenkins jenkins 23 Sep 29 15:27 .
drwxr-xr-x. 16 jenkins jenkins 16384 Sep 30 11:31 ..
drwxr-xr-x. 3 jenkins jenkins 110 Sep 30 09:38 first_job
[root@ip-172-31-25-157 jenkins]#
```

