

Task on Load Balancers

1. Configure Classic Load balancer.

Implementation

1. Open AWS Console → EC2 → Load Balancers.
2. Click Create Load Balancer.
3. Select Classic Load Balancer.
4. Enter the Load Balancer name.
5. Select the required VPC.
6. Select the required Availability Zones/Subnets.
7. Configure the Security Group to allow HTTP traffic on port 80.
8. Configure the listener:
 - Load Balancer Protocol: HTTP
 - Load Balancer Port: 80
 - Instance Protocol: HTTP
 - Instance Port: 80
9. Configure the Health Check:
 - Protocol: HTTP
 - Port: 80
 - Ping Path: /
10. Select the EC2 instances that should receive traffic.
11. Review the configuration and click Create Load Balancer.
12. Copy the DNS name of the Classic Load Balancer.
13. Open the DNS name in a browser and verify that traffic reaches the backend instances.

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#CreateCLBWizard:

aws

Search

[Alt+S] Ask Amazon Q

United States (N. Virginia)

VA (281712468655)

EC2 > Load balancers > Create Classic Load Balancer

Basic configuration [Edit](#)

Name: my-classic-lb

Scheme: Internet-facing

Network mapping [Edit](#)

VPC: [vpc-0aecc9dfe9b93edac](#)

Availability Zones and subnets:

- us-east-1a
[subnet-0efeab0fa7dd2cc8d](#)
- us-east-1b
[subnet-01a5f05d0ea0bbdd4](#)

Security groups [Edit](#)

default

[sg-0b6148a697424f998](#)

Listeners and routing [Edit](#)

HTTP:80

Health checks [Edit](#)

HTTP:80/index.html

- Timeout: 2 seconds
- Interval: 5 seconds
- Unhealthy threshold: 2
- Healthy threshold: 10

Instances [Edit](#)

2 instances added

- 1 instance in us-east-1a
- 1 instance in us-east-1b

Attributes [Edit](#)

- Cross-zone load balancing: On
- Connection draining: Off
- Connection draining timeout: 300 seconds

Tags [Edit](#)

-

Cancel

Create load balancer

CloudShell Agent Toolkit for AWS Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

32° Search

16:20 15-09-2026

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LoadBalancer:loadBalancerArn=my-classic-lb;tab=targetInstances

aws

Search

[Alt+S] Ask Amazon Q

United States (N. Virginia)

VA (281712468655)

EC2 > Load balancers > my-classic-lb

Volumes Snapshots Lifecycle Manager

Network & Security

Security Groups Elastic IPs Placement Groups Key Pairs Network Interfaces

Load Balancing

Load Balancers Target Groups Trust Stores

Auto Scaling

Auto Scaling Groups

Settings

my-classic-lb

Launch migration wizard

Actions

Details

Load balancer type

Classic

Status

2 of 2 instances in service

VPC

[vpc-0aecc9dfe9b93edac](#)

Date created

September 15, 2026, 16:21 (UTC+05:30)

Scheme

Internet-facing

Hosted zone

Z35SXDOTRQ7X7K

Availability Zones

[subnet-0efeab0fa7dd2cc8d](#) us-east-1a (use1-az1)

[subnet-01a5f05d0ea0bbdd4](#) us-east-1b (use1-az2)

DNS name [Info](#)

[my-classic-lb-138920337.us-east-1.elb.amazonaws.com](#) (A Record)

Distribution of targets by Availability Zone (AZ)

For each enabled Availability Zone, you can view the number of registered instances and their current health states. Selecting any values here will apply the

CloudShell Agent Toolkit for AWS Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

32° Search

16:24 15-09-2026

Instances (2) [Info](#)

Last updated 6 minutes ago [Refresh](#)

[Connect](#) [Instance state](#) [Actions](#) [Launch instances](#)

Saved filter sets

Choose filter set

Filter Instance by attribute or tag (case-sensitive)

Instance state = running

Clear filters

< 1 >

☐

Name

▼

Instance ID

Instance state

▼

Instance type

▼

Status check

Availability Zone

▼

☐

server-02

i-037532dc201c41512

Running

t3.micro

3/3 checks passed

us-east-1b

☐

server-01



i-001fceb5048c8dfc9

Running

t3.micro

3/3 checks passed

us-east-1a



2. Configure Application Load balancer.

Implementation

1. Open AWS Console → EC2 → Load Balancers.
2. Click Create Load Balancer.
3. Select Application Load Balancer.
4. Enter the Load Balancer name.
5. Select Internet-facing if the application must be publicly accessible.
6. Select the required IP address type, normally IPv4.
7. Select the required VPC.
8. Select at least two subnets in different Availability Zones.
9. Select/create a Security Group that allows HTTP traffic on port 80.
10. Create a Target Group:
 - Target type: Instances
 - Protocol: HTTP
 - Port: 80
11. Configure the health check path as /.
12. Register the required EC2 instances with the Target Group.
13. Configure the ALB listener:
 - Protocol: HTTP
 - Port: 80
 - Default action: Forward to the Target Group
14. Create the Application Load Balancer.
15. Wait until the registered targets show Healthy.
16. Copy the ALB DNS name.
17. Open the DNS name in a browser and verify the application.

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LoadBalancer:loadBalancerArn=arn:aws:elasticloadbalancing:us-east-1:281712468655...

EC2 > Load balancers > my-app-lb

my-app-lb

Details

Load balancer type Application	Status Active	VPC vpc-0aecc9dfe9b93edac	Load balancer IP address type IPv4
Scheme Internet-facing	Hosted zone Z35SXDOTRQ7X7K	Availability Zones subnet-0efeb0fa7dd2cc8d us-east-1a (use1-az1) subnet-01a5f05d0ea0bbdd4 us-east-1b (use1-az2)	Date created September 15, 2026, 17:16 (UTC+05:30)
Load balancer ARN arn:aws:elasticloadbalancing:us-east-1:281712468655:loadbalancer/app/my-app-lb/b3b21a4cbe72039e		DNS name info my-app-lb-1983363606.us-east-1.elb.amazonaws.com (A Record)	

CloudShell Agent Toolkit for AWS Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

31° Search 17:20 15-09-2026

Instances (2) Info Last updated 6 minutes ago Connect Instance state Actions Launch instances

Saved filter sets Choose filter set Filter Instance by attribute or tag (case-sensitive)

Instance state = running Clear filters

	Name	Instance ID	Instance state	Instance type	Status check	Availability Zone
☐	server-02	i-037532dc201c41512	Running	t3.micro	3/3 checks passed	us-east-1b
☐	server-01	i-001fceb5048c8dfc9	Running	t3.micro	3/3 checks passed	us-east-1a

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#TargetGroup:targetGroupArn=arn:aws:elasticloadbalancing:us-east-1:281712468655...

EC2 > Target groups > my-tar-group

my-tar-group

Details

[arn:aws:elasticloadbalancing:us-east-1:281712468655:targetgroup/my-tar-group/37a0ad715ea68d7a](#)

Target type Instance	Protocol : Port HTTP: 80	Protocol version HTTP1	VPC vpc-0aecc9dfe9b93edac
IP address type IPv4	Load balancer None associated		

2 Total targets	2 Healthy	0 Unhealthy	0 Unused	0 Initial	0 Draining
0 Anomalous					

Distribution of targets by Availability Zone (AZ)
Select values in this table to see corresponding filters applied to the Registered targets table below.

CloudShell Agent Toolkit for AWS Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

31° Search 17:18 15-09-2026

Targets
Monitoring
Health checks
Attributes
Tags

Registered targets (2)
Info
Anomaly mitigation: Not applicable
Deregister
Register targets

Target groups route requests to individual registered targets using the protocol and port number specified. Health checks are performed on all registered targets according to the target group's health check settings. Anomaly detection is automatically applied to HTTP/HTTPS target groups with at least 3 healthy targets.

Filter targets
1

	Instance ID	Name	Port	Zone	Health status	Health status det
☐	i-037532dc201c41512	server-02	80	us-east-1b (us...	Healthy	-
☐	i-001fceb5048c8dfc9	server-01	80	us-east-1a (us...	Healthy	-

← → ↻
Not secure
my-app-lb-1983363606.us-east-1.elb.amazonaws.com

welcome to server-02

← → ↻
Not secure
my-app-lb-1983363606.us-east-1.elb.amazonaws.com

welcome to server-01

3. Configure Network Load balancer.

Implementation

1. Open AWS Console → EC2 → Load Balancers.
2. Click Create Load Balancer.
3. Select Network Load Balancer.
4. Enter the Load Balancer name.
5. Select Internet-facing or Internal, depending on the requirement.
6. Select the required VPC.
7. Select subnets in multiple Availability Zones.
8. Create a Target Group:
 - Target type: Instances
 - Protocol: TCP
 - Port: 80
9. Configure the health check:
 - Protocol: TCP
 - Port: Traffic port
10. Register the required EC2 instances with the Target Group.
11. Configure the NLB listener:

- Protocol: TCP
- Port: 80
- Default action: Forward to the Target Group


12. Create the Network Load Balancer.

13. Wait for the registered targets to become Healthy.


14. Copy the NLB DNS name.

15. Test the application using the NLB DNS name.

Not able to create network load balancer

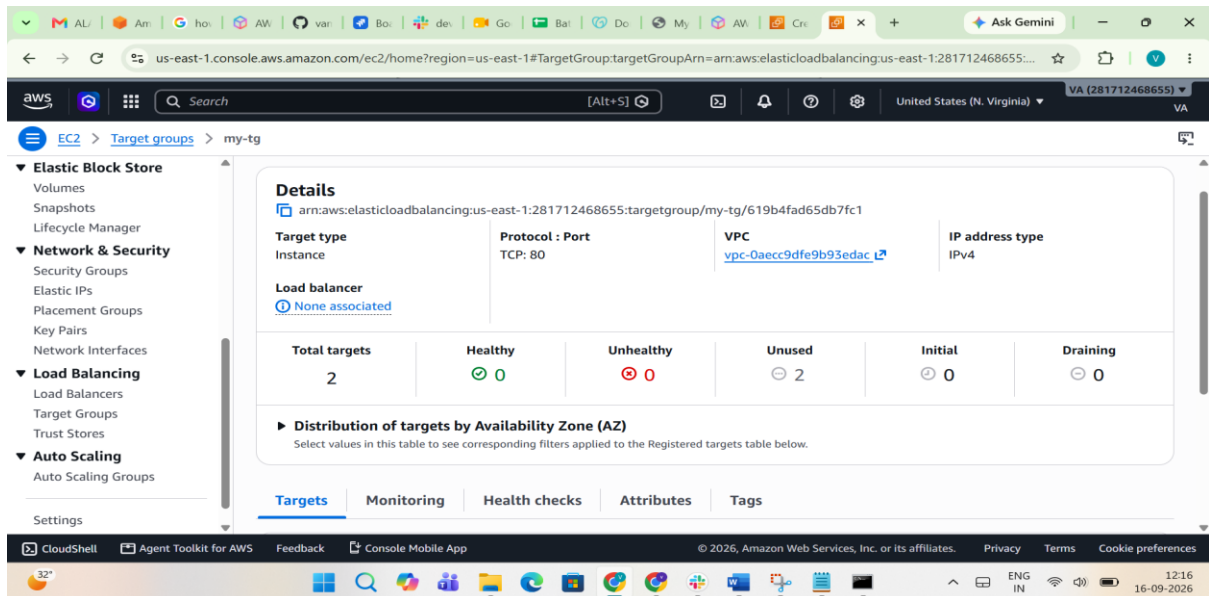

The screenshot shows the AWS Management Console for the 'my-tg' Target Group. The left sidebar shows the navigation menu with categories like Elastic Block Store, Network & Security, Load Balancing, and Auto Scaling. The main content area displays the 'Details' tab for the Target Group. The 'Target type' is 'Instance', 'Protocol : Port' is 'TCP: 80', 'VPC' is 'vpc-0aecc9dfe9b93edac', and 'IP address type' is 'IPv4'. A table shows the status of targets: Total targets: 2, Healthy: 0, Unhealthy: 0, Unused: 2, Initial: 0, and Draining: 0. Below the table, there is a section for 'Distribution of targets by Availability Zone (AZ)' with a note to select values to see corresponding filters. At the bottom, there are tabs for 'Targets', 'Monitoring', 'Health checks', 'Attributes', and 'Tags'.

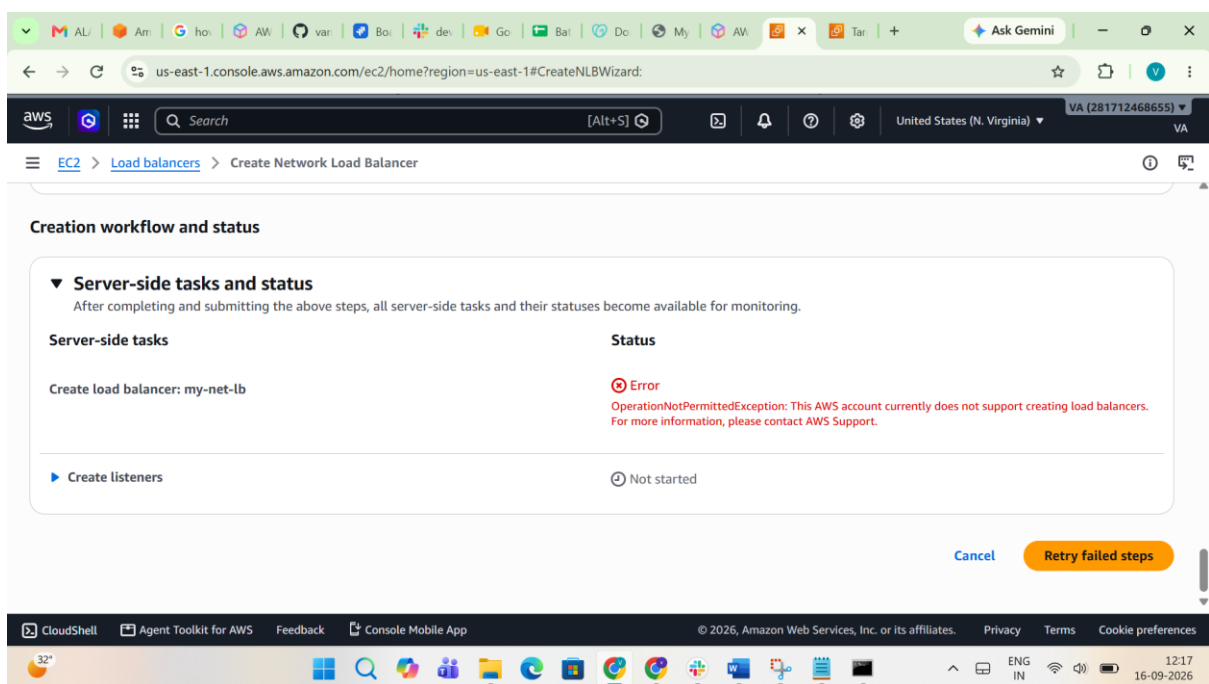


The screenshot shows the 'Create Network Load Balancer' wizard in the AWS Management Console. The left sidebar shows the navigation menu. The main content area displays the 'Creation workflow and status' section. Under 'Server-side tasks and status', there is a table with two columns: 'Server-side tasks' and 'Status'. The first task is 'Create load balancer: my-net-lb', which has a status of 'Error'. The error message is: 'OperationNotPermittedException: This AWS account currently does not support creating load balancers. For more information, please contact AWS Support.' The second task is 'Create listeners', which has a status of 'Not started'. At the bottom right, there are buttons for 'Cancel' and 'Retry failed steps'.

4. Attach SSL for application load balancer.

Implementation

1. Open AWS Certificate Manager (ACM).
2. Select the required AWS Region.
3. Click Request certificate.
4. Select Public certificate.
5. Enter the domain name, for example:
 - example.com
 - www.example.com
6. Select DNS validation.
7. Create/add the required DNS validation records.
8. Wait until the ACM certificate status becomes Issued.
9. Open EC2 → Load Balancers.
10. Select the Application Load Balancer.
11. Open the Listeners and rules tab.
12. Click Add listener.
13. Select:
 - Protocol: HTTPS
 - Port: 443
14. Select the issued ACM SSL/TLS certificate.
15. Configure the default action to Forward to the Target Group.
16. Save the listener.
17. Optionally configure the HTTP port 80 listener to redirect HTTP → HTTPS.

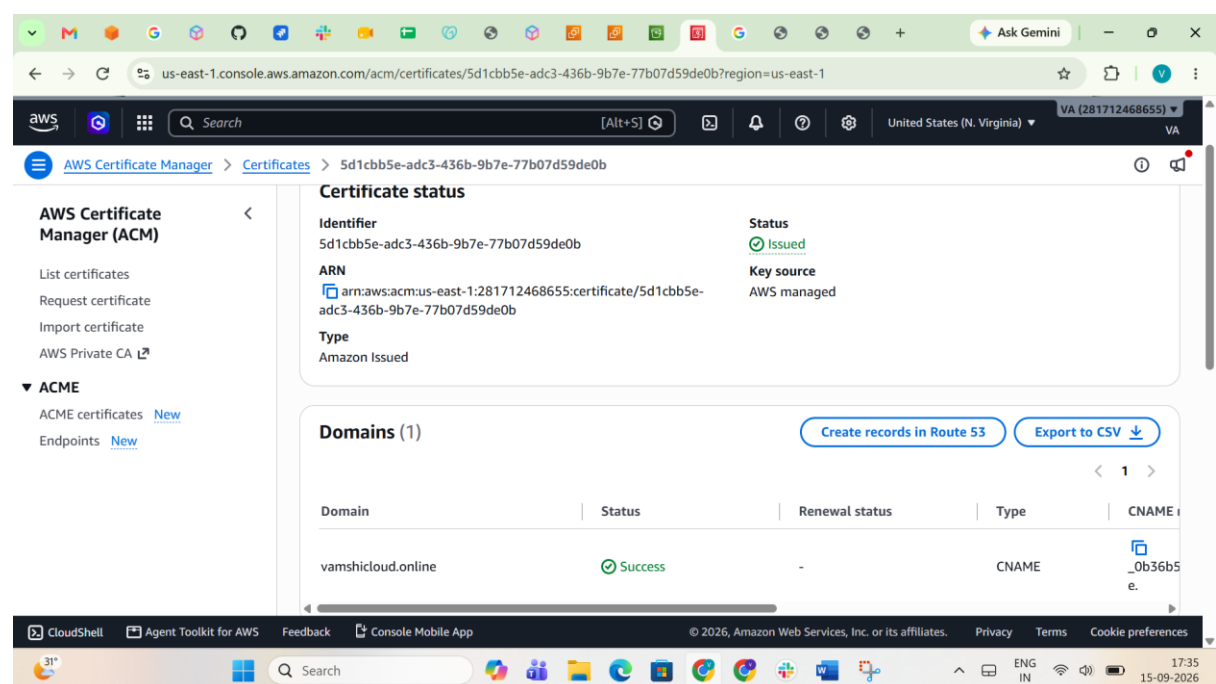

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#ElbAddListenerloadBalancerArn=arn:aws:elasticloadbalancing:us-east-1:281712468655...

EC2 > Load balancers > my-app-lb > Add listener

Listener: HTTPS:443

A listener checks for connection requests on its configured protocol and port. Incoming requests are evaluated against rules in priority order; the first matching rule determines routing. If no rule matches, the default action is applied.

Protocol
Used for connections from clients to the load balancer.
HTTPS

Port
The port on which the load balancer is listening for connections.
443
1-65535

Default action [Info](#)
The default action is used if no other rules apply. Choose the default action for traffic on this listener.

Pre-routing action [Info](#)

☒ No pre-routing action

☐ Authenticate user
User auth with OIDC or Amazon Cognito

☐ Validate token
Validate client-presented JSON Web Token (JWT)

Routing action

☒ Forward to target groups

☐ Redirect to URL

☐ Return fixed response

CloudShell Agent Toolkit for AWS Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

31° Search ENG IN 17:46 15-09-2026

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#ElbAddListenerloadBalancerArn=arn:aws:elasticloadbalancing:us-east-1:281712468655...

EC2 > Load balancers > my-app-lb > Add listener

The certificate used if a client connects without SNI protocol, or if there are no matching certificates. You can source this certificate from AWS Certificate Manager (ACM), Amazon Identity and Access Management (IAM), or import a certificate. This certificate will automatically be added to your listener certificate list.

Certificate source

☒ From ACM

☐ From IAM

☐ Import certificate

Certificate (from ACM)
The selected certificate will be applied as the default SSL/TLS server certificate for this load balancer's secure listeners.

vamshicloud.online
5d1cbb5e-adc3-436b-9b7e-77b07d59de0b

[Request new ACM certificate](#)

Client certificate handling [Info](#)
Client certificates are used to make authenticated requests to remote servers. [Learn more](#)

☐ **Mutual authentication (mTLS)**
Mutual TLS (Transport Layer Security) authentication offers two-way peer authentication. It adds a layer of security over TLS and allows your services to verify the client that's making the connection.

Default attributes are applied when adding a listener. You can edit them after adding the listener.

CloudShell Agent Toolkit for AWS Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

31° Search ENG IN 17:44 15-09-2026

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LoadBalancer:loadBalancerArn=arn:aws:elasticloadbalancing:us-east-1:28171246865...

aws [Search] [Alt+S] Ask Amazon Q United States (N. Virginia) VA (281712468655) VA

EC2 > Load balancers > my-app-lb

Capacity Manager New

- Images
 - AMIs
 - AMI Catalog
- Elastic Block Store
 - Volumes
 - Snapshots
 - Lifecycle Manager
- Network & Security
 - Security Groups
 - Elastic IPs
 - Placement Groups
 - Key Pairs
 - Network Interfaces
- Load Balancing
 - Load Balancers
 - Target Groups
 - Trust Stores

Successfully created listener.

my-app-lb

Details

Load balancer type Application	Status Active	VPC vpc-0aecc9dfe9b93edac	Load balancer IP address type IPv4
Scheme Internet-facing	Hosted zone Z35SXDOTRQ7X7K	Availability Zones subnet-0efeb0fa7dd2cc8d us-east-1a (use1-az1) subnet-01a5f05d0ea0bbdd4 us-east-1b (use1-az2)	Date created September 15, 2026, 17:16 (UTC+05:30)
Load balancer ARN arn:aws:elasticloadbalancing:us-east-1:281712468655:loadbalanc		DNS name Info my-app-lb-1983363606.us-east-1.elb.amazonaws.com (A Record)	

CloudShell Agent Toolkit for AWS Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

31° Search ENG IN 17:47 15-09-2026

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#ElbEditListener:loadBalancerArn=arn:aws:elasticloadbalancing:us-east-1:28171246865...

aws [Search] [Alt+S] Ask Amazon Q United States (N. Virginia) VA (281712468655) VA

EC2 > Load balancers > my-app-lb > HTTP:80 listener > Edit listener

Routing action

☐ Forward to target groups ☒ Redirect to URL ☐ Return fixed response

Redirect to URL Info
Redirect client requests from one URL to another. You cannot redirect HTTPS to HTTP. To avoid a redirect loop, you must modify at least one of the following components: protocol, port, hostname or path. Components that you do not modify retain their original values.

URI parts Full URL

Protocol
Used for connections from clients to the load balancer.
HTTPS


Port
The port on which the load balancer is listening for connections.
443
1-65535 or to retain the original port enter #{port}

☐ Custom host, path, query
Select to modify host, path and query. If no changes are made, settings from the request URL are retained.

Status code
301 - Permanently moved

CloudShell Agent Toolkit for AWS Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

31° Search ENG IN 17:52 15-09-2026

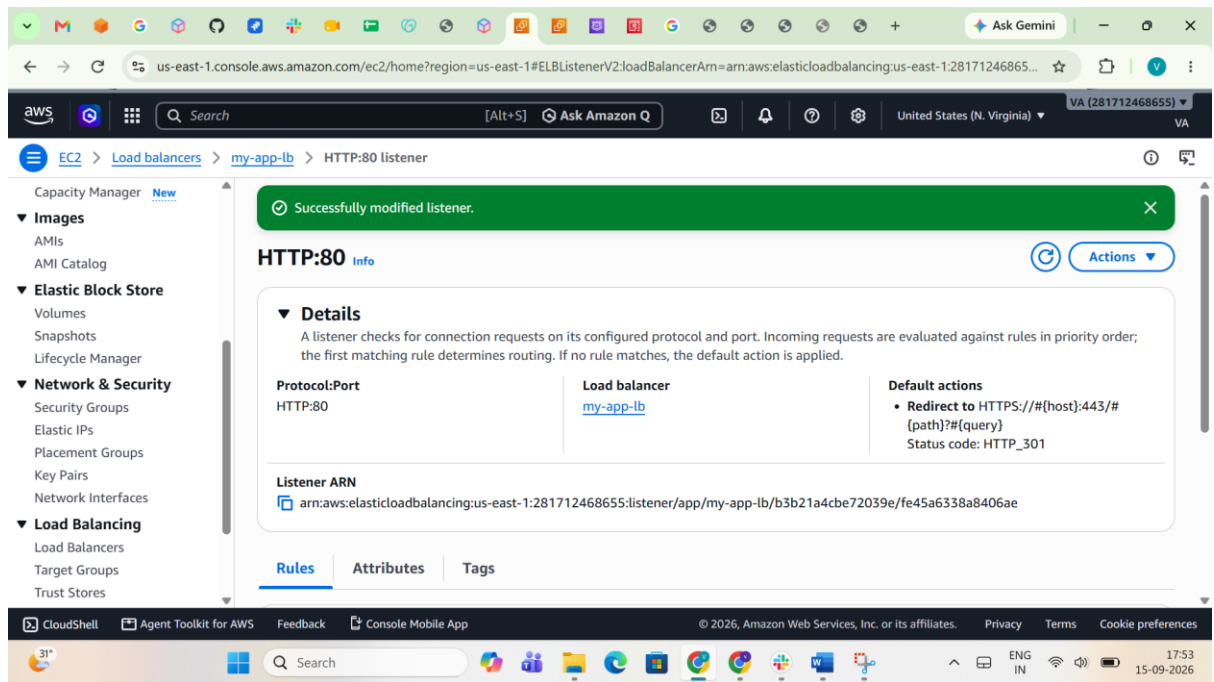

5. Map Application load balancer to R53.

Implementation

1. Open Route 53.
2. Go to Hosted zones.
3. Select your domain.
4. Click Create record.
5. Enter the required record name, for example:
 - www
 - or leave blank for the root domain.
6. Select the required record type:
 - A – IPv4 address
7. Enable Alias.
8. Select Alias to Application Load Balancer.
9. Select the correct AWS Region.
10. Select your Application Load Balancer.
11. Click Create records.
12. Wait for DNS propagation.
13. Test the application using <https://vamshicloud.online/>.
14. Verify that the domain resolves to the ALB and the application loads successfully.

us-east-1.console.aws.amazon.com/route53/v2/hostedzones?region=us-east-1#CreateRecordSet/Z01255262M9D5A8GN7UT

aws Search [Alt+S]

Route 53 > Hosted zones > vamshicloud.online > Create record

▼ Record 1 Delete

Record name [Info](#) subdomain vamshicloud.online

Record type [Info](#) A – Routes traffic to an IPv4 address and some AWS resources

Keep blank to create a record for the root domain.

☒ Alias

Route traffic to [Info](#)

Alias to Application and Classic Load Balancer

US East (N. Virginia)

Q dualstack.my-app-lb-1983363606.us-east-1.elb.amazonaws.com X

Alias hosted zone ID: Z355XDOTRQ7X7K

Routing policy [Info](#) Simple routing

Evaluate target health ☒ Yes

CloudShell Agent Toolkit for AWS Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

31° Search ENG IN 18:00 15-09-2026

```
Microsoft Windows [Version 10.0.26200.9457]
(c) Microsoft Corporation. All rights reserved.


C:\Windows\System32>ipconfig /flushdns

Windows IP Configuration

Successfully flushed the DNS Resolver Cache.
```

← → ↻ vamshicloud.online ☆ ⌵ ⌵ ⌵

welcome to server-01

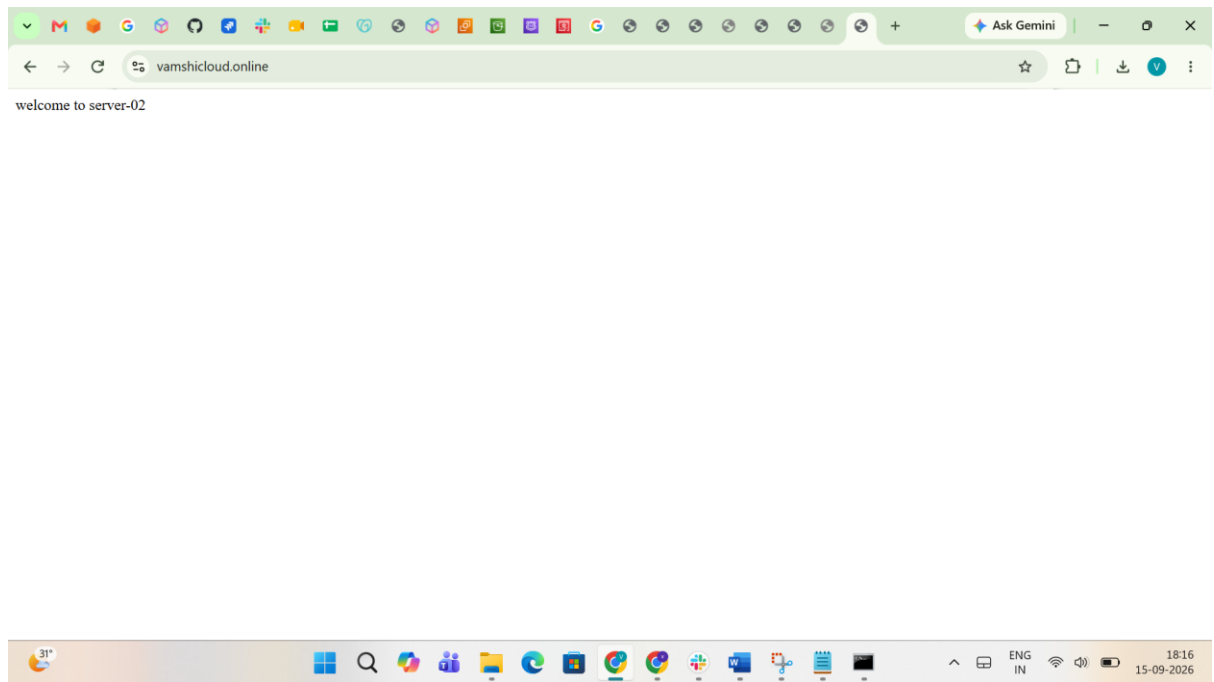

6. Push the application load balancer logs to S3.

Implementation

1. Open Amazon S3.
2. Create an S3 bucket for ALB access logs.
3. Keep the bucket in the appropriate AWS Region.
4. Configure the required bucket policy to allow the Elastic Load Balancing service to write access logs.
5. Open EC2 → Load Balancers.
6. Select the Application Load Balancer.
7. Open the Attributes tab.
8. Find Monitoring / Access logs.
9. Enable Access logs.
10. Select S3 as the destination.
11. Enter the S3 bucket name.
12. Optionally specify a prefix, for example:
 - alb-logs/
13. Save the changes.
14. Generate some traffic to the ALB.
15. Wait for the logs to be delivered.
16. Open the S3 bucket.
17. Navigate to the ALB log folder/prefix.
18. Verify that ALB access log files are being created.

us-east-1.console.aws.amazon.com/s3/buckets/my-alb-access-logs-2026-0509?region=us-east-1&tab=objects

Successfully created bucket "my-alb-access-logs-2026-0509"

my-alb-access-logs-2026-0509

Objects (0)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Name	Type	Last modified	Size	Storage class
No objects				

You don't have any objects in this bucket.

Upload

us-east-1.console.aws.amazon.com/s3/bucket/my-alb-access-logs-2026-0509/property/policy/edit?region=us-east-1

Policy

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Effect": "Allow",
6       "Principal": {
7         "Service": "logdelivery.elasticloadbalancing.amazonaws.com"
8       },
9       "Action": "s3:PutObject",
10      "Resource": "arn:aws:s3:::my-alb-access-logs-2026-0509/AWSLogs/281712468655/*"
11    }
12  ]
13 }
```

Edit statement Remove

Add actions

Choose a service

Search services

Included

S3

Available

AI Operations

AMP

API Gateway

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LoadBalancerEditAttributes:loadBalancerArn=arn:aws:elasticloadbalancing:us-east-1:281712468655:loadbalancer:my-app-lb

EC2 > Load balancers > my-app-lb > Edit load balancer attributes

Deletion protection

To prevent your load balancer from being deleted accidentally, turn on deletion protection. If you turn on deletion protection, you must turn it off before you can delete the load balancer.

☐ Deletion protection

Logging

All legacy logs are stored in S3. If no prefix is specified, logs are stored in the bucket root.

☒ **Access logs - legacy**

Access logs deliver detailed logs of all requests made to your load balancer. Additional charges apply. [Learn more](#)

S3 URI

s3://my-alb-access-logs-2026-0509

Format: s3://bucket/prefix

☐ **Connection logs - legacy**

Connection logs deliver detailed logs of all connections made to your load balancer. Additional charges apply. [Learn more](#)

☐ **Health check logs - legacy**

Health check logs deliver detailed logs of health checks for all targets in your load balancer's target groups. Additional charges apply. [Learn more](#)

Logging options

Log delivery to CloudWatch, Kinesis Firehose, and S3 is configurable through an integration with Logging - by Amazon CloudWatch. Visit [Logging](#) in the [Integrations tab](#).

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LoadBalancer:loadBalancerArn=arn:aws:elasticloadbalancing:us-east-1:281712468655...

EC2 > Load balancers > my-app-lb

Volumes
Snapshots
Lifecycle Manager

▼ Network & Security
Security Groups
Elastic IPs
Placement Groups
Key Pairs
Network Interfaces

▼ Load Balancing
Load Balancers
Target Groups
Trust Stores

▼ Auto Scaling
Auto Scaling Groups

Settings

Protection

Deletion protection
Off

Logging

Access logs - legacy
S3 location: [my-alb-access-logs-2026-0509](#)

Connection logs - legacy
Off

Health check logs - legacy
Off

Logging options
Log delivery to CloudWatch, Kinesis Firehose, and S3 is configurable through an integration with Logging - by Amazon CloudWatch. Visit [Logging](#) in the [Integrations](#) tab.

CloudShell Agent Toolkit for AWS Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

31° Search ENG IN 17:28 15-09-2026

us-east-1.console.aws.amazon.com/s3/object/my-alb-access-logs-2026-0509?region=us-east-1&prefix=AWSLogs/281712468655/elasticloadbalancing...

Amazon S3 > ... > 281712468655/ > elasticloadbalancing/ > us-east-1/ > 2026/ > 09/ > 15/ > 281712468655_elastic...

▼ Buckets
General purpose buckets
Directory buckets
Table buckets
Vector buckets

▼ Files
File systems

▼ Access management and security
Access Points
Access Points for FSx
Access Grants
IAM Access Analyzer

▼ Storage management and...

281712468655_elasticloadbalancing_us-east-1_app.my-app-lb.b3b21a4cbe72039e_20260915T1205Z_3.231.125.6_6519uiwv.log.gz Info

[Copy S3 URI](#) [Download](#) [Open](#) [Object actions](#)

Properties Permissions Versions

Object overview

Owner
9bf516a011a49cb45d7cf672227ff8f2dc489351e0902b38d8372cef2da8df35

AWS Region
US East (N. Virginia) us-east-1

Last modified
September 15, 2026, 17:35:08 (UTC+05:30)

S3 URI
[s3://my-alb-access-logs-2026-0509/AWSLogs/281712468655/elasticloadbalancing/us-east-1/2026/09/15/281712468655_elasticloadbalancing_us-east-1_app.my-app-lb.b3b21a4cbe72039e_20260915T1205Z_3.231.125.6_6519uiwv.log.gz](#)

Amazon Resource Name (ARN)
[arn:aws:s3::my-alb-access-logs-2026-0509/AWSLogs/281712468655/elasticloadbalancing/us-east-1/2026/09/15/281712468655_elasticloadbalancing_us-east-1_app.my-app-lb.b3b21a4cbe72039e_20260915T1205Z_3.231.125.6_6519uiwv.log.gz](#)

CloudShell Agent Toolkit for AWS Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

31° Search ENG IN 18:06 15-09-2026