

Task on RDS

1. Create MariaDB DB on EC2.

Implementation

1. Launch an EC2 instance with Amazon Linux.
2. Connect to the EC2 instance using SSH.
3. Update the packages: `sudo yum update -y`
4. Install MariaDB: `sudo yum install mariadb105-server -y`
5. Start and enable MariaDB: `sudo systemctl start mariadb`
`sudo systemctl enable mariadb`
6. Verify the service: `sudo systemctl status mariadb`
7. Login to MariaDB: `mysql -u root --password="${DBRootPassword}"`
8. Create a database: `CREATE DATABASE ec2db;`
9. Create a table and insert dummy data:

```
USE ec2db;
```

```
CREATE TABLE employees (  
    id INT PRIMARY KEY,  
    name VARCHAR(50),  
    department VARCHAR(50)  
);
```

```
INSERT INTO employees VALUES  
(1,'John','IT'),  
(2,'David','HR'),  
(3,'Sam','Finance');
```

10. Verify the data: `SELECT * FROM employees;`


```
root@ip-172-31-6-201:~  
[root@ip-172-31-6-201 ~]# dbName=ec2db  
DBPassword=admin123456  
DBUser=ec2dbuser  
[root@ip-172-31-6-201 ~]# echo "CREATE DATABASE ${dbName};" >> /tmp/db.setup  
[root@ip-172-31-6-201 ~]# echo "CREATE USER '${DBUser}' IDENTIFIED BY '${DBPassword}';" >> /tmp/db.setup  
[root@ip-172-31-6-201 ~]# echo "FLUSH PRIVILEGES;" >> /tmp/db.setup  
[root@ip-172-31-6-201 ~]# mysql -u root --password="${DBRootPassword}" < /tmp/db.setup  
[root@ip-172-31-6-201 ~]# mysqladmin -u root password "${DBRootPassword}"  
[root@ip-172-31-6-201 ~]# mysql -u root --password="${DBRootPassword}"  
Welcome to the MariaDB monitor.  Commands end with ; or \g.  
Your MariaDB connection id is 5  
Server version: 10.5.29-MariaDB MariaDB Server  
  
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.  
  
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.  
  
MariaDB [(none)]> show databases;  
+-----+  
| Database |  
+-----+  
| ec2db    |  
| information_schema |  
| mysql    |  
| performance_schema |  
+-----+  
4 rows in set (0.000 sec)  
  
MariaDB [(none)]> use ec2db;  
Database changed  
MariaDB [ec2db]> CREATE TABLE employees (  
-> id INT PRIMARY KEY,  
-> name VARCHAR(50),  
-> department VARCHAR(50)  
-> );  
[1]+  Stopped                  mysql -u root --password="${DBRootPassword}"  
[root@ip-172-31-6-201 ~]# mysql -u root --password="${DBRootPassword}"  
Welcome to the MariaDB monitor.  Commands end with ; or \g.  
Your MariaDB connection id is 6  
Server version: 10.5.29-MariaDB MariaDB Server  
  
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.  
  
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.  
  
MariaDB [(none)]> use ec2db;
```

```
MariaDB [(none)]> use ec2db;  
Database changed  
MariaDB [ec2db]> CREATE TABLE employees (  
-> id INT PRIMARY KEY,  
-> name VARCHAR(50),  
-> department VARCHAR(50)  
-> );  
Query OK, 0 rows affected (0.004 sec)  
  
MariaDB [ec2db]> INSERT INTO employees VALUES  
-> (1,'John','IT'),  
-> (2,'David','HR'),  
-> (3,'Sam','Finance');  
Query OK, 3 rows affected (0.001 sec)  
Records: 3 Duplicates: 0 Warnings: 0
```

```
MariaDB [ec2db]> SELECT * FROM employees;  
+-----+  
| id | name | department |  
+-----+  
| 1 | John | IT         |  
| 2 | David | HR         |  
| 3 | Sam  | Finance    |  
+-----+  
3 rows in set (0.000 sec)
```

2. Insert some dummy data.

Implementation

1. Login to MariaDB: `sudo mysql`
2. Select the database: `USE ec2db;`
3. Insert sample records:
`INSERT INTO employees VALUES
(4,'Alex','Sales');`

```
(5,'Mike','Support'),  
(6,'Robert','Admin');
```

4. Verify: `SELECT * FROM employees;`

```
MariaDB [ec2db]> INSERT INTO employees VALUES  
-> (4,'Alex','Sales'),  
-> (5,'Mike','Support'),  
-> (6,'Robert','Admin');  
Query OK, 3 rows affected (0.001 sec)  
Records: 3 Duplicates: 0 Warnings: 0  
  
MariaDB [ec2db]> SELECT * FROM employees;  
+----+-----+-----+  
| id | name  | department |  
+----+-----+-----+  
| 1  | John  | IT         |  
| 2  | David | HR         |  
| 3  | Sam   | Finance    |  
| 4  | Alex  | Sales      |  
| 5  | Mike  | Support    |  
| 6  | Robert| Admin      |  
+----+-----+-----+  
6 rows in set (0.000 sec)
```

3. Take the backup of dummy data on EC2.

Implementation

1. Exit MariaDB if required: `EXIT;`
2. Create a database backup using `mysqldump`: `mysqldump -u root -p ec2db > ec2db_backup.sql`
3. Verify the backup file: `ls -lh ec2db_backup.sql`
4. Check the backup contents: `head ec2db_backup.sql`
5. The .sql file contains the database structure and data.


```
MariaDB [ec2db]> exit;  
Bye  
[root@ip-172-31-6-201 ~]# mysqldump -u root -p ec2db > ec2db_backup.sql  
Enter password:  
[root@ip-172-31-6-201 ~]# ls -lh ec2db_backup.sql  
-rw-r--r--. 1 root root 2.1K Sep 17 12:25 ec2db_backup.sql  
[root@ip-172-31-6-201 ~]# head ec2db_backup.sql  
/*M!999999\~ enable the sandbox mode */  
-- MariaDB dump 10.19 Distrib 10.5.29-MariaDB, for Linux (x86_64)  
--  
-- Host: localhost Database: ec2db  
--  
-- Server version 10.5.29-MariaDB  
  
/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;  
/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;  
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;  
[root@ip-172-31-6-201 ~]#
```

4. Launch MariaDB RDS instance.

Implementation

1. Open AWS Console → RDS.
2. Select Create database.
3. Choose Standard create.
4. Select MariaDB as the engine.
5. Select the required MariaDB version.
6. Choose the required template, such as Free tier, if available.
7. Enter the DB instance identifier.
8. Configure the master username and password.

9. Select the required DB instance class.
10. Configure storage.
11. Select the VPC where your EC2 instance is running.
12. Configure the security group.
13. Allow TCP 3306 from the EC2 instance/security group.
14. Configure database name if required.
15. Click Create database.
16. Wait until the RDS instance status becomes Available.

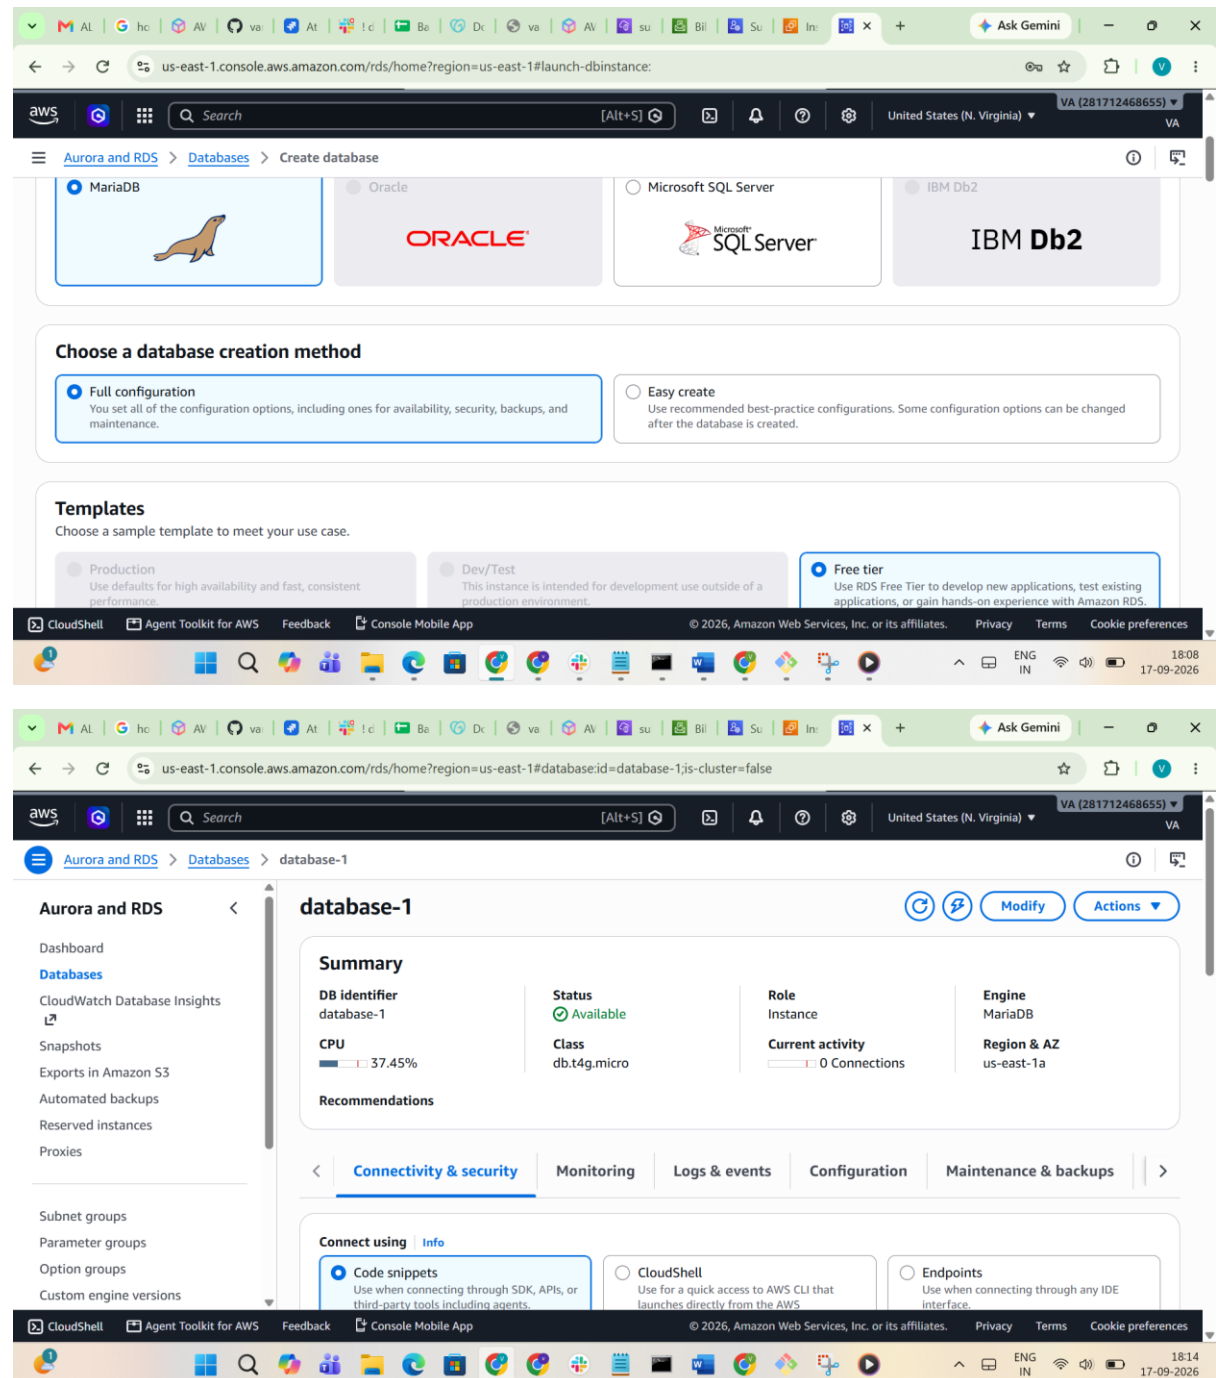

5. Migrate database from EC2 to RDS.

Implementation

1. Ensure the EC2 security group can connect to the RDS security group on TCP 3306.
2. From EC2, test the RDS connection: `mysql -h <RDS-ENDPOINT> -u <username> -p`
3. Create the target database on RDS: `CREATE DATABASE ec2db;`
4. Exit from the RDS MariaDB client.
5. Import the EC2 backup into RDS: `mysql -h <RDS-ENDPOINT> -u <username> -p ec2db < ec2db_backup.sql`
6. Login again to RDS: `mysql -h <RDS-ENDPOINT> -u <username> -p`
7. Verify the database:
`USE ec2db;`
`SHOW TABLES;`
`SELECT * FROM employees;`
8. Confirm that the dummy data from EC2 is available on RDS.

```
[root@ip-172-31-6-201 ~]# ls
ec2db_backup.sql
[root@ip-172-31-6-201 ~]# mysql -h database-1.cc182oq82u25.us-east-1.rds.amazonaws.com -u admin -p --ssl ec2db < ec2db_backup.sql
Enter password:
[root@ip-172-31-6-201 ~]# mysql -h database-1.cc182oq82u25.us-east-1.rds.amazonaws.com -u admin -p --ssl
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 99
Server version: 11.8.8-MariaDB managed by https://aws.amazon.com/rds/

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show databases;
+-----+
| Database |
+-----+
| ec2db    |
| information_schema |
| innodb   |
| mysql    |
| performance_schema |
| sys      |
+-----+
6 rows in set (0.001 sec)

MariaDB [(none)]> use ec2db;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
MariaDB [ec2db]> SELECT * FROM employees;
+----+-----+-----+
| id | name  | department |
+----+-----+-----+
| 1  | John  | IT         |
| 2  | David | HR         |
| 3  | Sam   | Finance    |
| 4  | Alex  | Sales      |
| 5  | Mike  | Support    |
| 6  | Robert| Admin      |
+----+-----+-----+
6 rows in set (0.001 sec)
```

```

Database changed
MariaDB [ec2db]> SELECT * FROM employees;
+-----+-----+-----+
| id | name | department |
+-----+-----+-----+
| 1 | John | IT |
| 2 | David | HR |
| 3 | Sam | Finance |
| 4 | Alex | Sales |
| 5 | Mike | Support |
| 6 | Robert | Admin |
+-----+-----+-----+
6 rows in set (0.001 sec)

MariaDB [ec2db]> SHOW TABLES;
+-----+
| Tables_in_ec2db |
+-----+
| employees |
+-----+
1 row in set (0.001 sec)

MariaDB [ec2db]> |

```

6. Install MySQL DB on EC2.

Implementation

1. Launch or use an EC2 instance with Amazon Linux.
2. Connect to the instance.
3. Update packages: `sudo yum update -y`
4. Install MySQL: `sudo yum install mysql-server -y`
5. Start MySQL: `sudo systemctl start mysqld`
6. Enable MySQL at boot: `sudo systemctl enable mysqld`
7. Check the service: `sudo systemctl status mysqld`
8. Login: `sudo mysql`
9. Create a test database and table:

```
CREATE DATABASE ec2mysqldb;
```

```
USE ec2mysqldb;
```

```
CREATE TABLE employees (
    id INT PRIMARY KEY,
    name VARCHAR(50)
);
```

10. Insert and verify sample data.

```
[root@ip-172-31-80-235 ~]# sudo dnf install https://dev.mysql.com/get/mysql84-community-release-el9-1.noarch.rpm -y
sudo dnf install mysql-community-server -y
Last metadata expiration check: 0:12:54 ago on Fri Sep 18 00:46:24 2026.
mysql84-community-release-el9-1.noarch.rpm
Dependencies resolved.
72 kB/s | 13 kB | 00:00
=====
Package                                Architecture      Version           Repository        Size
-----
Installing:
mysql84-community-release              noarch            el9-1            @commandline     13 k
Transaction Summary
-----
Install 1 Package
Total size: 13 k
Installed size: 14 k
Downloading Packages:
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
  Preparing      :
  Installing     : mysql84-community-release-el9-1.noarch 1/1
  Verifying      : mysql84-community-release-el9-1.noarch 1/1
=====
WARNING:
A newer release of "Amazon Linux" is available.
Available Versions:
```

```
[root@ip-172-31-80-235 ~]# mysql --version
mysql Ver 8.4.11 for Linux on x86_64 (MySQL Community Server - GPL)
[root@ip-172-31-80-235 ~]# sudo systemctl start mysqld
sudo systemctl enable mysqld
[root@ip-172-31-80-235 ~]# sudo systemctl status mysqld
● mysqld.service - MySQL Server
   Loaded: loaded (/usr/lib/systemd/system/mysqld.service; enabled; preset: disabled)
   Active: active (running) since Fri 2026-09-18 01:01:29 UTC; 17s ago
     Docs: man:mysqld(8)
           http://dev.mysql.com/doc/refman/en/using-systemd.html
   Main PID: 3517 (mysqld)
    Status: "Server is operational"
     Tasks: 35 (limit: 1059)
    Memory: 450.3M
       CPU: 4.135s
    CGroup: /system.slice/mysqld.service
            └─3517 /usr/sbin/mysqld

Sep 18 01:01:21 ip-172-31-80-235.ec2.internal systemd[1]: Starting mysqld.service - MySQL Server...
Sep 18 01:01:29 ip-172-31-80-235.ec2.internal systemd[1]: Started mysqld.service - MySQL Server.
[root@ip-172-31-80-235 ~]# sudo grep 'temporary password' /var/log/mysqld.log
2026-09-18T01:01:26.058002Z 6 [Note] [MY-010454] [Server] A temporary password is generated for root@localhost: 10u81M1o_Rro
```

```
root@ip-172-31-80-235:~
[root@ip-172-31-80-235 ~]# nc
[root@ip-172-31-80-235 ~]# mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 9
Server version: 8.4.11

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> ALTER USER 'root'@'localhost' IDENTIFIED BY 'MySQL@12345';
Query OK, 0 rows affected (0.02 sec)

mysql> EXIT;
Bye
[root@ip-172-31-80-235 ~]# mysql -u root -p
Enter password:
ERROR 1045 (28000): Access denied for user 'root'@'localhost' (using password: YES)
[root@ip-172-31-80-235 ~]# mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 11
Server version: 8.4.11 MySQL Community Server - GPL

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> CREATE DATABASE ec2mysqldb;
Query OK, 1 row affected (0.00 sec)

mysql> SHOW DATABASES;
+-----+
| Database |
+-----+
| ec2mysqldb |
| information_schema |
| mysql |
| performance_schema |
+-----+
```



```
root@ip-172-31-80-235:~
mysql
| performance_schema
| sys
|-----|
5 rows in set (0.01 sec)

mysql> USE ec2mysqladb;
Database changed
mysql> CREATE TABLE employees (
-> id INT PRIMARY KEY,
-> name VARCHAR(50),
-> department VARCHAR(50),
-> salary INT
-> );
Query OK, 0 rows affected (0.02 sec)

mysql> SHOW TABLES;
+-----+
| Tables_in_ec2mysqladb |
+-----+
| employees             |
+-----+
1 row in set (0.00 sec)

mysql> INSERT INTO employees VALUES
-> (1, 'John', 'IT', 50000),
-> (2, 'David', 'HR', 45000),
-> (3, 'Sam', 'Finance', 55000),
-> (4, 'Alex', 'Sales', 48000),
-> (5, 'Mike', 'Support', 42000);
Query OK, 5 rows affected (0.02 sec)
Records: 5 Duplicates: 0 Warnings: 0

mysql> SELECT * FROM employees;
+----+-----+-----+-----+
| id | name  | department | salary |
+----+-----+-----+-----+
| 1  | John  | IT         | 50000  |
| 2  | David | HR         | 45000  |
| 3  | Sam   | Finance    | 55000  |
| 4  | Alex  | Sales      | 48000  |
| 5  | Mike  | Support    | 42000  |
+----+-----+-----+-----+
5 rows in set (0.00 sec)

mysql> EXIT;
Bye
[root@ip-172-31-80-235 ~]#
```


7. Launch MySQL RDS image.

Implementation

1. Open AWS Console → RDS.
2. Click Create database.
3. Select Standard create.
4. Select MySQL as the database engine.
5. Select the required MySQL version.
6. Choose the required template.
7. Enter the DB instance identifier.
8. Configure the master username and password.
9. Select the DB instance class.
10. Configure storage.
11. Select the required VPC and DB subnet group.
12. Configure the security group.
13. Allow TCP 3306 from the EC2 security group.
14. Configure backup settings.
15. Click Create database.
16. Wait for the RDS instance to become Available.

17. Copy the RDS endpoint.

18. Test the connection from EC2: `mysql -h <RDS-ENDPOINT> -u <username> -p`.

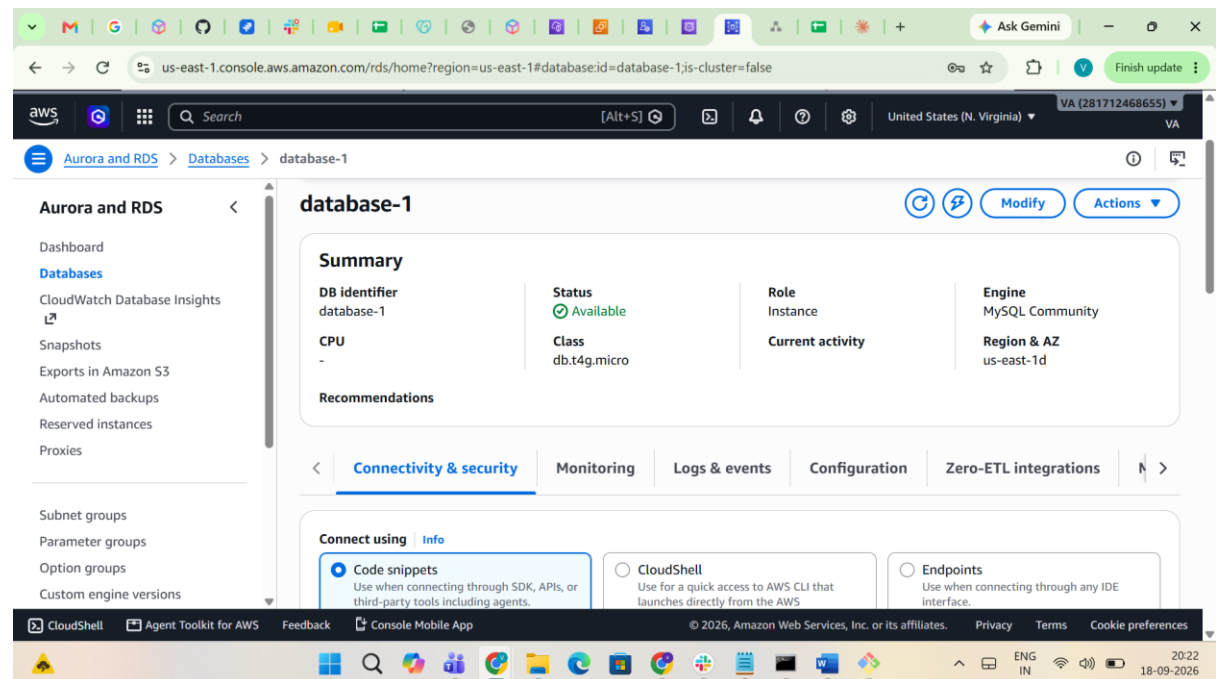

```
[root@ip-172-31-80-235 ~]# mysql -h database-1.cc182oq82u25.us-east-1.rds.amazonaws.com -u admin -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 32
Server version: 8.4.9 Source distribution

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
4 rows in set (0.03 sec)

mysql> CREATE DATABASE ec2mysql1db;
Query OK, 1 row affected (0.03 sec)

mysql> show databases;
+-----+
| Database |
+-----+
| ec2mysql1db |
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
5 rows in set (0.02 sec)
```

```
[root@ip-172-31-80-235 ~]# mysql -h database-1.cc182oq82u25.us-east-1.rds.amazonaws.com -u admin -p ec2mysqldb < ec2mysqldb_backup.sql
Enter password:
[root@ip-172-31-80-235 ~]# mysql -h database-1.cc182oq82u25.us-east-1.rds.amazonaws.com -u admin -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 36
Server version: 8.4.9 Source distribution

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> use ec2mysqldb
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> SELECT * FROM employees;
+----+-----+-----+-----+
| id | name  | department | salary |
+----+-----+-----+-----+
| 1  | John  | IT          | 50000  |
| 2  | David | HR          | 45000  |
| 3  | Sam   | Finance    | 55000  |
| 4  | Alex  | Sales       | 48000  |
| 5  | Mike  | Support     | 42000  |
+----+-----+-----+-----+
5 rows in set (0.00 sec)
```

8. Configure Multi-AZ.

Implementation

1. Open AWS Console → RDS → Databases.
2. Select the MySQL RDS instance.
3. Click Modify.
4. Find Availability & durability.
5. Enable Multi-AZ deployment.
6. Choose the appropriate Multi-AZ configuration offered for the selected RDS engine/version.
7. Choose Apply immediately if this is a lab environment and you want the change applied immediately.
8. Click Modify DB instance.
9. Wait for the modification to complete.
10. Verify the RDS instance shows Multi-AZ: Yes.
11. AWS automatically maintains a standby instance in another Availability Zone.
12. Applications continue using the same RDS endpoint during a supported failover; AWS changes the underlying database endpoint mapping.

9. Take backup of DB and restore the DB.

Implementation

Take RDS backup:

1. Open RDS → Databases.
2. Select the MySQL RDS instance.
3. Click Actions → Create snapshot.
4. Enter a snapshot identifier.

5. Click Create snapshot.
6. Wait until the snapshot status becomes Available.

Restore the database:

7. Go to RDS → Snapshots.
8. Select the snapshot.
9. Click Actions → Restore snapshot.
10. Configure the new DB instance identifier.
11. Select the required instance class, VPC, subnet group and security group.
12. Click Restore DB instance.
13. Wait until the restored DB becomes Available.
14. Copy the new RDS endpoint.
15. Connect from EC2: `mysql -h <RESTORED-RDS-ENDPOINT> -u <username> -p`
16. Verify the restored database and tables:
 - a. `SHOW DATABASES;`
 - b. `USE ec2mysqldb;`
 - c. `SHOW TABLES;`
 - d. `SELECT * FROM employees;`

The screenshot shows the AWS Management Console interface for taking a DB snapshot. The browser address bar shows the URL: `us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#take-snapshots:id=database-1,is-cluster=false`. The console header includes the AWS logo, a search bar, and navigation links for Aurora and RDS. The main heading is 'Take DB Snapshot'. Under the 'Preferences' section, there is a 'DB instance' dropdown menu set to 'database-1' and a 'Snapshot name' text input field containing 'mysql_backup'. A note below the input field states: 'Snapshot identifier is case insensitive, but stored as all lower-case, as in "mysnapshot". Cannot be null, empty, or blank. Must contain from 1 to 255 alphanumeric characters or hyphens. First character must be a letter. Cannot end with a hyphen or contain two consecutive hyphens.' At the bottom right of the form are 'Cancel' and 'Take snapshot' buttons. The footer of the console shows '© 2026, Amazon Web Services, Inc. or its affiliates.' and links for Privacy, Terms, and Cookie preferences. The Windows taskbar at the bottom shows the date as 18-09-2026 and time as 20:35.

us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#db-snapshot:engine=mysql:id=mysql-backup

Aurora and RDS > Snapshots > mysql-backup

mysql-backup

Actions

Details		
ARN arn:aws:rds:us-east-1:281712468655:snapshot:mysql-backup	Option group default:mysql-8-4	VPC vpc-0aecc9dfe9b93edac
Instance/Cluster Name database-1	Zone us-east-1d	Status Available
Master username admin	KMS key ID f447d03a-8da1-4cb6-940c-767c33956b7e	Storage type General Purpose SSD (gp2)
DB snapshot name mysql-backup	Source region N/A	DB storage 20 GiB
Snapshot type manual	Snapshot Creation Time September 18, 2026, 20:36 (UTC+05:30)	IOPS -
DB engine	Original Snapshot Creation Time	Storage throughput 0

CloudShell Agent Toolkit for AWS Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

20:37 18-09-2026

us-east-1.console.aws.amazon.com/rds/home?region=us-east-1#databases:

Aurora and RDS > Databases

Delete database-1 instance

Permanently delete **database-1** DB instance. You can't undo this action.

Proceeding with this action will delete the instance with all its content and can affect related resources. [Learn more](#)

☐ Create final snapshot
Determines whether a final DB Snapshot is created before the DB instance is deleted.

☒ Retain automated backups
Determines whether retaining automated backups for 1 day after deletion

You will be billed for retained backup storage at the rate described as 'Additional backup storage' found in [Backup Storage](#).


To avoid accidental deletion provide additional written consent.

To confirm deletion, type *delete me* into the field.

delete me

Cancel Delete

20:38 18-09-2026

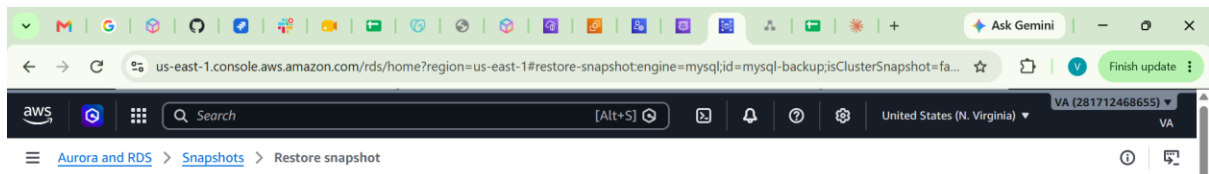

Restore snapshot

You are creating a new DB instance or DB cluster from a snapshot. The default VPC security group and parameter group are selected for the new DB instance or DB cluster, but you can change these settings.

Free plan has access to limited features and resources

The free plan limits the features and resources that are available for RDS and Aurora databases. Upgrade your account plan to remove all limitations. [Learn more](#)

[Upgrade plan](#)

DB instance settings

DB engine

MySQL Community

☐ Enable RDS Extended Support [Info](#)

Amazon RDS Extended Support is a [paid offering](#). By selecting this option, you consent to being charged for this offering if you are running your database major version past the RDS end of standard support date for that version. Check the end of standard support date for your major version in the [RDS for MySQL documentation](#).



Aurora and RDS

Dashboard

Databases

CloudWatch Database Insights

Snapshots

Exports in Amazon S3

Automated backups

Reserved instances

Proxies

Subnet groups

Parameter groups

Option groups

Custom engine versions

restore-db

Summary

DB identifier

restore-db

Status

Available

Role

Instance

Engine

MySQL Community

CPU

8.92%

Class

db.t3.micro

Current activity

0 Connections

Region & AZ

us-east-1c

Recommendations

Storage initialization in progress

Storage initialization is in progress. Your instance is available and functional, but it may experience increased latency. See the Primary storage or Additional storage volumes (if applicable) section on the Configuration tab for status and progress.

[Connectivity & security](#)

[Monitoring](#)

[Logs & events](#)

[Configuration](#)

[Zero-ETL integrations](#)

```
[root@ip-172-31-80-235 ~]# mysql -h restore-db.cc182oq82u25.us-east-1.rds.amazonaws.com -u admin -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 20
Server version: 8.4.9 Source distribution

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show databases;
+-----+
| Database |
+-----+
| ec2mysqldb |
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
5 rows in set (0.02 sec)

mysql> use ec2mysqldb
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> SELECT * FROM employees;
+-----+-----+-----+-----+
| id | name | department | salary |
+-----+-----+-----+-----+
| 1 | John | IT | 50000 |
| 2 | David | HR | 45000 |
| 3 | Sam | Finance | 55000 |
| 4 | Alex | Sales | 48000 |
| 5 | Mike | Support | 42000 |
+-----+-----+-----+-----+
5 rows in set (0.01 sec)
```

10. Create read replica.

Implementation



1. Open AWS Console → RDS → Databases.
2. Select the source MySQL RDS instance.
3. Click Actions → Create read replica.
4. Enter a unique identifier for the read replica.
5. Select the required destination region if creating a cross-region replica.
6. Configure the instance class and storage as required.
7. Configure networking/security groups.
8. Enable Multi-AZ for the read replica if required.
9. Click Create read replica.
10. Wait until the read replica status becomes Available.
11. Copy the read replica endpoint.
12. Connect to the read replica: `mysql -h <READ-REPLICA-ENDPOINT> -u <username> -p`
13. Run read-only queries:

USE ec2mysqldb;

SELECT * FROM employees;

14. Verify the replica is receiving changes from the source database.

15. Use the source RDS for write operations and the read replica primarily for read workloads.

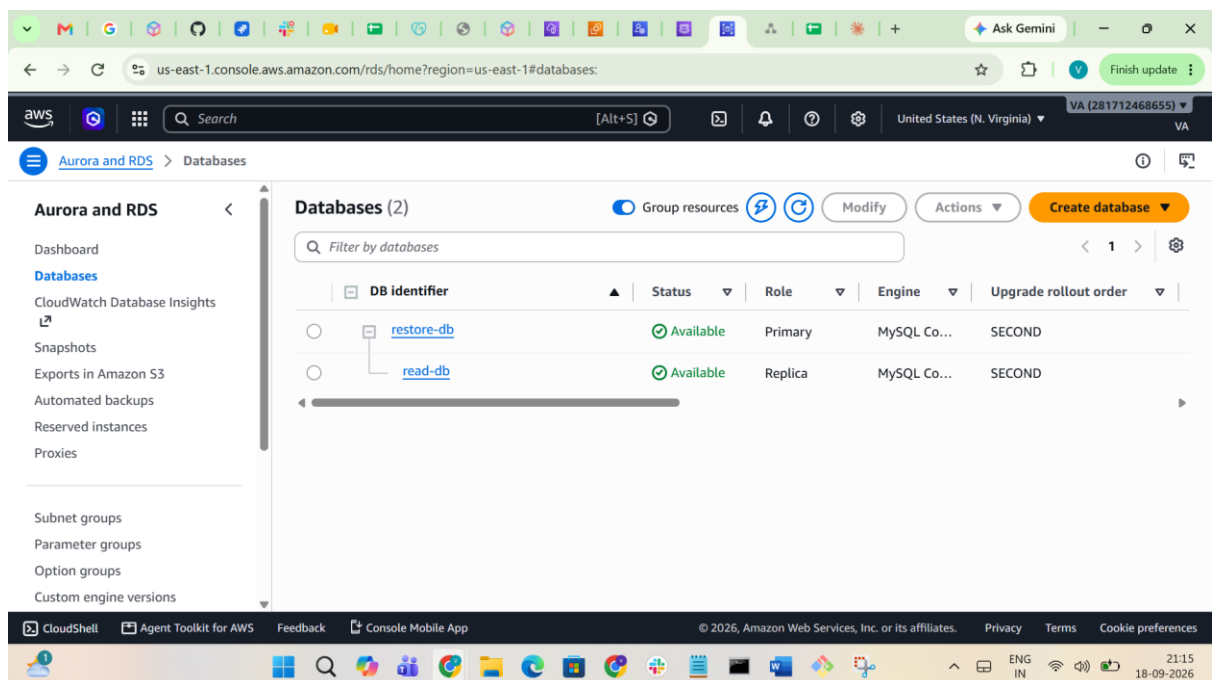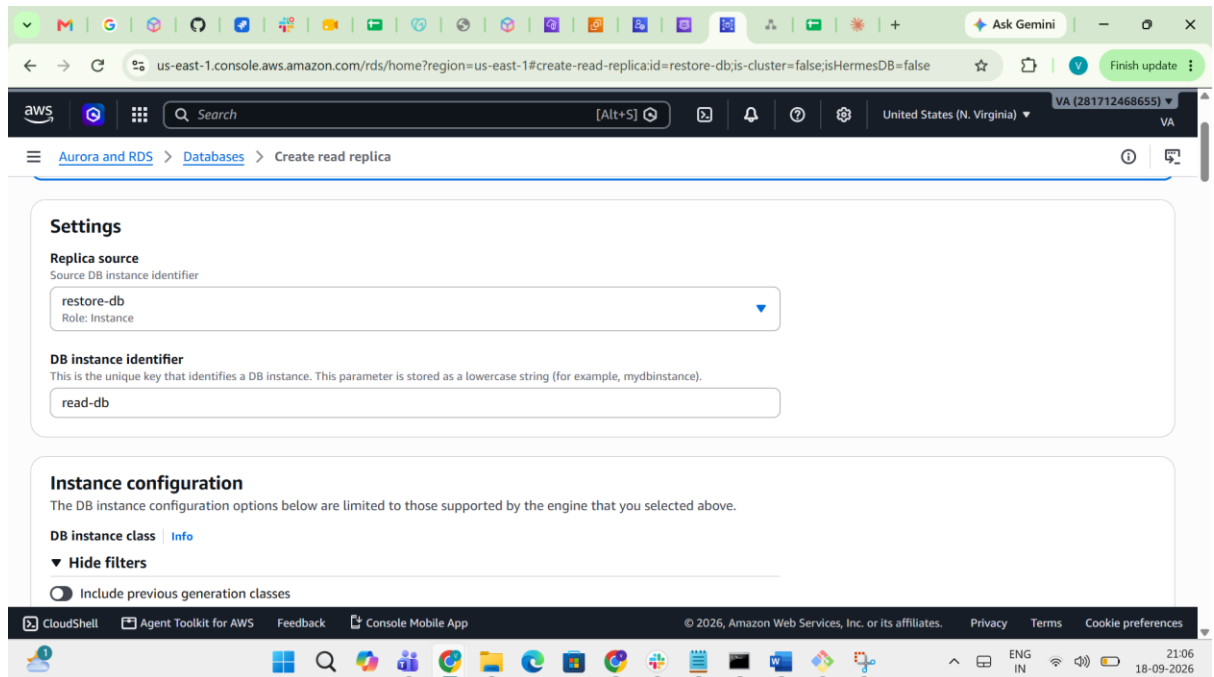


```

bash: $ (?: Command not found
[root@ip-172-31-80-235 ~]# mysql -h read-db.cc182oq82u25.us-east-1.rds.amazonaws.com -u admin -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 22
Server version: 8.4.9 Source distribution

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show databases;
+-----+
| Database |
+-----+
| ec2mysql |
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
1 rows in set (0.02 sec)

mysql> use ec2mysql
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> SELECT * FROM employees;
+----+-----+-----+-----+
| id | name | department | salary |
+----+-----+-----+-----+
| 1 | John | IT | 50000 |
| 2 | David | HR | 45000 |
| 3 | Sam | Finance | 55000 |
| 4 | Alex | Sales | 48000 |
| 5 | Mike | Support | 42000 |
+----+-----+-----+-----+
1 rows in set (0.00 sec)

```