


Linux Basic Commands

Definition


Linux is a free and open-source operating system.

Today I Executed the Following Linux Commands

1. **~ (Tild)** – Represents the current user's home directory.
2. **/** - is always represent root dir.
3. **echo \$0** – Displays the current shell (for example, bash).
4. **pwd** – Displays the present working directory.
5. **ll** – Displays a detailed list of files and directories (alias for ls -l).
6. **ls -ltr** – Lists files and directories in long format, sorted by modification time (oldest first).
7. **mkdir** – Creates a new directory.
8. **touch** – Creates a new empty file or updates the timestamp of an existing file.
9. **vi and nano** – Text editors used to create and edit files.
10. **cat** – Displays the contents of a file and can also be used to create or combine files.
11. **date** – Displays the current system date and time.
12. **cd** – Changes the current working directory.
13. **rm / rm -rf** - Removes files or directories.
14. **cp** – Copies files or directories from one location to another.
15. **mv** – Moves or renames files and directories.
16. **history** – Displays the list of previously executed commands.

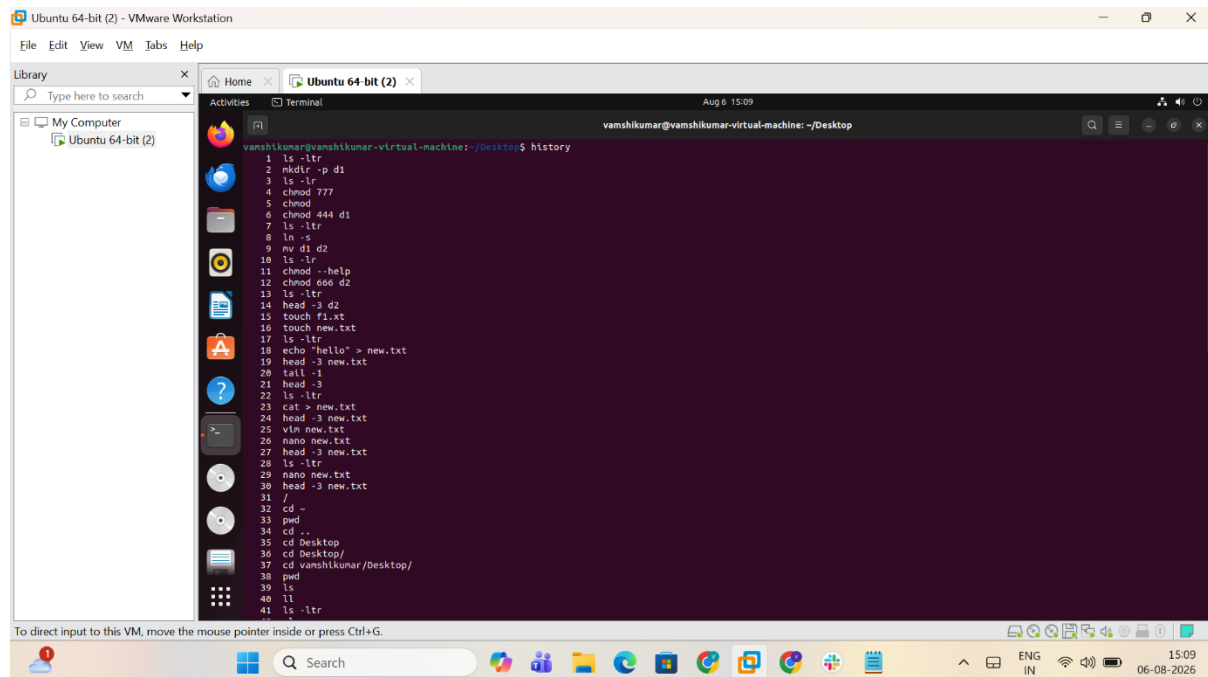

```
vanshikumar@vanshikumar-virtual-machine:~/Desktop$ history
1 ls -ltr
2 mkdir -p d1
3 ls -lr
4 chmod 777
5 chmod
6 chmod 444 d1
7 ls -ltr
8 ln -s
9 mv d1 d2
10 ls -lr
11 chmod --help
12 chmod 666 d2
13 ls -ltr
14 head -3 d2
15 touch f1.txt
16 touch new.txt
17 ls -ltr
18 echo "hello" > new.txt
19 head -3 new.txt
20 tail -1
21 head -3
22 ls -ltr
23 cat > new.txt
24 head -3 new.txt
25 vi new.txt
26 nano new.txt
27 head -3 new.txt
28 ls -ltr
29 nano new.txt
30 head -3 new.txt
31 /
32 cd ~
33 pwd
34 cd ..
35 cd Desktop
36 cd Desktop/
37 cd vanshikumar/Desktop/
38 pwd
39 ls
40 ll
41 ls -ltr
```

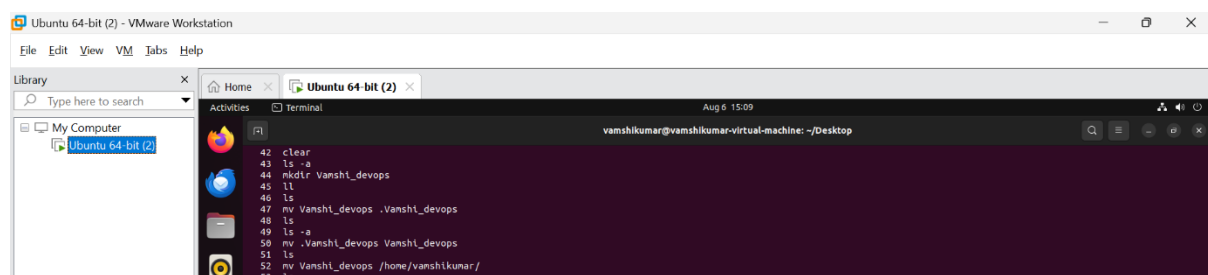

```
42 clear
43 ls -a
44 mkdir Vanshi_devops
45 ll
46 ls
47 mv Vanshi_devops .Vanshi_devops
48 ls
49 ls -a
50 mv .Vanshi_devops Vanshi_devops
51 ls
52 mv Vanshi_devops /home/vanshikumar/
53 ls
```

