




Task on s3

1. Create an S3 bucket and upload some objects to S3.

Implementation

1. Log in to the AWS Management Console.
2. Open S3 → General purpose buckets.
3. Click Create bucket.
4. Enter a globally unique bucket name, for example: my-devops-demo-bucket-2026
5. Select the required AWS Region.
6. Keep Block all public access enabled unless public access is specifically required.
7. Keep Bucket Versioning disabled for this basic task.
8. Click Create bucket.
9. Open the newly created bucket.
10. Click Upload.
11. Click Add files or Add folder.
12. Select the required files.
13. Click Upload.
14. Verify that the uploaded objects are visible under the Objects tab.

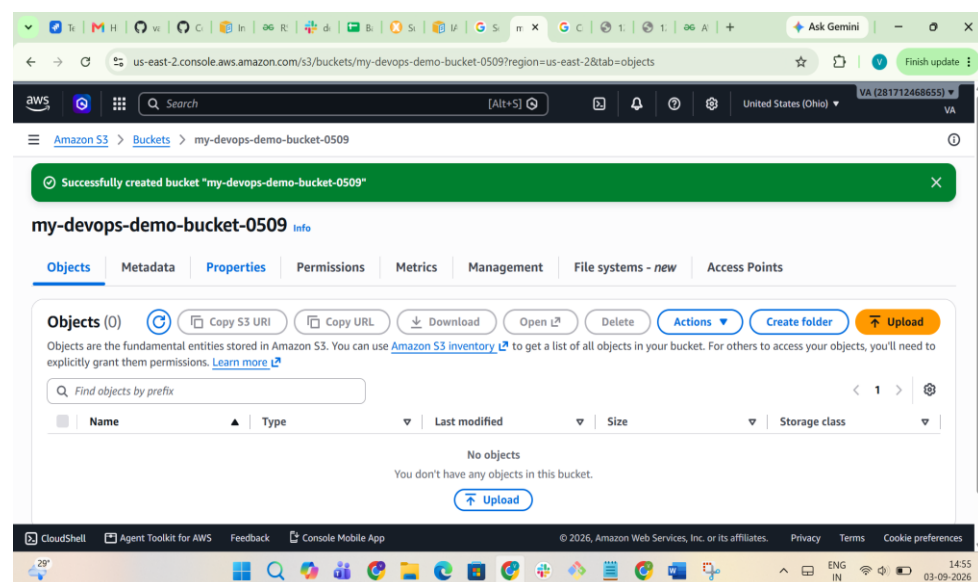

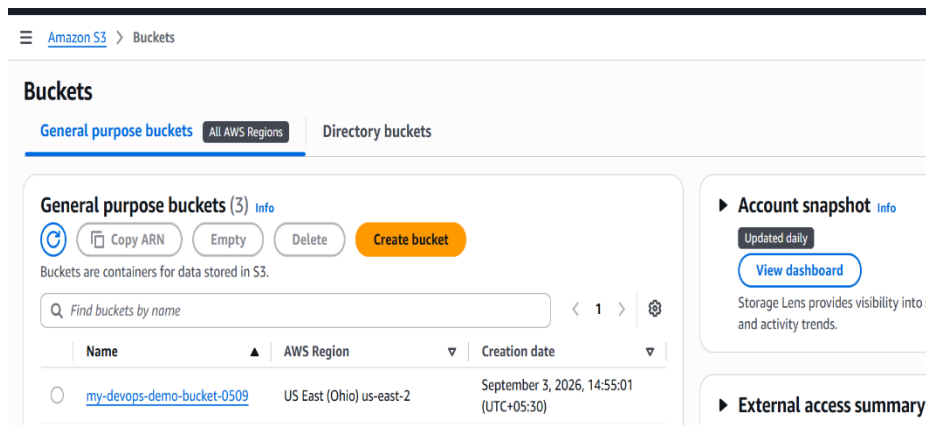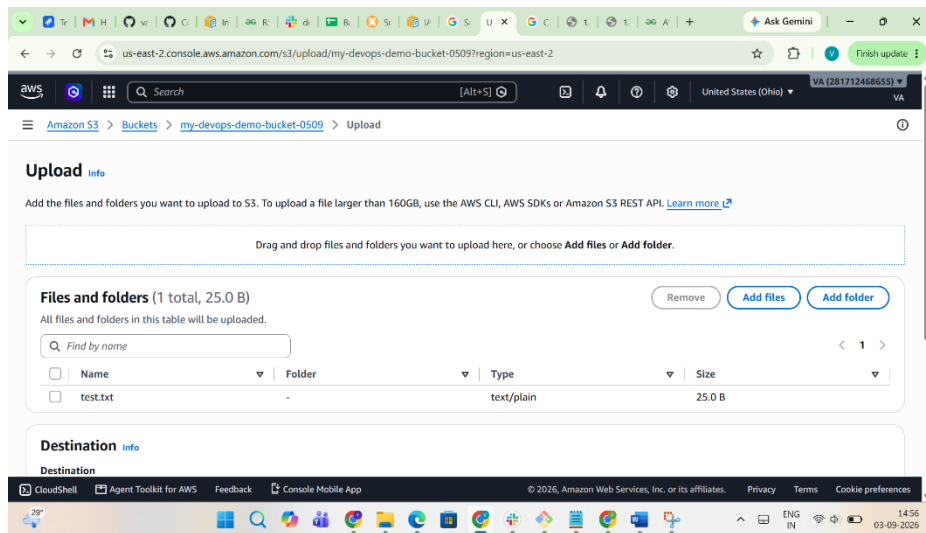

2. Deploy a static website in the S3 bucket.



Implementation




1. Create an S3 bucket.
2. Upload the website files, for example:
index.html
error.html
style.css
3. Open the bucket.
4. Go to Properties.
5. Find Static website hosting.
6. Click Edit.
7. Enable Static website hosting.

8. Select Host a static website.
9. Enter:

Index document: index.html

Error document: error.html
10. Save the changes.
11. Go to the bucket's Permissions.
12. Configure the required public-access settings if you intend to expose the website directly through the S3 website endpoint.
13. Add an appropriate bucket policy that allows s3:GetObject for the website objects.
14. Return to Properties → Static website hosting.
15. Copy the Bucket website endpoint.
16. Open the endpoint in a browser.
17. Verify that the static website is displayed.

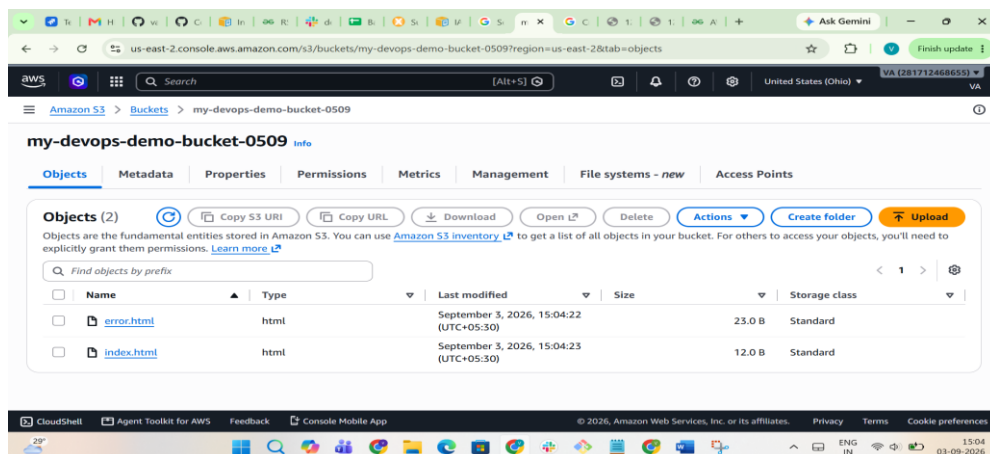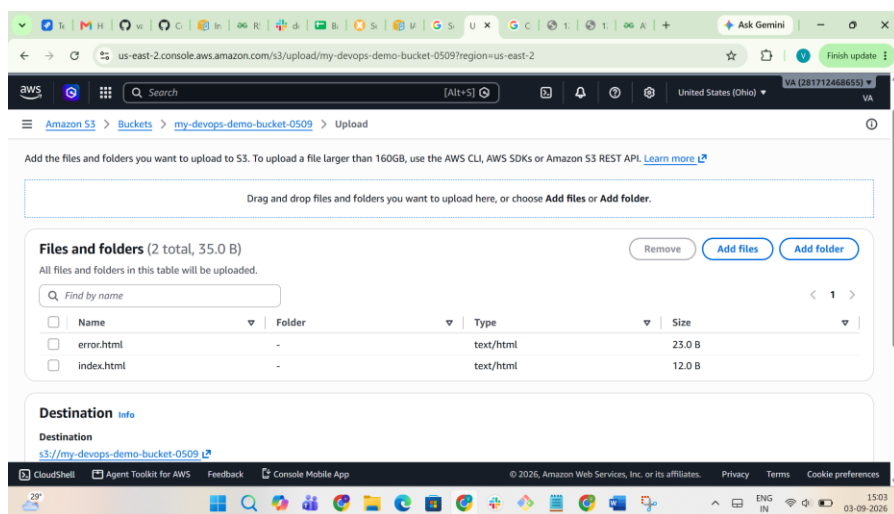

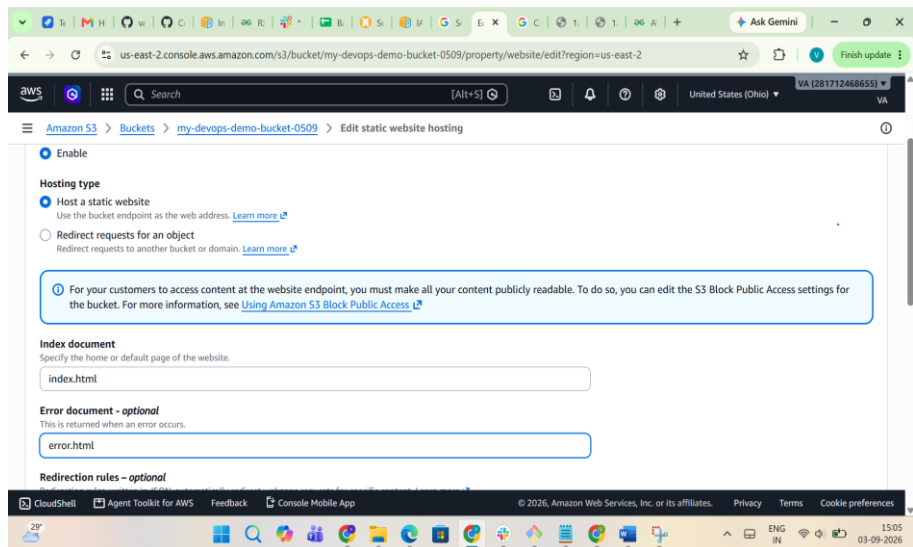

3. Enable cross-region replication on S3 buckets.

Implementation

1. Create a source S3 bucket in Region 1.
2. Create a destination S3 bucket in a different AWS Region.
3. Enable Versioning on both buckets.
4. Open the source bucket.
5. Go to Management → Replication rules.
6. Click Create replication rule.

7. Enter a rule name, for example:

CrossRegionReplication

8. Choose whether the rule applies to:

- All objects, or
- Objects matching a specific prefix/tags.

9. Select the destination bucket in the other Region.

10. Allow AWS to create/use the required IAM replication role.

11. Save the replication rule.

12. Upload a new object to the source bucket.

13. Open the destination bucket.

14. Verify that the object has been replicated.

15. Test by uploading additional objects and confirming they appear in the destination bucket.

Amazon S3 > Buckets

General purpose buckets (4) Info

  Copy ARN  Empty  Delete  Create bucket

Buckets are containers for data stored in S3.

Find buckets by name

	Name	AWS Region	Creation date
☐	my-devops-demo-bucket-0509	US East (Ohio) us-east-2	September 3, 2026, 14:55:01 (UTC+05:30)
☐	my-devops-demo-bucket-0509-rep	US East (N. Virginia) us-east-1	September 3, 2026, 15:15:09 (UTC+05:30)

us-east-2.console.aws.amazon.com/s3/management/my-devops-demo-bucket-0509/replication/create?region=us-east-2

Amazon S3 > Buckets > my-devops-demo-bucket-0509 > Replication rules > Create replication rule

Source bucket name
my-devops-demo-bucket-0509

Source Region
US East (Ohio) us-east-2

Choose a rule scope
☐ Limit the scope of this rule using one or more filters
☒ Apply to all objects in the bucket

Destination
You can replicate objects across buckets in different AWS Regions (Cross-Region Replication) or you can replicate objects across buckets in the same AWS Region (Same-Region Replication). You can also specify a different bucket for each rule in the configuration. [Learn more](#) or see [Amazon S3 pricing](#).

Choose a bucket in this account
☒ Choose a bucket in this account
☐ Specify a bucket in another account

Bucket name
Choose the bucket that will receive replicated objects.
my-devops-demo-bucket-0509-rep 

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

15:19 03-09-2026

us-east-2.console.aws.amazon.com/s3/management/my-devops-demo-bucket-0509/replication?region=us-east-2

Search[Alt+S]

United States (Ohio)VA (281712468655)VA

Amazon S3> Buckets> my-devops-demo-bucket-0509> Replication rules

Replication rules (1)

View detailsEdit ruleDeleteActionsCreate replication rule

Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. Replication also includes any annotations attached to your objects. [Learn more](#)

Replication rule name	Status	Destination bucket	Destination Region	Priority	Scope	Storage class	Replica owner	Replication Time Control	KMS-encrypted objects (SSE-KMS or DSSE-KMS)
CrossRegionReplication	Enabled	s3://my-devops-demo-bucket-0509-rep	US East (N. Virginia) us-east-1	0	Entire bucket	Same as source	Same as source	Disabled	Do not replicate

CloudShellAgent Toolkit for AWSFeedbackConsole Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. PrivacyTermsCookie preferences

29°FENG IN15:2003-09-2026

us-east-2.console.aws.amazon.com/s3/buckets/my-devops-demo-bucket-0509?region=us-east-2&tab=objects

Search[Alt+S]

United States (Ohio)VA (281712468655)VA

Amazon S3> Buckets> my-devops-demo-bucket-0509

my-devops-demo-bucket-0509

info

ObjectsMetadataPropertiesPermissionsMetricsManagementFile systems - newAccess Points

Objects (1)

Copy S3 URICopy URLDownloadOpen>DeleteActionsCreate folderUpload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefixShow versions

Name	Type	Last modified	Size	Storage class
test.txt	txt	September 3, 2026, 15:22:06 (UTC+05:30)	25.0 B	Standard

https://docs.aws.amazon.com/console/s3/inventoryFeedbackConsole Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. PrivacyTermsCookie preferences

29°FENG IN15:2203-09-2026

us-east-1.console.aws.amazon.com/s3/buckets/my-devops-demo-bucket-0509-rep?region=us-east-1&tab=objects

Search[Alt+S]

United States (N. Virginia)VA (281712468655)VA

Amazon S3> Buckets> my-devops-demo-bucket-0509-rep

my-devops-demo-bucket-0509-rep

info

ObjectsMetadataPropertiesPermissionsMetricsManagementFile systems - newAccess Points

Objects (1)

Copy S3 URICopy URLDownloadOpen>DeleteActionsCreate folderUpload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)



Find objects by prefixShow versions

Name	Type	Last modified	Size	Storage class
test.txt	txt	September 3, 2026, 15:22:06 (UTC+05:30)	25.0 B	Standard

CloudShellAgent Toolkit for AWSFeedbackConsole Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. PrivacyTermsCookie preferences

29°FENG IN15:2203-09-2026

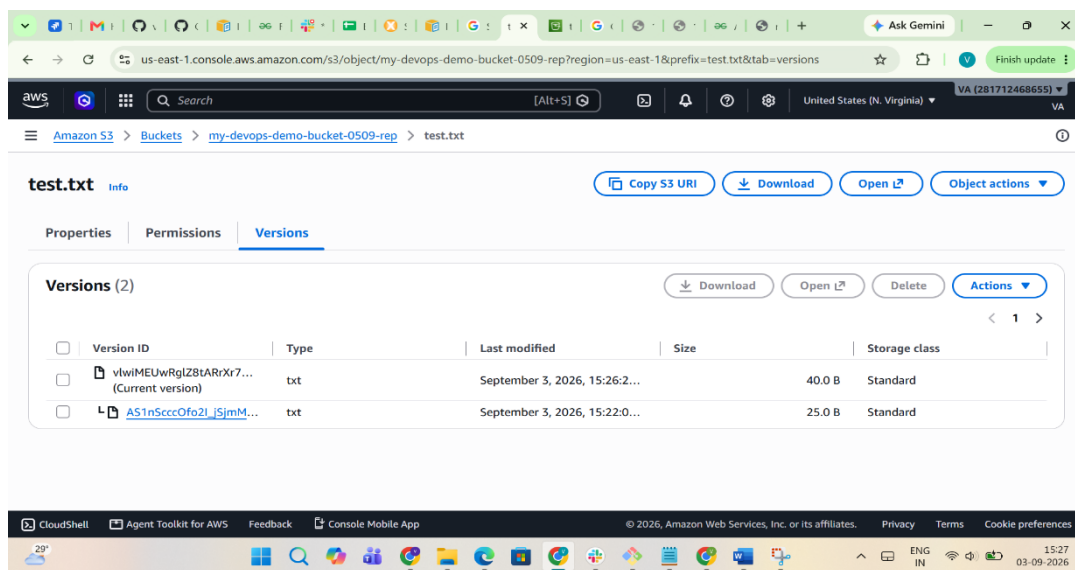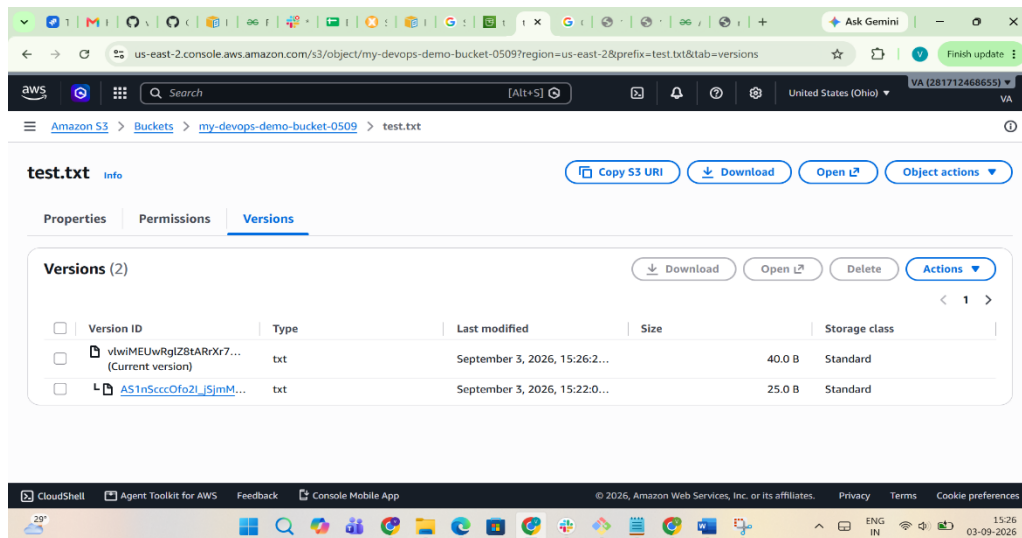

4. Configure a bucket policy so only the Admin user can see the objects of the S3 bucket.

Implementation

1. Create an S3 bucket.
2. Open the S3 bucket.
3. Go to Permissions → Bucket policy.
4. Add a bucket policy that allows the root user's ARN to access the bucket.
5. Restrict access to the required actions such as:
 - s3:ListBucket
 - s3:GetObject

6. Specify the root user's ARN in the Principal field.
7. Save the bucket policy.
8. Test using the root user.
9. Verify that the root user can list and read the objects.
10. Test with another user and verify that access is denied.

Example:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "DenyIAMUsersFromBucket",
      "Effect": "Deny",
      "Principal": "*",
      "Action": [
        "s3:ListBucket",
        "s3:GetObject",
        "s3:PutObject",
        "s3:DeleteObject"
      ],
      "Resource": [
        "arn:aws:s3:::my-devops-demo0509",
        "arn:aws:s3:::my-devops-demo0509/*"
      ],
      "Condition": {
        "ArnLike": {
          "aws:PrincipalArn": "arn:aws:iam::ACCOUNT_ID:user/*"
        }
      }
    }
  ]
}
```

}

us-east-2.console.aws.amazon.com/s3/bucket/my-devops-demo0509/property/policy/edit?region=us-east-2

Amazon S3 > Buckets > my-devops-demo0509 > Edit bucket policy

Policy JSON:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "DenyIAMUsersFromBucket",
      "Effect": "Deny",
      "Principal": "*",
      "Action": [
        "s3:ListBucket",
        "s3:GetObject",
        "s3:PutObject",
        "s3:DeleteObject"
      ],
      "Resource": [
        "arn:aws:s3:::my-devops-demo0509",
        "arn:aws:s3:::my-devops-demo0509/*"
      ],
      "Condition": {
        "ArnLike": {
          "aws:PrincipalArn": "arn:aws:iam::281712468655:user/*"
        }
      }
    }
  ]
}
```

Left Statement: DenyIAMUsersFromBucket

Add actions

Choose a service

Search services

Included: S3

Available: AI Operations, AMP, API Gateway, API Gateway V2, ARC Region switch, ARC Zonal Shift, AWS

us-east-2.console.aws.amazon.com/s3/buckets/my-devops-demo0509?region=us-east-2&tab=objects

Amazon S3 > Buckets > my-devops-demo0509

my-devops-demo0509 info

Objects (1)

Copy S3 URI, Copy URL, Download, Open, Delete, Actions

Create folder, Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Name	Type	Last modified	Size	Storage class
test.txt	txt	September 3, 2026, 15:41:05 (UTC+05:30)	40.0 B	Standard

us-east-2.console.aws.amazon.com/s3/buckets?region=us-east-2

Amazon S3 > Buckets


Buckets

General purpose buckets (3) info

Buckets are containers for data stored in S3.

Find buckets by name

Name	AWS Region	Creation date
my-devops-demo0509	US East (Ohio) us-east-2	September 3, 2026, 15:40:50 (UTC+05:30)
my-vpc-endpoint-test-281712468655	US East (Ohio) us-east-2	August 31, 2026, 17:21:32 (UTC+05:30)
s3-flow-log-1234	US East (N. Virginia) us-east-1	August 31, 2026, 06:00:15 (UTC+05:30)

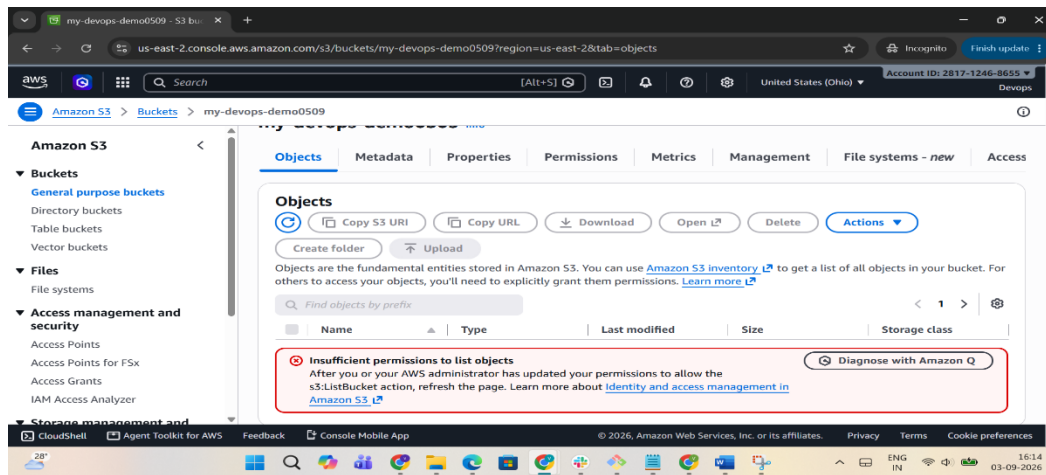

5. Set up lifecycle policies to automatically transition or delete objects based on specific criteria.

Implementation

1. Open the S3 bucket.
2. Go to Management.
3. Select Lifecycle rules.
4. Click Create lifecycle rule.
5. Enter a rule name, for example: ArchiveOldObjects
6. Choose whether the rule applies to all objects or a specific prefix/tags.
7. Configure a Transition action.
8. For example, move objects to S3 Standard-IA after 30 days.
9. Add another transition if required, such as moving objects to S3 Glacier Flexible Retrieval after 90 days.
10. Configure an Expiration action if objects should be automatically deleted.
11. For example: Delete objects after 365 days
12. Review the lifecycle rule.
13. Click Create rule.
14. Verify the rule under Management → Lifecycle rules.

6. Push some objects to S3 using the AWS CLI.

Implementation

1. Install the AWS CLI.
2. Configure AWS CLI: `aws configure`
3. Enter:

 AWS Access Key ID


 AWS Secret Access Key

4. Default region
5. Output format
6. Verify AWS CLI access: `aws sts get-caller-identity`
7. List existing S3 buckets: `aws s3 ls`
8. Upload a file: `aws s3 cp test.txt s3://my-devops-demo0509/`
9. Verify the uploaded object: `aws s3 ls s3://my-devops-demo0509/`
10. Verify the objects in the bucket.

```
root@ip-172-31-47-43 ~]# aws configure
AWS Access Key ID [None]: AKIAUDF27EKXSGHOVPZE
AWS Secret Access Key [None]: r3cewl/fTx7O93kQ
default region name [None]: us-east-2
default output format [None]: json
root@ip-172-31-47-43 ~]# aws sts get-caller-identity

{"UserId": "281712468655",
 "Account": "281712468655",
 "Arn": "arn:aws:iam::281712468655:root"}
```

```
[root@ip-172-31-47-43 ~]# aws s3 ls
2026-09-03 11:05:37 my-devops-demo0509
2026-08-31 11:51:34 my-vpc-endpoint-test-281712468655
2026-08-31 00:35:04 s3-flow-log-1234
[root@ip-172-31-47-43 ~]# touch demo.txt
[root@ip-172-31-47-43 ~]#
[root@ip-172-31-47-43 ~]# aws s3 cp demo.txt s3://my-devops-demo0509/
upload: ./demo.txt to s3://my-devops-demo0509/demo.txt
[root@ip-172-31-47-43 ~]#
[root@ip-172-31-47-43 ~]# aws s3 ls s3://my-devops-demo0509/
2026-09-03 11:37:56          0 demo.txt
2026-09-03 10:11:05        40 test.txt
[root@ip-172-31-47-43 ~]#
```

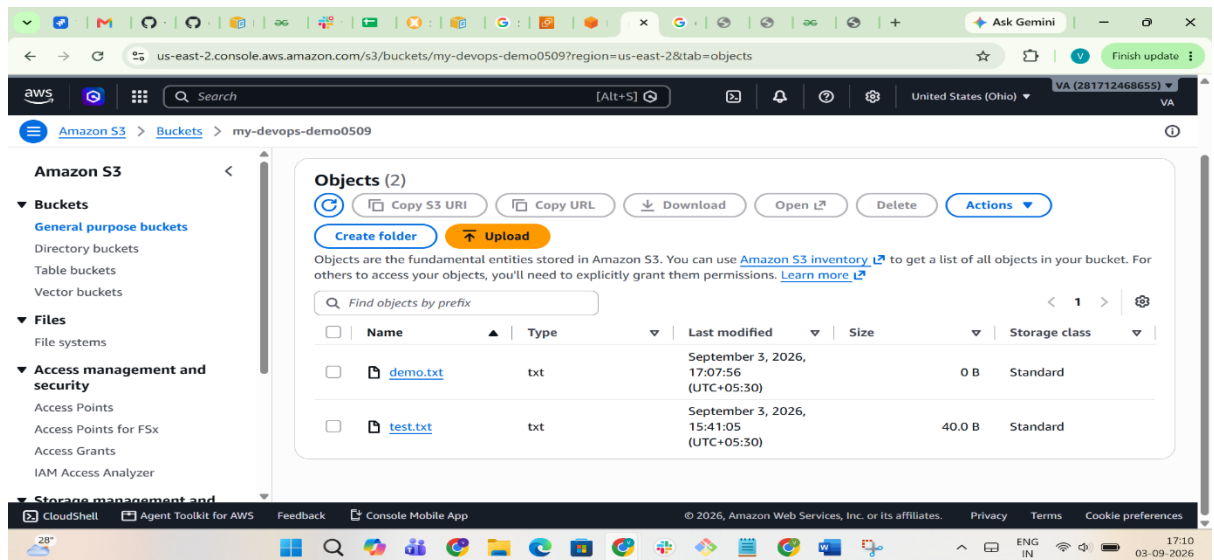

7. Write a Bash script to create an S3 bucket.

Implementation

1. Install and configure AWS CLI.
2. Create a file: vi create-s3-bucket.sh
3. Add the following script:

```
#!/bin/bash
```

```
BUCKET_NAME="my-devops-demo-bucket-20260509"
```

```
REGION="ap-south-1"
```

```
aws s3api create-bucket \
```

```
--bucket "$BUCKET_NAME" \
```

```
--region "$REGION" \
```

```
--create-bucket-configuration LocationConstraint="$REGION"
```

```
if [ $? -eq 0 ]; then
```

```
    echo "S3 bucket $BUCKET_NAME created successfully."
```

```
else
```

```
    echo "Failed to create S3 bucket."
```

```
    exit 1
```

```
fi
```

4. Save the file.
5. Give execute permission: `chmod +x create-s3-bucket.sh`
6. Run the script: `./create-s3-bucket.sh`
7. Verify the bucket: `aws s3 ls`
8. Confirm that the bucket appears in the S3 bucket list.


```
root@ip-172-31-39-67 ec2-user]# aws sts get-caller-identity
{
  "UserId": "AIDAUDF27EKXZWWGBRBTZ",
  "Account": "281712468655",
  "Arn": "arn:aws:iam::281712468655:user/Test-user"
}

root@ip-172-31-39-67 ec2-user]# vi create-s3-bucket.sh
root@ip-172-31-39-67 ec2-user]# cat create-s3-bucket.sh
#!/bin/bash
BUCKET_NAME="my-devops-demo-bucket-20260509"
REGION="ap-south-1"
aws s3api create-bucket \
  --bucket "$BUCKET_NAME" \
  --region "$REGION" \
  --create-bucket-configuration LocationConstraint="$REGION"

if [ $? -eq 0 ]; then
  echo "S3 bucket $BUCKET_NAME created successfully."
else
  echo "Failed to create S3 bucket."
  exit 1
fi

root@ip-172-31-39-67 ec2-user]#
```

```
[root@ip-172-31-39-67 ec2-user]# chmod +x create-s3-bucket.sh
[root@ip-172-31-39-67 ec2-user]# ./create-s3-bucket.sh
{
  "Location": "http://my-devops-demo-bucket-20260509.s3.amazonaws.com/",
  "BucketArn": "arn:aws:s3:::my-devops-demo-bucket-20260509"
}
S3 bucket my-devops-demo-bucket-20260509 created successfully.
[root@ip-172-31-39-67 ec2-user]# aws s3 ls
2026-09-03 12:12:44 account-b-devops-bucket-0509
2026-09-03 15:14:07 my-devops-demo-bucket-20260509
2026-09-03 11:05:37 my-devops-demo0509
2026-08-31 11:51:34 my-vpc-endpoint-test-281712468655
2026-08-31 00:35:04 s3-flow-log-1234
[root@ip-172-31-39-67 ec2-user]#
```

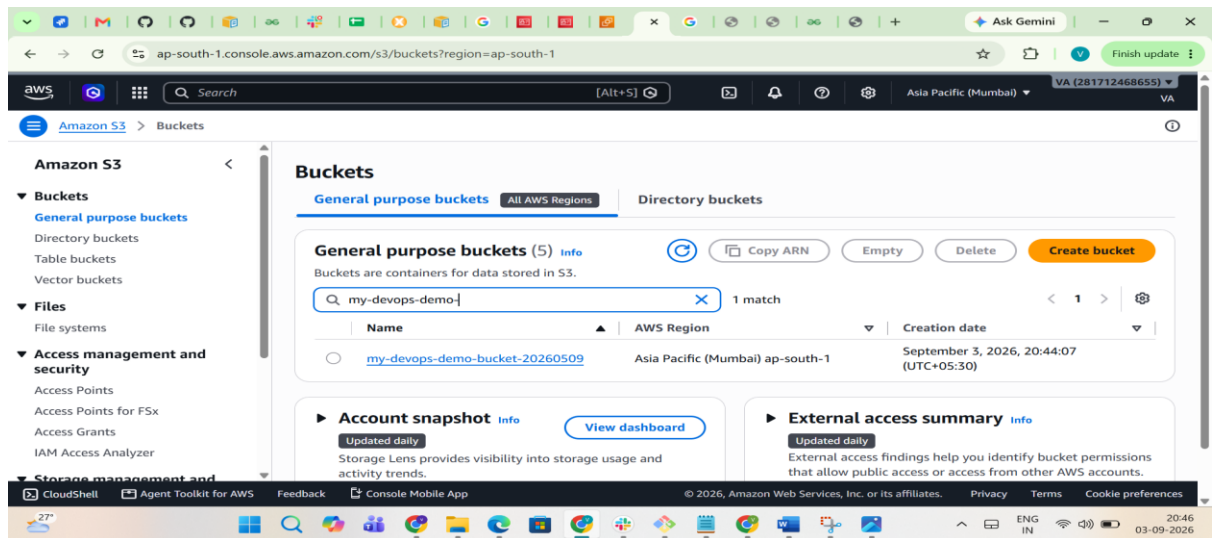

8. Upload a 1 GB file to S3 using the CLI.

Implementation

1. Make sure the AWS CLI is installed and configured.
2. Verify your credentials: `aws sts get-caller-identity`
3. Confirm that the destination S3 bucket exists: `aws s3 ls`
4. Create or obtain a 1 GB test file.
5. Verify the file size: `ls -lh 1gb.txt`
6. Upload the file using: `aws s3 cp 1gb.txt s3:// my-devops-demo-bucket-20260509/`
7. AWS CLI/S3 can use multipart upload for large objects as appropriate.
8. Verify the upload: `aws s3 ls s3:// my-devops-demo-bucket-20260509/`
9. Check the object's size:

```
aws s3api head-object \
    --bucket my-devops-demo-bucket-20260509 \
    --key 1gb.txt
```
10. Verify that the reported ContentLength corresponds to approximately 1 GB.

```

91738@IDEAPAD MINGW64 ~/Downloads
$ aws configure

Tip: You can deliver temporary credentials to the AWS CLI using your AWS Console
session by running the command 'aws login'.

AWS Access Key ID [None]: AKIAUDF27EKXW3WBKWE
AWS Secret Access Key [None]: J/DV+CHIYzm+gHYayKly8ZsIWIJ6ntmR6IedDwXu
Default region name [None]: ap-south-1
Default output format [None]: json

91738@IDEAPAD MINGW64 ~/Downloads
$ aws sts get-caller-identity
{
  "UserId": "AIDAUDF27EKXZWGGBRBTZ",
  "Account": "281712468655",
  "Arn": "arn:aws:iam::281712468655:user/Test-user"
}

91738@IDEAPAD MINGW64 ~/Downloads
$ ls -lh lgb.txt
ls: cannot access 'lgb.txt': No such file or directory

91738@IDEAPAD MINGW64 ~/Downloads
$ ls -lh lgb.txt
-rw-r--r-- 1 91738 197609 1.1G Sep  3 21:18 lgb.txt

91738@IDEAPAD MINGW64 ~/Downloads
$ aws s3 ls
2026-09-03 17:42:44 account-b-devops-bucket-0509
2026-09-03 20:44:07 my-devops-demo-bucket-20260509
2026-09-03 16:35:37 my-devops-demo0509
2026-08-31 17:21:34 my-vpc-endpoint-test-281712468655
2026-08-31 06:05:04 s3-flow-log-1234

```

```

91738@IDEAPAD MINGW64 ~/Downloads
$ aws s3 cp lgb.txt s3://my-devops-demo-bucket-20260509/
upload: .\lgb.txt to s3://my-devops-demo-bucket-20260509/lgb.txt

91738@IDEAPAD MINGW64 ~/Downloads
$ aws s3 ls s3://my-devops-demo-bucket-20260509/
2026-09-03 22:14:31 1099741824 lgb.txt

91738@IDEAPAD MINGW64 ~/Downloads
$ xtaws s3api head-object \
> --bucket my-devops-demo-bucket-20260509 \
> --key lgb.txt
{
  "AcceptRanges": "bytes",
  "LastModified": "2026-09-03T16:44:31+00:00",
  "ContentLength": 1099741824,
  "ETag": "\"8d8a32aa33fe208ef1034b92edec91d2-132\"",
  "ContentType": "text/plain",
  "ServerSideEncryption": "AES256",
  "Metadata": {}
}

```

