


HTML


CSS

JS


Structure/layout

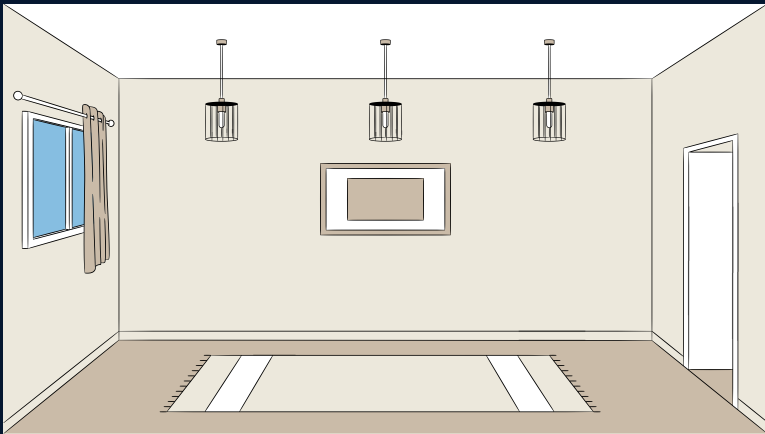

Style



Logic

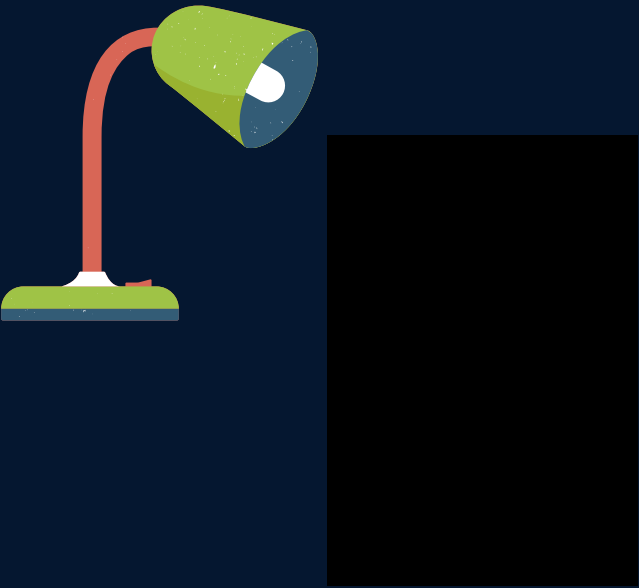

Level 1



APNA
COLLEGE


CSS

Cascading Style Sheet

*It is a language that is used to describe the **style** of a document.*

APNA
COLLEGE

Basic Syntax

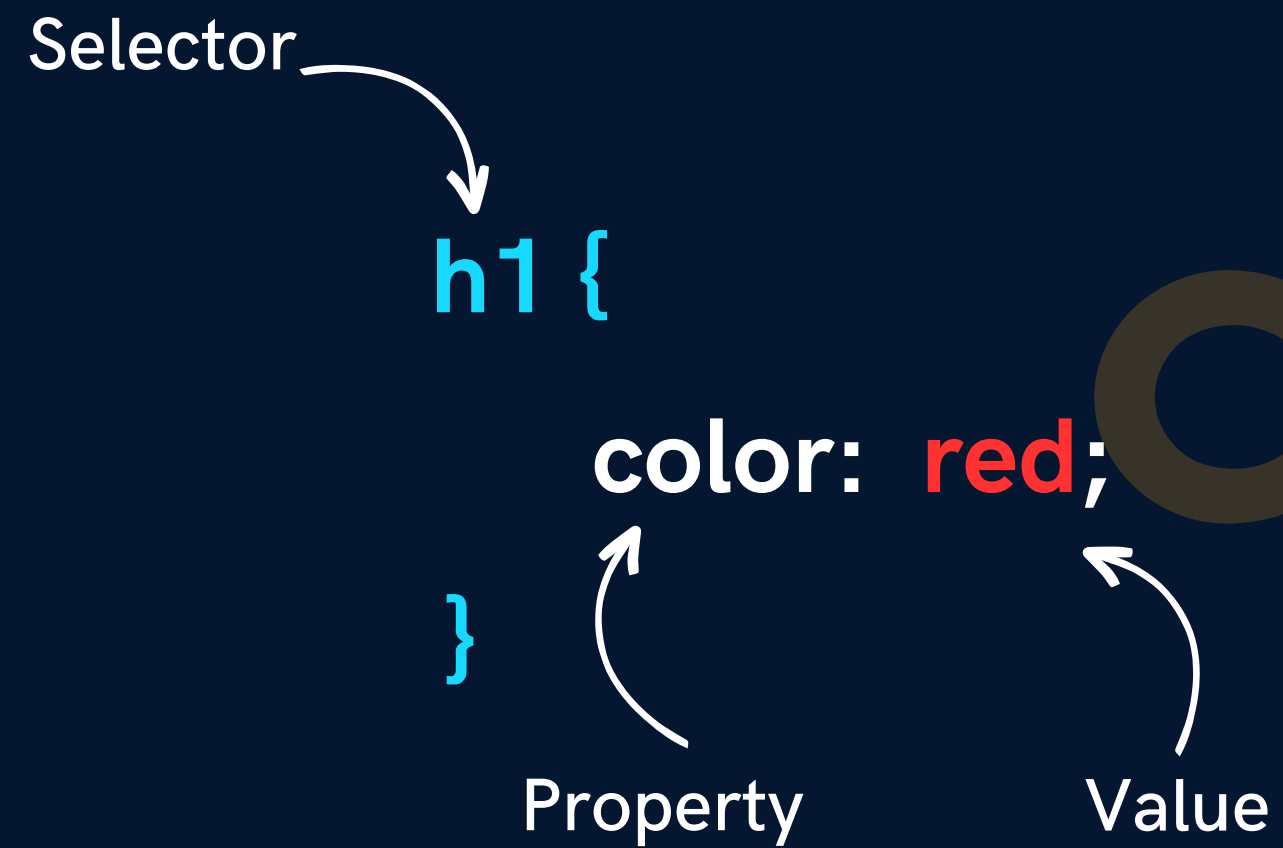

Including Style

- Inline

```
<h1 style="color: red"> Apna College </h1>
```

- <style> tag

```
<style>  
  h1 {  
    color : red;  
  }  
</style>
```


Including Style

- External Stylesheet

Writing CSS in a separate document & linking it with HTML file

Color Property

Used to set the color of foreground

color: red;

color: pink;

color: blue;

color: green;

APNA
COLLEGE

Background Color Property

*Used to set the color of **background***

background-color: **red**;

background-color: **pink**;

background-color: **blue**;

background-color: **green**;

Color Systems

- RGB

color: `rgb(255, 0, 0);`

color: `rgb(0, 255, 0);`



APNA
COLLEGE



Color Systems



- Hex (Hexadecimal)

color: **#ff0000**;

color: **#00ff00**;

APNA
COLLEGE

Selectors

- Universal Selector

```
* { }
```

- Element Selector

```
h1 { }
```

- Id Selector

```
#myId { }
```

- Class Selector

```
.myClass { }
```

APNA
COLLEGE

Practice Set 1

Q1: Create a simple div with an id "box".

Add some text content inside the div.

Set its background color to blue.

Q2: Create 3 headings with h1, h2 & h3.

Give them all a class "heading" & set color of "heading" to red.

Q3: Create a button & set its background color to :

- green using css stylesheet
- blue using <style> tag
- pink using inline style

Text Properties

text-align

text-align : left / right / center

APNA
COLLEGE

Text Properties

text-decoration

text-decoration : underline / overline / line-through

Text Properties

font-weight

font-weight : normal / bold / bolder / lighter

font-weight : 100-900

APNA
COLLEGE

Text Properties

font-family

font-family : arial

font-family : arial, roboto

APNA
COLLEGE

APNA COLLEGE

Units in CSS

Absolute

pixels (px)

96px = 1 inch

font-size: 2px;

APNA
COLLEGE

Text Properties

line-height

line-height : 2px

line-height : 3

line-height : normal

APNA
COLLEGE

Text Properties

text-transform

text-transform : uppercase / lowercase / capitalize / none

Practice Set 2

Q1: Create a heading centred on the page with all of its text capitalized by default.

Q2: Set the font family of all the content in the document to "Times New Roman".

Q3: Create one div inside another div.

Set id & text "outer" for the first one & "inner" for the second one.

Set the outer div text size to 25px & inner div text size to 10px.


Level 2



APNA
COLLEGE

Box Model in CSS

- Height
- Width
- Border
- Padding
- Margin

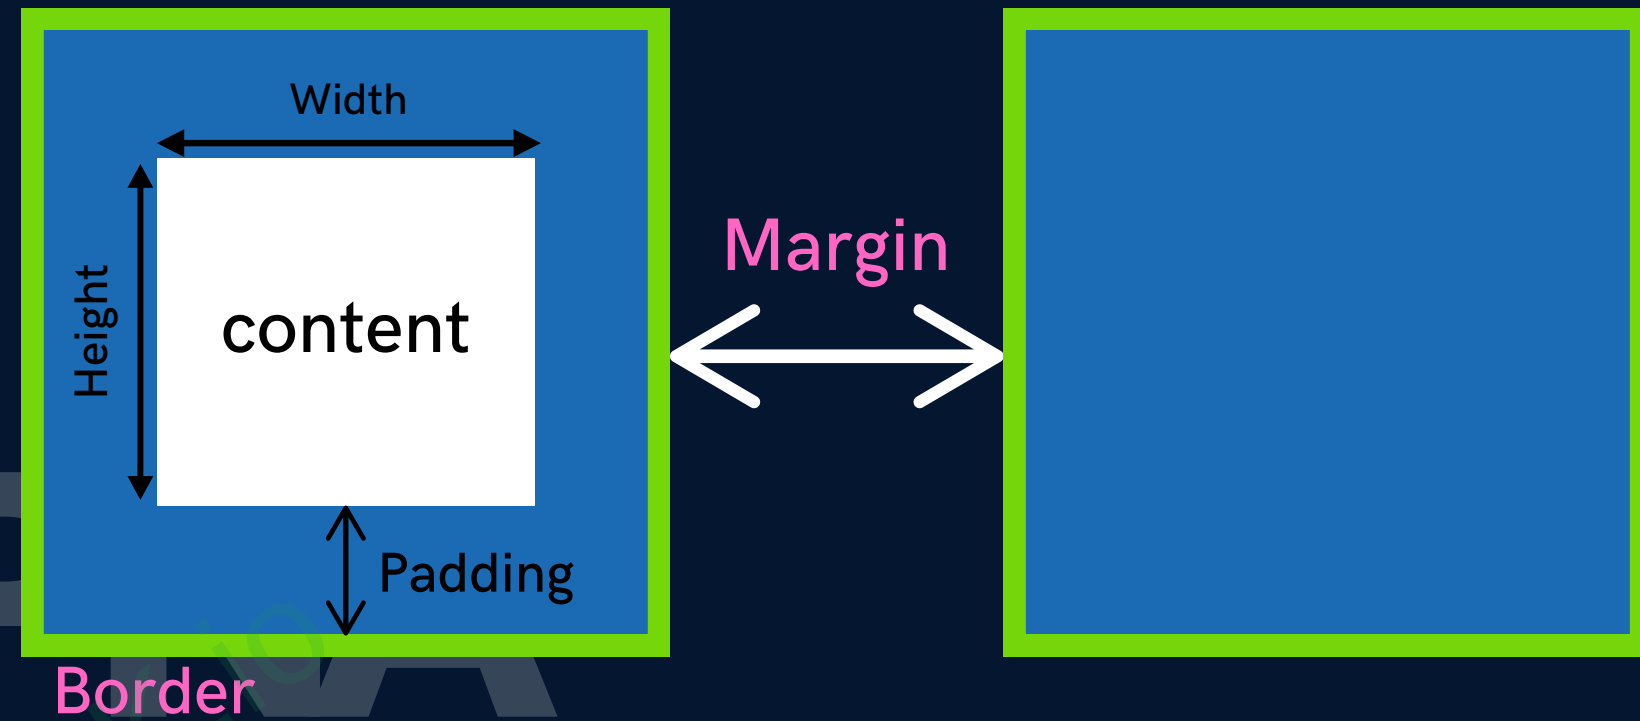


Height

By default, it sets the content area **height** of the element

```
div {
```

```
    height: 50px;
```

```
}
```

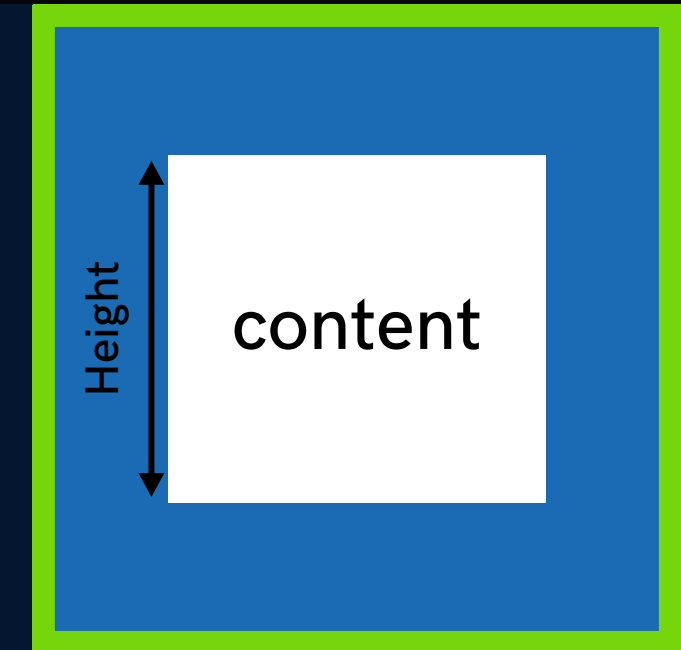


Width

By default, it sets the content area **width** of the element

```
div {
```

```
  width: 50px;
```

```
}
```

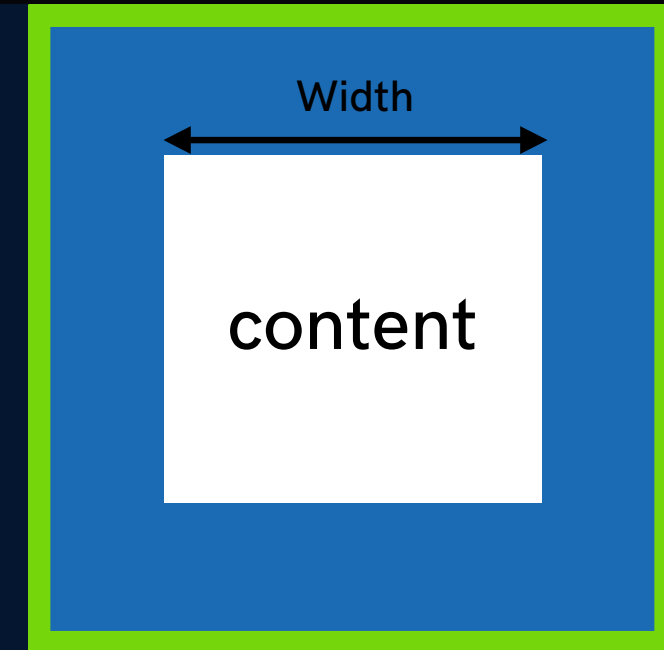


Border

Used to set an element's **border**

border-width : 2px;

border-style : solid / dotted / dashed

border-color : black;

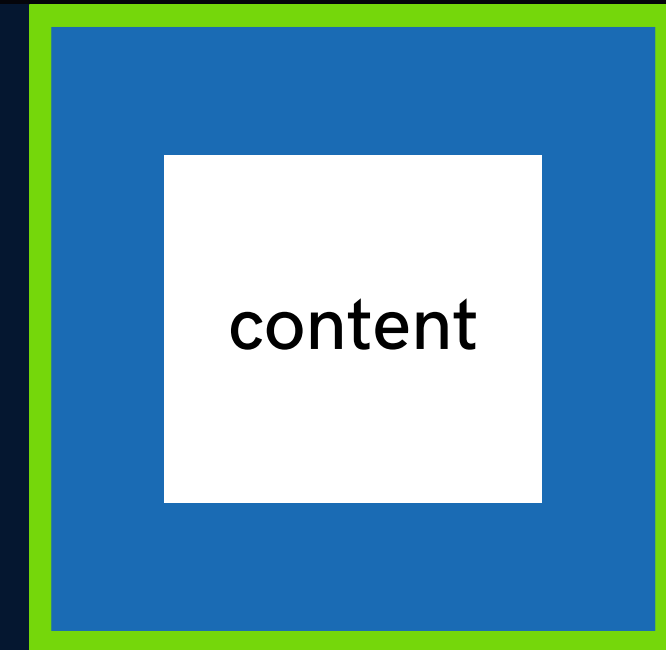

Border

Border

Shorthand

border : 2px solid black;

APNA
COLLEGE

Border


Used to **round the corners** of an element's outer border edge

border-radius : 10px;

border-radius : 50%;

Padding

- padding-left
- padding-right
- padding-top
- padding-bottom

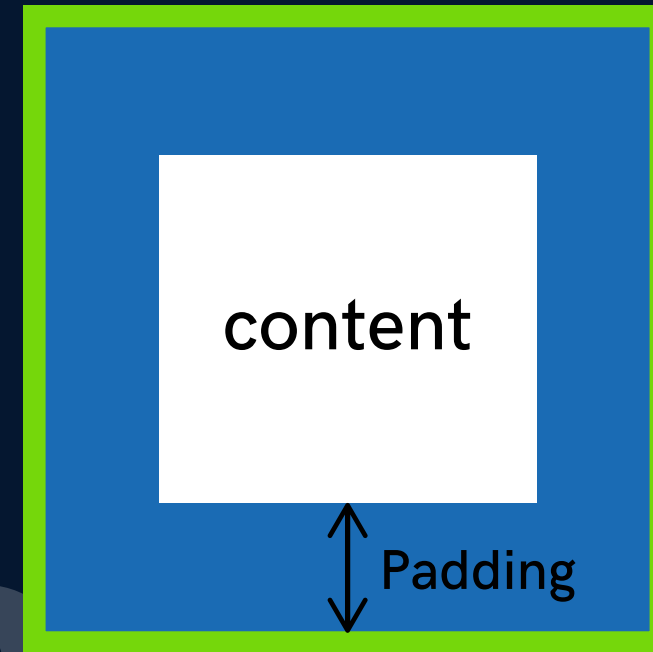

APNNA
COLLEGE

Padding

Shorthand


padding: 50px;

padding: 1px 2px 3px 4px;

top | right | bottom | left -> clockwise

Margin

- margin-right
- margin-left
- margin-top
- margin-bottom

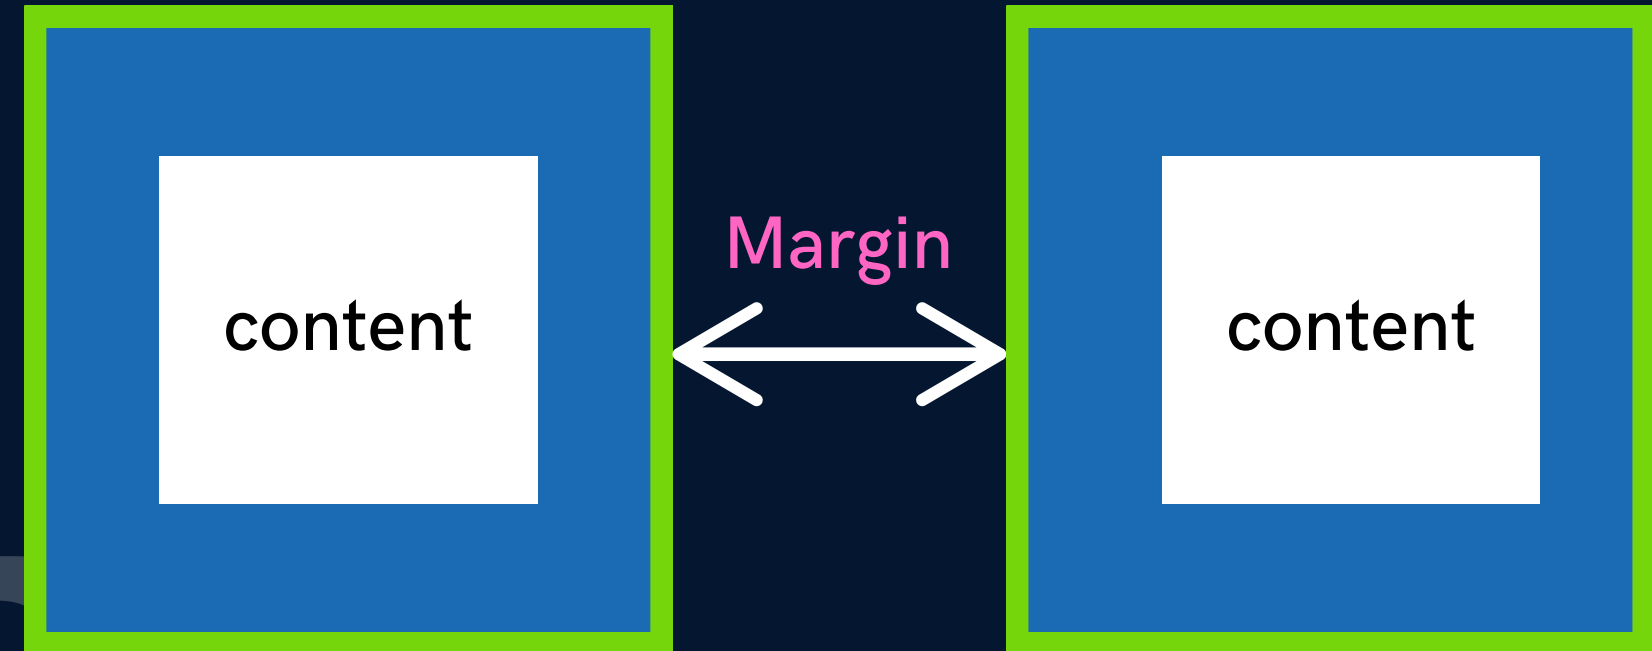

Margin


Shorthand

margin: 50px;

margin: 1px 2px 3px 4px;


top | right | bottom | left -> clockwise


Practice Set 3



Q1: Create a div with height & width of 100px.
Set its background color to green & the border radius to 50%.

Q2: Create the following navbar.

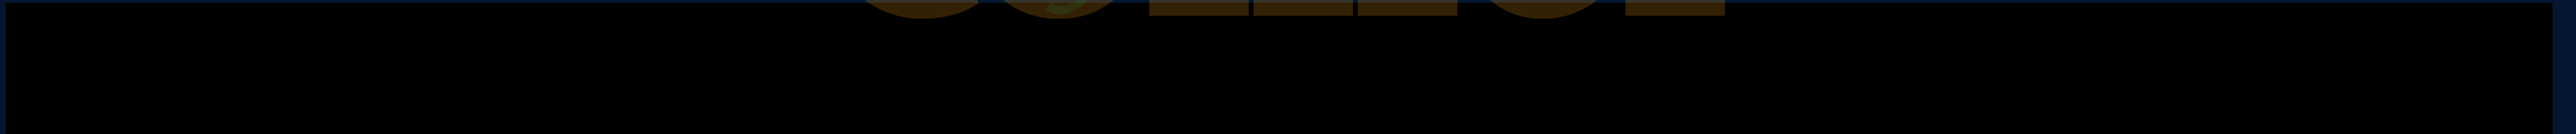

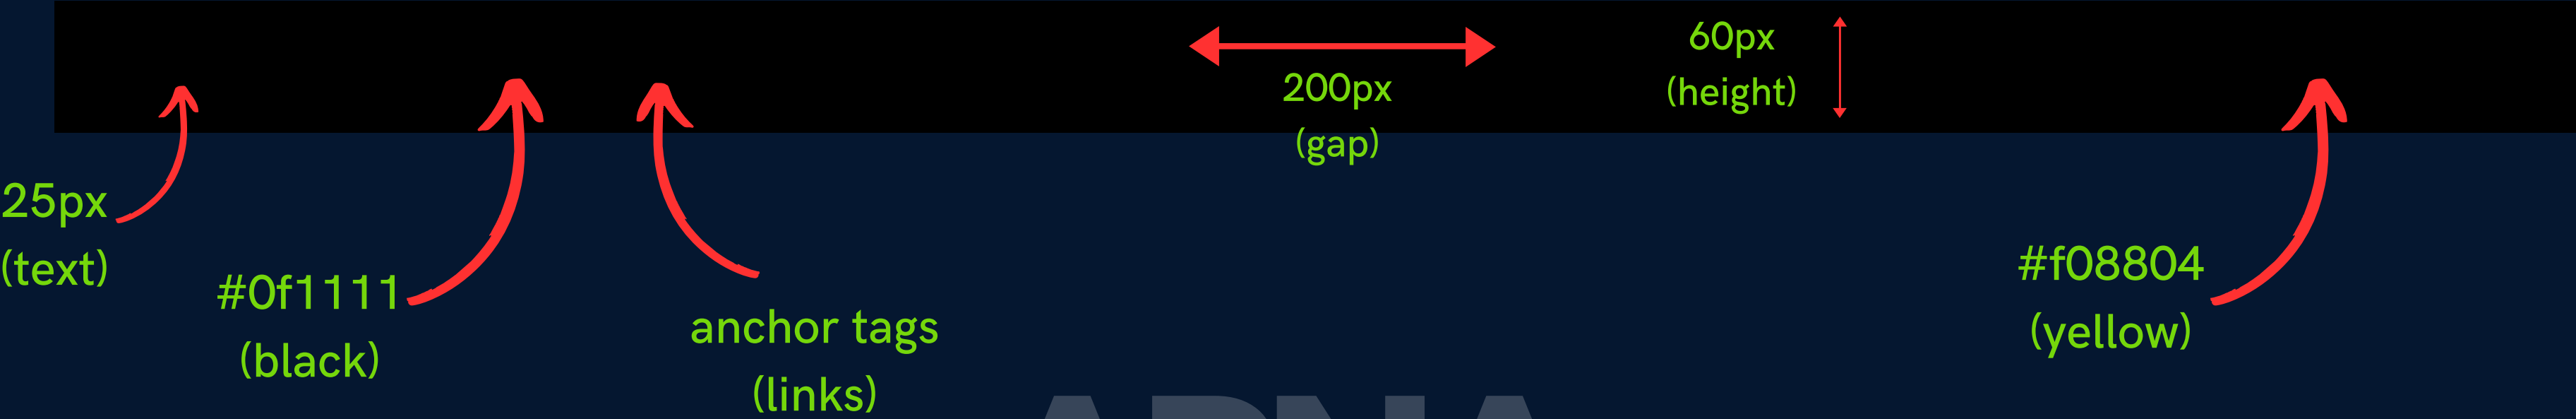

APNA
COLLEGE

Display Property

display: inline / block / inline-block / none

- **inline** - Takes only the space required by the element. (no margin/ padding)
- **block** - Takes full space available in width.
- **inline-block** - Similar to inline but we can set margin & padding.
- **none** - To remove element from document flow.

Visibility

visibility: hidden;

APNA
COLLEGE

Note : When visibility is set to none, space for the element is reserved.

But for display set to none, no space is reserved or blocked for the element.

Alpha Channel

opacity (0 to 1)

- **RGBA**


color: `rgba(255, 0, 0, 0.5);`

color: `rgba(255, 0, 0, 1);`

Practice Set 4

- Q1: Create a webpage layout with a header, a footer & a content area containing 3 divs.
Set the height & width of divs to 100px.
(add the previous navbar in the header)
- Q2: Add borders to all the divs.
- Q3: Add a different background color to each div with an opacity of 0.5
- Q4: Give the content area an appropriate height.

Level 3

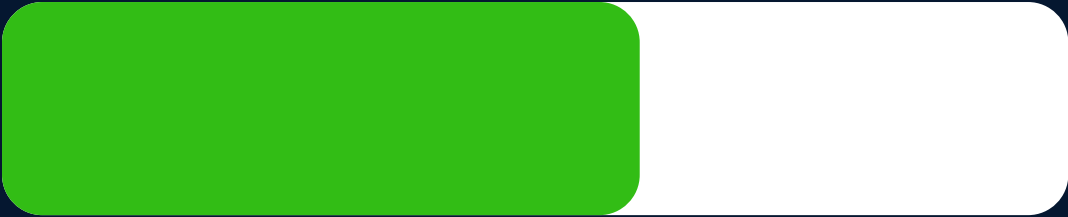

APNA
COLLEGE

Units in CSS

Relative

%

em

rem

APNA
COLLEGE

Percentage (%)


It is often used to define a **size as relative to an element's parent object**.

width : 33% ;

margin-left : 50% ;


APNA
COLLEGE

Em



COLLEGE

Rem (Root Em)



COLLEGE

Others

vh: relative to 1% viewport height

vw : relative to 1% viewport width

APNA
COLLEGE

Position

The position CSS property sets **how an element is positioned** in a document.

position : static / relative / absolute / fixed

APNIA
COLLEGE

Position

- **static** - default position (The top, right, bottom, left, and z-index properties have no effect)
- **relative** - element is relative to itself. (The top, right, bottom, left, and z-index will work)
- **absolute** - positioned relative to its closest positioned ancestor. (removed from the flow)
- **fixed** - positioned relative to browser. (removed from flow)
- **sticky** - positioned based on user's scroll position

z-index

It decides the **stack level** of elements

Overlapping elements with a larger z-index cover those with a smaller one.

z-index : auto (0)

z-index : 1 / 2 / ...

z-index : -1 / -2 / ...

APNA
COLLEGE

Background Image

Used to set an image as background

```
background-image : url("image.jpeg");
```


Background Size

background-size : cover / contain / auto

Practice Set 5

Qs: Create the following layout using the given html.

- Give the div a height, width & some background image.
- Use the appropriate position property for the div element to place it at the right end of the page. (The div should not move even on scroll)
- Use z-index to place the div on top of page.

```
<p> lorem*5 </p>
```

```
<div> Love Nature </div>
```

```
<p> lorem*5 </p>
```

Level 4



APNA
COLLEGE


Flexbox

Flexible Box Layout

It is a one-dimensional layout method for arranging items in rows or columns.

APNIA
COLLEGE

The Flex Model

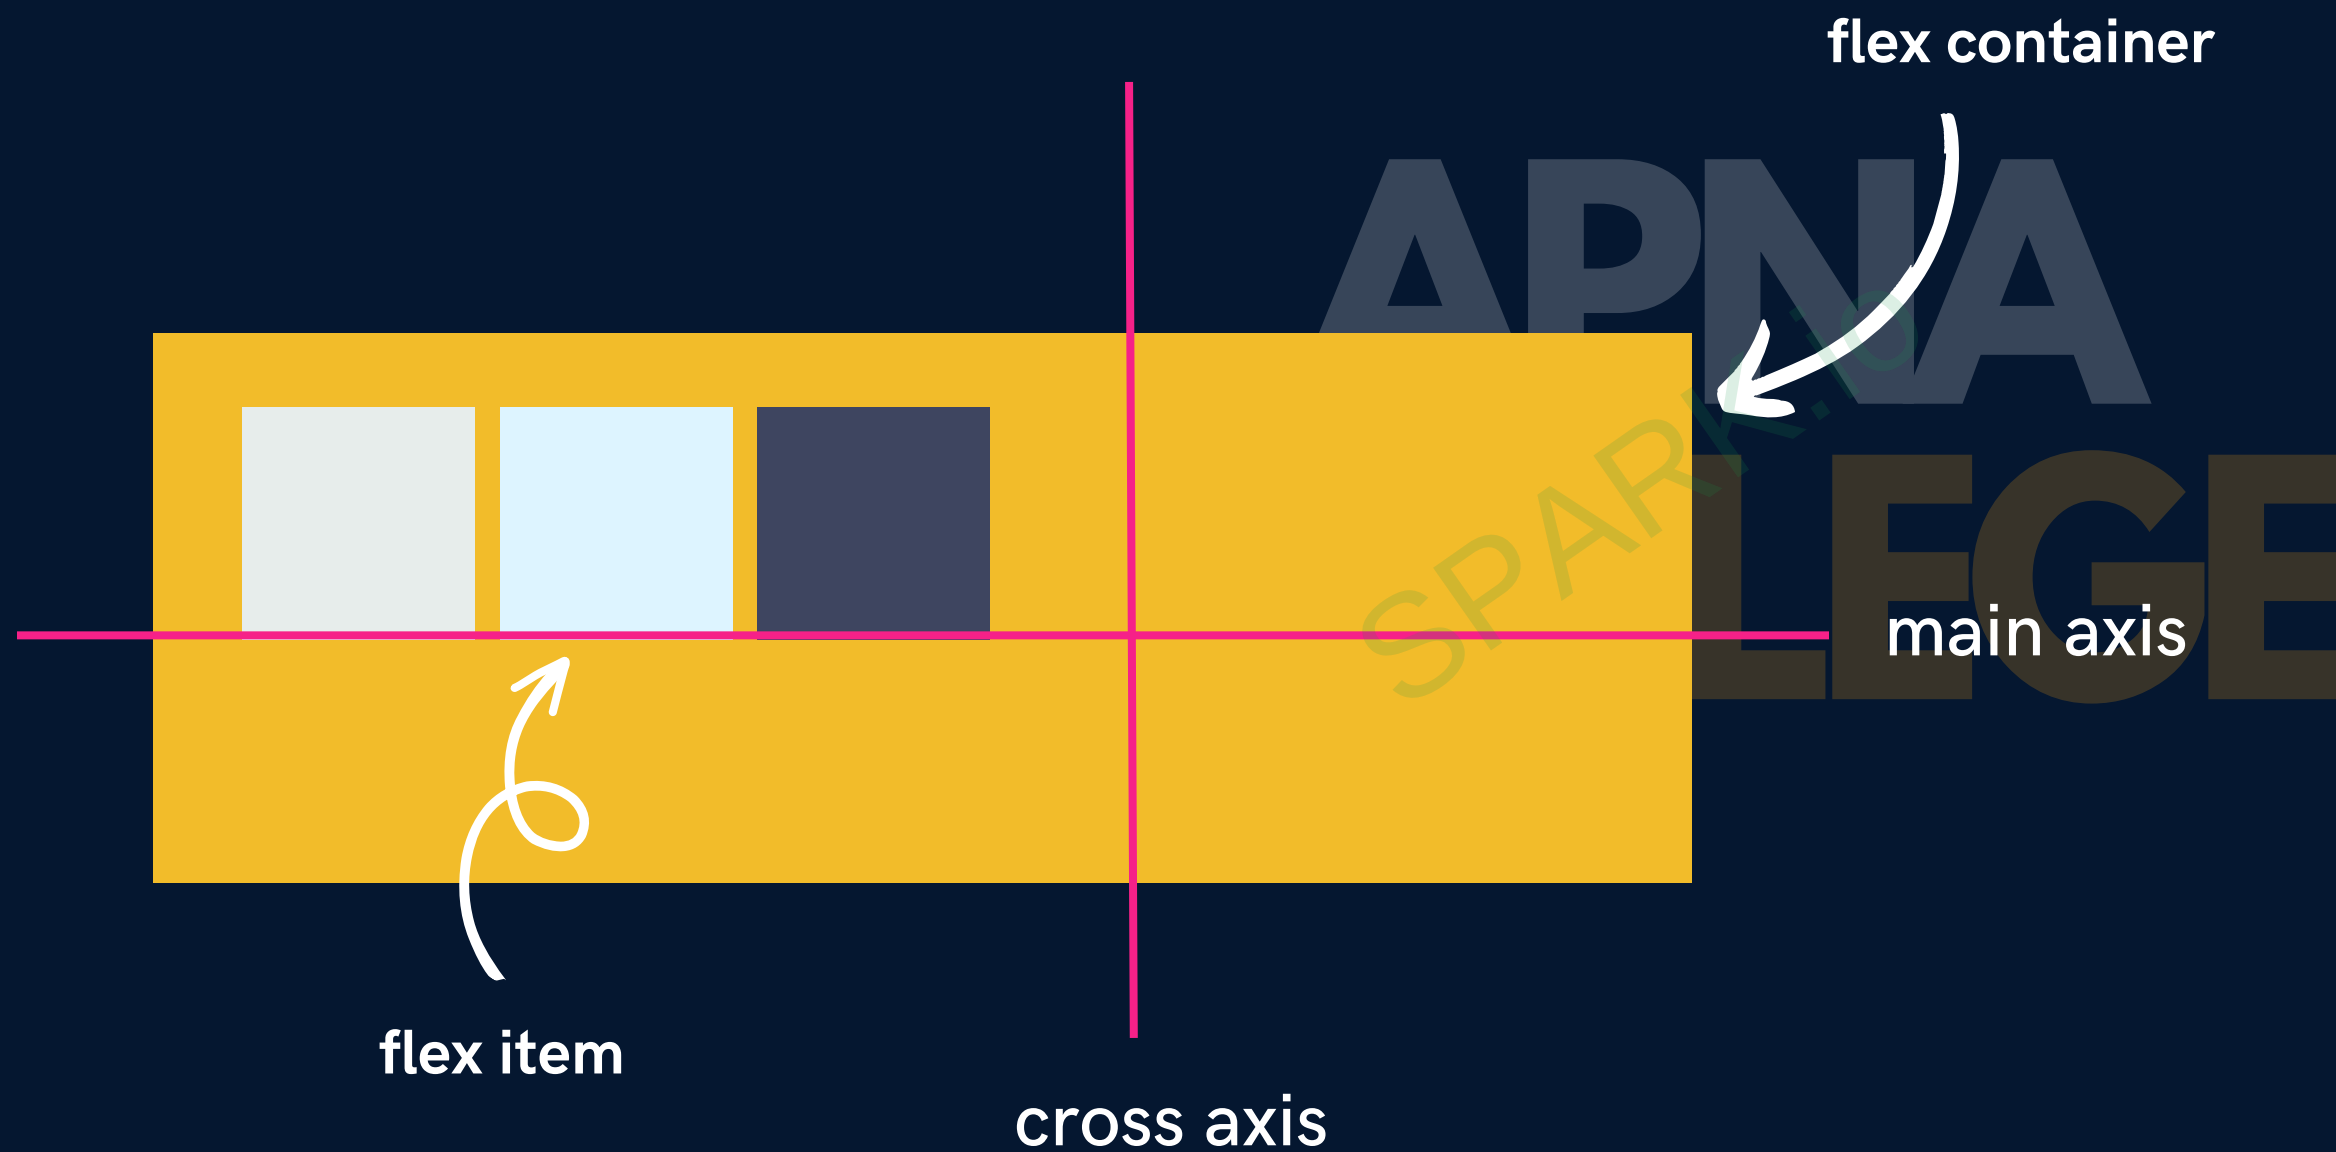

Flexbox Direction

It sets how flex items are placed in the flex container, along which axis and direction.

- flex-direction : row; (default)
- flex-direction : row-reverse;
- flex-direction : column;
- flex-direction : column-reverse;

APNA
COLLEGE

Flex Properties

for Flex Container

- **justify-content** : alignment along the main axis.
flex-start / flex-end / centre / space-evenly /
- **flex-wrap** : nowrap / wrap / wrap-reverse
- **align-items** : alignment along the cross axis.
- **align-content** : alignment of space between & around the content along cross-axis

Flex Properties

for Flex Item

- **align-self** : alignment of individual along the cross axis.
- **flex-grow** : how much a flex item will grow relative to the rest of the flex items if space is available
- **flex-shrink** : how much a flex item will shrink relative to the rest of the flex items if space is available

Practice Set 6

Qs: Create a navbar with 4 options in the form of anchor tags inside list items.
Now, use flexbox to place them all spaced equally in a single line.

Qs: Use flexbox to center one div inside another div.

Qs: Which has higher priority - align-items or align-self?

Media Queries

Help create a responsive website

```
@media (width : 600px) {  
  div {  
    background-color : red;  
  }  
}
```

```
@media (min-width : 600px) {  
  div {  
    background-color : red;  
  }  
}
```

APNA
COLLEGE

Media Queries

```
@media (min-width : 200px) and (min-width : 300px) {  
  div {  
    background-color : red;  
  }  
}
```

Practice Set 7

Qs: Add a media query to implement the following:

- the color of a div changes to green for viewport width less than 300px
- the color of a div changes to pink for width between 300px & 400px
- the color of a div changes to red for width between 400px & 600px
- the color of a div changes to blue for width above 600px

Level 5



APNA
COLLEGE

Transitions

Transitions enable you to define the transition between two states of an element.

- **transition-property** : property you want to transition (font-size, width etc.)
- **transition-duration** : 2s / 4ms ..
- **transition-timing-function** : ease-in / ease-out / linear / steps ..
- **transition-delay** : 2s / 4ms ..

Transition Shorthand

property name | duration | timing-function | delay

transition: font-size 2s ease-in-out 0.2s;

APNA
COLLEGE

CSS Transform

Used to apply 2D & 3D transformations to an element

- rotate

transform: rotate(45deg);

APNA
COLLEGE

CSS Transform

- scale

transform: scale(2);

transform: scale(0.5);

transform: scale(1, 2);

transform: scaleX(0.5);

transform: scaleY(0.5);

APNA
COLLEGE

CSS Transform

- translate

transform: translate(20px);

transform: translate(20px, 50px);

transform: translateX(20px);

transform: translateY(20px);

CSS Transform

- skew

transform: skew (30deg);

APNA
COLLEGE

Animation

To animate CSS elements

```
@keyframe myName {  
  from { font-size : 20px; }  
  to { font-size : 40px; }  
}
```

APNA
COLLEGE

Animation Properties

- animation-name
- animation-duration
- animation-timing-function
- animation-delay
- animation-iteration-count
- animation-direction

APNA
COLLEGE


Animation Shorthand

animation : myName 2s linear 3s infinite normal

% in Animation

```
@keyframe myName {  
  0% { font-size : 20px; }  
  50% { font-size : 30px; }  
  100% { font-size : 40px; }  
}
```

Practice Set 8



Qs: Create a simple loader using CSS

Step1 : create a div with circular shape & a thick border from one end (top/bottom/left/right)

Step2 : To make it spin create an animation which transforms it from 0deg to 360deg

Step3 : Add the animation property to the loader with infinite duration