

Abstract

Expanse and movement to clouds brings new challenges for developers. To utilize the most of cloud features new applications should be scalable, resilient and fast as while developing them, testing or pushing to production. One of the solutions is rethinking of old monolith architectures and refactor them to microservices or start to use cloud native development patterns for completely new projects. This transition to microservices scales very well with newly adopted container technologies.

Splitting one monolith application in number of microservices (often huge number) brings new challenges in software engineering processes. Especially completely new methods need to be used in operations departments to monitor, scale and deliver resilient workflow in software life cycle. One of the most important things to consider when running a complex distributed application is resiliency.

In this thesis service mesh Istio running on top of kubernetes cluster will be introduced as a solution to provide visibility, control, security and fault tolerance to your deployments. A working demo with the possibility to try out resiliency features of Istio is the final goal of the thesis.

Keywords

Microservices, REST, Containers, Docker, Kubernetes, Service Mesh, Istio, resiliency, fault tolerance

Table of Contents

| | |
|-------------------------------------|----|
| Abstract..... | 1 |
| Keywords..... | 1 |
| Introduction..... | 3 |
| Related work..... | 3 |
| Major idea..... | 4 |
| Microservices..... | 4 |
| Service mesh..... | 5 |
| Istio..... | 6 |
| Resiliency..... | 8 |
| Demo..... | 10 |
| Implementation..... | 11 |
| The Twelve Factors Application..... | 11 |
| Deploy with Kubernetes..... | 13 |
| Deploy with Istio..... | 13 |
| How to run..... | 13 |
| Evaluation..... | 14 |
| Routing..... | 17 |
| Load balancing..... | 19 |
| Fault injection..... | 21 |
| Timeout..... | 21 |
| Retries..... | 23 |
| Circuit breaker..... | 24 |
| Discussion..... | 26 |
| Conclusion..... | 26 |
| Future Work..... | 27 |
| References..... | 27 |
| Supplemental Material..... | 28 |

Introduction

migration to **clouds** → microservices, devops, fast code-to-market, leave only business logic for developers. Scaling monolith – challenge [eval]

Transition to microservices architecture helped to make application deployments more cloud friendly. Automation, scalability and continuous deployment are among the most valuable attributes coming with this architectural changes in software engineering process [10years]. All this factors and independence between microservices bring application resiliency on completely new level [migrate].

microservice architectural style is an approach to developing a single application as a suite of small services, each running in its own process and communicating with lightweight mechanisms, often an HTTP resource API. These services are built around business capabilities and independently deployable by fully automated deployment machinery [fowler].

A microservice isn't only code:

Your application code, compiled or not (depending on programming language)


Application libraries

Binary dependencies (for example, ImageMagick or libssl) that are installed on the operating system

Supporting processes, such as logging or cron

External dependencies, such as data stores, load balancers, or other services[action]

Containers:persistence, immutable - executable artifacts allows you to orchestrate deployment through a primitive operation — adding or removing a container[action], infrastructure as code, fast, shared kernel vs vm: Better isolation, resource heavy – redundant kernel [advanced], management [java]. Containers – run applications, Vms – run containers [advanced]. But together with a scheduler, containers provide a particularly elegant and flexible approach that meets our two deployment goals: speed and automation.

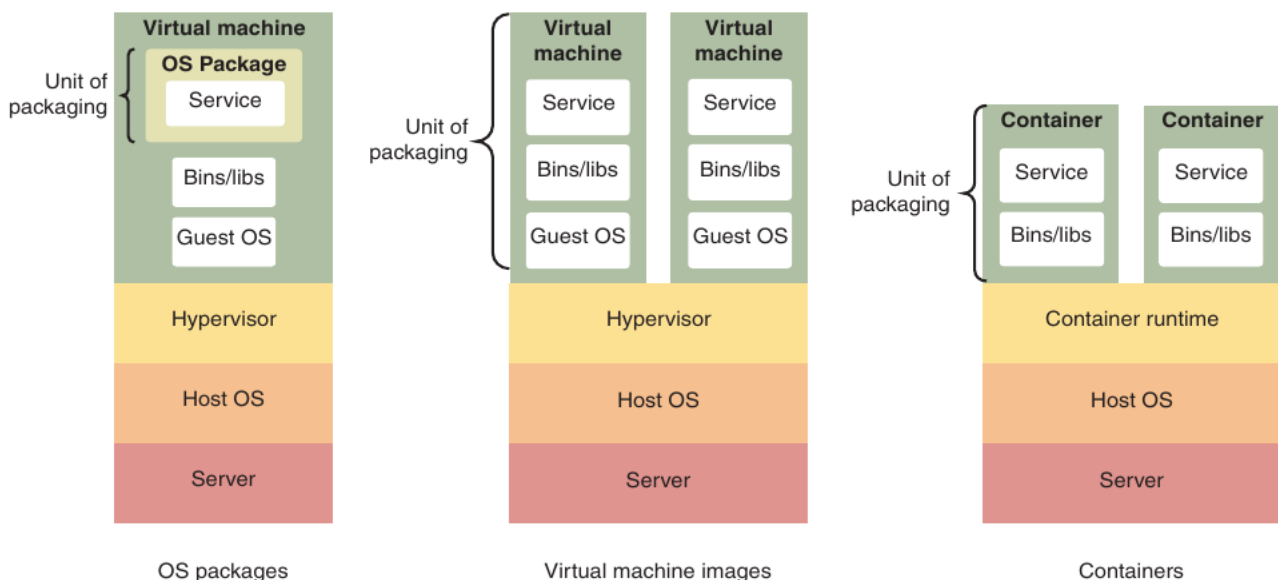

[action]

adoption of containers and automated deployments[10years], applications are packaged in images that run the same way by developer as in production environment. Containers are more lightweight and blazing fast in startup in compare with virtual machines. The problem of delivering code from developers to productions is solved with packaging application and dependencies in images.

Caring about deployment is crucial for microservices.

Kubernetes provides ideal features of a microservice deployment platform, including secret management, service discovery, and horizontal scalability[action].

kubernetes just orchestration, no possibility to deal with network errors – focus on pods
 number of **microservices** grows, lack of visibility and control,
 increased deployment velocity at our own company using Kubernetes.

resiliency. Impossible to eliminate faults in microservices application, but tolerate failures and recover is our goal. Maximize availability.

| Area | Possible failures |
|--------------------------------|---|
| Hardware | Hosts, data center components, physical network |
| Communication between services | Network, firewall, DNS errors |
| Dependencies | Timeouts, external dependencies, internal failures, for example, supporting databases |

[action]


goals, metrics: deploy microservices app, compare resiliency with and without istio
 cc project as template (refactored, adopted), deploy istio, demo in minikube, test resiliency
 validate resiliency and availability with the help of load testing and chaos testing [action].

Related work


Need for service meshes. Many digital firms try to achieve results in developing or adoption of new service meshes solutions. As there is a big demand in service meshes there are also solutions with completely different architectures on the market.

Pictures from [alt]


- libs: cons - code change (hystrix, ribbon). These libraries are used to get rid of network faults and not to implement code for communication inside application, but these should be developed for each programming language. This approach is not really useful with microservice architecture because abuses polyglot idea of microservices. Also violates a principle of separation of business logic and communication.

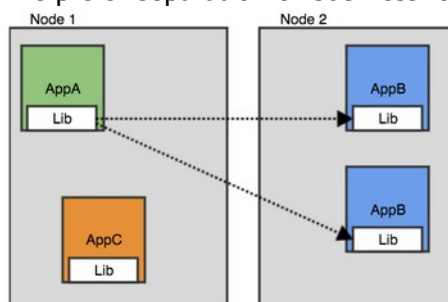

- node agent (linkerd)

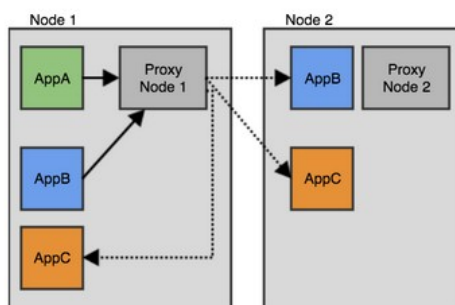

- sidecar (istio, linkerd2, consul)

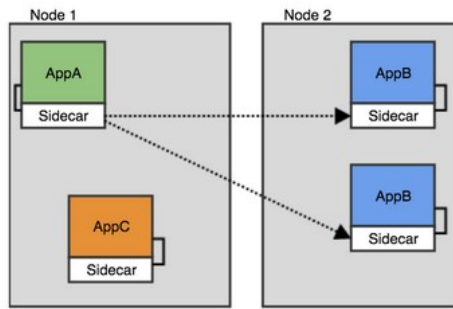

Major idea

There are plenty of tutorials online that utilize a sample application from istio web site (“Bookinfo” application) to show typical service mesh and specific istio features. The idea of this thesis is to take the already implemented project, but not the one from istio, adopt it a little bit and provide a working demo of istio resiliency features. In this way it will be possible to see how difficult or easy it is to deploy random application with istio.

The application itself should be based on microservices architecture

Trying to make focus on operational part of software engineering and not to focus on developing from scratch on of the solutions was to take a ready open source project from Github and deploy it with istio [micro_git].

After researching and looking into some of such projects the decision to take the application developed by myself in cloud computing course was made. The text of the original assignment can be found in supplemental material.

Microservices

Monolith to microservices[today]

monolithic difficult to update, because many teams → all should work as it was – slow development [eval]

Virtualization was not meant to speed application development.

Individually, microservices are similar internally to monolithic applications [action].


The idea of microservices attributes can be compared with UNIX ideas [flexible]:

- one program – one task
- universal interface for all programs
- programs communicate with one another

Ideally one developer should be enough to understand the idea of one special microservice and develop it further on [10years].

Microservices are small, independently scaled and managed services. Each service has its own unique and well-defined role, runs in its own process and communicates via HTTP APIs or messaging [native].

impossible to reproduce bugs in the code because it’s impossible to reconstruct the state of the system at the time of failure - > logging is so important [prodmicro].

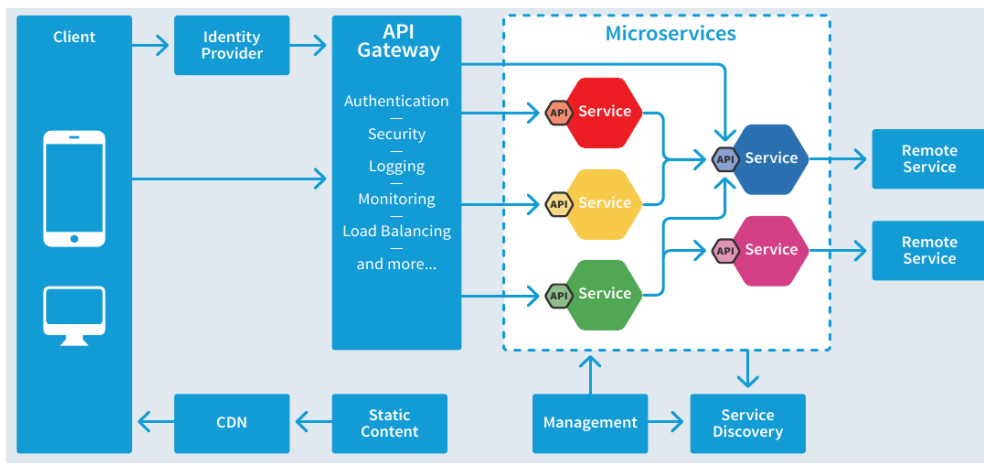

[native]

services with task in mind, no shared libraries and dependencies, separation of stateless and stateful services,

pros [appmicro]

- granularity - small
- rapid development – if one service knows little about other → easier to make changes
- polyglot – language, development teams, domains
- scaling
- suitable for infrastructure as code – CI/CD, canary
- separate data storage
- easier code maintenance
- simple updates

cons

- increased operational complexity – deployment and monitoring [towards]
- communication security
- partitioned database architecture [designmicro]
- unreliable communication [flexible]
- resiliency issues – cascade failures in distributed systems
- complicated transition from monolith to microservice [towards]
- service discovery
- testing complete system [designmicro]

Services, API rest/async, design no central database, 1 team 1 microservice, independent and automation in deployment, fault tolerance, replaceability, monitoring [decision].

Faulty on the integration level – too many of microservices [today]

design of microservice architecture: system, infrastructure – hosting, virtualization, monitoring and logging, organizational structures and processes – team, development, deployment, testing [decision].

Why? Well, **Docker** solves one big thing: the **packaging** problem. By allowing you to package your app and its (non-network) runtime dependencies into a container, your app is now a fungible unit that can be thrown around and run anywhere. By the same token, Docker makes it exponentially easier to run a *polyglot* stack: because the container is an atomic unit of execution, for deploy and operational purposes it doesn't really matter what's inside the container, and whether it's a JVM app or a Node app or Go or Python or Ruby. You just run it.

Kubernetes solves the next step: now that I have a bunch of “executable things”, and I also have a bunch of “things that can execute these executable things” (aka machines), I need a mapping between them. In a broad sense, you give **Kubernetes** a bunch of containers and a bunch of machines, and it figures out this **mapping**. (Which of course is a dynamic and ever-shifting thing, as new containers roll through the system, machines come in and out of operation, and so on. But Kubernetes figures it out.) [mesh]

Service mesh

Motivation

zero downtime and fast respond to requests[java]

If I had to put it into a single sentence, the value of the service mesh comes down to this: **The service mesh gives you features that are critical for running modern server-side software in a way that's uniform across your stack and decoupled from application code.**[mesh]

operators should manage microservices apps in **large** hybrid and multi-cloud deployments.

Tracing solves a common problem in microservices systems. A request to a microservice might result in other requests. Tracing helps to understand these dependencies, thus facilitating root cause analysis.

Logging is another important technology to gain more insight into a system. A service mesh collects information about the network communication. The logging support of a service mesh has the advantage that developers do not have to care about these logs at all. Besides, the logs are **uniform** no matter what kind of technology is used in the microservices and how they log. Enforcing a common logging approach and logging format takes some effort.

out of the box plenty of features that are now implemented in different ways: libraries for logging, API gateways for routing, certificates rotation for secure communication.

Service mesh provides:

service discovery, LB, resiliency, security (end-to-end encryption, authorization), observability (layer 7 metrics, tracing, alerting), routing control, API (programmable interface, kubernetes CRD)

focus on east-west traffic, manage and control services inside network, broker in internal resources, is between network and application – no business logic.

service mesh - network of microservices that make up distributed microservice applications and the interactions between them.

- requirements - discovery, load balancing, failure recovery, metrics, and monitoring.
- also operational- A/B testing, canary rollouts, rate limiting, access control and end-to-end authentication.

service mesh focuses on networking between microservices rather than business logic

[mesh]

What are these proxies? They're **Layer 7**-aware TCP proxies, just like haproxy and NGINX.

What do these proxies do? They proxy calls to and from the services. (they act as both “proxies” and “reverse proxies”, handling both **incoming** and **outgoing** calls.) And they implement a featureset that focuses on the calls *between* services. This focus on **traffic between services** is what differentiates service mesh proxies from, say, API gateways or ingress proxies, which focus on calls from the outside world into the cluster as a whole.

pros/cons

Istio

Istio is described as a tool to connect, secure, control, and observe services - a service mesh for microservices application.

It's designed to add application-level Layer (L7) observability, routing, and resilience to service-to-service traffic and this is what we call “east-west” traffic.

tracing, monitoring, and logging – deep view of microservice deployment

sidecars – to get plenty of signals about traffic that are used in mixer for policies and also for monitoring.

- service mesh
 - **security** – who talks whom, trusted communication, encryption
 - **observability** – tracing of requests, metrics, alerting, topology
 - **traffic management** - routing control
 - load balancing
 - communication resiliency
 - mirroring – OK if service is read-only to avoid computing overload
 - **API** (kubernetes CRD)
 - policies – rate limits, denials and white/black listing
- architecture
 - data plane – traffic routing
 - control plane – tls, policies

puts resiliency into the infrastructure

An Istio service mesh is logically split into a **data plane** and a **control plane**.


- The **data plane** is composed of a set of intelligent proxies ([Envoy](#)) deployed as sidecars. These proxies mediate (**intercept**) and **control** all network communication between microservices along with **Mixer**, a general-purpose policy and telemetry hub.
- The **control plane** manages and configures the proxies to **route** traffic. Additionally, the control plane configures Mixers to enforce policies and collect telemetry.

Traffic in Istio is categorized as **data plane traffic** and **control plane traffic**. Data plane traffic refers to the messages that the business logic of the workloads send and receive. Control plane traffic refers to configuration and control messages sent between Istio components to program the behavior of the mesh. **Traffic management** in Istio refers exclusively to data plane traffic.

control plane functionality:

- Automatic load balancing for HTTP, gRPC, WebSocket, and TCP traffic.
- Fine-grained control of traffic behavior with rich routing rules, retries, failovers, and fault injection.

- A pluggable policy layer and configuration API supporting access controls, rate limits and quotas.
- Automatic metrics, logs, and traces for all traffic within a cluster, including cluster ingress and egress.
- Secure service-to-service communication in a cluster with strong identity-based authentication and authorization.

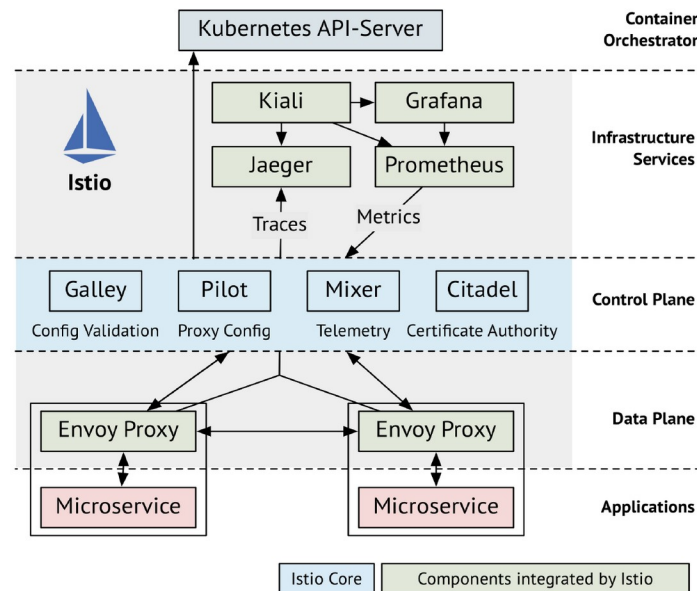

pilot – get rules and send them to proxies, works dynamically on the fly, without restart needed, looks into all registries in system and understands topology of deployment, uses service discovery adapter (k8s, consul)

mixer – take telemetry to analyze, has policies, all side cars calls mixer, if request is allowed, quotas, authZ backends, turns data into info → high cpu load, has caching → not single point of failure

citadel – certificates mTLS

galley – holds configs
sidecar proxy - envoy

Observability

Kiali – visualize services that are deployed

You can use Grafana to graph metric data, create human-readable dashboards, and trigger alerts[action].

Grafana with prometheus as backend

- runs in its own namespace – isolated from other procs
- fault injection:
 - http error codes, eg 400
 - delays

Manifests:

Virtual services – route traffic (headers, weight, URL), retries, timeouts, fault injection

destination rules – named subsets, circuit breaker, load balancing

gateways – Virtual Service to allow L7 routing, use default or deploy own

- ingress – to expose service with kubernetes
- egress – by default all external traffic is blocked, enabled in Service entry

Service entry – automatic from pilot, from k8s - service names and ports, add external services to istio registry, enables retry, timeout, fault-injection

Gateway and ServiceEntry control the north-south traffic (incoming and outgoing)

VirtualService and DestinationRule control the east-west traffic (inside service mesh)

pros:

- all in one solution
- language independent


cons:

- high complexity
- higher latency
- resource hungry – x2 containers
- young technology

Resiliency

In distributed microservices architecture one service can not await that all other services function without errors or that there are no network failures at all. Taking in consideration these aspects resiliency can be defined as the ability of distributed system continue to respond to client though there are network and service errors.

Services can use rate limits to protect themselves from spikes in load beyond their capacity to service [action].

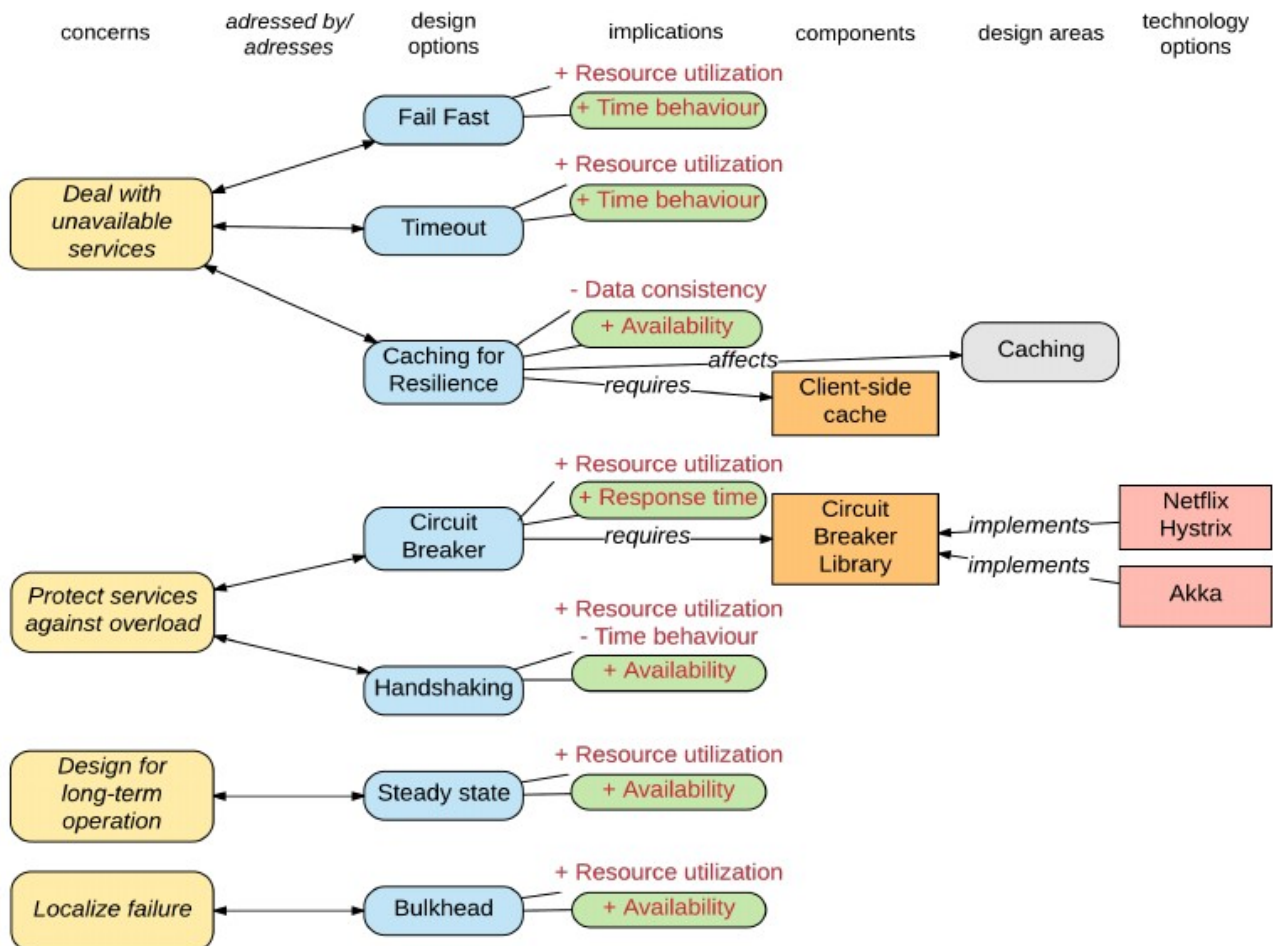

[decision]

Similarly, dedicating a large number of resources (like CPU) to a microservice that doesn't utilize it is inefficient. Inefficiency reduces performance: if it's not clear at the microservice level in every case, it's painful and costly at the ecosystem level. Underutilized hardware resources affects the bottom line, and hardware is not cheap [prodmicro].

Resiliency in istio: health checks, load balancing, delay injection, fault injection, timeouts, retries, rate limits, circuit breaker.

Resilience means that individual microservices still **work** even if other microservices **fail**. If a microservice calls another microservice and the called microservice fails, this will have an impact. Otherwise, the microservice would not need to be called at all. So the calling microservice will behave differently and might not be able to respond successfully to each request. However, the microservice **must** still **respond**. It must not block a request because then other microservices might be blocked and an error **cascade** might occur. Also **delays** in the network communication might lead to such problems.

A resilient microservice is one that can experience and recover from failures at every level of the microservice ecosystem: the hardware layer (e.g., a host or datacenter failure), the communication layer (e.g., RPC failures), the application layer (e.g., a failure in the deployment pipeline), and in the microservice layer (e.g., failure of a dependency, a bad deployment, or a sudden increase in traffic). There are several types of resiliency testing that, when used to evaluate the fault tolerance of a microservice, can ensure that the service is prepared for any known failures within any layer of the stack. [prodmicro]

What can go wrong in a Microservice architecture?

There are a number of moving components in a Microservice architecture, hence it has more points of failures. Failures can be caused by a variety of reasons – errors and exceptions in code, release of new code, bad deployments, hardware failures, datacenter failure, poor architecture, lack of unit tests, communication over the unreliable network, dependent services etc.

Why do you need to make service resilient?

A problem with Distributed applications is that they communicate over network – which is unreliable. Hence you need to design your microservices in such a way that they are fault tolerant and handle failures gracefully. In your microservice architecture, there might be a dozen of services talking with each other. You need to ensure that one failed service does not bring down the entire architecture.

Here you can find resiliency features of istio service mesh.

Health checks

There are two types: liveness and readiness probes [k8s]. They are crucial for system resiliency because the traffic should be forwarded only to healthy pods. Liveness probes help to determine if application started and run correctly. Readiness probes check if application is ready to receive traffic for example after all configurations finished successful [action].

Though these are mechanisms belong are kubernetes native they are still worth to mention because istio proxies allow these health checks to work seamlessly. Only Http health checks work only with mTLS enabled so need some configuration on the side istio system namespace.

Exec and tcp health checks work straight forward without any changes in kubernetes manifests.

Probes can be HTTP GET requests, scripts executed inside a container, or TCP socket checks.

Load balancing – more sophisticated then native kubernetes solution (round robin). Can be configured in destination rules.

- round robin (default)

- Random - random pods are taken for requests from load balancing pool
- Least requests - least overloaded pod get new requests

loadBalancer:
simple: RANDOM

Timeout – virt svc, default = 15 sec.

Helps to deliver fast responses to client without waiting for response from slow service. For user experience it is better to fail fast then to function with delays. Define a proper timeout for calls depends on application and microservice. Too small – not enough time to process request from client, too big – may lead to general slow system responses. Alone waiting for slow responses need much infrastructure resources (CPU, RAM). That is why timeouts are very important and it is very easy to configure them for service with Istio. The main challenge here will be to proper define the length of timeout. So infrastructure engineer need to understand how the microservices application work or need to communicate with developers direct.


percent: 100
fixedDelay: 2s

Retry – virt svc, default = NO.

Retries repeat the failed request in order to get the response faster then return error to client and initialize a completely request. Normally developers take care of it in application code, but istio has built-in retry policies to configure and to make calls more resilient. Of course with repeated retries the load on service will be higher. This should be taken in consideration and could also be protected with circuit breaker for example.

attempts: 3
perTryTimeout: 2s

circuit breaker is configured in istio destination rule manifests.

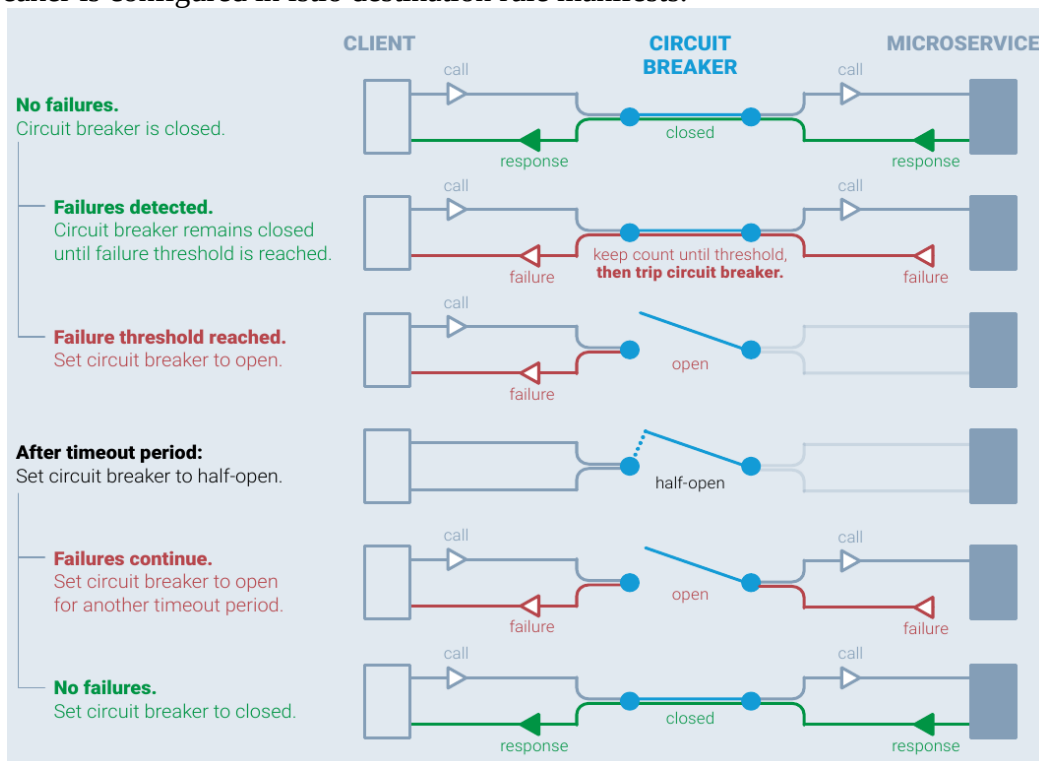

[native]

General explanation - ...

We can see two types of this pattern in istio.

The first one functions at the connection pool level and protects microservice from overloading. It stops sending traffic to service if requests reach some limit defined in destination rule for this microservice.

```
http:
  http1MaxPendingRequests: 1
  maxRequestsPerConnection: 1
tcp:
  maxConnections: 1
```

The second type is outlier detection. If there are many replicas of microservice one of them can start returning errors (eg 50x). In this case istio will eject the problem pod from the load balancing pool for some time.

Following settings can be configured:

```
consecutiveErrors: 7
interval: 5m
baseEjectionTime: 15m
maxEjectionPercent: 100
```

Demo

The main result of this thesis will be a fully working demo to show the main resilience possibilities of Istio service mesh. The focus is made on all-in-one solution. Project written in cloud computing course is used as a microservice application. Git repository with all necessary scripts is provided to easy start using istio in development environment.

With the help of this demo you will learn basics of distributed applications and microservices, the concepts of modern application packaging, deployment and orchestration. Docker files and kubernetes manifests contain best practices from production deployments.

The IP address of istio ingress can be different from test to test, because new cluster was installed multiple times while working on the implementation part.

Implementation


The Twelve Factors Application

Application itself is a simulation of airport security system. REST api [rest].

There are camera agents to stream image frames from dedicated airport sections. Cameras can be placed on entry or exit from the section. There is a configuration file for control panel that provides this information to system.

```
"cameras": [{
  "id": 1,
  "description": "exit camera section 1",
  "url": "http://camera-agent-1:8080",
  "section": 1,
  "type": "exit"
},
```

For simplicity of simulation “config.json” is packaged with docker image. So to update it you need to rebuild image or change it manually inside of running container and then update via special control panel endpoint.

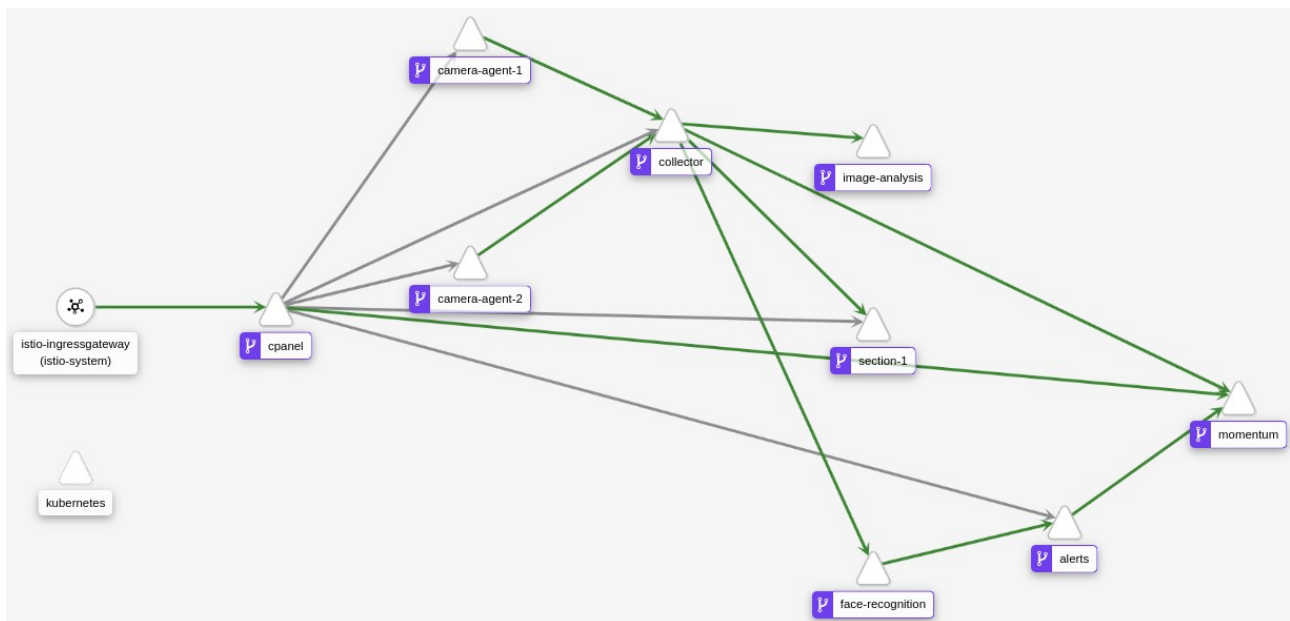

Collector receives frames from camera agents in json format and forward them to other microservices for analysis.

Image analysis takes frame and responses back with statistics about how many people are there, their gender and age. After that collector forwards statistics information about current image to appropriate section and momentum microservice.

Momentum microservice serves to store current processing frames with information about them from image analysis and face recognition.

Section stores the statistical information from current frame in json file.

Face recognition forwards response if there are any persons of interest on the image to alert microservice.

Alert microservice provides API to create, read and delete alerts from database (json file) and also forwards the response from face recognition to momentum microservice.

Camera agents, face recognition and image analysis microservices were already implemented and provided as docker images. The rest of microservices (collector, section, alerts and cpanel) were developed during the cloud computing course. Momentum microservice was added to separate temporally logic of saving current processing frames. Frontend was added to cpanel microservice was minimal functionality – just to display currently processed frames from momentum microservice.

Cpanel takes a role of API gateway. It hides backend microservices from the client and exposes only necessary endpoints [microcon]. Request routing. Is similar to facade pattern in object oriented design [designmicro].

More detailed description of the initial API and the hole system itself can be found in cloud computing assignment [cc].

Additional endpoints were implemented in each microservice:

| | |
|------------|---------------|
| alerts: | GET /status |
| collector: | GET /status |
| section: | GET /status |
| cpanel: | GET /status |
| | GET /, /index |
| | GET /analysis |
| | GET /alert |

momentum: GET /status
GET/POST /analysis
GET/POST /alert

The Twelve Factors App [twelve]

1. **Codebase**
One codebase tracked in revision control, many deploys - **GitHub**
2. **Dependencies**
Explicitly declare and isolate dependencies - **requirements.txt**
3. **Config**
Store config in the environment - **env variables**
4. **Backing Services**
Treat backing services as attached resources – **NO (json) or mount volume. It is recommended to use databases.**
5. **Build, release, run**
Strictly separate build and run stages – **docker images with env vars and versions**
6. **Processes**
Execute the app as one or more stateless processes – **Docker**
7. **Port binding**
Export services via port binding - **completely self-contained, exports HTTP as a service by binding to a port, gunicorn**
8. **Concurrency**
Scale out via the process model – **LB with docker containers**
9. **Disposability**
Maximize robustness with fast startup and graceful shutdown - **Docker**
10. **Dev/Prod parity**
Keep development, staging, and production as similar as possible - **Docker**
11. **Logs**
Treat logs as event streams – **logs to stdout**
12. **Admin Processes**
Run admin/management tasks as one-off processes - ???

refactor and **expand** of cc project

- frontend v1/v2
 - canary, blue/green deployment[java], user resiliency
- python + docker best practices:
 - alpine, root, no cache [sec]
- scaling deployment:
 - collector, image-analysis, face-recognition
- momentum microservice
- docker compose for local development, but telepresence is better

Deploy with Kubernetes

- services – fqdn, service discovery
- deployments with pods
- readiness/liveness - resiliency
- resources limits – to protect pods from starvation

Load balancing is done on top of related microservices for number of replicas [microcon].
Replication of pods is configured for collector, image analysis and face recognition.
Native server side service discovery of kubernetes is used to configure communication between microservices [microcon].

Service discovery is abstracted from client. They need to make the request just to load balancer.

Service registry is built-in in kubernetes architecture. [designmicro].

Services provide stable endpoints for Pods and are automatically registered in service registry. if pod restart - new IP.

Understanding namespaces and DNS

When you create a Service, it creates a corresponding DNS entry. This entry is of the form <service-name>.<namespace-name>.svc.cluster.local, which means that if a container just uses <service-name> it will resolve to the service which is local to a namespace. This is useful for using the same configuration across multiple namespaces such as Development, Staging and Production. If you want to reach across namespaces, you need to use the fully qualified domain name (FQDN). In Kubernetes, a service defines a set of pods and provides a method for reaching them, either by other applications in the cluster or from outside the cluster [action].

Deployments on Kubernetes are designed to maintain service availability by executing rolling updates of pods across replica sets[action].

Labels are k8s and its end users way to filter similar resources in the system.

Annotations are very similar to labels, but are usually used to keep metadata for different objects in the form of freestyle strings.

There is a Label selector which determines the pods which services target. Service without selector is not possible.

Deploy with Istio

single cluster deployment

istio verify install done in script

virtual services , destination rules for subsets, ingress gateway

gateway is added to cpanel virtual service to expose it outside of minikube cluster

Mirroring can be enabled on momentum microservice with the same version. In such a way we achieve additional resiliency for this read-only service. As there is no business logic and so no computing overload it is quite acceptable. Mirroring can be done in VirtualService in istio.

best practices: add dest rules and virt svc for all microservices []

How to run

git, virtualbox, curl, docker, shell scripts, yaml, minikube with kubectl, istio, Makefile, resiliency try out

install requirements (ram, cpu)

dirty tricks during installation and configuration test environment:

- sharing containers host/guest minikube
- telepresence for debugging and fast response to changes

Evaluation

Here resiliency features of istio service mesh will be introduced in practice. Kiali graphs, grafana graphics and console outputs will help to understand how fault tolerance can be configured with istio.

Running application


```
$ make deploy-app-default
./kubectl apply -f k8s
./kubectl get pods -w
```

Wait till all pods are up and running and stop monitoring them with Ctrl-c.

```
$ make deploy-istio-default
./kubectl apply -f istio/dest_rule_all.yaml
./kubectl apply -f istio/virt_svc_all.yaml
./kubectl apply -f istio/ingress_gateway.yaml
```

Check that application is deployed properly with istio configuration files.

```
$ make health
curl http://192.168.99.113:31221/status
CPanel v1 : Online
curl http://192.168.99.113:31221/cameras/1/state
{"streaming":false,"cycle":0,"fps":0,"section":null,"destination":null,"event":null}
curl http://192.168.99.113:31221/cameras/2/state
{"streaming":false,"cycle":0,"fps":0,"section":null,"destination":null,"event":null}
curl http://192.168.99.113:31221/collector/status
Collector v1 : Online
curl http://192.168.99.113:31221/alerts/status
Alerts v1 : Online
curl http://192.168.99.113:31221/sections/1/status
Section 1 v1 : Online
curl http://192.168.99.113:31221/momentum/status
Momentum v1 : Online
```


```
$ make start-cameras
curl http://192.168.99.113:31221/production?toggle=on
```

```
$ make health
curl http://192.168.99.113:31221/status
CPanel v1 : Online
curl http://192.168.99.113:31221/cameras/1/state
{"streaming":true,"cycle":8,"fps":0,"section":"1","destination":"http://
collector.default.svc.cluster.local:8080","event":"exit"}
curl http://192.168.99.113:31221/cameras/2/state
{"streaming":true,"cycle":6,"fps":0,"section":"1","destination":"http://
collector.default.svc.cluster.local:8080","event":"entry"}
curl http://192.168.99.113:31221/collector/status
Collector v1 : Online
curl http://192.168.99.113:31221/alerts/status
Alerts v1 : Online
curl http://192.168.99.113:31221/sections/1/status
Section 1 v1 : Online
curl http://192.168.99.113:31221/momentum/status
Momentum v1 : Online
```


```
$ make kiali
istio-1.4.3/bin/istioctl dashboard kiali
```

<http://localhost:44517/kiali>

`$./kubectl -n istio-system port-forward $(kubectl -n istio-system get pod -l app=grafana -o jsonpath='{.items[0].metadata.name}') 3000:3000 &`

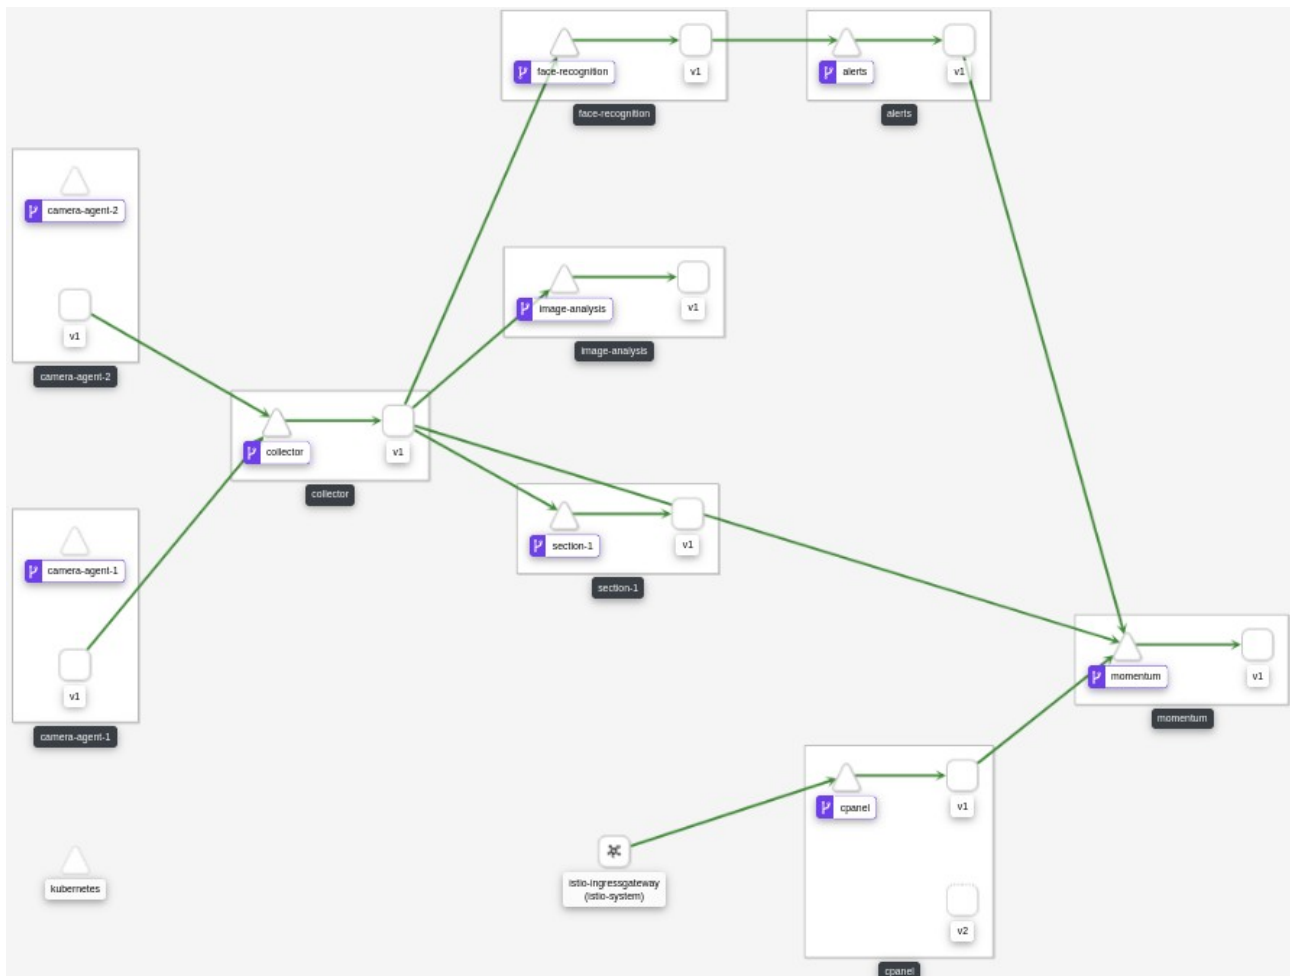

Version 1 of Cpanel microservice displays information about latest statistic from image analysis and the most recent alert. Both are displayed without showing the photo from camera agent itself. Splitting between admin users and normal users can be done in virtual service with help of headers. Displaying the photo is made in Version 2 of Cpanel microservice.

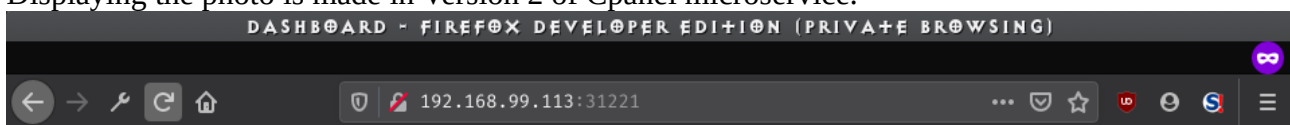

Dashboard V1

Section 1

timestamp: 2020-02-25T14:35:38.204522Z

gender: male | age: 38-43 | event: exit

Alert


timestamp: 2020-02-25T14:35:27.224857Z

section: 1

event: entry

name: **PersonX**

Default app with Cpanel v1 without load to frontend:

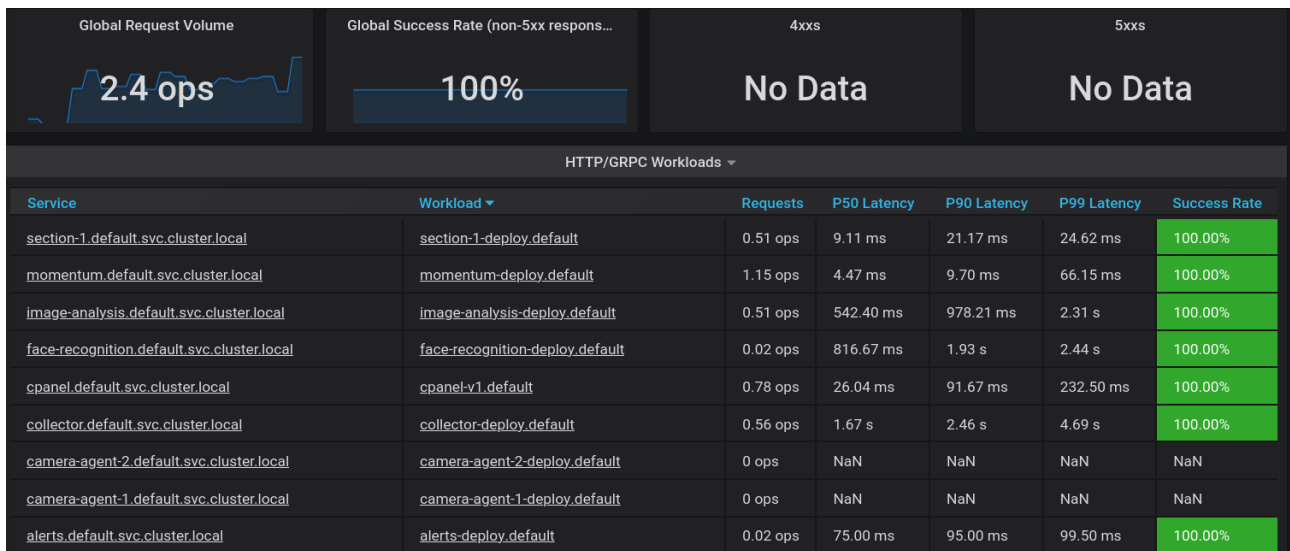

\$ make load


for i in {1..100}; do sleep 0.2; curl http://192.168.99.113:31221/status; printf "\n"; done

CPanel v1 : Online

CPanel v1 : Online

CPanel v1 : Online

...

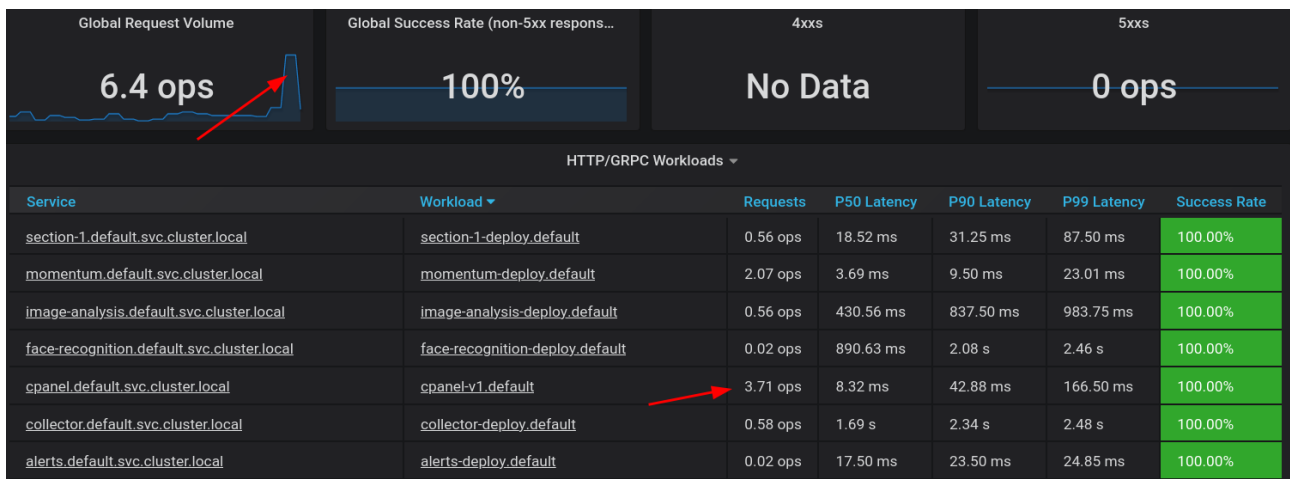

Kubernetes has only round robin load balancing. Istio with the help of destinations rules extends native kubernetes load balancing and presents the following types: random, round robin, weighted least request. In such a case istio can give any microservice replica set it's own load balancer. To show how istio load balancing can be configured, we need first to learn about routing mechanism provided by istio.

Routing

This solution can be used to make canary deployments and also make user experience more resilient - "user resilience". For example, new version of service can be made available only to one group of users (test group). It can be as much as only 1% of the whole traffic. Users can be filtered by headers in http request. If something goes wrong with new version of service it is very easy to rollback and switch all the traffic back to production version.

This mechanism allows also to do blue/green deployments[java].

route:


- destination:

host: cpanel.default.svc.cluster.local
port:
 number: 8080
 subset: v1
weight: 50
- destination:
 host: cpanel.default.svc.cluster.local
 port:
 number: 8080
 subset: v2
weight: 50

```
$ make cpanel-50-50  
./kubectl apply -f istio/virt_svc_50-50.yaml  
virtualservice.networking.istio.io/cpanel configured
```

check configuration
\$./kubectl get virtualservices cpanel -o yaml

```
$ make load-front  
for i in {1..100}; do sleep 0.2; curl --silent http://192.168.99.113:31221/ | grep -o "<h1>.*</h1>";  
done  
<h1>Dashboard V2</h1>  
<h1>Dashboard V2</h1>  
<h1>Dashboard V1</h1>  
<h1>Dashboard V2</h1>  
<h1>Dashboard V1</h1>  
<h1>Dashboard V1</h1>  
<h1>Dashboard V1</h1>  
<h1>Dashboard V2</h1>
```

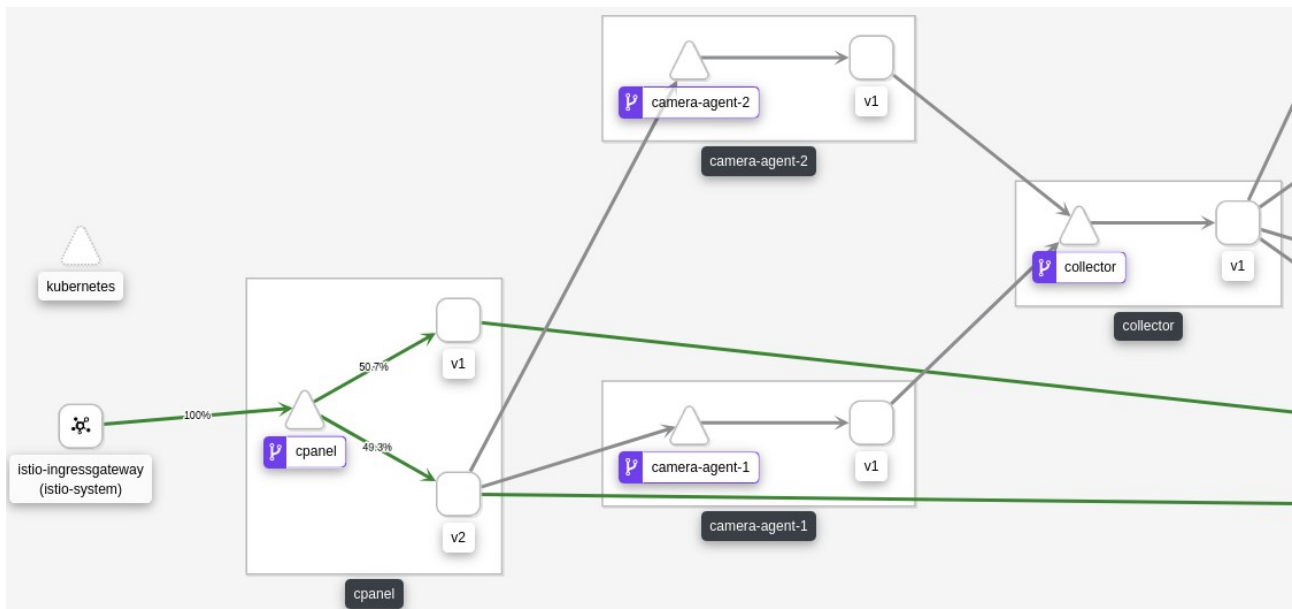


route:
- destination:
 host: cpanel.default.svc.cluster.local
 port:
 number: 8080

subset: v1
weight: 0
- destination:
 host: cpanel.default.svc.cluster.local
 port:
 number: 8080
 subset: v2
 weight: 100

```
$ make cpanel-v2  
./kubectl apply -f istio/virt_svc_v2.yaml  
virtualservice.networking.istio.io/cpanel configured
```

```
check configuration  
$ k get virtualservices cpanel -o yaml
```

```
$ make start-cameras  
curl http://192.168.99.113:31221/production?toggle=on
```

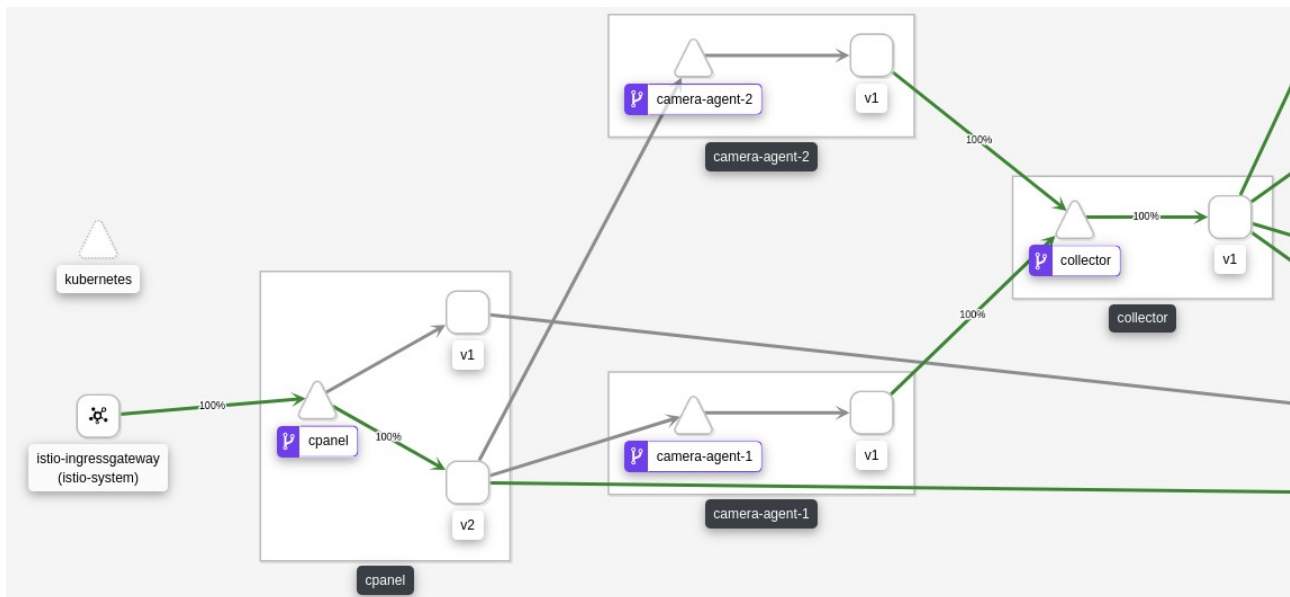

Dashboard V2

Section 1



timestamp: 2020-03-01T21:52:24.300268Z

gender: male | age: 25-32 | event: entry

gender: female | age: 25-32 | event: entry

Alert



timestamp: 2020-03-01T21:52:14.883934Z

section: 1

event: exit

name: **George W**

Load balancing

To show advanced load balancing in istio we can scale our cpanel-v2 deployment to 3 replicas. Then default round robin load balancing, without any configurations between v1 and v2 cpanel virtual services, can be recognized (should be 1:3).

```
$ make scale_v2_x3
./kubectl scale deployment cpanel-v2 --replicas=3
deployment.extensions/cpanel-v2 scaled
```

here we can see how kubernetes scales our service

```
$ ./kubectl get deployments
```

| NAME | READY | UP-TO-DATE | AVAILABLE | AGE |
|-----------|-------|------------|-----------|-------|
| cpanel-v1 | 1/1 | 1 | 1 | 3m52s |
| cpanel-v2 | 3/3 | 3 | 3 | 3m52s |

There is no more subset version from destination rule in ingress virtual services. So istio will split all incoming traffic between running pods of cpanel service based on default round robin load balancing strategy.

route:

- destination:

host: cpanel.default.svc.cluster.local

port:

number: 8080

```
$ make round_robin
```

```
./kubectl apply -f istio/round_robin_lb.yaml  
virtualservice.networking.istio.io/cpanel configured
```

```
$ make load  
for i in {1..100}; do sleep 0.2; curl http://192.168.99.114:32460/status; printf "\n"; done  
CPanel v2 : Online - cpanel-v2-86f86bc679-z5s2q  
CPanel v2 : Online - cpanel-v2-86f86bc679-5l2p5  
CPanel v2 : Online - cpanel-v2-86f86bc679-srgws  
CPanel v1 : Online - cpanel-v1-76864df47-hndph  
CPanel v2 : Online - cpanel-v2-86f86bc679-z5s2q  
CPanel v2 : Online - cpanel-v2-86f86bc679-5l2p5  
CPanel v1 : Online - cpanel-v1-76864df47-hndph  
CPanel v2 : Online - cpanel-v2-86f86bc679-z5s2q  
CPanel v2 : Online - cpanel-v2-86f86bc679-srgws
```

Changing load balancing strategies in destination rules for cpanels we want to show that random load balancing will be applied to subsets v1 and v2. So the distribution of responses from services should be 50/50 in average. For load balancing between replicas of cpanel v2 round robin is used.

```
$ make random  
./kubectl apply -f istio/random_lb.yaml  
destinationrule.networking.istio.io/cpanel configured  
$ ./kubectl get destinationrules cpanel -o yaml
```

```
$ make load  
for i in {1..100}; do sleep 0.2; curl http://192.168.99.114:32460/status; printf "\n"; done  
CPanel v2 : Online - cpanel-v2-86f86bc679-z5s2q  
CPanel v2 : Online - cpanel-v2-86f86bc679-5l2p5  
CPanel v1 : Online - cpanel-v1-76864df47-hndph  
CPanel v1 : Online - cpanel-v1-76864df47-hndph  
CPanel v1 : Online - cpanel-v1-76864df47-hndph  
CPanel v2 : Online - cpanel-v2-86f86bc679-srgws  
CPanel v2 : Online - cpanel-v2-86f86bc679-5l2p5
```

```
$ make deploy-istio-default  
./kubectl apply -f istio/dest_rule_all.yaml  
./kubectl apply -f istio/virt_svc_all.yaml  
./kubectl apply -f istio/ingress_gateway.yaml  
$ ./kubectl scale deployment cpanel-v2 --replicas=1
```

Fault injection

Internal istio mechanism for chaos testing. Allows simulating network and service errors without touching the source code of microservice at all. All faults are done by sidecar Envoy proxy. This istio ability is extremely helpful while testing application deployments on resiliency. Operations department can test the configuration files of istio deployments with making any code changes for simulation of unhealthy behavior of microservices.

To try both of this features separately the following predefined configuration for our application can be used. Both of them should be configured in virtual services.

```
$ make fault-injection-500
```

```
$ make fault-injection-delay10
```

But more interesting and sophisticated real world scenario is introduced when using fault injection mechanisms of istio together with such resiliency features for network communication as timeouts and retries of failed requests.

Timeout

In order to check how timeout mechanism works fixed delay 10 seconds for camera-agent-1 with success rate 50% was configured in virtual service. So after applying this configuration every second request to camera agent will be delayed. To protect client from waiting to long (full 10 seconds) timeout of 3 seconds is configured in virtual service. In such a way user will get response on request 3 times faster though it will be not positive.

```
$ make timeout
```

```
./kubectl apply -f istio/timeout.yaml
```

```
virtualservice.networking.istio.io/camera-agent-1 configured
```

```
virtualservice.networking.istio.io/cpanel configured
```

```
$ make health-timeout
```

```
for i in {1..100}; do sleep 0.2; curl http://192.168.99.114:32460/cameras/1/state; printf "\n"; done
```

```
{"streaming":true,"cycle":42,"fps":0,"section":"1","destination":"exit","event":"exit"}
```

```
{"streaming":true,"cycle":42,"fps":0,"section":"1","destination":"exit","event":"exit"}
```

```
{"streaming":true,"cycle":43,"fps":0,"section":"1","destination":"exit","event":"exit"}
```

```
{"streaming":true,"cycle":43,"fps":0,"section":"1","destination":"exit","event":"exit"}
```

```
upstream request timeout
```

```
upstream request timeout
```

```
{"streaming":true,"cycle":44,"fps":0,"section":"1","destination":"exit","event":"exit"}
```

```
upstream request timeout
```

```
{"streaming":true,"cycle":45,"fps":0,"section":"1","destination":"exit","event":"exit"}
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

```
upstream request timeout
```

Global Request Volume

2.2 ops

Global Success Rate (non-5xx respons...

99.47%

4xxs


No Data

5xxs

0.079 ops

HTTP/GRPC Workloads

| Service | Workload | Requests | P50 Latency | P90 Latency | P99 Latency | Success Rate |
|--|---------------------------------|------------------------------------|-------------|-------------|-------------|--------------|
| section-1.default.svc.cluster.local | section-1-deploy.default | section-1-deploy.default dashboard | 85 ms | 25.00 ms | 95.00 ms | 100.00% |
| momentum.default.svc.cluster.local | momentum-deploy.default | 0.53 ops | 3.33 ms | 9.50 ms | 23.20 ms | 100.00% |
| image-analysis.default.svc.cluster.local | image-analysis-deploy.default | 0.44 ops | 785.71 ms | 1.75 s | 2.42 s | 100.00% |
| face-recognition.default.svc.cluster.local | face-recognition-deploy.default | 0.09 ops | 794.12 ms | 1.50 s | 2.40 s | 100.00% |
| cpanel.default.svc.cluster.local | cpanel-v1.default | 0.24 ops | 199.79 ms | 4.47 s | 4.95 s | 53.24% |
| collector.default.svc.cluster.local | collector-deploy.default | 0.44 ops | 1.83 s | 2.50 s | 4.75 s | 100.00% |
| camera-agent-2.default.svc.cluster.local | camera-agent-2-deploy.default | 0 ops | NaN | NaN | NaN | NaN |
| camera-agent-1.default.svc.cluster.local | camera-agent-1-deploy.default | 0.41 ops | 9.91 ms | 48.54 ms | 94.56 ms | 100.00% |
| alerts.default.svc.cluster.local | alerts-deploy.default | 0.09 ops | 15.46 ms | 23.09 ms | 24.81 ms | 100.00% |

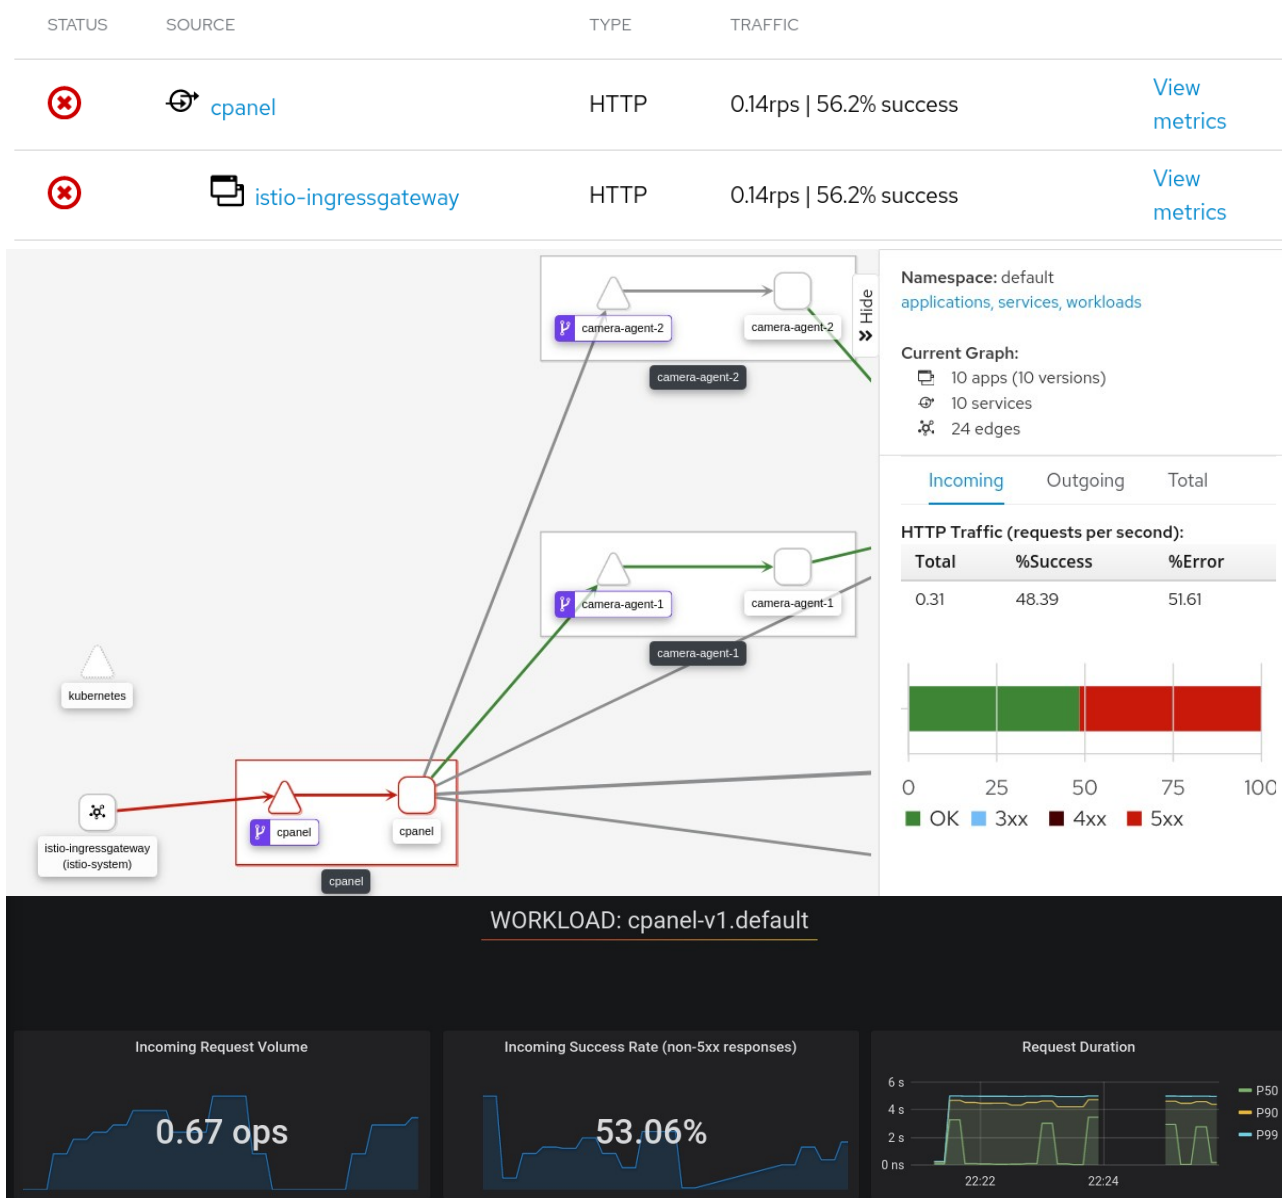

```
$ make deploy-istio-default
```

Retries

To demonstrate retry pattern in istio fault-injection was made in virtual service section-1 so that every fourth request will response with 500 HttpError. As a result collector will have failed requests and the data can be lost. To tolerate this artificial error rate retries were configured in collector virtual service. With 3 retries versus 25% error rate the system should behave much more stable.

```
$ make retries-fault
./kubectl apply -f istio/retry_fault.yaml
```

```
$ make start-cameras
curl http://192.168.99.114:32460/production?toggle=on
```



```
./kubectl apply -f istio/retry.yaml
```

```
$ make health-retries
for i in {1..100}; do sleep 0.2; curl http://192.168.99.114:32460/sections/1/status; printf "\n"; done
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
Section 1 v1 : Online
```

Circuit breaker

Outlier detection

```
$ make outlier
```

```
./kubectl apply -f istio/outlier_detection_collector.yaml
```

```
$ make outlier-scale
```

```
./kubectl scale deployment collector-deploy --replicas=3
```

```
$ make health-outlier
```

```
for i in {1..100}; do sleep 0.2; curl http://192.168.99.114:32460/collector/status; printf "\n"; done
Collector v1 : Online - collector-deploy-69c878f4b7-mdqcx
Collector v1 : Online - collector-deploy-69c878f4b7-5l4
Collector v1 : Online - collector-deploy-69c878f4b7-5l4
Collector v1 : Online - collector-deploy-69c878f4b7-9h8b9
Collector v1 : Online - collector-deploy-69c878f4b7-mdqcx
Collector v1 : Online - collector-deploy-69c878f4b7-5l4
Collector v1 : Online - collector-deploy-69c878f4b7-9h8b9
```

```
$ make outlier-fault
```

```
./kubectl exec -it collector-deploy-69c878f4b7-9h8b9 -c collector http localhost:8080/fault
```

```
HTTP/1.0 200 OK
```

```
Content-Length: 10
```

```
Content-Type: text/html; charset=utf-8
```

```
Date: Wed, 04 Mar 2020 13:52:24 GMT
```

```
Server: Werkzeug/1.0.0 Python/3.7.6
```

```
Now faulty
```

```
$ make health-outlier
```

```
for i in {1..100}; do sleep 0.2; curl http://192.168.99.114:32460/collector/status; printf "\n"; done
Collector v1 : Online - collector-deploy-69c878f4b7-mdqcx
Collector v1 : Online - collector-deploy-69c878f4b7-5l4
```

Collector v1 : Online - collector-deploy-69c878f4b7-jg5l4
Collector v1 : Online - collector-deploy-69c878f4b7-mdqcx
Collector v1 : Online - collector-deploy-69c878f4b7-jg5l4
Collector v1 : Online - collector-deploy-69c878f4b7-mdqcx
Collector v1 : Online - collector-deploy-69c878f4b7-jg5l4

So we can see that faulty pod is extracted from load balancing pool and no traffic is forwarded to it.

Connection pool

```
$ make deploy-fortio
./deploy_fortio.sh
service/fortio created
deployment.apps/fortio-deploy created
fortio pod: fortio-deploy-68c7549cc6-qc2lj
get response from collector
```

```
HTTP/1.1 200 OK
content-type: text/plain; charset=utf-8
content-length: 57
server: envoy
date: Wed, 04 Mar 2020 14:46:40 GMT
x-envoy-upstream-service-time: 5
```

```
$ make circuit-breaker
./kubectl apply -f istio/circuit_breaker.yaml
```

```
$ make load-fortio
./load_fortio.sh
fortio pod: fortio-deploy-68c7549cc6-qc2lj
generating load to cpanel
15:20:33 I logger.go:97> Log level is now 3 Warning (was 2 Info)
Fortio 1.3.1 running at 0 queries per second, 4->4 procs, for 20 calls: http://collector:8080/status
Starting at max qps with 3 thread(s) [gomax 4] for exactly 20 calls (6 per thread + 2)
15:20:33 W http_client.go:679> Parsed non ok code 503 (HTTP/1.1 503)
15:20:33 W http_client.go:679> Parsed non ok code 503 (HTTP/1.1 503)
15:20:33 W http_client.go:679> Parsed non ok code 503 (HTTP/1.1 503)
15:20:33 W http_client.go:679> Parsed non ok code 503 (HTTP/1.1 503)
15:20:33 W http_client.go:679> Parsed non ok code 503 (HTTP/1.1 503)
15:20:33 W http_client.go:679> Parsed non ok code 503 (HTTP/1.1 503)
15:20:33 W http_client.go:679> Parsed non ok code 503 (HTTP/1.1 503)
Ended after 249.209801ms : 20 calls. qps=80.254
Aggregated Function Time : count 20 avg 0.02127085 +/- 0.02412 min 0.000701932 max
0.079165391 sum 0.425416991
# range, mid point, percentile, count
>= 0.000701932 <= 0.001 , 0.000850966 , 5.00, 1
> 0.001 <= 0.002 , 0.0015 , 25.00, 4
> 0.002 <= 0.003 , 0.0025 , 30.00, 1
> 0.007 <= 0.008 , 0.0075 , 40.00, 2
> 0.008 <= 0.009 , 0.0085 , 45.00, 1
> 0.009 <= 0.01 , 0.0095 , 50.00, 1
```

```

> 0.012 <= 0.014 , 0.013 , 55.00, 1
> 0.018 <= 0.02 , 0.019 , 65.00, 2
> 0.02 <= 0.025 , 0.0225 , 70.00, 1
> 0.025 <= 0.03 , 0.0275 , 80.00, 2
> 0.03 <= 0.035 , 0.0325 , 85.00, 1
> 0.06 <= 0.07 , 0.065 , 90.00, 1
> 0.07 <= 0.0791654 , 0.0745827 , 100.00, 2
# target 50% 0.01
# target 75% 0.0275
# target 90% 0.07
# target 99% 0.0782489
# target 99.9% 0.0790737
Sockets used: 9 (for perfect keepalive, would be 3)
Code 200 : 13 (65.0 %)
Code 503 : 7 (35.0 %)
Response Header Sizes : count 20 avg 108.3 +/- 79.47 min 0 max 167 sum 2166
Response Body/Total Sizes : count 20 avg 229.7 +/- 8.301 min 223 max 241 sum 4594
All done 20 calls (plus 0 warmup) 21.271 ms avg, 80.3 qps

```

```

$ make get-fortio
./kubectl exec fortio-deploy-68c7549cc6-qc2lj -c istio-proxy -- pilot-agent request GET stats | grep
collector | grep pending
cluster.outbound|8080|v1|
collector.default.svc.cluster.local.circuit_breakers.default.rq_pending_open: 0
cluster.outbound|8080|v1|collector.default.svc.cluster.local.circuit_breakers.high.rq_pending_open:
0
cluster.outbound|8080|v1|collector.default.svc.cluster.local.upstream_rq_pending_active: 0
cluster.outbound|8080|v1|collector.default.svc.cluster.local.upstream_rq_pending_failure_eject: 0
cluster.outbound|8080|v1|collector.default.svc.cluster.local.upstream_rq_pending_overflow: 7
cluster.outbound|8080|v1|collector.default.svc.cluster.local.upstream_rq_pending_total: 22

```

Discussion

Conclusion

Application was successfully deployed with istio. Different resiliency hardening approaches were realized in demo both on side of kubernetes and istio. Graphics and console output shows the results.

Istio offers great features in terms of resiliency for modern microservices applications. It helps with focus shift of operational overhead from developers to operations departments.

Centrally managed decentralized system, extra hops, immature [enterprise].

- pros of istio resiliency features
- expanse of service meshes
- complexity of operations (# of micro services, agile)
- advices
 - move to production step by step incremental, complexity of debugging
 - adopt istio only if you have a use case that can be solved through it
 - configure log level to error – otherwise too much traffic \$\$\$

Not everyone will need istio right now. Complexity

debugging too complex. Many moving parts of istio, kubernetes, application, envoy deployments over 1000 opened issues in github [issues].

not really production ready

Future Work

Discussed only a small aspect of istio functionality. Try out other istio features and also resiliency with enabled mTLS.

Moving to a real world application and applying resiliency step by step in it.

Each new version of istio has plenty of bugs fixed. All of them influence on your the stability and resiliency of your deployment. It is up to you to test them, give feedback and become a part of new standard for future deployments of your microservices applications. Report bugs on github to participate in development process.

References

1. (rest)Fielding, Roy Thomas. *Architectural Styles and the Design of Network-based Software Architectures*. Doctoral dissertation, University of California, Irvine, 2000.
2. (fowler)<https://www.martinfowler.com/articles/microservices.html> (accessed 07.03.2020)
3. (sec)<https://snyk.io/blog/top-ten-most-popular-docker-images-each-contain-at-least-30-vulnerabilities/> (accessed 07.03.2020)
4. (cc)Cloud Computing Assignment
5. (twelve)<https://12factor.net/> (accessed 07.03.2020)
6. (k8s)<https://kubernetes.io/> (accessed 07.03.2020)
7. (istio)<https://istio.io/> (accessed 07.03.2020)
8. (docker)<https://www.docker.com/> (accessed 07.03.2020)
9. (alt)<https://aspenmesh.io/service-mesh-architectures/> (accessed 07.03.2020)
10. (tele)<https://www.telepresence.io/> (accessed 07.03.2020)
11. (action)Bruce, Morgan, and Paulo A. Pereira. *Microservices in Action*. Manning, 2019.
12. (towards)Towards an Understanding of Microservices. Proceedings of the 23rd International Conference on Automation & Computing, University of Huddersfield, Huddersfield, UK, 7-8 September 2017
13. (native) Alex Williams. *Guide to Cloud Native Microservices*. The New Stack, 2018.
14. (mesh)<https://servicemesh.io/> (accessed 07.03.2020)
15. (micro_git)https://github.com/davideaibi/Microservices_Project_List (accessed 07.03.2020)
16. (enterprise)Indrasiri, Kasun, and Prabath Siriwardena. *Microservices for the Enterprise: Designing, Developing, and Deploying*. Apress, 2018.
17. (advanced)Hunter, Thomas. *Advanced Microservices: a Hand-on Approach to Microservices Infrastructure and Tooling*. Apress, 2017.
18. (microcon)Kocher, Parminder Singh. *Microservices and Containers*. Addison Wesley, 2018.
19. (meshpath)Lee Calcote. *The Enterprise Path to Service Mesh Architectures*. O'Reilly Media, 2018

20. (appmicro)Alex Williams, Benjamin Ball. Applications and microservices with docker and containers. The New Stack, 2016
21. (prodmicro)Fowler, Susan J. *Production-Ready Microservices: Building Standardized Systems across an Engineering Organization*. O'Reilly Media, 2017.
22. (designmicro)Chris Richardson, Floyd Smith. Microservices From Design to Deployment. NGINX Inc., 2016
23. (buildmicro)Newman, Sam. *Building Microservices: Designing Fine-Grained Systems*. O'Reilly Media, 2018.
24. (eval)Villamizar, Mario & Garcés, Oscar & Castro, Harold & Verano Merino, Mauricio & Salamanca, Lorena & Casallas, Rubby & Gil, Santiago. (2015). Evaluating the monolithic and the microservice architecture pattern to deploy web applications in the cloud. 10.1109/ColumbianCC.2015.7333476.
25. (uprun)Calcote, Lee and Butcher Zack. *ISTIO: up and Running*. O'Reilly Media, 2019.
26. (10years) N. Kratzke and P.-C. Quint. Understanding cloud-native applications after 10 years of cloud computing - a systematic mapping study. *Journal of Systems and Software*, 126:1–16, 2017.
27. (flexible)E. Wolff. Microservices: Flexible Software Architectures. CreateSpace Independent Publishing Platform, 2016.
28. (migrate)A. Balalaie, A. Heydarnoori, and P. Jamshidi. Migrating to Cloud-Native Architectures Using Microservices: An Experience Report, pages 201–215. Springer International Publishing, Cham, 2016.
29. (today)N. Dragoni, S. Giallorenzo, A. L. Lafuente, M. Mazzara, F. Montesi, R. Mustafin, and L. Safina. Microservices: Yesterday, Today, and Tomorrow, pages 195–216. Springer International Publishing, Cham, 2017.
30. (decision)S. Haselbock and R. Weinreich. Decision guidance models for microservice monitoring. In 2017 IEEE International Conference on Software Architecture Workshops (ICSAW), pages 54–61, April 2017.
31. (java) Michael Hofmann, Erin Schnabel, Katherine Stanley. Microservices Best Practices for Java. IBM Corp., 2016
32. (issues)<https://github.com/istio/istio/issues> (accessed 07.03.2020)

Supplemental Material

- Cloud computing assignment (git)
- Useful commands (git)