
Let there are 2 rides on a page. They both have some distinct stata, as shown below.

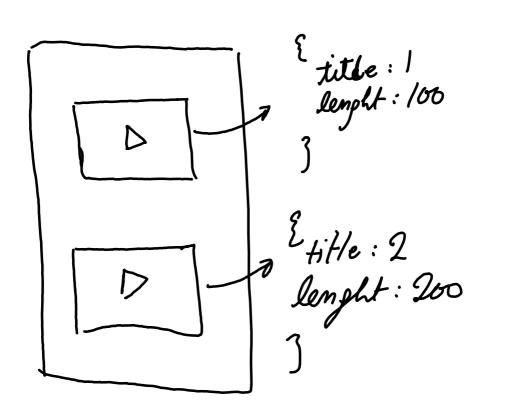

Now, what I am doing in JS [On page load] Get all the elements, that require a youtube viideo Create player Objects ruia I Frame API I next page

prev page A list of player objects is create For each player in the list do: ytanlytic = YTPlupin (, player, key) ytanletic. init().

Now the problem is that

For any event on any ruideo

Segment track events data for wides I or 2 is that of wides

