


CONSULTAS SQL AVANZADAS

Vanessa Michelle Calles Marroquín
KODIGO [Dirección de la compañía]

CONSULTA 01

```
-- 01 INSERTAR PROPIETARIO
```

```
INSERT INTO propietarios(nombre, telefono, email)  
VALUES ('Carlos López', '7777-7777', 'carlos@gmail.com');
```

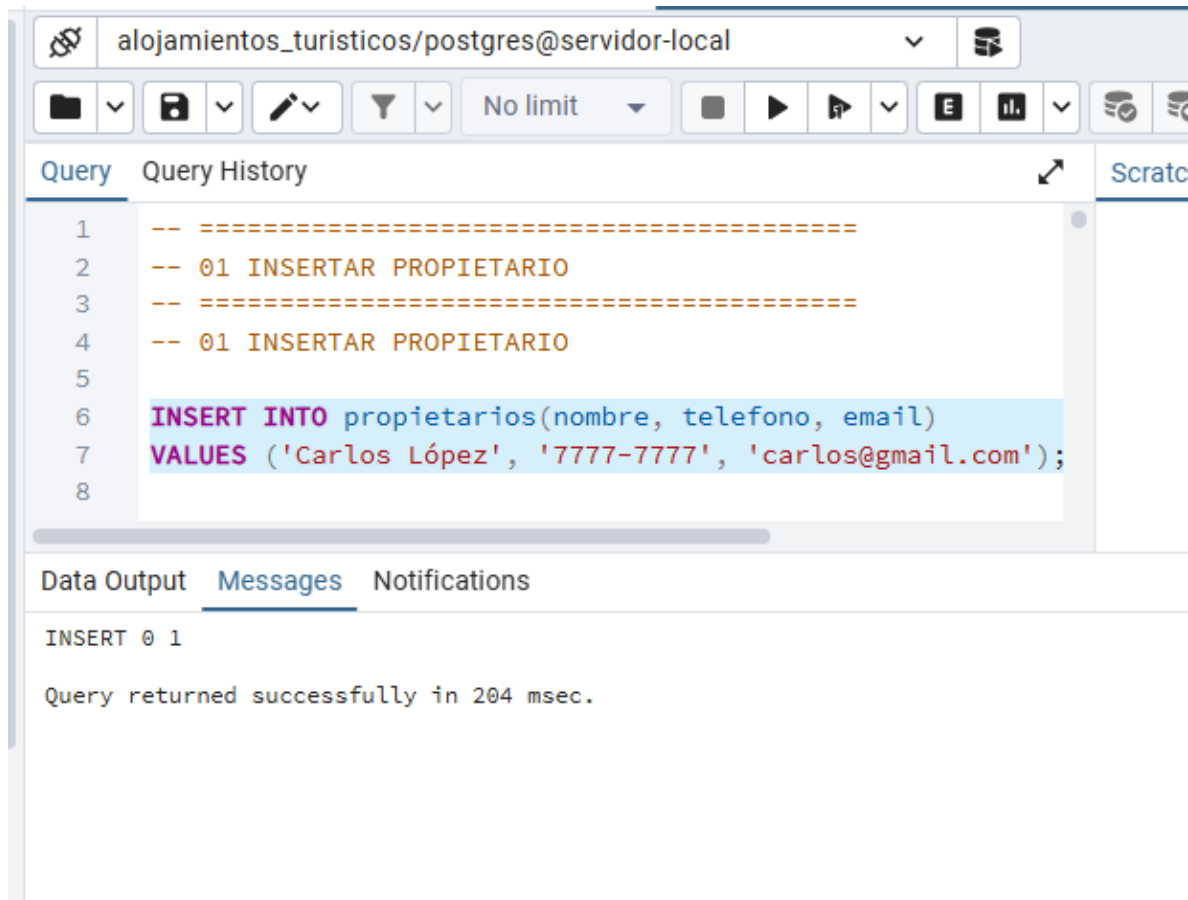

The screenshot shows a PostgreSQL client interface with the following components:

- Toolbar:** Includes icons for connection, save, edit, filter, and execution. The connection string is `alojamientos_turisticos/postgres@servidor-local`.
- Query Editor:** Contains the SQL query:

```
-- =====  
-- 01 INSERTAR PROPIETARIO  
-- =====  
-- 01 INSERTAR PROPIETARIO  
  
INSERT INTO propietarios(nombre, telefono, email)  
VALUES ('Carlos López', '7777-7777', 'carlos@gmail.com');
```

The query is highlighted in blue.
- Messages Tab:** Shows the execution result:

```
INSERT 0 1  
  
Query returned successfully in 204 msec.
```

CONSULTA 02

```
-- 02 INSERTAR ALOJAMIENTO
```

```
INSERT INTO alojamientos(nombre, ciudad, precio_noche, activo,  
id_propietario)  
VALUES ('Hotel Paraíso', 'San Salvador', 80.00, TRUE, 1);
```

```
8  
9 -- 02 INSERTAR ALOJAMIENT  
10  
11 INSERT INTO alojamientos(nombre, ciudad, precio_noche, activo, id_propietario)  
12 VALUES ('Hotel Paraíso', 'San Salvador', 80.00, TRUE, 1);
```

Data Output Messages Notifications

INSERT 0 1

Query returned successfully in 271 msec.

CONSULTA 03

```
-- 03 HUESPED Y RESERVA
```

```
INSERT INTO huespedes(nombre, país, email)  
VALUES ('Ana Pérez', 'México', 'ana@gmail.com');
```

```
INSERT INTO reservas(fecha_inicio, fecha_fin, estado, id_huesped,  
id_alojamiento)  
VALUES ('2026-06-01', '2026-06-05', 'Confirmada', 1, 1);
```

alojamientos_1411111111, postgres@server local

Query Query History

```
13 -- 03 HUESPED Y RESERVA  
14  
15 INSERT INTO huespedes(nombre, país, email)  
16 VALUES ('Ana Pérez', 'México', 'ana@gmail.com');  
17  
18 INSERT INTO reservas(fecha_inicio, fecha_fin, estado, id_huesped, id_alojamiento)  
19 VALUES ('2026-06-01', '2026-06-05', 'Confirmada', 1, 1);
```

Data Output Messages Notifications

INSERT 0 1

Query returned successfully in 201 msec.

CONSULTA 04

```
-- 04 INSERTAR PAGO
```

```
INSERT INTO pagos(monto, fecha_pago, id_reserva)  
VALUES (320.00, '2026-06-01', 1);
```

```
19 VALUES ('2026-06-01', '2026-06-05', 'Confirmada', 1, 1);
```

```
20
```

```
21 -- 04 INSERTAR PAGO
```

```
22
```

```
23 INSERT INTO pagos(monto, fecha_pago, id_reserva)
```

```
24 VALUES (320.00, '2026-06-01', 1);
```

```
25
```

Data Output Messages Notifications

INSERT 0 1

Query returned successfully in 211 msec.

CONSULTA 05

```
-- 05 ALOJAMIENTOS ACTIVOS
```

```
SELECT * FROM alojamientos  
WHERE activo = TRUE;
```

alojamientos_turisticos/postgres@servidor-local

Query Query History

```
25
26 -- 05 ALOJAMIENTOS ACTIVOS
27
28 SELECT * FROM alojamientos
29 WHERE activo = TRUE;
30
```

Execute script F5

Data Output Messages Notifications

Showing rows: 1 to 6 Page No:

	id_alojamiento [PK] integer	nombre character varying (100)	ciudad character varying (100)	precio_noche numeric (10,2)	activo boolean	id_propietario integer
1	2	Hotel Paraíso	San Salvador	80.00	true	1
2	3	Hotel Paraíso	San Salvador	80.00	true	1
3	4	Hotel Paraíso	San Salvador	80.00	true	1
4	5	Hotel Paraíso	San Salvador	80.00	true	1
5	1	Hotel Paraíso	San Salvador	95.00	true	1
6	6	Hotel Paraíso	San Salvador	80.00	true	1

CONSULTA 06

-- 06 HUESPEDES POR PAIS

```
SELECT * FROM huespedes
WHERE pais = 'México';
```

alojamientos_turisticos/postgres@servidor-local

Query Query History

```
30
31 -- 06 HUESPEDES POR PAIS
32
33 SELECT * FROM huespedes
34 WHERE pais = 'México';
35
```

Data Output Messages Notifications


Showing rows: 1 to 5

	id_huesped [PK] integer	nombre character varying (100)	pais character varying (50)	email character varying (100)
1	1	Ana Pérez	México	ana@gmail.com
2	2	Ana Pérez	México	ana@gmail.com
3	3	Ana Pérez	México	ana@gmail.com
4	4	Ana Pérez	México	ana@gmail.com
5	5	Ana Pérez	México	ana@gmail.com

CONSULTA 07

-- 07 RESERVAS POR FECHAS

```
SELECT * FROM reservas
WHERE fecha_inicio BETWEEN '2026-06-01' AND '2026-06-30'
```

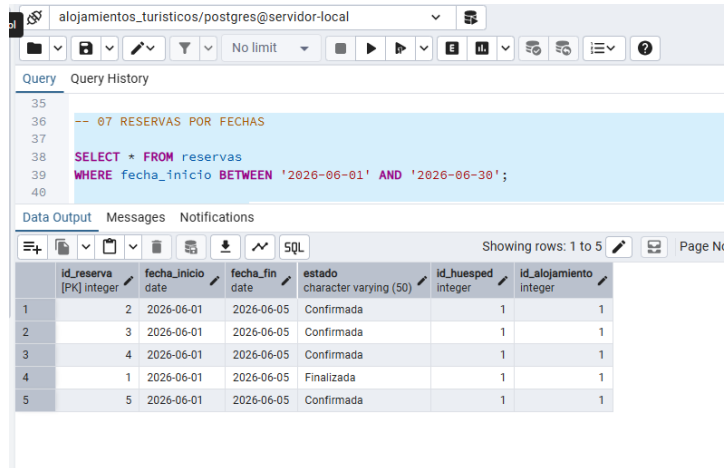

The screenshot shows a PostgreSQL query editor interface. The query is: `-- 07 RESERVAS POR FECHAS`
`SELECT * FROM reservas`
`WHERE fecha_inicio BETWEEN '2026-06-01' AND '2026-06-30';`


The results are displayed in a table with 7 columns: `id_reserva` (integer), `fecha_inicio` (date), `fecha_fin` (date), `estado` (character varying (50)), `id_huesped` (integer), `id_alojamiento` (integer). The table shows 5 rows of data.

	id_reserva [PK] integer	fecha_inicio date	fecha_fin date	estado character varying (50)	id_huesped integer	id_alojamiento integer
1	2	2026-06-01	2026-06-05	Confirmada	1	1
2	3	2026-06-01	2026-06-05	Confirmada	1	1
3	4	2026-06-01	2026-06-05	Confirmada	1	1
4	1	2026-06-01	2026-06-05	Finalizada	1	1
5	5	2026-06-01	2026-06-05	Confirmada	1	1

CONSULTA 08

-- 08 ACTUALIZAR PRECIO

```
UPDATE alojamientos
SET precio_noche = 95.00
WHERE id_alojamiento = 1;
```

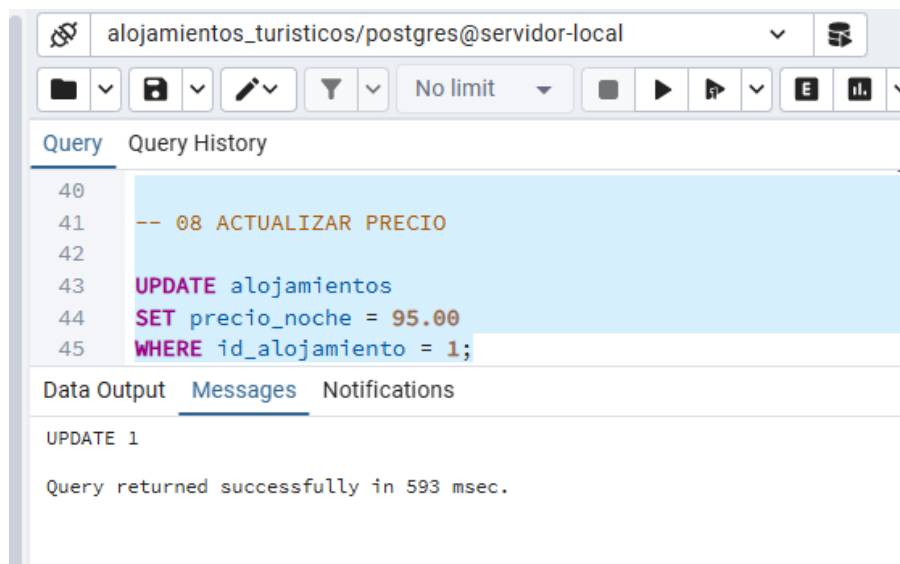

The screenshot shows a PostgreSQL query editor interface. The query is: `-- 08 ACTUALIZAR PRECIO`
`UPDATE alojamientos`
`SET precio_noche = 95.00`
`WHERE id_alojamiento = 1;`


The results are displayed in a table with 1 column: `UPDATE 1`. The message below the table states: "Query returned successfully in 593 msec."

UPDATE 1

CONSULTA 09

-- 09 ACTUALIZAR ESTADO RESERVA


```
UPDATE reservas
SET estado = 'Finalizada'
WHERE id_reserva = 1;
```

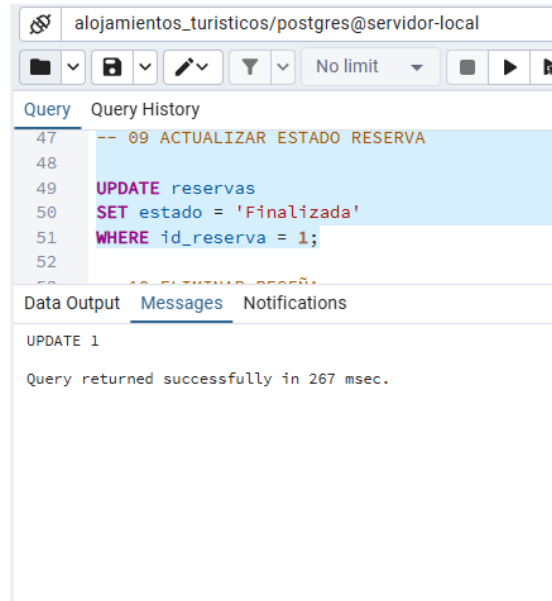

CONSULTA 10

-- 10 ELIMINAR RESEÑA


```
DELETE FROM resenas
WHERE id_resena = 1;
```

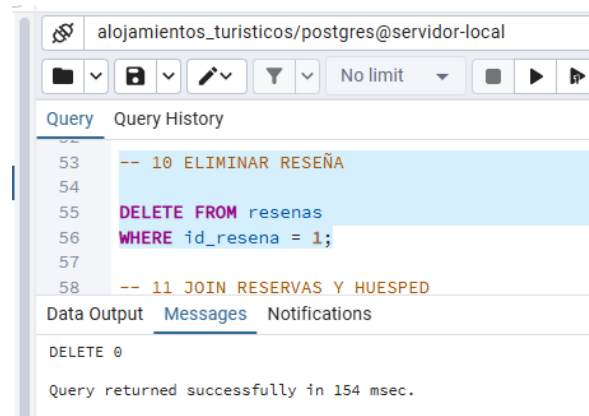

CONSULTA 11

```
-- 11 JOIN RESERVAS Y HUESPED

SELECT r.id_reserva, h.nombre, r.estado
FROM reservas r
INNER JOIN huespedes h
ON r.id_huesped = h.id_huesped;
```

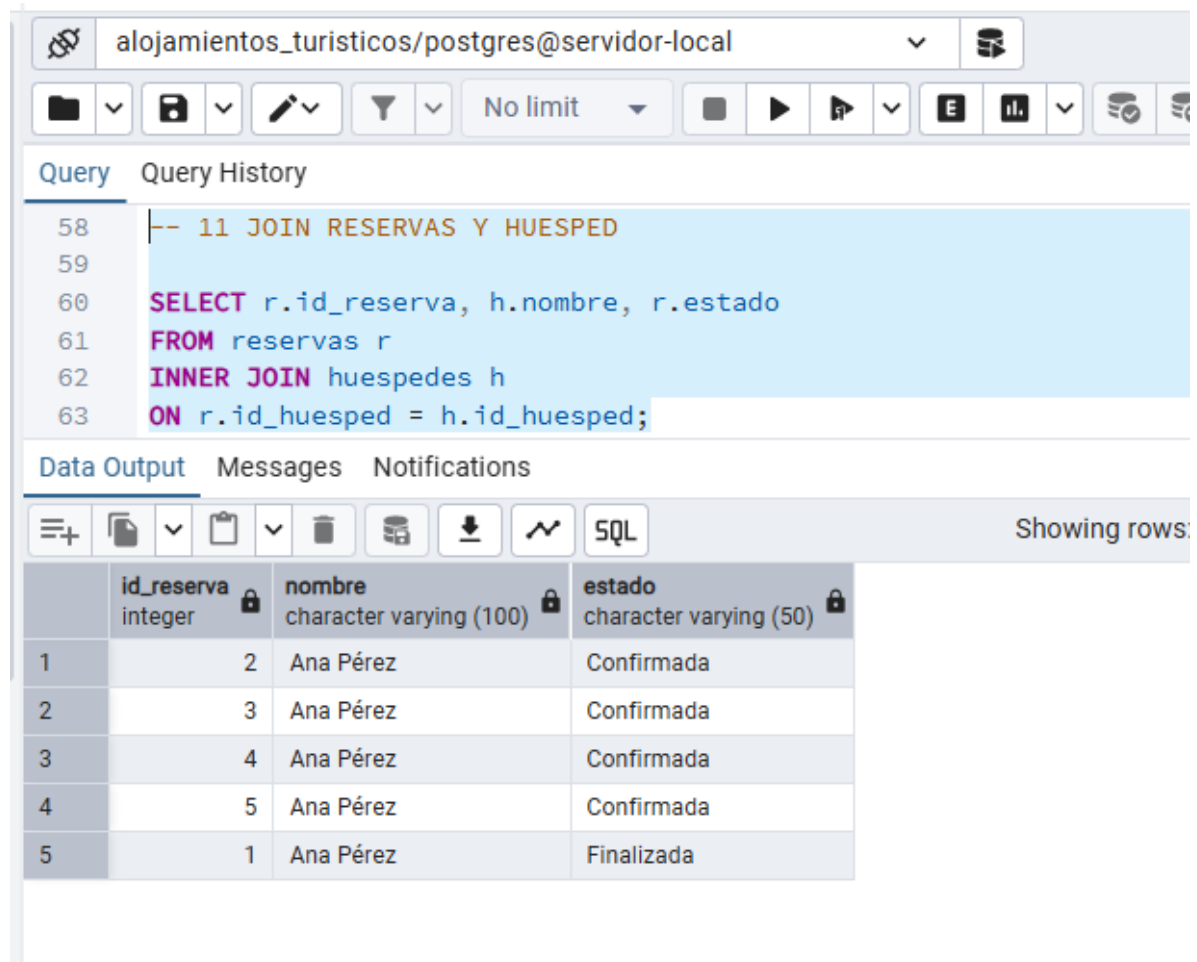

The screenshot shows a PostgreSQL query editor interface. The top bar indicates the connection to 'alojamientos_turisticos/postgres@servidor-local'. Below the toolbar, the 'Query' tab is active, displaying the following SQL query:

```
-- 11 JOIN RESERVAS Y HUESPED

SELECT r.id_reserva, h.nombre, r.estado
FROM reservas r
INNER JOIN huespedes h
ON r.id_huesped = h.id_huesped;
```

The 'Data Output' tab is also visible, showing the results of the query. The results are displayed in a table with the following columns: 'id_reserva' (integer), 'nombre' (character varying (100)), and 'estado' (character varying (50)). The table contains 5 rows of data:

	id_reserva integer	nombre character varying (100)	estado character varying (50)
1	2	Ana Pérez	Confirmada
2	3	Ana Pérez	Confirmada
3	4	Ana Pérez	Confirmada
4	5	Ana Pérez	Confirmada
5	1	Ana Pérez	Finalizada

CONSULTA 12

```
-- 12 JOIN ALOJAMIENTO COMPLETO

SELECT a.nombre, p.nombre AS propietario
FROM alojamientos a
INNER JOIN propietarios p
ON a.id_propietario = p.id_propietario;
```


alojamientos_turisticos/postgres@servidor-local

Query Query History

```

65 -- 12 JOIN ALOJAMIENTO COMPLETO
66
67 SELECT a.nombre, p.nombre AS propietario
68 FROM alojamientos a
69 INNER JOIN propietarios p
70 ON a.id_propietario = p.id_propietario;

```

Data Output Messages Notifications

	nombre character varying (100)	propietario character varying (100)
1	Hotel Paraíso	Carlos López
2	Hotel Paraíso	Carlos López
3	Hotel Paraíso	Carlos López
4	Hotel Paraíso	Carlos López
5	Hotel Paraíso	Carlos López
6	Hotel Paraíso	Carlos López

CONSULTA 13

-- 13 PAGOS Y RESERVAS

```

SELECT p.monto, r.estado
FROM pagos p
INNER JOIN reservas r
ON p.id_reserva = r.id_reserva;

```

alojamientos_turisticos/postgres@servidor-local

Query Query History

```
-- 13 PAGOS Y RESERVAS
SELECT p.monto, r.estado
FROM pagos p
INNER JOIN reservas r
ON p.id_reserva = r.id_reserva;
```

Data Output Messages Notifications

Showing rows: 1 to 9 Page No: 1

	monto numeric (10,2)	estado character varying (50)
1	320.00	Finalizada
2	320.00	Finalizada
3	320.00	Finalizada
4	320.00	Finalizada
5	320.00	Finalizada
6	320.00	Finalizada
7	320.00	Finalizada
8	320.00	Finalizada
9	320.00	Finalizada

✓ Successfully run. Total query runtime: :

CONSULTA 14

```
-- 14 LEFT JOIN SIN RESEÑAS

SELECT a.nombre, re.comentario
FROM alojamientos a
LEFT JOIN resenas re
ON a.id_alojamiento = re.id_alojamiento;
```

alojamientos_turisticos/postgres@servidor-local

Query Query History

```
79 -- 14 LEFT JOIN SIN RESEÑAS
80
81 SELECT a.nombre, re.comentario
82 FROM alojamientos a
83 LEFT JOIN resenas re
84 ON a.id_alojamiento = re.id_alojamiento;
```

Data Output Messages Notifications

SQL

	nombre character varying (100)	comentario text
1	Hotel Paraíso	[null]
2	Hotel Paraíso	[null]
3	Hotel Paraíso	[null]
4	Hotel Paraíso	[null]
5	Hotel Paraíso	[null]
6	Hotel Paraíso	[null]

Graph Visualiser

CONSULTA 15

```
-- 15 ALOJAMIENTOS SIN RESERVAS
```

```
SELECT a.nombre
FROM alojamientos a
LEFT JOIN reservas r
ON a.id_alojamiento = r.id_alojamiento
WHERE r.id_reserva IS NULL;
```

alojamientos_turisticos/postgres@servidor-local

Query Query History

```
86 -- 15 ALOJAMIENTOS SIN RESERVAS
87
88 SELECT a.nombre
89 FROM alojamientos a
90 LEFT JOIN reservas r
91 ON a.id_alojamiento = r.id_alojamiento
92 WHERE r.id_reserva IS NULL;
```

Data Output Messages Notifications

	nombre character varying (100)
1	Hotel Paraíso
2	Hotel Paraíso
3	Hotel Paraíso
4	Hotel Paraíso
5	Hotel Paraíso

CONSULTA 16

```
-- 16 TOTAL INGRESOS
```

```
SELECT SUM(monto) AS total_ingresos
FROM pagos;
```

alojamientos_turisticos/postgres@servidor-local

Query Query History

```
93
94 -- 16 TOTAL INGRESOS
95
96 SELECT SUM(monto) AS total_ingresos
97 FROM pagos;
98
99 -- 17 PROMEDIO RATING
```

Data Output Messages Notifications

	total_ingresos numeric
1	2880.00

CONSULTA 17

```
-- 17 PROMEDIO RATING
```

```
SELECT AVG(rating) AS promedio_rating
FROM resenas;
```

The screenshot shows a PostgreSQL client interface with the connection 'alojamientos_turisticos/postgres@servidor-local'. The query editor contains the following SQL code:

```
98
99 -- 17 PROMEDIO RATING
100
101 SELECT AVG(rating) AS promedio_rating
102 FROM resenas;
103
```

The 'Data Output' tab is active, showing the result of the query:

	promedio_rating
1	[null]

The interface includes a toolbar with icons for file operations, filters, and execution, and a status bar indicating 'Showing rows:'.

CONSULTA 18

-- 18 TOP ALOJAMIENTOS

```
SELECT id_alojamiento, COUNT(*) AS total_reservas
FROM reservas
GROUP BY id_alojamiento
ORDER BY total_reservas DESC
LIMIT 5;
```

alojamientos_turisticos/postgres@servidor-local

Query Query History

```
104 -- 18 TOP ALOJAMIENTOS
105
106 SELECT id_alojamiento, COUNT(*) AS total_reservas
107 FROM reservas
108 GROUP BY id_alojamiento
109 ORDER BY total_reservas DESC
110 LIMIT 5;
111
```

Data Output Messages Notifications

Showing rows: 1 to 5

	id_alojamiento integer	total_reservas bigint
1	1	5

CONSULTA 19

-- 19 MAS DE 3 RESERVAS

```
SELECT id_alojamiento, COUNT(*) AS total
FROM reservas
GROUP BY id_alojamiento
HAVING COUNT(*) > 3;
```

alojamientos_turisticos/postgres@servidor-local

Query Query History

```
111
112 -- 19 MAS DE 3 RESERVAS
113
114 SELECT id_alojamiento, COUNT(*) AS total
115 FROM reservas
116 GROUP BY id_alojamiento
117 HAVING COUNT(*) > 3;
118
```

Data Output Messages Notifications

	id_alojamiento integer	total bigint
1	1	5

CONSULTA 20

```
-- 20 ALOJAMIENTO MAS CARO

SELECT nombre, precio_noche
FROM alojamientos
WHERE precio_noche = (
    SELECT MAX(precio_noche)
    FROM alojamientos
);
```