Assignment 4

Q1

Topology and packet transfer

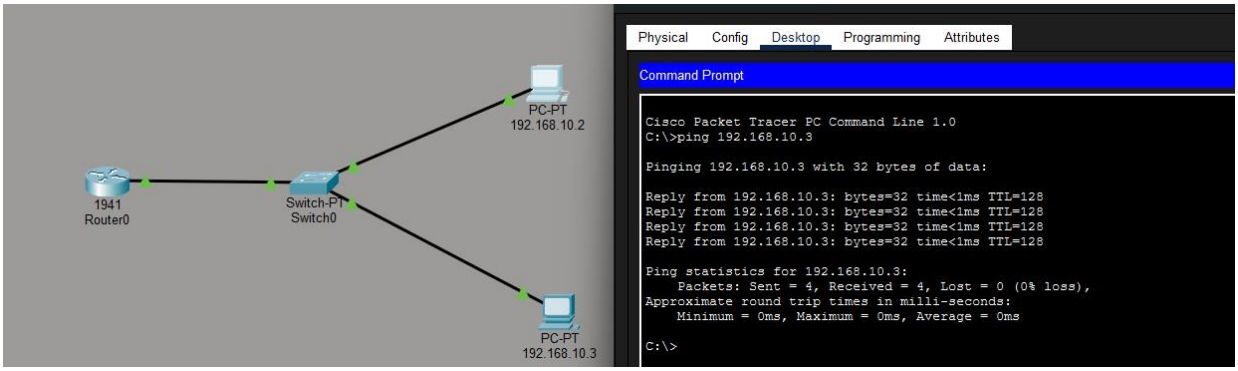

CLI code

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface GigabitEthernet 0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed
state to up

Router(config-if)#exit
Router(config)#ip dhcp pool xyz
Router(dhcp-config)#network 192.168.10.0 255.255.255.0
Router(dhcp-config)#dns-server 1.2.3.4
Router(dhcp-config)#no ip dhcp bootp ignore
```

DHCP request successful IP sent to Client 1

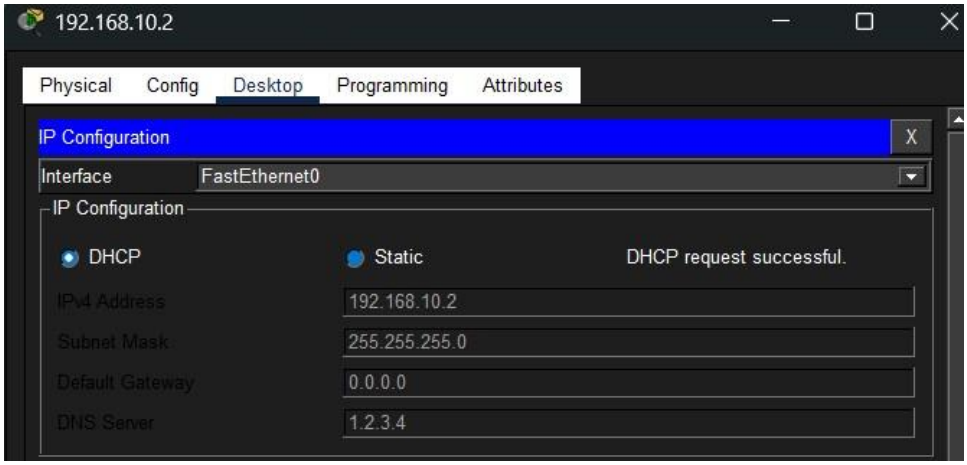
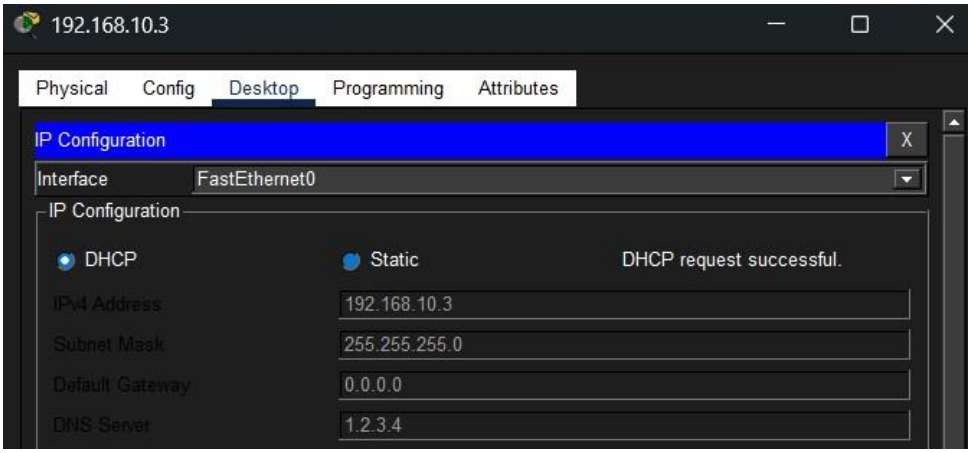
DHCP request successful – IP sent to Client 2