EXPERIMENT 10.1.1

ALGORITHM:

1 Start

2 **Input** a string `s`
3 Initialize an empty string `result = ""`

4 Repeat for each character `ch` in `s`:

5 **Check** if `ch` is:

- a letter (`a-z` or `A-Z`) OR
- a digit (`0-9`) OR
- a space

6 If yes:

Add `ch` to `result`

7 Else:

Ignore

8 Print the string `result`
9 End

FLOWCHART:

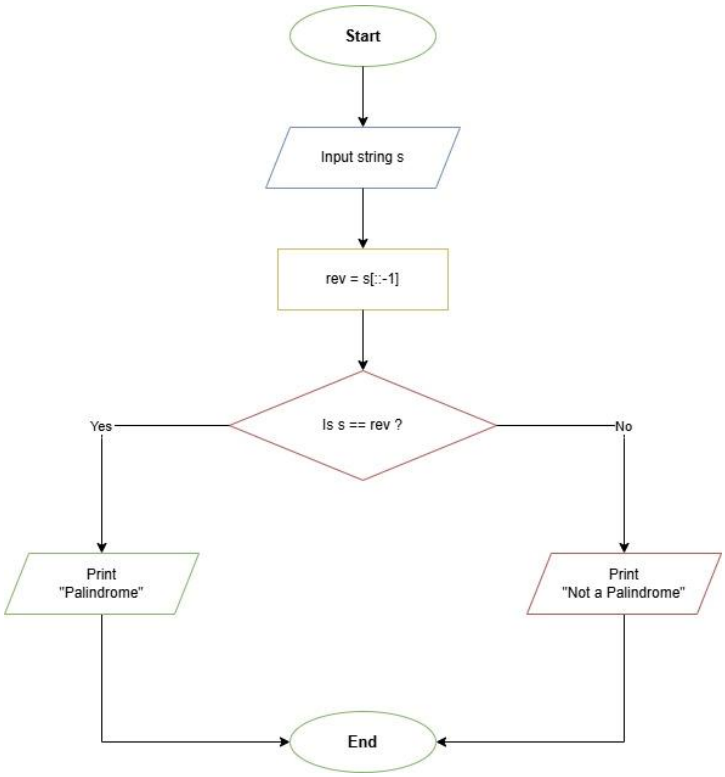

CODETANTRA:

CODETANTRA Home ira.handa.batch2025@sitnagpur.siu.edu.in Support Logout

10.1.1. Remove Punctuations from a String 04:21

Write a Python program to remove all punctuation marks from a given string and print the resulting string.

Punctuation marks are special characters that are not letters, digits, or spaces.

The program should keep all letters (uppercase and lowercase), digits, and spaces, but remove all punctuation marks.

Input Format:

- Single line contains a string (may include letters, digits, spaces, and punctuation marks).

Output Format:

- Print the string after removing all punctuation marks.

Note:

- Refer to sample test cases for better understanding.

removeP... Submit

```python
s = input()
result = ""
for ch in s:
    if ch.isalnum() or ch == " ":
        result += ch
print(result)
```

Terminal Test cases

EXPERIMENT 10.2.1

CODETANTRA:

CODETANTRA Home ira.handa.batch2025@sitnagpur.siu.edu.in Support Logout

10.1.2. Reverse a String 06:14

Write a Python program that prints the reverse of a given input string. The program uses a **reverse_string()** function that takes a string as input and returns its reversed string.

Input Format:

- The program prompts "Enter a string: " and reads a string representing the string to be reversed.

Output Format:

- The first line prints the original string, in the format:

```
Original String: <input_string>
```

- The next line prints the reversed string, in the format:

```
Reversed String: <reversed_string>
```

Sample Test Cases +

ReverseS... Submit

```python
def reverse_string(s):
    return s[::-1]



user_input = input("Enter a string: ")
result = reverse_string(user_input)
print(f"Original String: {user_input}")
print(f"Reversed String: {result}")
```

Terminal Test cases

< Prev Reset Submit Next >

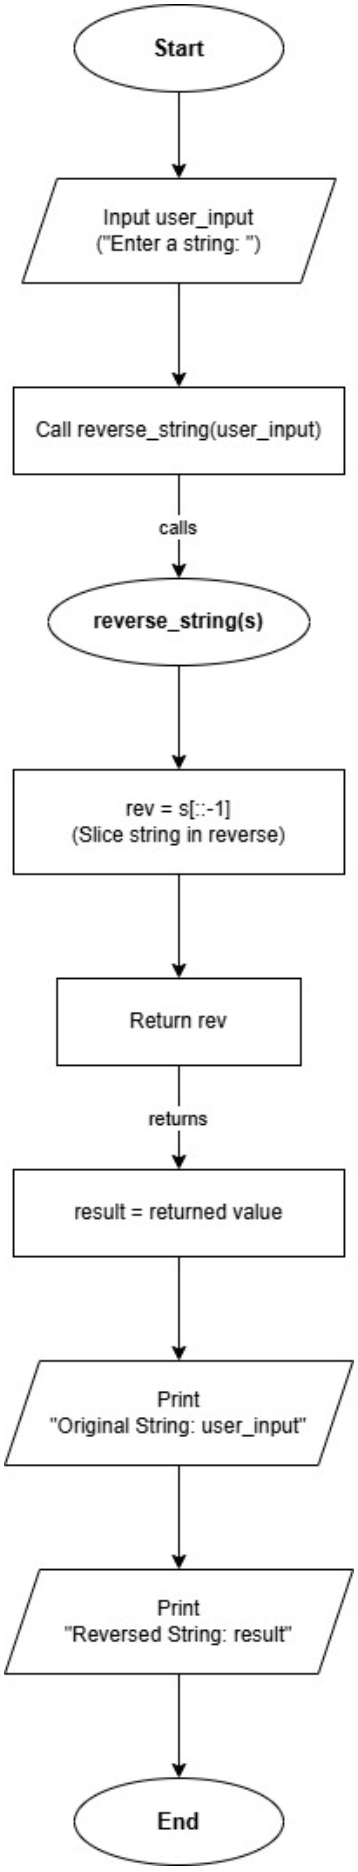
Start
Input user_input
("Enter a string: ")
Call reverse_string(user_input)
calls
reverse_string(s)
rev = s[::-1]
(Slice string in reverse)
Return rev
returns
result = returned value
Print
"Original String: user_input"
Print
"Reversed String: result"
End

FLOWCHART:

ALGORITHM:

1. Start the program
2. Take a string input from the user
3. Create a function named reverse_string that takes the string as a parameter
4. Inside the function, reverse the given string
5. Return the reversed string
6. Call the function using the input string and store the result
7. Display the original string
8. Display the reversed string
9. Stop the program