



iTrent RESTful Web Services Guide

Version: 1.04

Date Reviewed: May 2025

Classification: Company Confidential

Document Control

Issue	Published	Software Version	Comments
1.04	May 2025	10.55.02	2.2.3.1 Web service request categories updated 6.2.18 Import document attachment service request added
1.03	April 2025	10.55.02	Incorrect section references corrected 6.2.15.1 Requisition data service version 2 added 7.18 Requisition data service version 2 example added
1.02	November 2024	10.54.00	2.2.1 Setting up a function access notes updated 7.15 Added new pre-publish process for WDP 'Employee record (date effective)' 7.8 Added mapping for existing WDP service 'HR Core Data & Structure (Transfers)', including new field 'PreferredSurname' 7.1 , 7.7 , 7.14 Updated service mapping to include new field 'PreferredSurname' 9 Special character support
1.01	August 2024	10.53.00	8 Web services audit section added.
1.0	May 2024	10.52.00	New guide revised from original 'iTrent Web Services' user guide to provide more helpful instruction and guidance for RESTful Web Services – changes exist throughout the entire document. All content relating to SOAP services is now separately available in the 'iTrent SOAP web services' user guide. New features for release 10.52 are detailed below: 2.2.3 New form 'Web services user control details' 2.2.3.1 Introduction of service request categories 2.2.4 Web services password preferences 6.1 / 6.1.1 Pagination 6.2.1 / 6.2.3 / 6.2.7 / 6.2.13 – HR Core Data, Position Data, HR Core Data and Structure, Employee record services all updated to cater

			for pagination enhancements
--	--	--	-----------------------------

Document Classification

This document is **Company Confidential**. It may be disclosed within MHR. It may be disclosed externally when necessary under controlled and restricted conditions.

© Copyright MHR International UK Ltd. 2025

Contents

1. Introduction	7
2. Authentication	8
2.1 Real Time Outgoing Authentication	8
2.2 Other Web Services Authentication	9
2.2.1 Setting up a function access.....	9
2.2.2 Setting up User Details.....	10
2.2.3 Web services user control details	11
2.2.4 Web services password preferences	13
3. Incoming Web Services Configuration	14
3.1 Incoming Web Service – Example	15
3.1.1 Creating a Data Map	15
3.1.2 Example JSON request.....	16
4. Real Time Outgoing Web Services Configuration	17
4.1 Real Time Outgoing Web Service - Example	18
4.1.1 Creating a Data Publisher	18
4.1.2 Creating a Workflow	19
4.1.3 Example JSON output.....	19
4.1.4 Example XML output	19
4.1.5 Example SOAP output	20
5. Real Time Outgoing Web Services Monitoring	20
6. Request Driven Outgoing Web Services Configuration	21
6.1 Pagination	21
6.1.1 Pagination example.....	21
6.2 Pre-Publisher Processes	26
6.2.1 Service request details – HR Core Data	26
6.2.2 Service request details – Skills and Qualifications	27
6.2.3 Service request details – Position Data Service	27
6.2.4 Service request details – Absence Data Service	28
6.2.5 Service request details – Attendance Data Service	28
6.2.6 Service request details – Daily Pattern Service	28
6.2.7 Service request details – HR Core Data and Structure Service	29
6.2.8 Service request details – People Structure	30
6.2.9 Service request details – WMS People.....	30
6.2.10 Service request details – Elite3E (DAC3E)	30
6.2.11 Service request details – WFM Person (Grosvenor).....	31
6.2.12 Service request details – WFM Shifts (Grosvenor)	31
6.2.13 Service request details – Employee Record	32
6.2.14 Service request details – Employee Work Schedule.....	32

6.2.15 Service request details – Requisition Data Service.....	33
6.2.16 Service request details - User Defined Fields	35
6.2.17 Service request details - Grade and Payscale Details	36
6.2.18 Service request details – Import Document Attachment	37
6.3 Payslip Services	42
6.3.1 Payslips.....	42
6.3.2 Authentication	42
6.4 Payslip Summary.....	43
6.4.1 Payslip Summary Response	44
6.4.2 Payslip Summary Example Output	44
6.5 Payslip Details	45
6.6 All Payslip Details	46
6.7 Payslip Details / All Payslip Details Response	47
6.8 Payslip Details / All Payslip Details Example Output.....	50
6.9 P60 Services	53
6.9.1 Authentication	53
6.9.2 Authentication Payload.....	53
6.9.3 Authentication Response.....	53
6.10 P60 Summary.....	54
6.10.1 P60 Summary Response.....	55
6.10.2 P60 Summary Example.....	55
6.11 P60 Details	56
6.11.1 P60 Details Response	57
6.11.2 P60 Details Example	59
7. Pre-Publish Processes: Field Mappings and Example Outputs	61
7.1 HR Core Data.....	61
7.1.1 HR Core Example Output.....	66
7.2 Skills and Qualifications.....	68
7.2.1 Skills & Qualifications Example Output.....	69
7.3 Position Data Service	70
7.3.1 Position Example Output	71
7.4 Absence Data Service	72
7.4.1 Absence Example Output.....	73
7.5 Attendance Data Service	74
7.5.1 Attendance Example Output.....	75
7.6 Daily Pattern Service	76
7.6.1 Daily Patten Example Output	76
7.7 HR Core Data and Structure Service	77
7.7.1 HR Core Data & Structure Example Output.....	83
7.8 HR Core Data & Structure (Transfers)	86

7.8.1 HR Core Data & Structure (Transfers) Example Output	91
7.9 People Structure.....	94
7.9.1 People Structure Example Output	95
7.10 WMS People	96
7.10.1 WMS People Example Output.....	98
7.11 Elite3E (DAC3E).....	99
7.11.1 Elite3E (DAC3E) Example Output	100
7.12 WFM Person (Grosvenor).....	101
7.12.1 WFM Person (Grosvenor) Example Output	103
7.13 WFM Shifts (Grosvenor)	105
7.13.1 WFM Shifts (Grosvenor) Example Output	105
7.14 Employee Record	106
7.14.1 Employee Record Example Output	114
7.15 Employee record (date effective)	119
7.15.1 Employee record (date effective) Example Output.....	130
7.16 Employee work schedule	135
7.16.1 Employee Work Schedule Example Output.....	135
7.17 Requisition Data Service	138
7.17.1 Requisition Data Service Example Output.....	139
7.18 Requisition Data Service Version 2.....	141
7.18.1 Requisition Data Service Version 2 Example Output.....	143
7.19 User Defined Fields	144
7.19.1 UDF Example Output	144
7.20 Grade and Payscale Details	145
7.20.1 Grade and Payscale Example Output.....	147
8. Web services audit.....	148
8.1 Session audit.....	148
8.2 Transaction 'Read' audit.....	149
9. Special character output.....	149
Readers Comments.....	150

1. Introduction



This functionality is only available to licensed users. Please contact your Account Manager or Customer Care Executive to obtain further details.

iTrent has incoming and two types of outgoing RESTful web services.

For incoming web services, iTrent has a listener that will process an incoming JSON or XML format stream and load the data using the Data Migration services. Please see the ***iTrent Data Migration guide*** for information on how to configure the Data Maps and Data Packages used within this method of data transfer.

For outgoing web services the following methods are available:

- Real Time Driven event streams using Workflow (Webhooks)
- Request driven requests via a listener on iTrent

Real Time Workflows sending data can use either the data directly available on the specified form, as per an e-mail request or can use one of the specific pre-publisher processes that are available and documented in section 8.

Requests via the GET command can only request the specific pre-publisher data that is available. There are separate request driven web services for payslips and P60's. These are documented in section 6 and are only available via this method of request.

For more information on data publisher configuration and functionality, please see the ***iTrent Workflow Data Publisher User Guide***.

2. Authentication

2.1 Real Time Outgoing Authentication

Authentication is required for all web services. iTrent uses the Basic Authentication method for all types. For Real Time web services, the user name and password will be for the system being connected to, and can be set up against the Data Publisher record in iTrent.

Data publisher details My Integration Service

Description *

My Integration Service

Only for chatbot

☐

HTTP Method

POST

End point URL *

https://myintegration.com/conn€

Reference No.

User name

MyIntegrationServiceUser

Password

.....

Proxy user name

Proxy user password

Timeout (ms)

Pre-publish process

Output format *

JSON

Namespace

Namespace prefix

Use business object document

☐

Update log

☐

Save

Delete


New

2.2 Other Web Services Authentication

For all other Web Services, a user access will need to be configured within iTrent. When making the web service request the user name and password will need to be used in the authorisation header.

2.2.1 Setting up a function access

Organisation>Security>Function access>New – Function access details

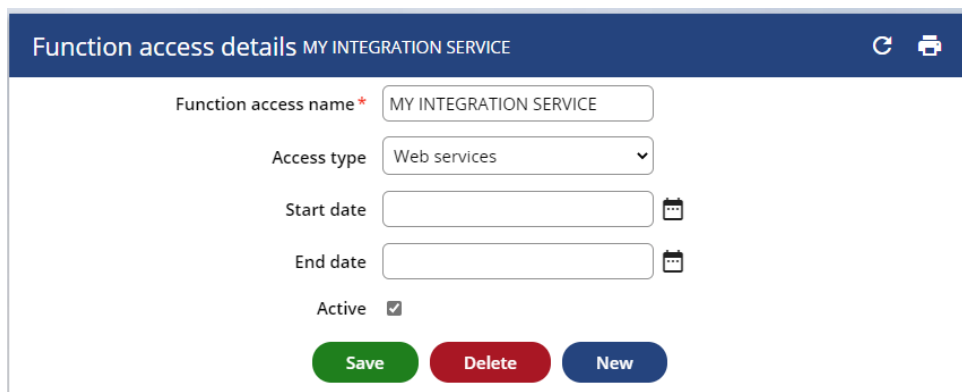

Function access details MY INTEGRATION SERVICE

Function access name * MY INTEGRATION SERVICE

Access type Web services

Start date

End date

Active ☒

Save Delete New

An active 'Web Services' function access will need to be configured for attaching to the user. The 'Access type' must be set to 'Web services'.

Note:

Web services users should only be provided with a singular Web services function access. Role and Group accesses are not recommended for this use case.

Navigation access will also need to be provided on this function access using the "Navigation Security" page.

Web service users are not permitted to log into iTrent manually. If manual log in is required then a separate user with a standard access must be used.

2.2.2 Setting up User Details

Organisation>Security>Users>New – User details

The screenshot shows a web form titled 'User details MY INTEGRATION USER'. The form contains the following fields and options:

- User name: MY INTEGRATION USER (pre-filled)
- User email: (empty text box)
- External person name: (empty text box)
- Active: ☒
- Person record: (empty text box with search and clear icons)
- Supervisor: (empty text box with search and clear icons)
- Function access name: MY INTEGRATION SERVICE (pre-filled with search icon)
- Email address: (empty text box)
- Effective end date: (empty date picker)
- Non-Trent password checking: ☐
- New password: (password masked with dots)
- Confirm password: (password masked with dots)
- Password locked: ☐
- Allow the user to change their password: ☐
- Require the user to change their password at next login: ☐
- Password can expire: ☐
- Sharing report output method: None (dropdown menu)

An active iTrent user record will need to be created. The access type selected for the 'Function access name' should be the 'Web services' access created in Section [2.2.1](#).

The user name and password entered for this user will need to be used in the authorisation header using Basic Authentication. It is therefore recommended to enter a suitable, high strength password for this user that conforms to your password security guidelines.

2.2.3 Web services user control details

Security->Users->Web services user control details

For users with a 'Web service' function access assigned, a form "Web services user control details" is available. Here, admins can specify what service categories the Web services user has access to. As this is at user level, this means the same 'Web services' function access can be applied to multiple users, with different levels of access assigned per user.

The screenshot shows a web interface titled "Web services user control details MY INTEGRATION USER". Below the title bar, there are icons for refresh, print, and a document. The main content area is labeled "Service request categories". It features two side-by-side list boxes. The left box, labeled "Available:", is currently empty. The right box, labeled "Selected:", contains a list of service categories: "Core HR and structure", "Payroll", "Workforce management", "Absence", "Recruitment", "HTTP listener", and "SOAP services". Between the two boxes are four arrow buttons: a double right arrow (»), a single right arrow (>), a single left arrow (<), and a double left arrow («). At the bottom center of the form is a green "Save" button.

If wanting a Web services user to access a particular category of service, the category can be added into the 'Selected' column.

If a Web services user attempts to access a request which is not permitted (i.e. not in the 'Selected' column), they will receive an invalid error/page not found response depending on the type of request. This will also create a session audit record in iTrent with an event type of 'Request category not permitted' detailing the type of request made.

Note: This functionality has been added in Release 10.52. All pre-existing web service users will have all items selected by default to prevent interruption to existing behaviour.

Any new Web service users created in Release 10.52 or later **will not** have any categories selected by default. Admins therefore must access this page upon creation of the user to select the relevant access permitted.

These controls are not applicable to outbound workflow data publishers.

2.2.3.1 Service request categories

The available service requests have been grouped into categories to enable web service user restriction based on type of data being accessed.

The categories and groupings are detailed as below:

Category	Service requests
Core HR and Structure	HR Core Data, Skills and Qualifications, Employee record, Elite3, Daily pattern, Position data, People structure, HR core data and structure User defined fields (UDF) where iTrent-Object-Type = • PERSON • POSITION • VEHICLE • UNIT • POST Document attachment where AttachTo = • PERSON
Payroll	Grade and payscale, Payslips, P60s User defined fields (UDF) where iTrent-Object-Type = • ELEMENT • VEHICLE
Workforce management	WFM person, WFM shifts, Employee work schedule, WMS people
Absence	Absence data, Attendance data, Daily pattern User defined fields (UDF) where iTrent-Object-Type = • Absence
Recruitment	Requisition data User defined fields (UDF) where iTrent-Object-Type = • REQUISITION • APPLICANT Document attachment where AttachTo = • APPLICANT • APPLICATION
HTTP listener	All inbound HTTP listener requests
SOAP services	Access to all SOAP services

2.2.4 Web services password preferences

Security->Password preference details

The 'User lockout threshold' defined against the "Password preference details" form will also apply to Web services users.

Password preference details SYSTEM		▼ MENU	↻	🖨
Default user set-up to non-Trent password checking ☐				
Password expiry				
Password expiry	10 days ▼			
Password length				
Minimum password length	8 ▼			
Password format				
Passwords must include both upper and lower case characters	☐			
Passwords must include both alpha and numeric characters	☐			
Previous password				
Allow users to logon once using an expired password	☒			
Allow users to select passwords they have previously used	☒			
Require users to logon before changing their password	☒			
User lockout				
User lockout threshold	After 10 failed log on attempt ▼			

Should a user exceed the maximum number of allowed failed attempts of authentication, their user record will be locked, and no further login attempts will be allowed until the lock is removed.

3. Incoming Web Services Configuration

Incoming Web Services use the Data Migration functionality of iTrent, and allow incoming JSON or XML format requests. Due to the configurability of the Data Maps, exact details of the input will be dependent on the specific configuration used within any individual iTrent instance.

The following end points can be used to send data into iTrent:

For JSON:

`http<s>://<WEBSEVERNAME>/<CONNAME>_web/wrd/run/http_listener.json?ORG=xx`

For XML:

`http<s>://<WEBSEVERNAME>/<CONNAME>_web/wrd/run/http_listener.xml?ORG=xx`

The WEBSEVERNAME and CONNAME values within the list can be identified from your normal iTrent URL.

The ORG parameter will need to include the name of the organisation in your iTrent instance that you wish to load data to.

Incoming Web Services can utilise either Data Maps or Data Packages as documented in the ***iTrent Data Migration guide***.

The key components of an Incoming Web Services message are: -

Method: This will always be a POST

Authentication: As documented in Section 2.

Content Type: application/json or application/xml

Content: This contains two key parts

Event: The name of the data map or package


Payload: A group of fields as defined by the data map or package

The example given will show setting up a Data Map and the expected format for that Map.

3.1 Incoming Web Service – Example

3.1.1 Creating a Data Map

Organisation>System administration>Data migration maps>New – Data map details

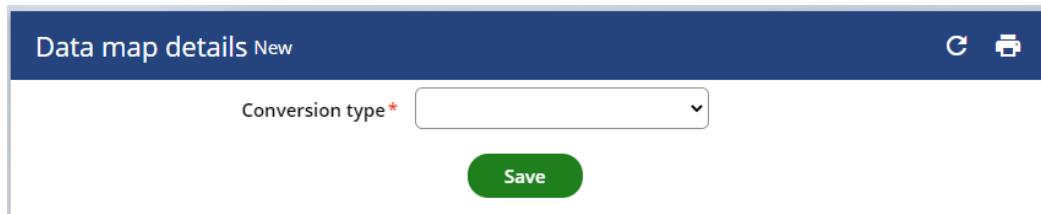


Data map details New

Conversion type*

Save

First select the type of data conversion that is required for the data load. On selection, the page will refresh to reveal the corresponding data conversion fields available.

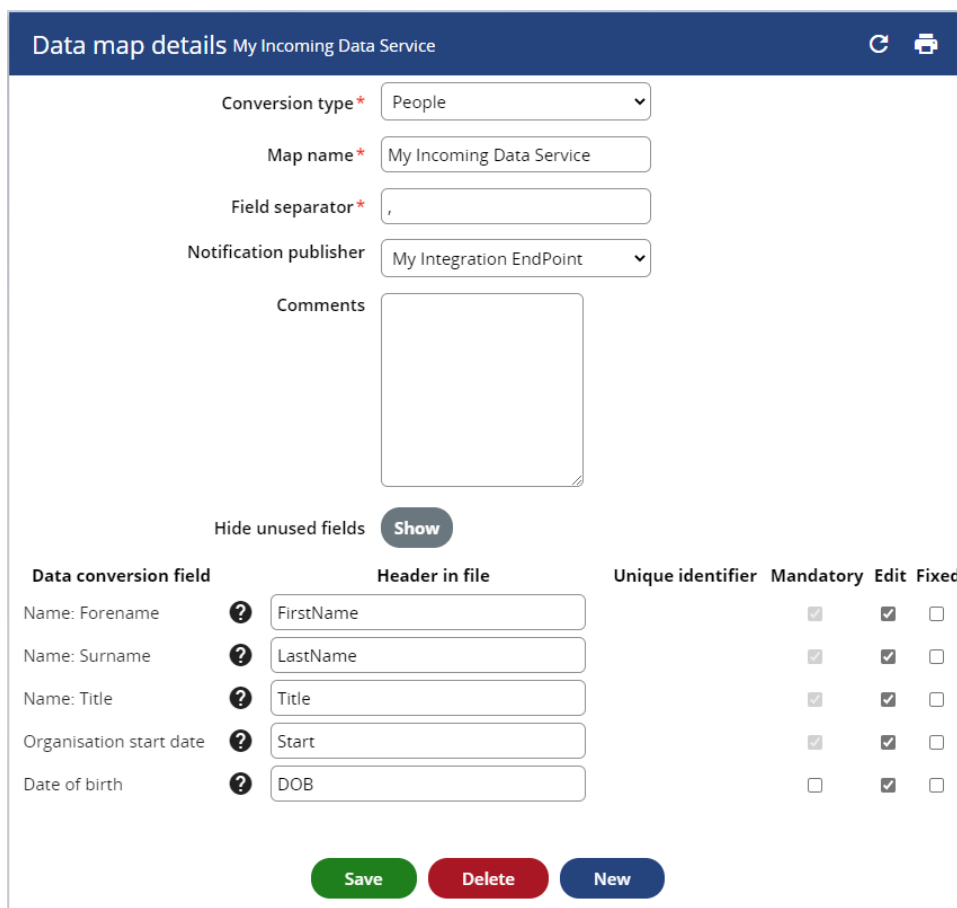

Data map details My Incoming Data Service

Conversion type*

Map name*

Field separator*

Notification publisher

Comments

Hide unused fields **Show**

Data conversion field		Header in file	Unique identifier	Mandatory	Edit	Fixed
Name: Forename	?	FirstName	☒	☒	☐	
Name: Surname	?	LastName	☒	☒	☐	
Name: Title	?	Title	☒	☒	☐	
Organisation start date	?	Start	☒	☒	☐	
Date of birth	?	DOB	☐	☒	☐	

Save **Delete** **New**

This data map is for loading a new person into iTrent. The 'Header in file' field is configurable and defines the information that is required within the payload section of the Web Service content.

3.1.2 Example JSON request

```
Method: POST
Authorization: Basic TXlVc2VyOk15UGFzc3dvcmQ=
Content-Type: application/json
{
  "event": "ORGANISATION STRUCTURE",
  "payload": [{
    "FirstName": "John",
    "LastName": "Smith",
    "Title": "Mr",
    "Start": 20230101,
    "DOB": 19800101

  },
  {
    "FirstName": "Jane",
    "LastName": "Smith",
    "Title": "Mrs",
    "Start": 20230101,
    "DOB": 19800101

  },
  {
    "FirstName": "Joan",
    "LastName": "Smith",
    "Title": "Dr",
    "Start": 20230101,
    "DOB": 19800101

  }
  ]
}
```


4. Real Time Outgoing Web Services Configuration

Real Time Outgoing Web Services are provided via the workflow engine. These can be configured to send data at the point of data entry, in a similar manner to sending a notification e-mail. Each data publisher can be configured to send either a JSON, XML or SOAP format record.

The following HTTP Methods are supported.

- POST – This is the default method.
- GET
- HEAD
- PUT
- DELETE
- OPTIONS
- TRACE

The authorisation user name and password can also be specified within this record.

Any Real Time outgoing web service can either use a pre-publish format method specified in section 8. Or if no pre-publish is specified for the data publisher, then the available fields for the workflow step will be available to select from for inclusion.

Additional UDFs can be added to any pre-publish process if required. When configuring the data publisher, the relevant UDF's will be listed and can be selected for inclusion.

The final output for the outgoing system can also be modified using XSLT transformations that can be selected against the data publisher. These allow for customisation and configuration of the final output. All transformations need to be written as if working with the XML format of output but can be applied even if the other formats are used. iTrent will perform the transformation prior to converting the final output to the required format.

If when sending the request an error is received this will be logged, and each time a future web service attempts to send data any failed items will first be retried. These can be managed within the data publisher monitor, and any failed records can be removed to avoid resending data in circumstances that is not required.

4.1 Real Time Outgoing Web Service - Example

4.1.1 Creating a Data Publisher

Organisation>Workflow>Data publisher end points>Data publisher details>New – Data publisher details

The screenshot shows a web form titled 'Data publisher details My Integration Service'. The form contains the following fields and options:

- Description*: My Integration Service
- Only for chatbot: ☐
- HTTP Method: POST (dropdown)
- End point URL*: https://myintegration.com/conn
- Reference No.: (empty text box)
- User name: MyIntegrationServiceUser
- Password: (masked with dots)
- Proxy user name: (empty text box)
- Proxy user password: (empty text box)
- Timeout (ms): (empty text box)
- Pre-publish process: (empty dropdown)
- Output format*: JSON (dropdown)
- Namespace: (empty text box)
- Namespace prefix: (empty text box)
- Use business object document: ☐
- Update log: ☐

At the bottom of the form are three buttons: 'Save' (green), 'Delete' (red), and 'New' (blue).

This data publisher is not using a Pre-publish process and therefore does not have UDF fields available to select. The final output will be a POST request with the information we select in the workflow step.

4.1.2 Creating a Workflow

Organisation>Workflow>Workflow processes>Workflow details>New – Workflow details

Workflow details My Integration Workflow

Start Add section >> End

Personal details [People] (Details)

Data publisher - My Integration Service

Data Publisher Details

Data publisher
My Integration Service

End point URL (<https://myintegration.com/conne>)

Reference No.

Only for chatbot ☐

Data attributes

Available:

- commitaldate
- componentname
- dataretentionpolicy
- date
- dateofcheck

Selected:

- dateofbirth
- forename
- forename2
- personalreferenceno
- surname

Save Delete New

Once the step is selected on the workflow, in this example on an update to Personal details, the data publisher step can be selected. All normal triggers for firing workflow steps can be used to determine if the data publisher step should be used. Within the step, the specific data publisher can be selected and for data publishers that do not have a pre-publish process selected a list of data attributes for you to select is available.

4.1.3 Example JSON output

```
{ "itrentdatapublisher" : { "forename2" : "My Middle Name", "personalreferenceno" : "MyRef", "dateofbirth" : "1980-01-01", "forename" : "My Name", "surname" : "My Surname" }}
```

4.1.4 Example XML output

```
<?xml version="1.0" encoding="UTF-8"?>
<itrentdatapublisher>
  <forename2>My Middle Name</forename2>
  <personalreferenceno>MyRef</personalreferenceno>
  <dateofbirth>1980-01-01</dateofbirth>
  <forename>My Name</forename>
  <surname>My Surname</surname>
</itrentdatapublisher>
```

4.1.5 Example SOAP output

```
<?xml version="1.0" encoding="UTF-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Header/>
  <soap:Body>
    <itrentdatapublisher>
      <forename2>My Middle Name</forename2>
      <personalreferenceno>MyRef</personalreferenceno>
      <dateofbirth>1980-01-01</dateofbirth>
      <forename>My Name</forename>
      <surname>My Surname</surname>
    </itrentdatapublisher>
  </soap:Body>
</soap:Envelope>
```

5. Real Time Outgoing Web Services Monitoring

The data publisher monitor allows for monitoring and management of any of the outgoing web services. Any request will be logged and shows the status and response along with what event within the system triggered it, and where it was sent. The menu options will allow removal of any logs for maintenance, or to stop errored records from resending or the event itself could be disabled to stop any future sends.

Data publisher monitor											
12 Today 36 Past 7 days 64 Past 30 days 90 Passed 2 Failed 92 Total 04 July 2023 - 14:40 pm											
Refresh rate 10 seconds 30 seconds 1 minute 5 minutes 15 minutes 30 minutes 1 hour											
Date	Time	Status	HTTP status	HTTP Method	End point URL	Description	Workflow	Event	User	Options	
04/07/2023	14:39	ERROR		POST	https://myintegration.com/connector	My Integration Service	My Integration Workflow (Active)	Personal details	SYSADMIN	⋮	
04/07/2023	14:39	ERROR		POST	https://myintegration.com/connector	My Integration Service	My Integration Workflow (Active)	Personal details	SYSADMIN	⋮	
HTTP	04/07/2023 14:37	OK	HTTP/1.1 200 OK	POST	https://myintegration.com/connector	My Integration Service	My Integration Workflow (Active)	Personal details	SYSADMIN	⋮	
HTTP	04/07/2023 14:37	OK	HTTP/1.1 200 OK	POST	https://myintegration.com/connector	My Integration Service	My Integration Workflow (Active)	Personal details	SYSADMIN	⋮	
HTTP	04/07/2023 14:37	OK	HTTP/1.1 200 OK	POST	https://myintegration.com/connector	My Integration Service	My Integration Workflow (Active)	Personal details	SYSADMIN	⋮	
HTTP	04/07/2023 14:37	OK	HTTP/1.1 200 OK	POST	https://myintegration.com/connector	My Integration Service	My Integration Workflow (Active)	Personal details	SYSADMIN	⋮	
HTTP	04/07/2023 14:36	OK	HTTP/1.1 200 OK	POST	https://myintegration.com/connector	My Integration Service	My Integration Workflow (Active)	Personal details	SYSADMIN	⋮	
HTTP	04/07/2023 14:36	OK	HTTP/1.1 200 OK	POST	https://myintegration.com/connector	My Integration Service	My Integration Workflow (Active)	Personal details	SYSADMIN	⋮	
HTTP	04/07/2023 14:35	OK	HTTP/1.1 200 OK	POST	https://myintegration.com/connector	My Integration Service	My Integration Workflow (Active)	Personal details	SYSADMIN	⋮	

More information on the Data publisher monitor is available in the ***iTrent Workflow Data Publisher User Guide***.

6. Request Driven Outgoing Web Services Configuration

Request driven web services all require a specific GET request to be sent to iTrent and are available in two formats. General pre-publishers use the pre-publish processes used with the real time system, these are single call requests that provide all the data. The other format is for payslip and P60 data. These require multiple requests to get summary data and drill down to the full data, each request requiring its own authentication before continuing.

Note: It is recommended that reference numbers are used within iTrent for any item which may be requested, for example person/structure reference numbers. Failure to use reference numbers may result in records being omitted from paginated responses.

6.1 Pagination

A selection of the RESTful service requests available have pagination capability. This allows third parties to retrieve the full data set for the service (as of today's date) as opposed to making the request using a specific reference. Where pagination is an available feature, this will be documented against the individual service request in section 6.2.

Although each service retrieves a different data set, the overall rule of pagination request formatting will be the same and is detailed below using the 'Employee record' service as an example.

Any specific variations or detail with respect to the pagination of individual services will be detailed in the relevant section/s.

6.1.1 Pagination example

The 'Employee record' service requires the 'iTrent-Operation', 'PartyName' and 'RefNo' headers to retrieve the file format for a specific employee:

The screenshot shows a REST client interface with the following configuration:

Params	Authorization	Headers (14)	Body	Scripts	Tests	Settings
☒	Accept-Encoding			☒	gzip, deflate, br	
☒	Connection			☒	keep-alive	
☒	iTrent-Operation				employee	
☒	PartyName				Sorrayas Org	
☒	RefNo				PER0042	

The response is shown in the 'Body' tab, displaying a JSON object for an employee record:

```
1 {
  "employee": {
    "person": {
      "personid": "PER0042",
      "title": "Miss",
      "initials": "BE",
      "forename1": "Bettie",
      "forename2": "Editagan",
      "forename3": "",
      "surname": "Draper",
      "previousurname": "",
      "preferredname": "Bettie",
      "formattedname": "Miss Bettie Draper (PER0042)",
      "honours": "",
      "birthdate": "1982-06-17",
      "servicedate": "",
      "reconabledates": {
        "reconabledate": {
          "servicetype": "First Reckonable Service Type",
          "servicedate": "2023-01-01"
        }
      },
      "maritalstatus": "",
      "ethnicity": "Any other Mixed background",
      "nationality": "Barbadian",
      "gender": "F",
      "nnumber": "",
      "addressline1": "52",
      "addressline2": "Maple Road",
      "addressline3": "Beeston",
      "addressline4": "Nottingham",
      "addressline5": "",
      "addressline6": "",
      "country": "United Kingdom",
      "organisationstartdate": "2021-01-01",
      "organisationenddate": "",
      "dependants": "0",
      "emergencycontacts": {
        "emergencycontact": {
          "ecname": "Non primary contact",
          "ecprimarycontact": "F",
          "eccontact": "",
          "eccontactemail": "",
          "ecrelationship": "Daughter",
          "ecaddressline1": "",
          "ecaddressline2": "",
          "ecaddressline3": "",
          "ecaddressline4": "",
          "ecaddressline5": "",
          "ecaddressline6": "",
          "eccountry": ""
        },
        {
          "ecname": "Second no primary",
          "ecprimarycontact": "F",
          "eccontact": "",
          "eccontactemail": "",
          "ecrelationship": "",
          "ecaddressline1": "",
          "ecaddressline2": "",
          "ecaddressline3": "",
          "ecaddressline4": "",
          "ecaddressline5": ""
        }
      }
    }
  }
}
```

The following headers have been added to enable pagination across all supported service requests:

Params Authorization • Headers (15) Body Scripts Tests Settings

☒	Accept-Encoding	gzip, deflate, br
☒	Connection	keep-alive
☒	iTrent-Operation	employee
☒	PartyName	Sorrayas Org
☒	RefNo	
☒	Size	
☒	Lastid	
☒	Proccount	
☒	Number	

Header	Required input
RefNo	Where wanting to use pagination, leave the 'RefNo' field blank If a value is provided for this header, any other pagination related headers will be ignored by the service and the service will attempt to retrieve an individual record.
Size	Use this value to specify how many records should be returned per page. This enables control over ideal performance. Must be a whole number greater than 0 If left blank will default to 50
Lastid	Final record ID in the response of latest page Required to retrieve subsequent pages To be left blank on page 1 request
Proccount	Cumulative number of records returned on latest page/s Required to retrieve subsequent pages To be left blank on page 1 request
Number	Page number of latest page response Required to retrieve subsequent pages To be left blank on page 1 request

Using an example size of '5', the Employee Record service request has called the first page:

The screenshot shows a REST client interface with a request tab selected. The request is a GET call to the 'Employee Record' service. The parameters are as follows:

Key	Value	Description
☒ iTrent-Operation	employee	
☒ PartyName	Sorrayas Org	
☒ RefNo		
☒ Size	5	
☒ Lastid		
☒ Proccount		
☒ Number		

The response tab is also visible, showing a JSON response in 'Pretty' format. The response includes a 'checks' array and a 'page' object with metadata.

```
702      "checks": {
703        "check": {
704          "checkname": "DBS Check",
705          "checkdate": "2024-01-01",
706          "checkrenew": "2025-01-01",
707          "checkstatus": "Passed Vetting"
708        }
709      },
710    ],
711    "page": {
712      "size": "5",
713      "totalelements": "130",
714      "totalpages": "26",
715      "number": "1",
716      "proccount": "5",
717      "lastid": "29601900HJ"
718    }
719  }
720 }
721 }
```

The response will include a "page" summary of metadata relating to the request:

```
"page": {
  "size": "5",
  "totalelements": "129",
  "totalpages": "26",
  "number": "1",
  "proccount": "5",
  "lastid": "29601900HJ"
}
```

Response	Meaning
size	The number of records requested per page
totalelements	The number of records in total to be returned
totalpages	The number of pages in total based on totalelements & size
number	The current page number
proccount	The cumulative number of records processed so far
lastid	The lastid of the final record returned in the page response

To continue retrieving subsequent pages, the lastid, proccount and number of the latest page need inserting into the request headers:

The screenshot displays a REST client interface with the 'Headers' tab selected. The headers list includes:

- ☒ iTrent-Operation: employee
- ☒ PartyName: Sorrayas Org
- ☒ RefNo
- ☒ Size: 5
- ☒ Lastid: 29601900HJ
- ☒ Proccount: 5
- ☒ Number: 1

Below the headers, the 'Body' tab is active, showing a JSON response in 'Pretty' format:

```

702     "checks": {
703       "check": {
704         "checkname": "DBS Check",
705         "checkdate": "2024-01-01",
706         "checkrenew": "2025-01-01",
707         "checkstatus": "Passed Vetting"
708       }
709     },
710   ],
711   "page": {
712     "size": "5",
713     "totalelements": "130",
714     "totalpages": "26",
715     "number": "1",
716     "proccount": "5",
717     "lastid": "29601900HJ"
718   }
719 }
720 }
721 }
```


This will result in the next page being called with the response as shown below.

```
"page": {  
  "size": "5",  
  "totalelements": "130",  
  "totalpages": "26",  
  "number": "2",  
  "proccount": "10",  
  "lastid": "51338907ZU"  
}
```

This process can be completed until all pages have successfully returned a response.

Note: Each data set will be returned in a particular logical order, for example surname followed by person id for the Employee Record. Modified/created/deleted data will only be returned in the response if the sequencing of this new data has not yet been passed.

For example, if the latest page of a paginated response is returning employees with a surname starting with C and a new employee is created with a surname starting with B, this employee will not be returned in the subsequent pages.

6.2 Pre-Publisher Processes

Several requests have been made available to retrieve data from, or POST data into iTrent. These requests and any conditional information are detailed below.

The GET pre-publishers will provide responses in JSON format.

6.2.1 Service request details – HR Core Data

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Individual Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: hrcore PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number>
Pagination Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: hrcore PartyName: <Organisation name> RefNo: Blank Size: <Insert whole number greater than 0>. Defaults to 50 if left blank. Proccount: <proccount> value of previous page. Blank for first page request. Lastid: <lastid> value of previous page. Blank for first page request. Number: <number> value of previous page. Blank for first page request.
Request Body	None
Example Response Body	See section 7.1.1
Status	200
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json Pagination: - Leavers with an end date less than the current date will not be included in the paginated response - Future dated starters will not be included in the paginated response

6.2.2 Service request details – Skills and Qualifications

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: skillqual PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number>
Request Body	None
Example Response Body	See section 7.2.1
Status	200
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json

6.2.3 Service request details – Position Data Service

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Individual Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: position PartyName: <Organisation name> RefNo: <Position Reference Number>
Paginated Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: position PartyName: <Organisation name> RefNo: Blank Size: <Insert whole number greater than 0>. Defaults to 50 if left blank. Proccount: <proccount> value of previous page. Blank for first page request. Lastid: <lastid> value of previous page. Blank for first page request. Number: <number> value of previous page. Blank for first page request.
Request Body	None
Example Response Body	See section 7.3.1
Status	200
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json Positions ending prior to the current date or with a future start date will not be returned via either the individual or paginated service response

6.2.4 Service request details – Absence Data Service

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: absence PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number>
Request Body	None
Example Response Body	See section 7.4.1
Status	200
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json

6.2.5 Service request details – Attendance Data Service

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: attend PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number>
Request Body	None
Example Response Body	See section 7.5.1
Status	200
Notes	Absence record must be active on day of request. Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json

6.2.6 Service request details – Daily Pattern Service

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: daypat PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number>
Request Body	None
Example Response Body	See section 7.6.1

Status	200
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json

6.2.7 Service request details – HR Core Data and Structure Service

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Individual Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: hrcorestruct PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number>
Paginated Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: hrcorestruct PartyName: <Organisation name> RefNo: Blank Size: <Insert whole number greater than 0>. Defaults to 50 if left blank. Proccount: <proccount> value of previous page. Blank for first page request. Lastid: <lastid> value of previous page. Blank for first page request. Number: <number> value of previous page. Blank for first page request.
Request Body	None
Example Response Body	See section 7.7.1
Status	200
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json • Employees without a structure attachment will not be returned by the service • Employees with more than one structure attachment will have a record returned per structure attachment Pagination: • Leavers with an end date less than the current date will not be included in the paginated response • Future dated starters will not be included in the paginated response

6.2.8 Service request details – People Structure

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: perstruct PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number>
Request Body	None
Example Response Body	See section 7.9.1
Status	200
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json

6.2.9 Service request details – WMS People

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: wmsper PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number>
Request Body	None
Example Response Body	See section 7.10.1
Status	200
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json

6.2.10 Service request details – Elite3E (DAC3E)

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: dac3e PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number>
Request Body	None
Example Response Body	See section 7.11.1
Status	200
Notes	Example URL:

	https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json
--	---

6.2.11 Service request details – WFM Person (Grosvenor)

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: wfmper PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number>
Request Body	None
Example Response Body	See section 7.12.1
Status	200
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json

6.2.12 Service request details – WFM Shifts (Grosvenor)

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: wfmshift PartyName: <Organisation name> RefNo: <Roster Reference Number>
Request Body	None
Example Response Body	See section 7.13.1
Status	200
Notes	Person must be attached, and Roster Shift Reference must be completed on Work Unit Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json

6.2.13 Service request details – Employee Record

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Individual Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: employee PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number>
Pagination Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: employee PartyName: <Organisation name> RefNo: Blank Size: <Insert whole number greater than 0>. Defaults to 50 if left blank. Proccount: <proccount> value of previous page. Blank for first page request. Lastid: <lastid> value of previous page. Blank for first page request. Number: <number> value of previous page. Blank for first page request.
Request Body	None
Example Response Body	See section 7.14.1
Status	200
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json Pagination: - Leavers with an end date less than the current date will not be included in the paginated response - Future dated starters will not be included in the paginated response

6.2.14 Service request details – Employee Work Schedule

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: empsched PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number>
Request Body	None
Example Response Body	See section 7.16.1
Status	200
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json

6.2.15 Service request details – Requisition Data Service

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json												
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: requisition PartyName: <Organisation name> RefNo: <Requisition Reference Number> (optional) Keywords: See notes (optional) Salarybanding: See notes (optional) Region: See notes (optional) Location: See notes (optional) Jobcategorytype: See notes (optional)												
Request Body	None												
Example Response Body	See section 7.17.1												
Status	200												
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json - Requisitions must be open, published and have a reference number to return results. If no reference is input against 'RefNo' then all requisitions matching these criteria will be returned (Note: this response is not paginated) - Multi-value searches should be separated by a comma ',' <table border="1"> <thead> <tr> <th>Request header</th><th>Notes</th></tr> </thead> <tbody> <tr> <td>Keywords</td><td>"Requisition application form details" / Keyword 1-4</td></tr> <tr> <td>Salarybanding</td><td>Hardcoded 'Salary band' search values list in Web view e.g., '10-15k' Case sensitive</td></tr> <tr> <td>Region</td><td>"Requisition application form details" / Region Case sensitive</td></tr> <tr> <td>Location</td><td>"Requisition application form details" / Location Case sensitive</td></tr> <tr> <td>Jobcategorytype</td><td>"Requisition details" / Requisition category/type Case sensitive</td></tr> </tbody> </table>	Request header	Notes	Keywords	"Requisition application form details" / Keyword 1-4	Salarybanding	Hardcoded 'Salary band' search values list in Web view e.g., '10-15k' Case sensitive	Region	"Requisition application form details" / Region Case sensitive	Location	"Requisition application form details" / Location Case sensitive	Jobcategorytype	"Requisition details" / Requisition category/type Case sensitive
Request header	Notes												
Keywords	"Requisition application form details" / Keyword 1-4												
Salarybanding	Hardcoded 'Salary band' search values list in Web view e.g., '10-15k' Case sensitive												
Region	"Requisition application form details" / Region Case sensitive												
Location	"Requisition application form details" / Location Case sensitive												
Jobcategorytype	"Requisition details" / Requisition category/type Case sensitive												

6.2.15.1 Service request details – Requisition Data Service Version 2

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json												
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: requisition PartyName: <Organisation name> RefNo: <Requisition Reference Number> (optional) Keywords: See notes (optional) Salarybanding: See notes (optional) Region: See notes (optional) Location: See notes (optional) Jobcategorytype: See notes (optional) API-Version: 2												
Request Body	None												
Example Response Body	See section 7.18.1												
Status	200												
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json - Requisitions must be open, published and have a reference number to return results. If no reference is input against 'RefNo' then all requisitions matching these criteria will be returned (Note: this response is not paginated) - Multi-value searches should be separated by a comma ',' - Vacancies with a historic end date will not be returned <table border="1"> <thead> <tr> <th>Request header</th><th>Notes</th></tr> </thead> <tbody> <tr> <td>Keywords</td><td>"Requisition application form details" / Keyword 1-4</td></tr> <tr> <td>Salarybanding</td><td>Hardcoded 'Salary band' search values list in Web view e.g., '10-15k' Case sensitive</td></tr> <tr> <td>Region</td><td>"Requisition application form details" / Region Case sensitive</td></tr> <tr> <td>Location</td><td>"Requisition application form details" / Location Case sensitive</td></tr> <tr> <td>Jobcategorytype</td><td>"Requisition details" / Requisition category/type Case sensitive</td></tr> </tbody> </table>	Request header	Notes	Keywords	"Requisition application form details" / Keyword 1-4	Salarybanding	Hardcoded 'Salary band' search values list in Web view e.g., '10-15k' Case sensitive	Region	"Requisition application form details" / Region Case sensitive	Location	"Requisition application form details" / Location Case sensitive	Jobcategorytype	"Requisition details" / Requisition category/type Case sensitive
Request header	Notes												
Keywords	"Requisition application form details" / Keyword 1-4												
Salarybanding	Hardcoded 'Salary band' search values list in Web view e.g., '10-15k' Case sensitive												
Region	"Requisition application form details" / Region Case sensitive												
Location	"Requisition application form details" / Location Case sensitive												
Jobcategorytype	"Requisition details" / Requisition category/type Case sensitive												

6.2.16 Service request details - User Defined Fields

URL	http(s)://<web-server>/<conname>_web/wrd/run/etudf001api.json																				
Request Headers	Authorisation Basic: <User:Password in Base 64> iTrent-Operation: get_udfs iTrent-Object-Type: See Notes iTrent-Object-Ref: See Notes iTrent-UDF-ORG: <Organisation name> iTrent-UDF-Category: <Category ID> iTrent-UDF-Field: <FIELD ID> (optional)																				
Request Body	None																				
Example Response Body	See section 7.19.1																				
Status	200																				
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etudf001api.json iTrent-UDF-Field is only required to produce an individual UDF value return rather than a category group <table border="1"> <thead> <tr> <th>iTrent-Object-Type</th><th>iTrent-Object-Ref</th></tr> </thead> <tbody> <tr> <td>PERSON</td><td><Personal Reference Number></td></tr> <tr> <td>POSITION</td><td><Position Reference Number></td></tr> <tr> <td>VEHICLE</td><td><Vehicle Registration Number></td></tr> <tr> <td>UNIT</td><td><Unit Reference Number></td></tr> <tr> <td>POST</td><td><Post Reference Number></td></tr> <tr> <td>ELEMENT</td><td><Element Code></td></tr> <tr> <td>APPLICANT</td><td><Applicant Reference></td></tr> <tr> <td>ABSENCE</td><td><Personal Reference Number></td></tr> <tr> <td>REQUISITION</td><td><Requisition Reference Number></td></tr> </tbody> </table>	iTrent-Object-Type	iTrent-Object-Ref	PERSON	<Personal Reference Number>	POSITION	<Position Reference Number>	VEHICLE	<Vehicle Registration Number>	UNIT	<Unit Reference Number>	POST	<Post Reference Number>	ELEMENT	<Element Code>	APPLICANT	<Applicant Reference>	ABSENCE	<Personal Reference Number>	REQUISITION	<Requisition Reference Number>
iTrent-Object-Type	iTrent-Object-Ref																				
PERSON	<Personal Reference Number>																				
POSITION	<Position Reference Number>																				
VEHICLE	<Vehicle Registration Number>																				
UNIT	<Unit Reference Number>																				
POST	<Post Reference Number>																				
ELEMENT	<Element Code>																				
APPLICANT	<Applicant Reference>																				
ABSENCE	<Personal Reference Number>																				
REQUISITION	<Requisition Reference Number>																				

6.2.17 Service request details - Grade and Payscale Details

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json
Request Headers	Authorisation Basic : <User:Password in Base 64> iTrent-Operation: gradepayscale PartyName: <Organisation name> RefNo: <Personal Reference Number> or <National Insurance Number> PartyRefNo: <Position Reference Number> StartDate: <Effective start date of Grade/Payscale data> EndDate: <Effective end date of Grade/Payscale data> (optional)
Request Body	None
Example Response Body	See section 7.20.1
Status	200
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json • Where a RefNo is the PerRefNo / NINO of a single person, the service returns all positions future and past with relevant payscale and grade data • Where PartyRefNo is used, the service returns relevant payscale and grade data for that position only • Where any RefNos are left blank, no data will be returned

6.2.18 Service request details – Document attachment

URL	http(s)://<web-server>/<conname>_web/wrd/run/etws001api.json								
Request method	POST								
Request Headers	Authorisation Basic : <User:Password in Base 64> iTrent-Operation: docattach PartyName: <Organisation name> AttachTo <PERSON> or <APPLICANT> or <APPLICATION> RefNo: <Personal Reference Number> or <National Insurance Number> or <Applicant Reference Number> RequisitionRefNo: <Requisition Reference Number> Document: <Document name> DocType: <Document type> Filename: <Filename> Visibleinselfservice: <T> or <F> or null								
Request Body	The request body must include the raw Base64 file. {“filedata”: “data:application/octet-stream;base64,<insert raw data>”} See section 6.2.18.1 for an example.								
Example Response Body	None								
Status	200								
Notes	Example URL: https://myserver.webitrent.com/mysystemli_web/wrd/run/etws001api.json This service is used to POST a document attachment into the following areas: <table border="1"> <thead> <tr> <th>AttachTo</th><th>Attaches to (Core iTrent)</th></tr> </thead> <tbody> <tr> <td>PERSON</td><td>People -> Document attachments</td></tr> <tr> <td>APPLICANT</td><td>Applicants -> Document attachments</td></tr> <tr> <td>APPLICATION</td><td>Applicants -> Requisitions -> Document attachments / Requisitions -> Applicants -> Document attachments</td></tr> </tbody> </table> - All headers are mandatory except for the following: - Visibleinselfservice is a non-mandatory header. It is also not applicable for APPLICATION attachments - RequisitionRefNo is a conditional mandatory header. It is only required where ‘AttachTo’ is APPLICATION and must be supplied alongside the RefNo to identify the appropriate application/requisition	AttachTo	Attaches to (Core iTrent)	PERSON	People -> Document attachments	APPLICANT	Applicants -> Document attachments	APPLICATION	Applicants -> Requisitions -> Document attachments / Requisitions -> Applicants -> Document attachments
AttachTo	Attaches to (Core iTrent)								
PERSON	People -> Document attachments								
APPLICANT	Applicants -> Document attachments								
APPLICATION	Applicants -> Requisitions -> Document attachments / Requisitions -> Applicants -> Document attachments								

- File types and File sizes not supported under “Default system preferences” will be rejected
- The Filename must include the document type, e.g. ‘filename.docx’ or ‘filename.pdf’
- The DocType (document type) must be valid for the AttachTo type. See iTrent core document management types for the list of accepted values. If attempting to load a document type not within the available list, this will be rejected
- Attachments imported through this service will be uploaded to DLX if in use. Similarly to the above, the document type used must be mapped within DLX (as per manual input) or this will be rejected

6.2.18.1 Service request details – Document attachment

An example request body of the Import Document Attachment API service using a raw base64 file format is included below.

This request body will load a word document with the text 'This is a word document I am posting through the API' and can be used for testing purposes.

[illegible]

pQqrqGbWkeZbcr4RUKGVQDki7BepsuersX9hk++OG5NnZ7drWg5zZASz9NbS071Ly1jYpiMrgXEM/7AXtrgUwyVHJzCN
Kl0YW4LJBUPMwquFsjRTKDFHLAmVw5GZSGCWZ98PyT2Im0PIUnMgqYo3Vco0KclMR6+srmWhrqDPp1iYhz1ACwdR
ACy4o5giOSxT0Xc7uKyptktpHDTKL3U4gzrsEemEVe4XZs93HEsEfjV5wXNs9TRHgVWfb0bL6s6AEIE4bNbRPbCQGJr6
NikVfbuqbIBb5LBf78XJRBLuOEUXebQiwZodl3PYoyX9TiYCyfym1ocDoboNfqOBnBRBhM38FWT/uCjlnyJShgh9K5gQ3Z7
RYUKWkuhcY5PxyWieEwUJKDJKAUqkSm7dOt8RHOFP8UF5S03+AWfoKr1HOH1PU2mM5He7Yg1r/Ws76bXcyBceSni
dMDv4Bidl7xqMplEvhFHSVWRBgst43p+cQobT4WgQn0JGwzCcz08i/5vnJhzGgVur7r5SntgHit2F1cjKvcWriBniqaKotbBPI
q71SNXTIAqPpwT6LjLElmXqwU6nAjRHjM1h4T3gFo0nmOoCWplbswVSq4a39lAnrdD4vuy5bPsl6rOSZVGHw4WKSsbeJ
YzjOplK80C5t+syXfooATfFAVQK/HWj3Do1y7NNDMjCtYMH5OTlfnofJ7W8mNqaaVDFqgoKgWmq3DcZnS1NqEVjYezhp
etm6SrQMYih0UV5iYos18G3vWgsUXeduDX87ZeY4u9LW5sfW/rN7aBtw2sbQ09RzEqnuAw+KG155IuxSX4rsFfmapFcJfT
e2+r2puhnSzNka/FrHNxzGCfLxDutuoo2En8RS32es4oyHG542lZ615UhTOqoXUUCeebqTz2h8PCOMEyu7fPg7gW1egmn
MziYQX33cVuXHeBff9G8inSBNeYD+1XoT/mk9v5JjPneFkEnXi+WzWGD3E/U50eQukt0EYBqN/60Pq/3e6/g8AAP//AwB
QSwMEFAAGAAgAAAAhAC6dkGcNEAAACKcAAA8AAAB3b3JkL3N0eWxlcy54bWzsXW1zm0GvS/n5V9x8ofbr7kLvlYfJLr
XfLdpJL6pKsN3ZUp49gZLFG6AMUx/vrb95AlZWD6Kgt9aaUUhVLQD8zNNPM90g5sefv2S4CvPizhLwbDHW4HAU/DLI
rt+4vBI7u3r04HQVGyNGZJJvKLWRMvBj//9Pe//fh4XpRPCS8CAZAW54vwYjAvy+X5wUeRZvmCFT9kS56KnBMSX7BSfM3
vDxYsf1gtX4XZYsnKeBoncfl0cHR4OBkYmLwLsJabxSF/nYWRBU9LZX+Q80QgZmkxj5dFhfbYBe0xy6Nln0W8KMRJLXkNt
2BxWsMMxwBoEYd5VmSz8gdxMqZHCKqYDw/Vp0WyBjJGARwBgEnlv+EwTg3GgbC0cellhzOpceLlwwHrjAUQRVAQR6O
qH/KPNLewiqiM5ji4iqMDactKNmffBnXluAQxxaidrAkCx9sT4btOMa8GkhOVyE5+/v0yxN00QgCa8MhGMFCfjL/iRfRH/hk
1tl8NiPswS+UGM2k9CulEwVwYztkrKQn7Nb3Lz1XxTf95maVkJ+esCOP4TvRXNLqLrfvLtMiHog9nBXIZRGzxp1z+aFXT
1iU1uarOloHB7LFB56nYvdXJgb+SG8q/qg31FuuZac2tiUsva+28fTVv67szqlNX27lpqlo6mLA8e3l8pwOD5P4ntWrlRx+Q3
haDDXR5di/Pn38oVS+TBB2Zg9FruJbb31QvlyMvafYQOiqg0nh7IHSSyD6NHxWfXl80ppyVZlzhPAPpvD5sAGBPBT
S+Wx2BXV4++yB8jUe3pdxMVBTiY1f3tkcZaLKhsXOfntio23fBg/6iOlpaB6TyO+G9znn4peLT/utb5chmQxitiUvF5dDJR
XpQU0ZtvIV/KuCv2pkxy+kkaJPLoVbxuXJn/twlbGtqa7OecyYtPMNyGUN1HQRxJi8l622bM1da5q6NQDY321dB4Xw0d76
uhyb4aOtlXQ6f7akjBPGdDcRqJ64g6HjYDUHfhONSIXnGIDY3j0BlaxyEVNI5DCWgch6OjcrX+jMzXuCKp8xClxdazj5yeHs
77u5rhB/uf7kuCH+7uK4Af7u6A74e7O7774e4O5364u6O3H+7uY13H1VOt4L2QWVr2VtkSy8o0K3kgJ7290VgqsFRGToMnL
3o8JzJIAhgd2cyFuDdayNT33R6iROp/PS9l4hhks2AW38uUp3fHefqVJ9mSByyKBB4hYM5FUuYYER+fzvmM5zwNOaVj04
HKTD8IV4spgW8u2T0ZfK8j4uGrEEemCQu3QIn+eS5HEBE69YGGe9e9axsjw4e46D9WEIS4WiUJJ8L6RONiCqt/bqBg+qc
GCqZ/ZqBg+icGFmdUQ2TQiEbKoBENmEEjGjfn1TjztClxs2gEY2bQes/bndxmagQb886ht1rd9dJJu+h9O7HbXyfqqsbyR
TMw1uWM7uc7acB7Kq3QcxrnzO2nassegRuKK5pNrLVLvF65iKlx+mq/4BuoFGJq8YjkleNRYSwGq+/x/D6KAbKcol2jyWduV
9OyUbQKqZNob1my0hPa/mpjZX8PWwvvgbZwXZDJohiXw4E9yOivplh8617279gaq7+stqMSafcmJEEv5Q1XmjD87mnJc
5GWpFRGepslSfblIzE2zLptK/Zkj9SIHSS/JvFcs6KWOVKGXddL/XV0xfBR7bsfUI3CYtTgt7evFqwOAnoZhDv7j5+CO6ypU
wz5cDQAF5IZZktyDBNJfAfV/HpP2K6eCmS4PSJ6GwvicpDCuw6JrJlaKQsIkI508w4jUmuoQrv3/xpmrE8okG7ybl+HqXkRli3
bLHUkw4CbYm4+CjD8FsSOH9h+WxrAtRieqOBMwqGxar6e887B/qPmUBSWXol1Wp6o9qqqs6eD6TxM24PpPERSb4vI
g/ZfgZdfg+p/sBhzVyV4nrChi5y1Ubzyq063wqM+3f/Jn8Llky2erhG4AK0CyEawAYYwS1aLtKA8Y4VHeMIKj/p8CV1G4RG
U5BTev/I4liNDgVExocCoaFbgVBwMoMFiC+j+yH4U1f0zHAuv/rI4GI5oCWGBUfkZ6+Se6y2OBUfmZAqPyMwVg5WckjMrP
Rq8DDPpuJSTddJcaCPi5CuL5LuQpOWfLHMcpY/EUG+Sfg9lyiQarSBpJvJX8JkqX6lwwBS1qgTwsmd2hqMi+T+JeuaxKLsf
0FFICVJlhHV1tYXHGW5+ezaLjP1S5DeXbhJWMjnWRLx3HF0bluRL9/qn2Vsd191o1PZ80N8Py+D23ld7bdhJoc7LauEfcN
sd4NNYz6pfvzSZPaRR/FqUXUU/phiMupurDx6w3i823g9k9iwPO5oCduc7LZcz5I3LE86Wsl2TztaKp1uWLBp4TXLHxod4a
TNf+ocz+F8J21eVBs3NtvmSLVlkWuetHnRhISCyzCUDwsgO90047bvJh63PUZFbhSMnNwonXXlhmGt2Gf+NZZXdkzQVO
3VT0+AuK8m0Z0i56+rTNftN244df9R13sxcUoLHjTijLrfuNqI/Mu5x7Bxu3BCd444bonMAckN0ikROc1RicqN0jk1uiM5Byg2BjI
bwioCLVtAeF62gvU+Ogig+0arHLMAN0Xk64IZACxVColXaY6bghkAJFZ7h7CRWioLUKldBChRBoocIJGE6o0B4nVGjv1SI4i
NuIIlWkoRACxVColUKldBChRBooXrO7Z3mXkKFKGihQgiOUCEEWqhqvhtDqNAeJ1Ro7yNuIoiJvIiCfiqEQAsVQqCFCi
HQQoUQakFCCJQqgmBUCEKwqQAi1UCIEWq6p0b9QoT1Q6NdR6gQxUeoEAUvAIBFIdEQAsVQqCFCiQoU
QKKECcy+hQhSOUCEEWqQAi1UdbOwh1ChPU6o0N5HqBDFR6QBS1UCIEWkoRACxVColUKldBChRAooQJzL6FCF
LRQIQRaQBcizT/NLURXY/ZDfNXT+cR+91tXpIOf7Z9y21Cj7IBVr9xY3X+LcJVID0HjDw9HKt/oBhJPkzhTJWrHbXUbVz0Sg
brx+ct1+y98bPSeL10yv4VQ90wB+LirJaipjNtc3rYESd64zdNtSdZrHLdFX9sSXAhhbUFX6bJ6KEVcjoBxW5ixjlcO87ZobZn
DIW6L0ZYhHOG2yGwZwgFui8eW4XEgg/O29XHhcZrZu5cChDZ3tBB03Ahtbgm5qslxFEZX0twlXdlzI3SIOY2A4tMjgyfW
DYVm2A3IRzWUGZZqf6G6EbBUQwQvqgGMP9UQyptqCOVHNQyMWKohApZq/+DsRvCiGsD4Uw2hvkMGuH5Uw0sZl
mqIlgKUalmCp7nlBdsL4Uw2hvkMGuH5Uw8kdmlqIguAlmCphgheVAMYf6ohIdfVEMqPapAlo6mGCFiqIQKWAojgRTWA
8acaQnltDaHaqFZVIAUQxb5rhJmGwluyBbhrgbBl6ZEuWtWVe2ZCF4ZkuQq4pzXLZkk+ZG6MqeG6ErjW4EFJ9OGDyx
big0w24oP6px2VIT1f5CdSNggqZLS06qcdISK9W4bKmwValy25KYaly01UY3Llpqo9g/OBgQvqnHZUivVuGjPWpctuSmGpct
NVGNy5aaqMZIS01U97wgO2H8qcZIS61U47IIN9W4bKmwValy21EQ1LltqohqXLtmpxmVLvTjsqVWqnHZkptqXLBURDUu
W2qiGpctNVGNy5acVOOypVaqcdISK9W4bOmjMikJXgF1u2B5GdC9L+4dK+Yl6/9ywi9pzoss+cqjgPZUP6DO8uBxY/kria2
WlHThI2LM5BvQrZ8rRfoNsAZQHfg+qpepkSayJ4FZPCxsVh02t2t1i8pwR1M1uLXPATw68WtVAtTJs7qFzkaOPFUVhixYbt0i
Gp71cz1nOV679pVq2OMGNfn8nieF3FU7T48PLs6Gg1N4DGLIz1wwwk2lfb5BfBDy/Ut/W6ZIP5TjExAiO9sJIZ5uzUqDbTb
2368DWpWzLUmTZaF5ljv7csMid3vjHb5P6NdeY2LnrzMNnV/U6c6FVued2vt+OTiflNdbCKABcDpvS/3iwwfShFAV281wnpZu
upms70snd5mLRjn4zxHTucxIYjGeY46OM9alvq4DVE+3suZdfn2ulcVUGb4z9xoZsm330t6utfl6V7mcQ8a9xpJ9+5VDbnDvL
Y50T5c5cjM3DYWyFTberrK2Okq5vkeGlcZv3BXObU9pQr70FOUfOg9Jdb/X+ve9fWbhn5x7PQI89wWjUccfx8eoVty8mJH
Tx/QS8A2+YAZURofmLxwHxjbPuB0ASWLVqA4FzP5b9sh5KpLa3e4i+Vqvpfq7Ht6w4nTG0xfgsYbTr4Lb6gG/DkDwp75P
3Xyb2YINPyfID+dzGuRLBX/R+dyH9d+H9NMUc8c/JvWKHh/+wwyn81xM+peHrGQzHYLDQvZnfU0cwCS/UbgTtyStu+4Fi
FycGjKY7t4tHd71JWc1v6rKq9QVAXRB2OlpnTyuniaZafHifSkd7IF5S9zT6xJSU2H/Nk+Qj00dnS/ehCZ9JuY9w0P1Ps6t/V
O9tITPPIf3lJwAB5ud0V/b/UQvNhnR8c4662y0N4w3OqXWn1HuqMPH6tCDM2tPGC7fxu11O1emp3BMFjHn62A1qgDVxg
zHu4MYe6g9P+yKzPSXeF0UXpERKmp03W9Kn3/DPepXCIZ1kVGF8MjloZNXZSe4T+rAGCz1ad4iGRL1/lcbl2J2DKlyZfD
1r4LeEHdK3NxcXESumPPj9alicB13vcvEwleYJJOJfQh30LQvKJbro5KLkhlGsuYd7odL400nQIR8XCadEJJir4F9CF8+c7
++mRBDjXScEVfIRv6fMjZTb9goztsdZbm4LBY0V19TSGvGooyJmFD1c5AgUzfM2PZPFMTQoulguv3XSeSdjqzKrhjYVQ7
hiiXlhvx65F/Bsx/qM1Fm/qoblgef12K/n0tWWYzMs9uxab6MT5ZrBri/pq0bL1dzO8TKz2v1z1qzheq3ubYLqHRRKrsBaxWw
KUCgxp6uF/hAn8LErs/OZS9zYWQjgfmGskP0mvhuUuMjvK9BNJ3Jz/slnjs9MWbMy9ZoC28zorRSaVehtgjwykxnpq6v9NJ
s64vewspS5K1ftAm22zC3Hh/JfF9ao0+D1UDXS0VclFqduFnZKZK8j1+yy8q7JelmO7bFSP2pY797lw3AoRqZ+hnLIWN3hk

6.3 Payslip Services

6.3.1 Payslips

These services are available to users who wish to access the data generated on the payslips. The payslip services are provided on a separate URL to the main services. All follow the same format for an authentication request, followed by a request for either Summary Data or Payslip Details in JSON format.

Depending on the query attached will define the payload and response.

6.3.2 Authentication

URL	http(s)://<web-server>/<conname>_web/wrd/run/payslip.json				
Method	POST				
Request Headers	Authorisation Basic: <User:Password in Base 64>				
Request Body	{"itrent": {"login": {"user": "MYUSER", "pwd": "mypassword"}}				
Query Parameters	<table><tr><th>Parameter</th><th>Notes</th></tr><tr><td>func</td><td>Always defined as login</td></tr></table>	Parameter	Notes	func	Always defined as login
Parameter	Notes				
func	Always defined as login				
Example Response Body	{"itrent": {"login": {"sessionid": "XXXXXXXXXXXXXXXXXXXXXXXXXXXXX"}}				
Status	200				
Notes					

6.4 Payslip Summary

The payslip summary will return a list of payslips, with some basic summary data similar to that displayed within Employee Self Service.

URL	http(s)://<web-server>/<conname>_web/wrd/run/payslip.json														
Method	GET														
Request Headers	None														
Request Body	None														
Query Parameters	<table><tr><th>Parameter</th><th>Notes</th></tr><tr><td>usession</td><td>The value returned from an authentication request</td></tr><tr><td>func</td><td>paysum</td></tr><tr><td>org</td><td>Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.</td></tr><tr><td>personid</td><td>The Personal Reference Number for the person upon whom the request is being made</td></tr><tr><td>startd</td><td>Optional value of the format YYYY-MM-DD used to retrieve payslips only from this date</td></tr><tr><td>endd</td><td>Optional value of the format YYYY-MM-DD used to retrieve payslips only up to this date</td></tr></table>	Parameter	Notes	usession	The value returned from an authentication request	func	paysum	org	Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.	personid	The Personal Reference Number for the person upon whom the request is being made	startd	Optional value of the format YYYY-MM-DD used to retrieve payslips only from this date	endd	Optional value of the format YYYY-MM-DD used to retrieve payslips only up to this date
Parameter	Notes														
usession	The value returned from an authentication request														
func	paysum														
org	Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.														
personid	The Personal Reference Number for the person upon whom the request is being made														
startd	Optional value of the format YYYY-MM-DD used to retrieve payslips only from this date														
endd	Optional value of the format YYYY-MM-DD used to retrieve payslips only up to this date														
Example Response Body	See section 6.4.2														
Status	200														
Notes	Example URL: http[s]://<web-server>/<conname>_web/wrd/run/payslip.json?usession=<sessionid>&func=paysum&org=<organisation name>&personid=<person reference number>&startd=1900-12-31&endd=2099-12-31 If both the startd and endd parameters are omitted then all payslips will be retrieved for the person.														

6.4.1 Payslip Summary Response

Field	Notes
payslipid	The unique reference used to retrieve this payslips details
pay_date	The pay date associated with the payslip
run_type	Either 'Main' or the description of the pay run that is entered when an additional run is created
total_payments	The value of all payments made on the payslip
total_deductions	The value of all deductions made on the payslip
total_pay	The value of the pay for the payslip, payments less deductions

6.4.2 Payslip Summary Example Output

```
{
  "itrent": {
    "payslip": [
      {
        "payslipid": "8653360MBm",
        "pay_date": "2017-05-25",
        "run_type": "Main",
        "total_payments": 2000,
        "total_deductions": 366.6,
        "total_pay": 1633.4
      },
      {
        "payslipid": "1210750DNr",
        "pay_date": "2017-04-25",
        "run_type": "Main",
        "total_payments": 2000,
        "total_deductions": 366.4,
        "total_pay": 1633.6
      }
    ]
  }
}
```

6.5 Payslip Details

The payslip details service will return all of the values for a single payslip.

URL	http(s)://<web-server>/<conname>_web/wrd/run/payslip.json										
Method	GET										
Request Headers	None										
Request Body	None										
Query Parameters	<table><tr><th>Parameter</th><th>Notes</th></tr><tr><td>usession</td><td>The value returned from an authentication request</td></tr><tr><td>func</td><td>paydet</td></tr><tr><td>org</td><td>Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.</td></tr><tr><td>payslipid</td><td>The Payslip reference returned from the payslip summary service.</td></tr></table>	Parameter	Notes	usession	The value returned from an authentication request	func	paydet	org	Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.	payslipid	The Payslip reference returned from the payslip summary service.
Parameter	Notes										
usession	The value returned from an authentication request										
func	paydet										
org	Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.										
payslipid	The Payslip reference returned from the payslip summary service.										
Example Response Body	See section 6.8										
Status	200										
Notes	Example URL: http[s]://<web-server>/<conname>_web/wrd/run/payslip.json?usession=<sessionid>&func=paydet&org=<organisation name>&payslipid=<payslipid>										

6.6 All Payslip Details

The all payslip details service will return all of the values for a number of payslips depending on the query requests. The query has a number of parameters as defined below.

URL	http(s)://<web-server>/<conname>_web/wrd/run/payslip.json														
Method	GET														
Request Headers	None														
Request Body	None														
Query Parameters	<table><tr><th>Parameter</th><th>Notes</th></tr><tr><td>usession</td><td>The value returned from an authentication request</td></tr><tr><td>func</td><td>payall</td></tr><tr><td>org</td><td>Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.</td></tr><tr><td>personid</td><td>Optional value that will limit the request to payslips for a specific person. This should contain the Personal Reference Number.</td></tr><tr><td>startd</td><td>Optional value of the format YYYY-MM-DD used to retrieve payslips only from this date</td></tr><tr><td>endd</td><td>Optional value of the format YYYY-MM-DD used to retrieve payslips only to this date</td></tr></table>	Parameter	Notes	usession	The value returned from an authentication request	func	payall	org	Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.	personid	Optional value that will limit the request to payslips for a specific person. This should contain the Personal Reference Number.	startd	Optional value of the format YYYY-MM-DD used to retrieve payslips only from this date	endd	Optional value of the format YYYY-MM-DD used to retrieve payslips only to this date
Parameter	Notes														
usession	The value returned from an authentication request														
func	payall														
org	Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.														
personid	Optional value that will limit the request to payslips for a specific person. This should contain the Personal Reference Number.														
startd	Optional value of the format YYYY-MM-DD used to retrieve payslips only from this date														
endd	Optional value of the format YYYY-MM-DD used to retrieve payslips only to this date														
Example Response Body	See section 6.8														
Status	200														
Notes	Example URL: http[s]://<web-server>/<conname>_web/wrd/run/payslip.json?usession=<sessionid>&func=payall&org=<organisation name>&personid=<person reference number>&startd=1900-12-31&endd=2099-12-31 The start and end dates if left blank operate in the following manner: • If only End date is given, all payslips up to the end date will be provided. • If only Start date is given, all payslips from the start date will be provided. • If neither start or end date is given, start date is today - 12 months and end date is today.														

6.7 Payslip Details / All Payslip Details Response

Field	Notes
payslipid	The unique reference used to retrieve this payslips details
unit	The name of the unit that the person is attached to for this contract
formatted_name	The formatted name of the employee
address_line1	First line of the address on the payslip
address_line2	Second line of the address on the payslip
address_line3	Third line of the address on the payslip
address_line4	Fourth line of the address on the payslip
address_line5	Fifth line of the address on the payslip
address_line6	Sixth line of the address on the payslip
payroll_name	Name of the payroll for this payslip
pay_date	Pay date for the payslip
run_type	Either a 'Main' run or the description given to the additional payrun
tax_period	The tax period that the payslip was generated for
tax_code	The tax code associated with the employee
tax_basis	The basis for the tax code associated to the employee, either 0 or 1 for cumulative or month 1 / week 1 respectively
social_security_number	The employees Social security Number for the attached legislation
ni_category	The employees National Insurance Category
payroll_ref_no	The employees Payroll Reference Number
total_payments	The total value of all the payments made on the payslip
total_deductions	The total value of all the deductions made on the payslip

Field	Notes
payment_element_nm	The name of the payment element. This will be repeated for each payment element on the payslip
payment_cash_value	The cash value associated with the element that has preceded it, if a cash value is given.
payment_unit_value	The unit value associated with the element that has preceded it, if a unit value is given.
payment_time_value	The time value associated with the element that has preceded it, if a time value is given.
payment_rate_value	The rate value associated with the element that has preceded it, if a rate value is given.
payment_earned_date	The date earned that is held against the associated element, if it has been entered.
payment_balance_value	The year to date value for the associated element.
benefit_element_nm	The name of the benefit element. This will be repeated for each benefit element on the payslip
benefit_cash_value	The cash value associated with the element that has preceded it, if a cash value is given.
benefit_unit_value	The unit value associated with the element that has preceded it, if a unit value is given.
benefit_time_value	The time value associated with the element that has preceded it, if a time value is given.
benefit_rate_value	The rate value associated with the element that has preceded it, if a rate value is given.
benefit_earned_date	The date earned that is held against the associated element, if it has been entered.
benefit_balance_value	The year to date value for the associated element.
deduction_element_nm	The name of the deduction element. This will be repeated for each deduction element on the payslip
deduction_cash_value	The cash value associated with the element that has preceded it, if a cash value is given.
deduction_unit_value	The unit value associated with the element that has preceded it, if a unit value is given.

Field	Notes
deduction_time_value	The time value associated with the element that has preceded it, if a time value is given.
deduction_rate_value	The rate value associated with the element that has preceded it, if a rate value is given.
deduction_earned_date	The date earned that is held against the associated element, if it has been entered.
deduction_balance_value	The year to date value for the associated element.
name	A grouping of either This period values or Year to Date elements that are not directly associated with payment, benefit or deduction elements
value	The value given for the preceding element.
type	A constant associated with the element to help identify, for example EE_NI for employees NI
message1	A payslip message line as entered in the payslip design
message2	A payslip message line as entered in the payslip design
message3	A payslip message line as entered in the payslip design
message4	A payslip message line as entered in the payslip design
message5	A payslip message line as entered in the payslip design
net_pay	The total pay for the payslip defined by the payments less deductions
method	The payment method associated with the employee for this payslip
sort_code	The sort code, if a bank payment method is given, that the payment was made to.
bank_account_no	The bank account, if a bank payment method is given, that the payment was made to.
payment_methods_list	If multiple pay methods have been defined, other methods and breakdown of payments will be given.

6.8 Payslip Details / All Payslip Details Example Output

```
{
  "itrent": {
    "payslip": [
      {
        "payslipid": "123456ABCD",
        "unit": "My Unit",
        "formatted_name": "A Person",
        "address_line1": "",
        "address_line2": "",
        "address_line3": "",
        "address_line4": "",
        "address_line5": "",
        "address_line6": "",
        "payroll_name": "My Payroll",
        "pay_date": "2017-01-25",
        "run_type": "Main",
        "tax_period": 10,
        "tax_code": "1100L",
        "tax_basis": "0",
        "social_security_number": "NX738393A",
        "ni_category": "A",
        "payroll_ref_no": "",
        "total_payments": 1354.84,
        "total_deductions": 169.34,
        "payments": [
          {
            "payment_element_nm": "Annual Salary",
            "payment_cash_value": 1354.84,
            "payment_unit_value": 0,
            "payment_time_value": 0,
            "payment_rate_value": "",
            "payment_earned_date": "",
            "payment_balance_value": ""
          }
        ],
        "benefits": {
```

```

},
"deductions": [
  {
    "deduction_element_nm": "Tax",
    "deduction_cash_value": 87.4,
    "deduction_unit_value": 0,
    "deduction_time_value": 0,
    "deduction_rate_value": "",
    "deduction_earned_date": "",
    "deduction_balance_value": ""
  },
  {
    "deduction_element_nm": "NI - A",
    "deduction_cash_value": 81.94,
    "deduction_unit_value": 0,
    "deduction_time_value": 0,
    "deduction_rate_value": "",
    "deduction_earned_date": "",
    "deduction_balance_value": ""
  }
],
"ytdperiod": [
  {
    "element_nm": "Taxable Pay",
    "value": 1354.84,
    "type": "TAXPAYTP"
  }
],
"ytd": [
  {
    "name": "Tax",
    "value": 87.4,
    "type": "TAXYTD"
  },
  {
    "name": "NI - A",

```


6.9 P60 Services

These services are available to users who wish to access the data generated on the P60. The P60 services are provided on a separate URL to the main SOAP services. All follow the same format for an authentication request, followed by a request for either Summary Data or P60 Details in JSON format. The P60 Services require that the P60 has been published to Employee Self Service.

All requests for payslip data are routed through a single URL

`http[s]://<web-server>/<conname>_web/wrd/run/p60.json`

Depending on the query attached will define the payload and response.

6.9.1 Authentication

The initial request will need to authenticate using the Login function. This will return a session id that is required for any other requests. The user that is authenticated must be linked to a web services account as defined in section 3.3.

`http[s]://<web-server>/<conname>_web/wrd/run/p60.json?func=login`

6.9.2 Authentication Payload

```
{
  "itrent": {
    "login": {
      "user": "USER",
      "pwd": "*****"
    }
  }
}
```

6.9.3 Authentication Response

```
{
  "itrent": {
    "login": {
      "sessionid": " XXXXXXXXXXXXXXXXXXXXXXXXXX "
    }
  }
}
```

6.10 P60 Summary

The P60 summary will return a list of P60's, with some basic summary data similar to that displayed within Employee Self Service. The query has a number of parameters as defined below.

URL	http(s)://<web-server>/<conname>_web/wrd/run/p60.json														
Method	GET														
Request Headers	None														
Request Body	None														
Query Parameters	<table><tr><th>Parameter</th><th>Notes</th></tr><tr><td>usession</td><td>The value returned from an authentication request</td></tr><tr><td>func</td><td>p60sum</td></tr><tr><td>org</td><td>Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.</td></tr><tr><td>personid</td><td>The Personal Reference Number for the person upon whom the request is being made</td></tr><tr><td>startd</td><td>Optional value of the format YYYY-MM-DD used to retrieve P60s only from this date</td></tr><tr><td>endd</td><td>Optional value of the format YYYY-MM-DD used to retrieve P60s only up to this date</td></tr></table>	Parameter	Notes	usession	The value returned from an authentication request	func	p60sum	org	Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.	personid	The Personal Reference Number for the person upon whom the request is being made	startd	Optional value of the format YYYY-MM-DD used to retrieve P60s only from this date	endd	Optional value of the format YYYY-MM-DD used to retrieve P60s only up to this date
Parameter	Notes														
usession	The value returned from an authentication request														
func	p60sum														
org	Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.														
personid	The Personal Reference Number for the person upon whom the request is being made														
startd	Optional value of the format YYYY-MM-DD used to retrieve P60s only from this date														
endd	Optional value of the format YYYY-MM-DD used to retrieve P60s only up to this date														
Example Response Body	See section 7.4.2														
Status	200														
Notes	Example URL: <pre>http[s]://<web-server>/<conname>_web/wrd/run/p60.json?usession=<sessionid>&func=p60sum&org=<organisation name>&personid=<personalreference></pre> If both the startd and endd parameters are omitted then all P60s will be retrieved for the person that have been published to Employee Self Service.														

6.10.1 P60 Summary Response

Field	Notes
return_name	This is always P60
tax_year	The period for the P60
start_tax_year	The starting calendar year for the P60
end_tax_year	The ending calendar year for the P60
description	A description of the P60
messages	Any error messages from the request

6.10.2 P60 Summary Example

```
{
  "itrent": {
    "p60_summary": [
      {
        "return_name": "P60",
        "tax_year": "2019\2020",
        "start_tax_year": 2019,
        "end_tax_year": 2020,
        "description": "6th April 2019 - 5th April 2020 (UK_MonthlyPayroll)"
      }
    ],
    "messages": {
    }
  }
}
```

6.11 P60 Details

The P60 details will return all of the values for a single P60. The query has a number of parameters as defined below.

URL	http(s)://<web-server>/<conname>_web/wrd/run/p60.json													
Method	GET													
Request Headers	None													
Request Body	None													
Query Parameters	<table><tr><th>Parameter</th><th>Notes</th></tr><tr><td>usession</td><td>The value returned from an authentication request</td></tr><tr><td>func</td><td>p60dets</td></tr><tr><td>org</td><td>Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.</td></tr><tr><td>personid</td><td>The Personal Reference Number for the person upon whom the request is being made</td></tr><tr><td>taxyear</td><td>The starting tax year returned from the P60 summary service.</td></tr></table>		Parameter	Notes	usession	The value returned from an authentication request	func	p60dets	org	Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.	personid	The Personal Reference Number for the person upon whom the request is being made	taxyear	The starting tax year returned from the P60 summary service.
Parameter	Notes													
usession	The value returned from an authentication request													
func	p60dets													
org	Name of the organisation being assessed. This will be used to validate a correct request for the id being requested.													
personid	The Personal Reference Number for the person upon whom the request is being made													
taxyear	The starting tax year returned from the P60 summary service.													
Example Response Body	See section 7.5.2													
Status	200													
Notes	Example URL: http[s]://<web-server>/<conname>_web/wrd/run/p60.json?usession=<sessionid>&func=p60dets&org=<organisation name>&personid=<personalreference>&taxyear=<start_tax_year>													

6.11.1 P60 Details Response

Field	Notes
Ee_formatted_name	The formatted name of the employee
address_line1	First line of the employees address
address_line2	Second line of the employees address
address_line3	Third line of the employees address
address_line4	Fourth line of the employees address
address_line5	Fifth line of the employees address
End_year	Calendar year for the end of tax year
Part1	First part of the employers tax reference
Part2	Second part of the employers tax reference
Er_name	Employers name
address_line1	First line of the employers address
address_line2	Second line of the employers address
address_line3	Third line of the employers address
address_line4	Fourth line of the employers address
address_line5	Fifth line of the employers address
address_line6	Sixth line of the employers address
address_line7	Seventh line of the employers address
Surname	The employees surname
Forenames	The employees forename(s)
Pay_number	The employees Payroll Reference Number
Ni_number	The employees National Insurance Number
Tax_code	The employees Tax Code

Field	Notes
Tax_basis	Indicator for Cumulative (Blank) or Month 1 / Week 1 (M or W) tax calculation
Taxable_pay	Taxable pay from previous employments within the tax year
Tax_deducted	Tax taken from previous employments within the tax year
Taxable_pay	Taxable pay from the current employment within the tax year
Tax_deducted	Tax taken from the current employment within the tax year
Taxable_pay	Total Taxable pay within the tax year
Tax_deducted	Total Tax taken within the tax year
Smp	Statutory Maternity pay paid
Spp	Statutory Paternity pay paid
Shpp	Statutory Shared Parental pay paid
Sap	Statutory Adoption pay paid to the employee
Student_loan	Student Loan deducted from the employee
Post_grad_loan	Post Graduate Loan deducted from the employee
Table_letter	National Insurance Category
Earnings_at_lcl	Total National Insurance pay up to Lower Earnings Level
Earnings_lelopt	Total National Insurance pay from Lower Earnings Level to Primary Threshold
Earnings_pttouel	Total National Insurance pay from Primary Threshold to Upper Earnings Level
Ee_conts_due	Total National Insurance contributions paid
Messages	Any error messages from the request

6.11.2 P60 Details Example

```
{
  "itrent": {
    "p60_details": [
      {
        "ee_formatted_name": "Miss Rachael Adopt-One",
        "ee_formatted_address": {
          "address1": "30 High Street",
          "address2": "Derby",
          "address3": "",
          "address4": "",
          "address5": "NG3 3AB"
        },
        "end_year": 2020,
        "er_paye_ref": {
          "part1": "999",
          "part2": "A185"
        },
        "er_name": "MidlandHR Testing Ltd",
        "er_address": {
          "address1": "",
          "address2": "",
          "address3": "",
          "address4": "",
          "address5": "",
          "address6": "",
          "address7": ""
        },
        "surname": "Adopt-One",
        "forenames": "Rachael ",
        "pay_number": "PAY027",
        "ni_number": "AE894525A",
        "tax_code": "1250L",
        "tax_basis": "M",
        "prev_employments": {
          "taxable_pay": 0,
          "tax_deducted": 0
        }
      }
    ]
  }
}
```

```

    },
    "this_employment": {
      "taxable_pay": 38412.66,
      "tax_deducted": 5328.8
    },
    "total_for_year": {
      "taxable_pay": 38412.66,
      "tax_deducted": 5328.8
    },
    "smp": 0,
    "spp": 0,
    "shpp": 0,
    "sap": 6557.82,
    "student_loan": 0,
    "post_grad_loan": 0,
    "ni": [
      {
        "table_letter": "A",
        "earnings_at_lcl": 6144,
        "earnings_lcltop": 2360,
        "earnings_pttouel": 29909,
        "ee_conts_due": 3589.08
      }
    ]
  }
],
"messages": {
}
}
}

```

7. Pre-Publish Processes: Field Mappings and Example Outputs

7.1 HR Core Data

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
PersonID	Personal details / Person ref	String	
Title	Personal details / Title	String	
Initials		String	Derived from 3 forenames
Forename1	Personal details / Forename	String	
Forename2	Personal details / Forename2	String	
Forename3	Personal details / Forename3	String	
Surname	Personal details / Surname	String	
PreviousSurname	Personal details / Previous surname	String	
PreferredName	Personal details / Preferred name	String	
PreferredSurname	Personal details / Preferred surname	String	
FormattedName		String	Derived from Formatted Name Configuration
BirthDate	Key date details / Birth Date	Date	YYYY-MM-DD
MaritalStatus	Sensitive information / Marital status	String	
Gender	Personal details / Sex	String	To be converted to M / F or U
NInumber	Social security details / Social security no	String	UK legislation value
AddressLine1	Address details / Address line 1	String	Address Lines can be configured differently within the system
AddressLine2	Address details / Number / Street	String	Address Lines can be configured differently within the system

Data Field Name	iTrent Field	Format	Notes
AddressLine3	Address details / Local area	String	Address Lines can be configured differently within the system
AddressLine4	Address details / POSTTOWN	String	Address Lines can be configured differently within the system
AddressLine5	Address details / COUNTRY	String	Address Lines can be configured differently within the system
AddressLine6	Address details / POSTCODE	String	Address Lines can be configured differently within the system
Country	Address details / Country	String	
OrganisationStartDate	Personal details / Start date	Date	YYYY-MM-DD
OrganisationEndDate	Leaver information / Leaving date	Date	YYYY-MM-DD
NOKname	Next of kin details / Next of kin name	String	Repeats for each Next of Kin
NOKRelationship	Next of kin details / Relationship	String	
NOKAddressLine1	Next of kin details / Address line 1	String	Address Lines can be configured differently within the system
NOKAddressLine2	Next of kin details / Number / Street	String	Address Lines can be configured differently within the system
NOKAddressLine3	Next of kin details / Local area	String	Address Lines can be configured differently within the system
NOKAddressLine4	Next of kin details / POSTTOWN	String	Address Lines can be configured differently within the system
NOKAddressLine5	Next of kin details / COUNTRY	String	Address Lines can be configured differently within the system
NOKAddressLine6	Next of kin details / POSTCODE	String	Address Lines can be configured differently within the system
NOKCountry	Next of kin details / Country	String	
ECName	Emergency contact details / Name	String	Repeats for each Emergency Contact

Data Field Name	iTrent Field	Format	Notes
ECPrimaryContact	Emergency contact details / Primary contact	String	T or F
ECContact	Emergency contact details / Contact at	String	
ECContactEmail	Emergency contact details / Contact email	String	
ECRelationship	Emergency contact details / Relationship	String	
ECAddressLine1	Emergency contact details / Address line 1	String	Address Lines can be configured differently within the system
ECAddressLine2	Emergency contact details / Number / Street	String	Address Lines can be configured differently within the system
ECAddressLine3	Emergency contact details / Local area	String	Address Lines can be configured differently within the system
ECAddressLine4	Emergency contact details / POSTTOWN	String	Address Lines can be configured differently within the system
ECAddressLine5	Emergency contact details / COUNTRY	String	Address Lines can be configured differently within the system
ECAddressLine6	Emergency contact details / POSTCODE	String	Address Lines can be configured differently within the system
ECCountry	Emergency contact details / Country	String	
PositionID	Position details / Position reference	String	Repeats for all positions
OccupancyID	Occupancy details / Position occ. Reference	String	
PositionName	Position details / Job title	String	
OccupancyStartDate	Occupancy details / Occupancy start	Date	YYYY-MM-DD
OccupancyEndDate	Occupancy details / Occupancy end	Date	YYYY-MM-DD
ExpOccupancyEndDate	Occupancy details / Expected occupancy end date	Date	YYYY-MM-DD
Location	Position details / Location	String	

Data Field Name	iTrent Field	Format	Notes
StructureGroup1	Position details / Structure group 1	String	
StructureGroup2	Position details / Structure group 2	String	
JobFamily	Position details / Job family	String	
ReportingPositionName	Position details / Reports to	String	
ReportingPositionID	Position details / Position reference	String	For position in Position Details / Reports to
ReportingOccupantName		String	Formatted Name of Position Occupant
ReportingOccupantID	Occupancy details / Position occ. Refence	String	For person in Position Details / Reports to
ReportingOccupantEmail	Person / Contact details / Contact at	String	Means of Contact identified as User e-mail address
ReportingUnit	Position details / Reporting unit	String	
ReportingUnitID	Unit details / Unit reference	String	For reportingunit
ReportingUnitLoc	Unit details / Location	String	For reportingunit
ReportingUnitGroup1	Unit details / Structure group 1	String	For reportingunit
ReportingUnitGroup2	Unit details / Structure group 2	String	For reportingunit
ContactType	(At position level) Contact details / Means of contact	String	Repeats for all contacts
ContactDets	(At position level) Contact details / Contact at	String	
PosnAddressLine1	(At position level) Address details / Address line 1	String	Repeats for all addresses Address Lines can be configured differently within the system
PosnAddressLine2	(At position level) Address details / Number / Street	String	Address Lines can be configured differently within the system
PosnAddressLine3	(At position level) Address details / Local area	String	Address Lines can be configured differently within the system
PosnAddressLine4	(At position level) Address details / POSTTOWN	String	Address Lines can be configured differently within the system

Data Field Name	iTrent Field	Format	Notes
PosnAddressLine5	(At position level) Address details / COUNTRY	String	Address Lines can be configured differently within the system
PosnAddressLine6	(At position level) Address details / POSTCODE	String	Address Lines can be configured differently within the system
PosnCountry	(At position level) Address details / Country	String	
Category	Hours and basis details / Category	String	For position identified in position id
ReportingPost		String	
ReportingPostID	Post details / Post reference	String	
ReportingPostLoc	Post details / Location	String	
ReportingPostGroup1	Post details / Structure group 1	String	
ReportingPostGroup2	Post details / Structure group 2	String	
Contact			
OthAddrAddressType	Person / Address details / Address type	String	Repeats for each current none mailing address
OthAddrAddressLine1	Person / Address details / Address line 1	String	Address Lines can be configured differently within the system
OthAddrAddressLine2	Person / Address details / Number / Street	String	Address Lines can be configured differently within the system
OthAdrAddressLine3	Address details / Local area	String	Address Lines can be configured differently within the system
OthAddrAddressLine4	Address details / POSTTOWN	String	Address Lines can be configured differently within the system
OthAddrAddressLine5	Address details / COUNTRY	String	Address Lines can be configured differently within the system
OthAddrAddressLine6	Address details / POSTCODE	String	Address Lines can be configured differently within the system
OthAddrCountry	Address details / Country	String	

7.1.1 HR Core Example Output

```
{
  "itrent": {
    "Person": {
      "PersonID": "String",
      "Title": "String",
      "Initials": "String",
      "Forename1": "String",
      "Forename2": "String",
      "Forename3": "String",
      "Surname": "String",
      "PreviousSurname": "String",
      "PreferredName": "String",
      "PreferredSurname": "String",
      "FormattedName": "String",
      "Student": "String",
      "BirthDate": "Date",
      "MaritalStatus": "String",
      "Gender": "String",
      "NINumber": "String",
      "AddressLine1": "String",
      "AddressLine2": "String",
      "AddressLine3": "String",
      "AddressLine4": "String",
      "AddressLine5": "String",
      "AddressLine6": "String",
      "Country": "String",
      "OrganisationStartDate": "Date",
      "OrganisationEndDate": "Date",
      "NextOfKin": {
        "NOKName": "String",
        "NOKRelationship": "String",
        "NOKAddressLine1": "String",
        "NOKAddressLine2": "String",
        "NOKAddressLine3": "String",
        "NOKAddressLine4": "String",
        "NOKAddressLine5": "String",
        "NOKAddressLine6": "String",
        "NOKCountry": "String"
      },
      "EmergencyContact": {
        "ECName": "String",
        "ECPrimaryContact": "String",
        "ECContact": "String",
        "ECContactEmail": "String",
        "ECRelationship": "String",
        "ECAddressLine1": "String",
        "ECAddressLine2": "String",
        "ECAddressLine3": "String",
        "ECAddressLine4": "String",
        "ECAddressLine5": "String",
        "ECAddressLine6": "String",
        "ECCountry": "String"
      },
      "Position": {
        "PositionID": "String",
        "OccupancyID": "String",

```

```

    "PositionName": "String",
    "OccupancyStartDate": "Date",
    "OccupancyEndDate": "Date",
    "ExpOccupancyEndDate": "String",
    "Location": "String",
    "StructureGroup1": "String",
    "StructureGroup2": "String",
    "JobFamily": "String",
    "ReportingPositionName": "String",
    "ReportingPositionID": "String",
    "ReportingOccupantName": "String",
    "ReportingOccupantID": "String",
    "ReportingOccupantEmail": "String",
    "ReportingUnit": "String",
    "ReportingUnitID": "String",
    "ReportingUnitLoc": "String",
    "ReportingUnitGroup1": "String",
    "ReportingUnitGroup2": "String",
    "PositionContacts": {
      "ContactType": "String",
      "ContactDets": "String"
    },
    "PositionAddresses": [
      {
        "PosnAddressLine1": "String",
        "PosnAddressLine2": "String",
        "PosnAddressLine3": "String",
        "PosnAddressLine4": "String",
        "PosnAddressLine5": "String",
        "PosnAddressLine6": "String",
        "PosnCountry": "String"
      }
    ],
    "Category": "String",
    "ReportingPost": "String",
    "ReportingPostID": "String",
    "ReportingPostLoc": "String",
    "ReportingPostGroup1": "String",
    "ReportingPostGroup2": "String"
  },
  "Contact": "",
  "OtherAddress": {
    "OthAddrAddressType": "String",
    "OthAddrAddressLine1": "String",
    "OthAddrAddressLine2": "String",
    "OthAddrAddressLine3": "String",
    "OthAddrAddressLine4": "String",
    "OthAddrAddressLine5": "String",
    "OthAddrAddressLine6": "String",
    "OthAddrCountry": "String"
  }
}
}
}
}

```

7.2 Skills and Qualifications

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
PersonID	Personal details / Person ref	String	
SkillName	Person / Skill details / Skill	String	
SkillSet	Person / Skill details / Skill set	String	
SkillStartDate	Person / Skill details / Start date	Date	YYYY-MM-DD
SkillExpiryDate	Person / Skill details / Skill expiry date	Date	YYYY-MM-DD
SkillReviewDate	Person / Skill details / Next review date	Date	YYYY-MM-DD
SkillScore	Person / Skill details / Score	String	
SkillScoreEffDate	Person / Skill details / Score effective date	Date	YYYY-MM-DD
SkillAuthStatus		String	
SubjectName	Person / Qualification details / Subject	String	Multiple
TypeName	Person / Qualification details / Type	String	Multiple
Level	Person / Qualification details / Level	String	
Grade	Person / Qualification details / Grade	String	
InstitutionType	Person / Qualification details / Institution type	String	
PlaceOfLearning	Person / Qualification details / Place of learning	String	
StudyCommencementDate	Person / Qualification details / Study commencement date	Date	YYYY-MM-DD
StudyExpectedDate	Person / Qualification details / Study expected end date	Date	YYYY-MM-DD
DateObtained	Person / Qualification details / Date obtained	Date	YYYY-MM-DD
ValidUntil	Person / Qualification details / Valid until	Date	YYYY-MM-DD
QualAuthStatus		String	

7.2.1 Skills & Qualifications Example Output

```
{
  "itrent": {
    "Person": {
      "PersonID": "String",
      "Skills": [
        {
          "SkillName": "String",
          "SkillSet": "String",
          "SkillStartDate": "Date",
          "SkillExpiryDate": "Date",
          "SkillReviewDate": "Date",
          "SkillScore": "String",
          "SkillScoreEffDate": "Date",
          "SkillAuthStatus": "String"
        }
      ],
      "Qualifications": {
        "Subjects": [
          {
            "SubjectName": "String"
          }
        ],
        "Types": {
          "TypeName": "String"
        },
        "Level": "String",
        "Grade": "String",
        "InstitutionType": "String",
        "PlaceOfLearning": "String",
        "StudyCommenceDate": "Date",
        "StudyExpectedDate": "Date",
        "DateObtained": "Date",
        "ValidUntil": "Date",
        "QualAuthStatus": "String"
      }
    }
  }
}
```

7.3 Position Data Service

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
PositionID	Position details / Position reference	String	
Name	Position details / Job title	String	
EffectiveDate		Date	Today's Date YYYY-MM-DD
OccupancyStartDate	Occupancy details / Occupancy start	Date	YYYY-MM-DD
OccupancyEndDate	Occupancy details / Occupancy end	Date	YYYY-MM-DD
Occupied		String	Derived value of T or F based on if there is a person attached to the position on the EffectiveDate
Location	Position details / Location	String	
SstructureGroup1	Position details / Structure group 1	String	
StuctureGroup2	Position details / Structure group 2	String	
ReportingPositionID	Position details / Position reference	String	For position in Position Details / Reports to
ReportingPositionName	Position details / Reports to	String	
WorkingPattern	Pattern Details / Pattern	String	For Working Pattern type
Category	Hours and basis details / Category	String	For position identified in PositionID
FTE	Hours and basis details / FTE hours	Numeric	
ContractHours	Hours and basis details / Contractual Hours	Numeric	
UnitName	Position details / Reporting unit	String	
UnitID	Unit details / Unit reference	String	For UnitName
UnitLocation	Unit details / Location	String	For UnitName
UnitGroup1	Unit details / Structure group 1	String	For UnitName
UnitGroup2	Unit details / Structure group 2	String	For UnitName

Data Field Name	iTrent Field	Format	Notes
PersonID	Personal details / Person ref	String	
Initials		String	Derived from 3 forenames
Surname	Personal details / Surname	String	
Forename1	Personal details / Forename	String	
NInumber	Social security details / Social security no	String	UK legislation value
ReportingMgrRef	Personal details / Person ref	String	
EmploymentBasis	Hours and basis details / Basis	String	
EmploymentType	Hours and basis details / Type	String	

7.3.1 Position Example Output

```

"itrent": {
  "Position": {
    "PositionID": "String",
    "Name": "String",
    "EffectiveDate": "Date",
    "OccupancyStartDate": "Date",
    "OccupancyEndDate": "String",
    "Occupied": "String",
    "Location": "String",
    "StructureGroup1": "String",
    "StructureGroup2": "String",
    "ReportingPositionID": "String",
    "ReportingPositionName": "String",
    "WorkingPattern": "String",
    "Category": "String",
    "FTE": "Numeric",
    "ContractHours": "Numeric",
    "UnitName": "String",
    "UnitID": "String",
    "UnitLocation": "String",
    "UnitGroup1": "String",
    "UnitGroup2": "String",
    "PersonID": "String",
    "Initials": "String",
    "Surname": "String",
    "Forename1": "String",
    "NInumber": "String",
    "ReportingMgrRef": "String",
    "EmploymentBasis": "String",
    "EmploymentType": "String"
  }
}

```

7.4 Absence Data Service

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

This service only provides data for sickness absences.

Data Field Name	iTrent Field	Format	Notes
PersonID	Personal details / Person ref	String	
PositionID	Position details / Position reference	String	
PositionName	Position details / Job title	String	
AbsStartDate	Sickness absence details / Absence start date	Date	YYYY-MM-DD
AbsStartType	Sickness absence details / Absence start type	String	
AbsStartTime	Sickness absence details / Absence start time	Date	HH:MM
AbsStartHours	Sickness absence details / Hours absent	Date	For the absence start section HH:MM
AbsEndDate	Sickness absence details / Absence end date	Date	YYYY-MM-DD
AbsEndType	Sickness absence details / Absence end type	String	
AbsEndTime	Sickness absence details / Absence end time	Date	HH:MM
AbsEndHours	Sickness absence details / Hours absence	Date	For the absence end section
AbsStatus		String	Derived value of LIVE or DEL
AuthStatus		String	
CertType	Certification details (sickness) / Certification type	String	
CertStartDate	Certification details (sickness) / Start date	Date	YYYY-MM-DD
CertEndDate	Certification details (sickness) / End date	Date	YYYY-MM-DD

7.4.1 Absence Example Output

```
{
  "itrent": {
    "Person": {
      "PersonID": "String",
      "Position": {
        "PositionID": "String",
        "PositionName": "String",
        "Absence": {
          "AbsStartDate": "Date",
          "AbsStartType": "String",
          "AbsStartTime": "Date",
          "AbsStartHours": "Date",
          "AbsEndDate": "Date",
          "AbsEndType": "String",
          "AbsEndTime": "Date",
          "AbsEndHours": "Date",
          "AbsStatus": "String",
          "AuthStatus": "String",
          "AbsenceCert": {
            "CertType": "String",
            "CertStartDate": "Date",
            "CertEndDate": "Date"
          }
        }
      }
    }
  }
}
```

7.5 Attendance Data Service

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
PersonID	Personal details / Person ref	String	
PositionID	Position details / Position reference	String	
PositionName	Position details / Job title	String	
EffectiveDate		Date	Today's Date YYYY-MM-DD
WorkingPattern	Pattern Details / Pattern	Date	Value for the day associated with the EffectiveDate HH:MM
AbsenceType		String	
DurationType		String	Derived Part Day or Full Day depending on the EffectiveDate field
AbsStartTime	Absence details / Absence start time	Date	HH:MM
AbsEndTime	Absence details / Absence end time	Date	HH:MM
AbsReason	Absence details / Absence reason	String	
AbsStatus		String	Derived value of LIVE or DEL
AuthStatus		String	
CertType	Certification details / Certification type	String	

7.5.1 Attendance Example Output

```
{
  "itrent": {
    "Person": {
      "PersonID": "String",
      "Position": {
        "PositionID": "String",
        "PositionName": "String",
        "Absence": {
          "EffectiveDate": "Date",
          "WorkingPattern": "Date",
          "AbsenceType": "String",
          "DurationType": "String",
          "AbsStartTime": "Date",
          "AbsEndTime": "Date",
          "AbsReason": "String",
          "AbsStatus": "String",
          "AuthStatus": "String",
          "AbsenceCert": {
            "CertType": "String"
          }
        }
      }
    }
  }
}
```

7.6 Daily Pattern Service

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
PersonID	Personal details / Person ref	String	
PositionID	Position details / Position reference	String	
PositionName	Position details / Job title	String	
EffectiveDate		Date	Today's Date YYYY-MM-DD
WorkingPattern	Pattern Details / Pattern	Date	Value for the day associated with the EffectiveDate HH:MM

7.6.1 Daily Patten Example Output

```
{
  "itrent": {
    "Person": {
      "PersonID": "String",
      "Position": {
        "PositionID": "String",
        "PositionName": "String",
        "Pattern": {
          "EffectiveDate": "Date",
          "WorkingPattern": "Date"
        }
      }
    }
  }
}
```

7.7 HR Core Data and Structure Service

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
PersonID	Personal details / Person ref	String	
Title	Personal details / Title	String	
Initials		String	Derived from 3 forenames
Forename1	Personal details / Forename	String	
Forename2	Personal details / Forename2	String	
Forename3	Personal details / Forename3	String	
Surname	Personal details / Surname	String	
PreviousSurname	Personal details / Previous surname	String	
PreferredName	Personal details / Preferred name	String	
PreferredSurname	Personal details / Preferred surname	String	
FormattedName		String	Derived from Formatted Name Configuration
BirthDate	Key date details / Birth Date	Date	YYYY-MM-DD
MaritalStatus	Sensitive information / Marital status	String	
Gender	Personal details / Sex	String	To be converted to M / F or U
NInumber	Social security details / Social security no	String	UK legislation value

AddressLine1	Address details / Address line 1	String	Address Lines can be configured differently within the system
AddressLine2	Address details / Number / Street	String	Address Lines can be configured differently within the system
AddressLine3	Address details / Local area	String	Address Lines can be configured differently within the system
AddressLine4	Address details / POSTTOWN	String	Address Lines can be configured differently within the system
AddressLine5	Address details / COUNTRY	String	Address Lines can be configured differently within the system
AddressLine6	Address details / POSTCODE	String	Address Lines can be configured differently within the system
Country	Address details / Country	String	
OrganisationStartDate	Personal details / Start date	Date	YYYY-MM-DD
OrganisationEndDate	Leaver information / Leaving date	Date	YYYY-MM-DD
NOKname	Next of kin details / Next of kin name	String	Repeats for each Next of Kin
NOKRelationship	Next of kin details / Relationship	String	
NOKAddressLine1	Next of kin details / Address line 1	String	Address Lines can be configured differently within the system
NOKAddressLine2	Next of kin details / Number / Street	String	Address Lines can be configured differently within the system

NOKAddressLine3	Next of kin details / Local area	String	Address Lines can be configured differently within the system
NOKAddressLine4	Next of kin details / POSTTOWN	String	Address Lines can be configured differently within the system
NOKAddressLine5	Next of kin details / COUNTRY	String	Address Lines can be configured differently within the system
NOKAddressLine6	Next of kin details / POSTCODE	String	Address Lines can be configured differently within the system
NOKCountry	Next of kin details / Country	String	
ECName	Emergency contact details / Name	String	Repeats for each Emergency Contact
ECPrimaryContact	Emergency contact details / Primary contact	String	T or F
ECContact	Emergency contact details / Contact at	String	
ECContactEmail	Emergency contact details / Contact email	String	
ECRelationship	Emergency contact details / Relationship	String	
ECAddressLine1	Emergency contact details / Address line 1	String	Address Lines can be configured differently within the system
ECAddressLine2	Emergency contact details / Number / Street	String	Address Lines can be configured differently within the system
ECAddressLine3	Emergency contact details / Local area	String	Address Lines can be configured differently within the system
ECAddressLine4	Emergency contact details / POSTTOWN	String	Address Lines can be configured differently within the system

ECAddressLine5	Emergency contact details / COUNTRY	String	Address Lines can be configured differently within the system
ECAddressLine6	Emergency contact details / POSTCODE	String	Address Lines can be configured differently within the system
ECCountry	Emergency contact details / Country	String	
OthAddrAddressType	Person / Address details / Address type	String	Repeats for each current none mailing address
OthAddrAddressLine1	Person / Address details / Address line 1	String	Address Lines can be configured differently within the system
OthAddrAddressLine2	Person / Address details / Number / Street	String	Address Lines can be configured differently within the system
OthAddrAddressLine3	Address details / Local area	String	Address Lines can be configured differently within the system
OthAddrAddressLine4	Address details / POSTTOWN	String	Address Lines can be configured differently within the system
OthAddrAddressLine5	Address details / COUNTRY	String	Address Lines can be configured differently within the system
OthAddrAddressLine6	Address details / POSTCODE	String	Address Lines can be configured differently within the system
OthAddrCountry	Address details / Country	String	
collarno	Personal details / Collar number	String	
conttype	(At person level) Contact details / Means of contact	String	Repeats for all contacts
contvalue	(At person level) Contact details / Contact at	String	Repeats for all contacts
PositionID	Position details / Position reference	String	Repeats for all positions

OccupancyID	Occupancy details / Position occ. Reference	String	
PositionName	Position details / Job title	String	
OccupancyStartDate	Occupancy details / Occupancy start	Date	YYYY-MM-DD
OccupancyEndDate	Occupancy details / Occupancy end	Date	YYYY-MM-DD
ExpOccupancyEndDate	Occupancy details / Expected occupancy end date	Date	YYYY-MM-DD
Location	Position details / Location	String	
StructureGroup1	Position details / Structure group 1	String	
StuctureGroup2	Position details / Structure group 2	String	
JobFamily	Position details / Job family	String	
ReportingPositionName	Position details / Reports to	String	
ReportingPositionID	Position details / Position reference	String	For position in Position Details / Reports to
ReportingOccupantName		String	Formatted Name of Position Occupant
ReportingOccupantID	Occupancy details / Position occ. Refence	String	For person in Position Details / Reports to
ReportingOccupantEmail	Person / Contact details / Contact at	String	Means of Contact identified as User e-mail address
ReportingUnit	Position details / Reporting unit	String	
ReportingUnitID	Unit details / Unit reference	String	For reportingunit
ReportingUnitLoc	Unit details / Location	String	For reportingunit
ReportingUnitGroup1	Unit details / Structure group 1	String	For reportingunit
ReportingUnitGroup2	Unit details / Structure group 2	String	For reportingunit
ContactType	(At position level) Contact details / Means of contact	String	Repeats for all contacts
ContactDets	(At position level) Contact details / Contact at	String	

PosnAddressLine1	(At position level) Address details / Address line 1	String	Repeats for all addresses Address Lines can be configured differently within the system
PosnAddressLine2	(At position level) Address details / Number / Street	String	Address Lines can be configured differently within the system
PosnAddressLine3	(At position level) Address details / Local area	String	Address Lines can be configured differently within the system
PosnAddressLine4	(At position level) Address details / POSTTOWN	String	Address Lines can be configured differently within the system
PosnAddressLine5	(At position level) Address details / COUNTRY	String	Address Lines can be configured differently within the system
PosnAddressLine6	(At position level) Address details / POSTCODE	String	Address Lines can be configured differently within the system
PosnCountry	(At position level) Address details / Country	String	
Category	Hours and basis details / Category	String	For position identified in position id
ReportingPost		String	
ReportingPostID	Post details / Post reference	String	
ReportingPostLoc	Post details / Location	String	
ReportingPostGroup1	Post details / Structure group 1	String	
ReportingPostGroup2	Post details / Structure group 2	String	
EmploymentBasis	Hours and basis details / Basis	String	
EmploymentType	Hours and basis details / Type	String	
UnitID	Unit details / Unit reference	String	Repeats for each unit level up to organisation
UnitName	Unit details / Organisation unit	String	Repeats for each unit level up to organisation
UnitLevel		Numeric	Derived for each level going up Repeats for each unit level up to organisation

UnitType		String	Either UNIT or ORG Repeats for each unit level up to organisation
UnitLocation	Unit details / Location	String	Repeats for each unit level up to organisation
UnitGroup1	Unit details / Structure Group 1	String	Repeats for each unit level up to organisation
UnitGroup2	Unit details / Structure Group 2	String	Repeats for each unit level up to organisation
UnitWorkflowGroup	Unit details / Structure workflow group	String	Repeats for each unit level up to organisation
Grade	Salary details / Grade name	String	

7.7.1 HR Core Data & Structure Example Output

```
{
  "HRCoreData": {
    "Person": {
      "PersonID": "String",
      "Title": "String",
      "Initials": "String",
      "Forename1": "String",
      "Forename2": "String",
      "Forename3": "String",
      "Surname": "String",
      "PreviousSurname": "String",
      "PreferredName": "String",
      "PreferredSurname": "String",
      "FormattedName": "String",
      "Student": "String",
      "BirthDate": "Date",
      "MaritalStatus": "String",
      "Gender": "String",
      "NINumber": "String",
      "AddressLine1": "String",
      "AddressLine2": "String",
      "AddressLine3": "String",
      "AddressLine4": "String",
      "AddressLine5": "String",
      "AddressLine6": "String",
      "Country": "String",
      "OrganisationStartDate": "Date",
      "OrganisationEndDate": "Date",
      "NextOfKin": {
        "NOKName": "String",
        "NOKRelationship": "String",
        "NOKAddressLine1": "String",
        "NOKAddressLine2": "String",
        "NOKAddressLine3": "String",
        "NOKAddressLine4": "String",
        "NOKAddressLine5": "String",

```

```

    "NOKAddressLine6": "String",
    "NOKCountry": "String"
  },
  "EmergencyContact": {
    "ECName": "String",
    "ECPrimaryContact": "String",
    "ECContact": "String",
    "ECContactEmail": "String",
    "ECRelationship": "String",
    "ECAddressLine1": "String",
    "ECAddressLine2": "String",
    "ECAddressLine3": "String",
    "ECAddressLine4": "String",
    "ECAddressLine5": "String",
    "ECAddressLine6": "String",
    "ECCountry": "String"
  },
  "OtherAddress": {
    "OthAddrAddressType": "String",
    "OthAddrAddressLine1": "String",
    "OthAddrAddressLine2": "String",
    "OthAddrAddressLine3": "String",
    "OthAddrAddressLine4": "String",
    "OthAddrAddressLine5": "String",
    "OthAddrAddressLine6": "String",
    "OthAddrCountry": "String"
  },
  "collarno": "String",
  "contacts": {
    "contactdet": {
      "conttype": "String",
      "contvalue": "String"
    }
  },
  "Position": {
    "PositionID": "String",
    "OccupancyID": "String",
    "PositionName": "String",
    "OccupancyStartDate": "Date",
    "OccupancyEndDate": "Date",
    "ExpOccupancyEndDate": "Date",
    "Location": "String",
    "StructureGroup1": "String",
    "StructureGroup2": "String",
    "JobFamily": "String",
    "ReportingPositionName": "String",
    "ReportingPositionID": "String",
    "ReportingOccupantName": "String",
    "ReportingOccupantID": "String",
    "ReportingOccupantEmail": "String",
    "ReportingUnit": "String",
    "ReportingUnitID": "String",
    "ReportingUnitLoc": "String",
    "ReportingUnitGroup1": "String",
    "ReportingUnitGroup2": "String",
  }
}

```

```

"PositionContacts": {
  "ContactType": "String",
  "ContactDets": "String"
},
"PositionAddresses": [
  {
    "PosnAddressLine1": "String",
    "PosnAddressLine2": "String",
    "PosnAddressLine3": "String",
    "PosnAddressLine4": "String",
    "PosnAddressLine5": "String",
    "PosnAddressLine6": "String",
    "PosnCountry": "String"
  }
],
"Category": "String",
"ReportingPost": "String",
"ReportingPostID": "String",
"ReportingPostLoc": "String",
"ReportingPostGroup1": "String",
"ReportingPostGroup2": "String",
"ReportingMgrRef": "String",
"EmploymentBasis": "String",
"EmploymentType": "String",
"PositionUnit": {
  "UnitID": "String",
  "UnitName": "String",
  "UnitLevel": "Numeric",
  "UnitType": "String",
  "UnitLocation": "String",
  "UnitGroup1": "String",
  "UnitGroup2": "String",
  "UnitWorkflowGroup": "String",
  "UnitToOrg": {
    "UnitID": "String",
    "UnitName": "String",
    "UnitLevel": "Numeric",
    "UnitType": "String",
    "UnitLocation": "String",
    "UnitGroup1": "String",
    "UnitGroup2": "String",
    "UnitWorkflowGroup": "String"
  }
},
"Grade": "String"
}
}
}
}

```

7.8 HR Core Data & Structure (Transfers)

Available as a real-time outgoing web service (WDP) only.

Data Field Name	iTrent Field	Format	Notes
PersonID	Personal details / Person ref	String	
Title	Personal details / Title	String	
Initials		String	Derived from 3 forenames
Forename1	Personal details / Forename	String	
Forename2	Personal details / Forename2	String	
Forename3	Personal details / Forename3	String	
Surname	Personal details / Surname	String	
PreviousSurname	Personal details / Previous surname	String	
PreferredName	Personal details / Preferred name	String	
PreferredSurname	Personal details / Preferred surname	String	
FormattedName		String	Derived from Formatted Name Configuration
BirthDate	Key date details / Birth Date	Date	YYYY-MM-DD
MaritalStatus	Sensitive information / Marital status	String	
Gender	Personal details / Sex	String	To be converted to M / F or U
NInumber	Social security details / Social security no	String	UK legislation value

AddressLine1	Address details / Address line 1	String	Address Lines can be configured differently within the system
AddressLine2	Address details / Number / Street	String	Address Lines can be configured differently within the system
AddressLine3	Address details / Local area	String	Address Lines can be configured differently within the system
AddressLine4	Address details / POSTTOWN	String	Address Lines can be configured differently within the system
AddressLine5	Address details / COUNTRY	String	Address Lines can be configured differently within the system
AddressLine6	Address details / POSTCODE	String	Address Lines can be configured differently within the system
Country	Address details / Country	String	
OrganisationStartDate	Personal details / Start date	Date	YYYY-MM-DD
OrganisationEndDate	Leaver information / Leaving date	Date	YYYY-MM-DD
NOKname	Next of kin details / Next of kin name	String	Repeats for each Next of Kin
NOKRelationship	Next of kin details / Relationship	String	
NOKAddressLine1	Next of kin details / Address line 1	String	Address Lines can be configured differently within the system
NOKAddressLine2	Next of kin details / Number / Street	String	Address Lines can be configured differently within the system

NOKAddressLine3	Next of kin details / Local area	String	Address Lines can be configured differently within the system
NOKAddressLine4	Next of kin details / POSTTOWN	String	Address Lines can be configured differently within the system
NOKAddressLine5	Next of kin details / COUNTRY	String	Address Lines can be configured differently within the system
NOKAddressLine6	Next of kin details / POSTCODE	String	Address Lines can be configured differently within the system
NOKCountry	Next of kin details / Country	String	
ECName	Emergency contact details / Name	String	Repeats for each Emergency Contact
ECPrimaryContact	Emergency contact details / Primary contact	String	T or F
ECContact	Emergency contact details / Contact at	String	
ECContactEmail	Emergency contact details / Contact email	String	
ECRelationship	Emergency contact details / Relationship	String	
ECAddressLine1	Emergency contact details / Address line 1	String	Address Lines can be configured differently within the system
ECAddressLine2	Emergency contact details / Number / Street	String	Address Lines can be configured differently within the system
ECAddressLine3	Emergency contact details / Local area	String	Address Lines can be configured differently within the system
ECAddressLine4	Emergency contact details / POSTTOWN	String	Address Lines can be configured differently within the system

ECAddressLine5	Emergency contact details / COUNTRY	String	Address Lines can be configured differently within the system
ECAddressLine6	Emergency contact details / POSTCODE	String	Address Lines can be configured differently within the system
ECCountry	Emergency contact details / Country	String	
OthAddrAddressType	Person / Address details / Address type	String	Repeats for each current none mailing address
OthAddrAddressLine1	Person / Address details / Address line 1	String	Address Lines can be configured differently within the system
OthAddrAddressLine2	Person / Address details / Number / Street	String	Address Lines can be configured differently within the system
OthAddrAddressLine3	Address details / Local area	String	Address Lines can be configured differently within the system
OthAddrAddressLine4	Address details / POSTTOWN	String	Address Lines can be configured differently within the system
OthAddrAddressLine5	Address details / COUNTRY	String	Address Lines can be configured differently within the system
OthAddrAddressLine6	Address details / POSTCODE	String	Address Lines can be configured differently within the system
OthAddrCountry	Address details / Country	String	
CollarNo	Personal details / Collar number	String	
conttype	(At person level) Contact details / Means of contact	String	Repeats for all contacts
contvalue	(At person level) Contact details / Contact at	String	Repeats for all contacts
PositionID	Position details / Position reference	String	Repeats for all positions

OccupancyID	Occupancy details / Position occ. Reference	String	
PositionName	Position details / Job title	String	
OccupancyStartDate	Occupancy details / Occupancy start	Date	YYYY-MM-DD
OccupancyEndDate	Occupancy details / Occupancy end	Date	YYYY-MM-DD
ExpOccupancyEndDate	Occupancy details / Expected occupancy end date	Date	YYYY-MM-DD
Location	Position details / Location	String	
StructureGroup1	Position details / Structure group 1	String	
StuctureGroup2	Position details / Structure group 2	String	
JobFamily	Position details / Job family	String	
ReportingPositionName	Position details / Reports to	String	
ReportingPositionID	Position details / Position reference	String	For position in Position Details / Reports to
ReportingOccupantName		String	Formatted Name of Position Occupant
ReportingOccupantID	Occupancy details / Position occ. Refence	String	For person in Position Details / Reports to
ReportingOccupantEmail	Person / Contact details / Contact at	String	Means of Contact identified as User e-mail address
ReportingUnit	Position details / Reporting unit	String	
ReportingUnitID	Unit details / Unit reference	String	For reportingunit
ReportingUnitLoc	Unit details / Location	String	For reportingunit
ReportingUnitGroup1	Unit details / Structure group 1	String	For reportingunit
ReportingUnitGroup2	Unit details / Structure group 2	String	For reportingunit
Category	Hours and basis details / Category	String	For position identified in position id
ReportingPost		String	
ReportingPostID	Post details / Post reference	String	
ReportingPostLoc	Post details / Location	String	

ReportingPostGroup1	Post details / Structure group 1	String	
ReportingPostGroup2	Post details / Structure group 2	String	
EmploymentBasis	Hours and basis details / Basis	String	
EmploymentType	Hours and basis details / Type	String	
PrevOccupancyID	Occupancy details / Position occ. Refence	String	
UnitID	Unit details / Unit reference	String	Repeats for each unit level up to organisation
UnitName	Unit details / Organisation unit	String	Repeats for each unit level up to organisation
UnitLevel		Numeric	Derived for each level going up Repeats for each unit level up to organisation
UnitType		String	Either UNIT or ORG Repeats for each unit level up to organisation
UnitLocation	Unit details / Location	String	Repeats for each unit level up to organisation
UnitGroup1	Unit details / Structure Group 1	String	Repeats for each unit level up to organisation
UnitGroup2	Unit details / Structure Group 2	String	Repeats for each unit level up to organisation
UnitWorkflowGroup	Unit details / Structure workflow group	String	Repeats for each unit level up to organisation
Grade	Salary details / Grade name	String	

7.8.1 HR Core Data & Structure (Transfers) Example Output

```
{
  "hrcoredatatransfer" : {
    "person" : {
      "personid" : "String",
      "title" : "String",
      "initials" : "String",
      "forename1" : "String",
      "forename2" : "String",
      "forename3" : "String",
      "surname" : "String",
      "previousurname" : "String",
      "preferredname" : "String",
      "preferredsurname" : "String",

```

```

"formattedname" : "String",
"birthdate" : "String",
"maritalstatus" : "String",
"gender" : "String",
"ninumber" : "String",
"addressline1" : "String",
"addressline2" : "String",
"addressline3" : "String",
"addressline4" : "String",
"addressline5" : "String",
"addressline6" : "String",
"country" : "String",
"organisationstartdate" : "Date",
"organisationenddate" : "Date",
"collarno" : "String",
"contacts" : "String",
"fromposition" : {
  "positionid" : "String",
  "occupancyid" : "String",
  "positionname" : "String",
  "occupancystartdate" : "Date",
  "occupancyenddate" : "Date",
  "expoccupancyenddate" : "Date",
  "location" : "String",
  "structuregroup1" : "String",
  "structuregroup2" : "String",
  "jobfamily" : "String",
  "reportingpositionname" : "String",
  "reportingpositionid" : "String",
  "reportingoccupantname" : "String",
  "reportingoccupantid" : "String",
  "reportingoccupantemail" : "String",
  "reportingunit" : "String",
  "reportingunitid" : "String",
  "reportingunitloc" : "String",
  "reportingunitgroup1" : "String",
  "reportingunitgroup2" : "String",
  "category" : "String",
  "reportingpost" : "String",
  "reportingpostid" : "String",
  "reportingpostloc" : "String",
  "reportingpostgroup1" : "String",
  "reportingpostgroup2" : "String",
  "prevoccupancyid" : "String",
  "positionunit" : {
    "unitid" : "String",
    "unitname" : "String",
    "unitlevel" : "Numeric",
    "unittype" : "String",
    "unitlocation" : "String",
    "unitgroup1" : "String",
    "unitgroup2" : "String",
    "unitworkflowgroup" : "String",
    "unittoorg" : {
      "unitid" : "String",

```

```

"unitname" : "String",
"unitlevel" : "Numeric",
"unitttype" : "String",
"unitlocation" : "String",
"unitgroup1" : "String",
"unitgroup2" : "String",
"unitworkflowgroup" : "String"
    }
  },
  "grade" : "String"
},
"toposition" : {
  "positionid" : "String",
  "occupancyid" : "String",
  "positionname" : "String",
  "occupancystartdate" : "Date",
  "occupancyenddate" : "Date",
  "expoccupancyenddate" : "Date",
  "location" : "String",
  "structuregroup1" : "String",
  "structuregroup2" : "String",
  "jobfamily" : "String",
  "reportingpositionname" : "String",
  "reportingpositionid" : "String",
  "reportingoccupanname" : "String",
  "reportingoccupantid" : "String",
  "reportingoccupantemail" : "String",
  "reportingunit" : "String",
  "reportingunitid" : "String",
  "reportingunitloc" : "String",
  "reportingunitgroup1" : "String",
  "reportingunitgroup2" : "String",
  "category" : "String",
  "reportingpost" : "String",
  "reportingpostid" : "String",
  "reportingpostloc" : "String",
  "reportingpostgroup1" : "String",
  "reportingpostgroup2" : "String",
  "prevoccupancyid" : "String",
  "positionunit" : {
    "unitid" : "String",
    "unitname" : "String",
    "unitlevel" : "String",
    "unitttype" : "String",
    "unitlocation" : "String",
    "unitgroup1" : "String",
    "unitgroup2" : "String",
    "unitworkflowgroup" : "String",
    "unittoorg" : {
      "unitid" : "String",
      "unitname" : "String",
      "unitlevel" : "String",
      "unitttype" : "String",
      "unitlocation" : "String",
      "unitgroup1" : "String",

```

```
"unitgroup2": "String",  
"unitworkflowgroup": "String"  
}  
},  
"grade": "String"  
}  
}  
}
```

7.9 People Structure

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
PersonID	Personal details / Person ref	String	
NInumber	Social security details / Social security no	String	UK legislation value
Title	Personal details / Title	String	
Forename1	Personal details / Forename	String	
Forename2	Personal details / Forename2	String	
Forename3	Personal details / Forename3	String	
Surname	Personal details / Surname	String	
PositionID	Position details / Position reference	String	Repeats for all positions
PostID	Post details / Post reference	String	For parent post
OccupancyID	Occupancy details / Position occ. Reference	String	
PositionName	Position details / Job title	String	
ContractHours	Hours and basis details / Contractual Hours	Numeric	
Grade	Salary details / Grade name	String	
Costcode	Structure costing / Cost code	String	

Data Field Name	iTrent Field	Format	Notes
Group1	Position details / Structure group 1	String	
Group2	Position details / Structure group 2	String	
WorkflowGroup	Position details / Structure workflow group	String	
JobFamily	Position details / Job family	String	
UnitID	Unit details / Unit reference	String	Repeats for each unit level up to organisation
UnitName	Unit details / Organisation unit	String	Repeats for each unit level up to organisation
UnitLevel		Numeric	Derived for each level going up Repeats for each unit level up to organisation
UnitType		String	Either UNIT or ORG Repeats for each unit level up to organisation
UnitLocation	Unit details / Location	String	Repeats for each unit level up to organisation
UnitGroup1	Unit details / Structure Group 1	String	Repeats for each unit level up to organisation
UnitGroup2	Unit details / Structure Group 2	String	Repeats for each unit level up to organisation
UnitWorkflowGroup	Unit details / Structure workflow group	String	Repeats for each unit level up to organisation

7.9.1 People Structure Example Output

```
{
  "itrent": {
    "Person": {
      "PersonID": "String",
      "NlNumber": "String",
      "Title": "String",
      "Forename1": "String",
      "Forename2": "String",
      "Forename3": "String",
      "Surname": "String",
      "Position": {
        "PositionID": "String",
        "PostID": "String",
        "OccupancyID": "String",

```

```

"PositionName": "String",
"ContractHours": "Numeric",
"Grade": "String",
"CostCode": "String",
"Group1": "String",
"Group2": "String",
"WorkflowGroup": "String",
"JobFamily": "String",
"PositionUnit": {
  "UnitID": "String",
  "UnitName": "String",
  "UnitLevel": "Numeric",
  "UnitType": "String",
  "UnitLocation": "String",
  "UnitGroup1": "String",
  "UnitGroup2": "String",
  "UnitWorkflowGroup": "String",
  "UnitToOrg": {
    "UnitID": "String",
    "UnitName": "String",
    "UnitLevel": "String",
    "UnitType": "String",
    "UnitLocation": "String",
    "UnitGroup1": "String",
    "UnitGroup2": "String",
    "UnitWorkflowGroup": "String"
  }
}
}
}

```

7.10 WMS People

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
change_date		Date	Today's Date YYYY-MM-DD
last_modification_time		Date	Today's Date and Time
organisation	Organisation details / Organisation	String	Organisation name for employee_id
employee_id	Personal details / Person ref	String	
first_name	Personal details / Forename	String	
last_name	Personal details / Surname	String	

Data Field Name	iTrent Field	Format	Notes
email_address	(At person level) Contact details / Contact at	String	For contact linked to User e-mail address
userid	User details / User name	String	
date_of_birth	Key date details / Birth Date	Date	YYYY-MM-DD
contacts	(At person level) Contact details / Contact at	String	For contact linked to personal telephone
addresses		String	Derived from Address1-6 for home address
hr_status		String	Derived either a T or A
organisation_hire_date	Personal details / Start date	Date	YYYY-MM-DD
termination_date	Leaver information / Leaving date	Date	YYYY-MM-DD
assignment_start_date	Occupancy details / Occupancy start	Date	YYYY-MM-DD
assignment_end_date	Occupancy details / Expected occupancy end date	Date	YYYY-MM-DD
assignment_id	Occupancy details / Position occ. Reference	String	
assignment_job_title	Position details / Job title	String	
full_time_status		String	Derived either FT or PT
manager_flag		String	Derived either T or F
manager_id	Personal details / Person ref	String	For reporting manager
standard_weekly_hours	Hours and basis details / Contractual Hours	Numeric	
work_location	Position details / Location	String	
work_group2	Position details / Structure group 2	String	
salary	Salary details / FT Salary (Number)	Numeric	
scalepoint	Payscale values / FT Salary (Scalepoint)	String	If used then salary is also taken from this field

7.10.1 WMS People Example Output

```
{
  "itrent": {
    "payload": {
      "header": {
        "change_date": "Date",
        "last_modification_time": "Date",
        "organisation": "String"
      },
      "person": {
        "employee_id": "String",
        "first_name": "String",
        "last_name": "String",
        "email_address": "String",
        "userid": "String",
        "date_of_birth": "Date",
        "contacts": "String",
        "addresses": "String",
        "hr_status": "String",
        "organisation_hire_date": "Date",
        "termination_date": "Date",
        "assignment": {
          "assignment_start_date": "Date",
          "assignment_end_date": "Date",
          "assignment_id": "String",
          "assignment_job_title": "String",
          "full_time_status": "String",
          "manager_flag": "String",
          "manager_id": "String",
          "standard_weekly_hours": "Numeric",
          "work_location": "String",
          "work_group2": "String",
          "salary": "Numeric",
          "scalepoint": "String"
        }
      }
    }
  }
}
```

7.11 Elite3E (DAC3E)

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
TkprNumber	Personal details / Person ref	String	
DisplayName		String	Derived from Preferred name and Surname
Status		String	Derived either Active or Inactive depending on organisation end date and EmploymentBasis
BillingName		String	Derived from Forename1 and Surname
HiredOn	Personal details / Start date	Date	YYYY-MM-DD
TerminatedOn	Leaver information / Leaving date	Date	YYYY-MM-DD
StartDate	Occupancy details / Occupancy start	Date	YYYY-MM-DD
OccupancyReference	Occupancy details / Position occ. Reference	String	
PositionReference	Position details / Position reference	String	
Office	Position details / Location	String	
SubledgerLocation	Position details / Location	String	Office and subledger require to be separated by a character
StructureGroup1	Position details / Structure group 1	String	
StructureGroup2	Position details / Structure group 2	String	
Department	Position details / Reporting unit	String	
Section	Position details / Reporting unit	String	
Title	Position details / Job title	String	
SupervisingTimekeeper	Occupancy details / Position occ. Refence	String	For the reporting manager

Data Field Name	iTrent Field	Format	Notes
SupervisingTimekeeperReference	Position details / Position reference	String	For reporting position
ContractedHours	Hours and basis details / Contractual Hours	Numeric	
FTE	Hours and basis details / FTE hours	Numeric	
EmploymentBasis	Hours and basis details / Basis	String	
FTEPercent		Numeric	Derived calculate FTE value
ParentDepartment	Unit details / Organisation unit	String	Repeats for each unit level up to organisation

7.11.1 Elite3E (DAC3E) Example Output

```
{
  "Person": {
    "TkprNumber": "String",
    "DisplayName": "String",
    "Status": "String",
    "BillingName": "String",
    "HiredOn": "Date",
    "TerminatedOn": "Date",
    "Occupancy": {
      "StartDate": "String",
      "OccupancyReference": "String",
      "PositionReference": "String",
      "Office": "String",
      "SubledgerLocation": "String",
      "StructureGroup1": "String",
      "StructureGroup2": "String",
      "Department": "String",
      "Section": "String",
      "Title": "String",
      "SupervisingTimekeeper": "String",
      "SupervisingTimekeeperReference": "String",
      "ContractHours": "Numeric",
      "FTE": "Numeric",
      "EmploymentBasis": "String",
      "FTEPercent": "Numeric",
      "Parent": {
        "ParentDepartment": "String"
      }
    }
  }
}
```

7.12 WFM Person (Grosvenor)

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
PersonID	Personal details / Person ref	String	
Title	Personal details / Title	String	
Forename1	Personal details / Forename	String	
Surname	Personal details / Surname	String	
FormattedName		String	Derived from Formatted Name Configuration
OrganisationStartDate	Personal details / Start date	Date	YYYY-MM-DD
OrganisationEndDate	Leaver information / Leaving date	Date	YYYY-MM-DD
PositionID	Position details / Position reference	String	Repeats for all positions
OccupancyID	Occupancy details / Position occ. Reference	String	
PositionName	Position details / Job title	String	
OccupancyStartDate	Occupancy details / Occupancy start	Date	YYYY-MM-DD
OccupancyEndDate	Occupancy details / Occupancy end	Date	YYYY-MM-DD
Location	Position details / Location	String	Repeats for all location history
StartDate		Date	Repeats for all location history YYYY-MM-DD
EndDate		Date	Repeats for all location history YYYY-MM-DDD
StructureGroup1	Position details / Structure group 1	String	Repeats for all structure group1 history

Data Field Name	iTrent Field	Format	Notes
StartDate		Date	Repeats for all structure group1 history YYYY-MM-DD
EndDate		Date	Repeats for all structure group1 history YYYY-MM-DDD
StuctureGroup2	Position details / Structure group 2	String	Repeats for all structure group2 history
StartDate		Date	Repeats for all structure group2 history YYYY-MM-DD
EndDate		Date	Repeats for all structure group2 history YYYY-MM-DDD
JobFamily	Position details / Job family	String	Repeats for all Job Family history
StartDate		Date	Repeats for all Job Family history YYYY-MM-DD
EndDate		Date	Repeats for all Job Family history YYYY-MM-DDD
SchemeName	Paid time scheme details / Scheme name	String	For all attached paid time schemes
StartDate	Terms & conditions / Start date	Date	For all attached paid time schemes For selected scheme name
EndDate	Terms & conditions / End date	Date	For all attached paid time schemes For selected scheme name

Data Field Name	iTrent Field	Format	Notes
LinksToRoster	Paid time scheme details / Link to roster shift	String	For all attached paid time schemes Either T or F
Reason	Paid time scheme details / Available elements (reason)	String	For all attached paid time schemes For all selected elements
SchemeName	Flexitime scheme details / Scheme Name	String	For all attached flexitime schemes
StartDate	Terms & conditions / Start date	Date	For all attached flexitime schemes For selected scheme name
EndDate	Terms & conditions / End date	Date	For all attached flexitime schemes For selected scheme name

7.12.1 WFM Person (Grosvenor) Example Output

```
{
  "itrent": {
    "Person": {
      "PersonID": "String",
      "Title": "String",
      "Forename1": "String",
      "Surname": "String",
      "FormattedName": "String",
      "OrganisationStartDate": "Date",
      "OrganisationEndDate": "Date",
      "Position": {
        "PositionID": "String",
        "OccupancyID": "String",
        "PositionName": "String",
        "OccupancyStartDate": "Date",
        "OccupancyEndDate": "Date",
        "Location": {
          "LocationName": "String",
          "StartDate": "Date",
          "EndDate": "Date"
        },
      },
      "StructureGroup1": {
        "StructureGroup1Name": "String",
        "StartDate": "Date",

```

```

        "EndDate": "Date"
    },
    "StructureGroup2": {
        "StructureGroup2Name": "String",
        "StartDate": "Date",
        "EndDate": "Date"
    },
    "JobFamily": {
        "JobFamilyname": "String",
        "StartDate": "Date",
        "EndDate": "Date"
    },
    "PaidTimeScheme": {
        "SchemeName": "String",
        "StartDate": "Date",
        "EndDate": "Date",
        "LinksToRoster": "String",
        "Reason": {
            "ReasonText": "String"
        }
    },
    "FlexiTimeScheme": {
        "SchemeName": "String",
        "StartDate": "Date",
        "EndDate": "Date"
    }
}
}
}
}
}
}

```


7.13 WFM Shifts (Grosvenor)

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
ShiftID	Work unit details / Roster shift reference	String	Repeats for each shift
RosterID	Roster details / Reference	String	Repeats for each shift
PositionID	Position details / Position reference	String	Repeats for each shift
WorkUnitName	Work unit details / Tasks	String	Repeats for each shift
StartDate	Work unit details / Start date	Date	Repeats for each shift YYYY-DD-MM
StartTime	Work unit details / Start time	Date	Repeats for each shift HH:MM
EndDate	Work unit details / End date	Date	Repeats for each shift YYYY-DD-MM
EndTime	Work unit details / End time	Date	Repeats for each shift HH:MM

7.13.1 WFM Shifts (Grosvenor) Example Output

```
{
  "itrent": {
    "Roster": {
      "Shift": {
        "ShiftID": "String",
        "RosterID": "String",
        "PositionID": "String",
        "WorkUnitName": "String",
        "StartDate": "Date",
        "StartTime": "Date",
        "EndDate": "Date",
        "EndTime": "Date"
      }
    }
  }
}
```

7.14 Employee Record

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
personid	Personal details / Person ref	String	
title	Personal details / Title	String	
initials		String	Derived from 3 forenames
forename1	Personal details / Forename	String	
forename2	Personal details / Forename2	String	
forename3	Personal details / Forename3	String	
surname	Personal details / Surname	String	
previousurname	Personal details / Previous surname	String	
preferredname	Personal details / Preferred name	String	
preferredsurname	Personal details / Preferred surname	String	
formattedname		String	Derived from Formatted Name Configuration
honours	Personal details / Honours	String	
birthdate	Key dates / Date of birth	Date	YYYY-MM-DD
contservicedate	Key dates / Reckonable service date	Date	YYYY-MM-DD
servicetype	Reckonable service details / Reckonable service type	String	Repeats for each reckonable service type
servicedate	Reckonable service details / date	Date	YYYY-MM-DD
maritalstatus	Sensitive information / Marital status	String	
ethnicity	Sensitive information / Ethnic origin	String	
nationality	Sensitive information / Nationality	String	

Data Field Name	iTrent Field	Format	Notes
gender	Personal details / Sex	String	To be converted to M / F or U
ninumber	Social security details / Social security no	String	UK legislation value
addressline1	Address details / Address line 1	String	Address Lines can be configured differently within the system
addressline2	Address details / Number / Street	String	Address Lines can be configured differently within the system
addressline3	Address details / Local area	String	Address Lines can be configured differently within the system
addressline4	Address details / POSTTOWN	String	Address Lines can be configured differently within the system
addressline5	Address details / COUNTRY	String	Address Lines can be configured differently within the system
addressline6	Address details / POSTCODE	String	Address Lines can be configured differently within the system
country	Address details / Country	String	
organisationstartdate	Personal details / Start date	Date	YYYY-MM-DD
organisationenddate	Leaver information / Leaving date	Date	YYYY-MM-DD
nokname	Next of kin details / Next of kin name	String	Repeats for each Next of Kin
nokrelationship	Next of kin details / Relationship	String	
nokaddressline1	Next of kin details / Address line 1	String	Address Lines can be configured differently within the system
nokaddressline2	Next of kin details / Number / Street	String	Address Lines can be configured differently within the system

Data Field Name	iTrent Field	Format	Notes
nokaddressline3	Next of kin details / Local area	String	Address Lines can be configured differently within the system
nokaddressline4	Next of kin details / POSTTOWN	String	Address Lines can be configured differently within the system
nokaddressline5	Next of kin details / COUNTRY	String	Address Lines can be configured differently within the system
nokaddressline6	Next of kin details / POSTCODE	String	Address Lines can be configured differently within the system
nokcountry	Next of kin details / Country	String	
dependants		Numeric	Derived count of NOK records Son / Daughter
ecname	Emergency contact details / Name	String	Repeats for each Emergency Contact
ecprimarycontact	Emergency contact details / Primary contact	String	T or F
eccontact	Emergency contact details / Contact at	String	
eccontactemail	Emergency contact details / Contact email	String	
ecrelationship	Emergency contact details / Relationship	String	
ecaddressline1	Emergency contact details / Address line 1	String	Address Lines can be configured differently within the system
ecaddressline2	Emergency contact details / Number / Street	String	Address Lines can be configured differently within the system
ecaddressline3	Emergency contact details / Local area	String	Address Lines can be configured differently within the system
ecaddressline4	Emergency contact details / POSTTOWN	String	Address Lines can be configured differently within the system

Data Field Name	iTrent Field	Format	Notes
ecaddressline5	Emergency contact details / COUNTRY	String	Address Lines can be configured differently within the system
ecaddressline6	Emergency contact details / POSTCODE	String	Address Lines can be configured differently within the system
eccountry	Emergency contact details / Country	String	
otheraddresstype	Person / Address details / Address type	String	Repeats for each current none mailing address
otheraddressline1	Person / Address details / Address line 1	String	Address Lines can be configured differently within the system
otheraddressline2	Person / Address details / Number / Street	String	Address Lines can be configured differently within the system
otheraddressline3	Address details / Local area	String	Address Lines can be configured differently within the system
otheraddressline4	Address details / POSTTOWN	String	Address Lines can be configured differently within the system
otheraddressline5	Address details / COUNTRY	String	Address Lines can be configured differently within the system
otheraddressline6	Address details / POSTCODE	String	Address Lines can be configured differently within the system
othercountry	Address details / Country	String	
conttype	(At person level) Contact details / Means of contact	String	Repeats for all contacts
contvalue	(At person level) Contact details / Contact at	String	Repeats for all contacts
positionid	Position details / Position reference	String	Repeats for all positions
occupancyid	Occupancy details / Position occ. Reference	String	

Data Field Name	iTrent Field	Format	Notes
positionname	Position details / Job title	String	
occupancystartdate	Occupancy details / Occupancy start	Date	YYYY-MM-DD
occupancyenddate	Occupancy details / Occupancy end	Date	YYYY-MM-DD
expoccupancyenddate	Occupancy details / Expected occupancy end date	Date	YYYY-MM-DD
location	Position details / Location	String	
structuregroup1	Position details / Structure group 1	String	
structuregroup2	Position details / Structure group 2	String	
jobfamily	Position details / Job family	String	
costlevelname	Structure costing / Rule name	String	
costcode	Structure costing / Cost code	String	
costsplitpercent	Split / Percent	Numeric	
costsplitvalue	Split / Value	Numeric	
coststartdate	Structure costing / Start date	Date	YYYY-MM-DD
costenddate	Structure costing / End date	Date	YYYY-MM-DD
meansofcontact	(At position level) Contact details / Means of contact	String	Repeats for all contacts
structurecontactat	(At position level) Contact details / Contact at	String	
structurecontactstartdate	(At position level) Contact details / Start date	Date	YYYY-MM-DD
structurecontactenddate	(At position level) Contact details / End date	Date	YYYY-MM-DD
TCItem	Terms & conditions / T&C item	String	Repeats for all T&C Items
TCCchoice	Terms & conditions / Choice	String	

Data Field Name	iTrent Field	Format	Notes
TCStartDate	Terms & conditions / Start date	Date	YYYY-MM-DD
TCEndDate	Terms & conditions / End date	Date	YYYY-MM-DD
reportingpositionname	Position details / Reports to	String	
reportingpositionid	Position details / Position reference	String	For position in Position Details / Reports to
reportingoccupantname		String	Formatted Name of Position Occupant
reportingoccupantid	Occupancy details / Position occ. Refence	String	For person in Position Details / Reports to
reportingoccupantemail	Person / Contact details / Contact at	String	Means of Contact identified as User e-mail address
reportingunit	Position details / Reporting unit	String	
reportingunitid	Unit details / Unit reference	String	For reportingunit
reportingunitloc	Unit details / Location	String	For reportingunit
reportingunitgroup1	Unit details / Structure group 1	String	For reportingunit
reportingunitgroup2	Unit details / Structure group 2	String	For reportingunit
reportingpost		String	
reportingpostid	Post details / Post reference	String	
reportingpostloc	Post details / Location	String	
reportingpostgroup1	Post details / Structure group 1	String	
reportingpostgroup2	Post details / Structure group 2	String	
reportingmgrref	Personal details / Person ref	String	For person in Position Details / Reports to
category	Hours and basis details / Category	String	For position identified in positionid
employmentbasis	Hours and basis details / Basis	String	

Data Field Name	iTrent Field	Format	Notes
employmenttype	Hours and basis details / Type	String	
contractedhours	Hours and basis details / Contractual hours	Numeric	
unitid	Unit details / Unit reference	String	Repeats for each unit level up to organisation
unitname	Unit details / Organisation unit	String	Repeats for each unit level up to organisation
unitlevel		Numeric	Derived for each level going up Repeats for each unit level up to organisation
unittype		String	Either UNIT or ORG Repeats for each unit level up to organisation
unitlocation	Unit details / Location	String	Repeats for each unit level up to organisation
unitgroup1	Unit details / Structure Group 1	String	Repeats for each unit level up to organisation
unitgroup2	Unit details / Structure Group 2	String	Repeats for each unit level up to organisation
unitworkflowgroup	Unit details / Structure workflow group	String	Repeats for each unit level up to organisation
payrollrefno	Attach contract to payroll / Payroll number	String	
payrollname	Attach contract to payroll / Payroll name	String	
ftsalary	Salary details / FT Salary (Number)	Numeric	
salaryfrequency	Salary details / FT Salary (Drop Down)	String	
salaryeffectivedate	Salary details	Date	Effective date for start of current salary. YYYY-MM-DD
gradename	Salary details / Grade name	String	

Data Field Name	iTrent Field	Format	Notes
holidayentitlementtotal	Absence scheme table details / Entitlement	Numeric	
holidayentitlementunit	Absence scheme rules / Units for entitlement	String	
holidayschemestartdate	Absence scheme rules / Start (dd/mm)	Date	DD-MM
checkname	Check details / Name	String	
checkdate	Check details / Date checked	Date	YYYY-MM-DD
checkrenew	Check details / Renew date	Date	YYYY-MM-DD
checkstatus	Check details / Status	String	
skillname	Person / Skill details / Skill	String	
skillset	Person / Skill details / Skill set	String	
skillstartdate	Person / Skill details / Start date	Date	YYYY-MM-DD
skillexpirydate	Person / Skill details / Skill expiry date	Date	YYYY-MM-DD
skillreviewdate	Person / Skill details / Next review date	Date	YYYY-MM-DD
skillscore	Person / Skill details / Score	String	
skillscoreeffdate	Person / Skill details / Score effective date	Date	YYYY-MM-DD
skillauthstatus		String	
reference	Person / Skill details / Skill reference	String	
subjectname	Person / Qualification details / Subject	String	Multiple
typename	Person / Qualification details / Type	String	Multiple
level	Person / Qualification details / Level	String	
grade	Person / Qualification details / Grade	String	
institutiontype	Person / Qualification details / Institution type	String	

Data Field Name	iTrent Field	Format	Notes
placeoflearning	Person / Qualification details / Place of learning	String	
studycommencementdate	Person / Qualification details / Study commencement date	Date	YYYY-MM-DD
studyexpecteddate	Person / Qualification details / Study expected end date	Date	YYYY-MM-DD
dateobtained	Person / Qualification details / Date obtained	Date	YYYY-MM-DD
validuntil	Person / Qualification details / Valid until	Date	YYYY-MM-DD
qualauthstatus		String	

7.14.1 Employee Record Example Output

```
{
  "employeeerecord":{
    "person":{
      "personid":"String",
      "title":"String",
      "initials":"String",
      "forename1":"String",
      "forename2":"String",
      "forename3":"String",
      "surname":"String",
      "previousurname":"String",
      "preferredname":"String",
      "preferredsurname":"String",
      "formattedname":"String",
      "honours":"String",
      "birthdate":"Date",
      "contservicedate":"Date",
      "reckonabledates":{
        "reckonabledate":{
          "servicetype":"String",
          "servicedate":"Date"
        }
      }
    },
    "maritalstatus":"String",
    "ethnicity":"String",
    "nationality":"String",
    "gender":"String",
    "ninumber":"String",
    "addressline1":"String",
    "addressline2":"String",
    "addressline3":"String",
  }
}
```

```

"addressline4": "String",
"addressline5": "String",
"addressline6": "String",
"country": "String",
"organisationstartdate": "Date",
"organisationenddate": "Date",
"nextofkins": {
  "nextofkin": {
    "nokname": "String",
    "nokrelationship": "String",
    "nokaddressline1": "String",
    "nokaddressline2": "String",
    "nokaddressline3": "String",
    "nokaddressline4": "String",
    "nokaddressline5": "String",
    "nokaddressline6": "String",
    "nokcountry": "String"
  }
},
"dependants": "Numeric",
"emergencycontacts": {
  "emergencycontact": {
    "ecname": "String",
    "ecprimarycontact": "String",
    "eccontact": "String",
    "eccontactemail": "String",
    "ecrelationship": "String",
    "ecaddressline1": "String",
    "ecaddressline2": "String",
    "ecaddressline3": "String",
    "ecaddressline4": "String",
    "ecaddressline5": "String",
    "ecaddressline6": "String",
    "eccountry": "String"
  }
},
"otheraddresses": {
  "otheraddress": {
    "otheraddresstype": "String",
    "otheraddressline1": "String",
    "otheraddressline2": "String",
    "otheraddressline3": "String",
    "otheraddressline4": "String",
    "otheraddressline5": "String",
    "otheraddressline6": "String",
    "othercountry": "String"
  }
},
"contacts": {
  "contactdet": {
    "conttype": "String",
    "contvalue": "String"
  }
},
"positions": {

```

```

"position":{
  "positionid":"String",
  "occupancyid":"String",
  "positionname":"String",
  "occupancystartdate":"Date",
  "occupancyenddate":"Date",
  "expoccupancyenddate":"Date",
  "location":"String",
  "structuregroup1":"String",
  "structuregroup2":"String",
  "jobfamily":"String",
  "costing":{
    "costlevel":[
      {
        "costlevelname":"String",
        "costcode":"String",
        "costsplitpercent":"Numeric",
        "costsplitvalue":"Numeric",
        "coststartdate":"Date",
        "costenddate":"Date"
      }
    ]
  },
  "structurecontacts":{
    "structurecontact":{
      "meansofcontact":"String",
      "structurecontactat":"String",
      "structurecontactstartdate":"Date",
      "structurecontactenddate":"Date"
    }
  },
  "TermsandConditions":{
    "TermandCondition":[
      {
        "TCItem":"String",
        "TCChoice":"String",
        "TCStartDate":"Date",
        "TCEndDate":"Date"
      }
    ]
  },
  "reportingpositionname":"String",
  "reportingpositionid":"String",
  "reportingoccupantname":"String",
  "reportingoccupantid":"String",
  "reportingoccupantemail":"String",
  "reportingunit":"String",
  "reportingunitid":"String",
  "reportingunitloc":"String",
  "reportingunitgroup1":"String",
  "reportingunitgroup2":"String",
  "reportingpost":"String",
  "reportingpostid":"String",
  "reportingpostloc":"String",
  "reportingpostgroup1":"String",

```

```

    "reportingpostgroup2":"String",
    "reportingmgrref":"String",
    "category":"String",
    "employmentbasis":"String",
    "employmenttype":"String",
    "contractedhours":"Numeric",
    "positionunit":{
      "unitid":"String",
      "unitname":"String",
      "unitlevel":"Numeric",
      "unittype":"String",
      "unitlocation":"String",
      "unitgroup1":"String",
      "unitgroup2":"String",
      "unitworkflowgroup":"String",
      "unittoorg":{
        "unitid":"String",
        "unitname":"String",
        "unitlevel":"Numeric",
        "unittype":"ORG",
        "unitlocation":"String",
        "unitgroup1":"String",
        "unitgroup2":"String",
        "unitworkflowgroup":"String"
      }
    },
    "payrollrefno":"String",
    "payrollname":"String",
    "salarydetails":{
      "salary":{
        "ftsalary":"Numeric",
        "salaryfrequency":"String",
        "salaryeffectivedate":"Date",
        "gradename":"String"
      }
    },
    "holidays":{
      "holidayscheme":[
        {
          "holidayentitlementtotal":"Numeric",
          "holidayentitlementunit":"String",
          "holidayschemestartdate":"Date"
        }
      ]
    }
  },
  "checks":{
    "check":{
      "checkname":"String",
      "checkdate":"Date",
      "checkrenew":"Date",
      "checkstatus":"String"
    }
  },

```

```

"skills":{
  "skill":[
    {
      "skillname":"String",
      "skillset":"String",
      "skillstartdate":"Date",
      "skillexpirydate":"Date",
      "skillreviewdate":"Date",
      "skillscore":"String",
      "skillscoreeffdate":"Date",
      "skillauthstatus":"String",
      "reference":"String"
    }
  ]
},
"qualifications":{
  "qualification":{
    "subjects":{
      "subject":[
        {
          "subjectname":"String"
        }
      ]
    }
  },
  "types":{
    "type":{
      "typename":"String"
    }
  },
  "level":"String",
  "grade":"String",
  "institutiontype":"String",
  "placeoflearning":"String",
  "studycommencementdate":"Date",
  "studyexpecteddate":"Date",
  "dateobtained":"Date",
  "validuntil":"Date",
  "qualauthstatus":"String"
}
}
}
}
}

```

7.15 Employee record (date effective)

Available as a real-time outgoing web service (WDP) only.

The header of this WDP output contains an 'Effective date' for the overall payload. This date will be driven by the system effective date at the point the data publisher was triggered. The output will contain current and future dated changes from the effective date onwards.

This has been built to support third party integrations whereby the third-party system may not have a concept of an effective date. The inclusion of effective date in the header allows for middleware to retain the payload until the desired point of input.

An example scenario has been provided below to give an idea of expected behaviour:

Example 1:

Rebecca Smith is in 2 positions

Position 1 occupancy: 01/01/2024 – Open ended

Position 2 occupancy: 01/01/2024 – 01/11/2024

Rebecca is given a salary increase as of 01/01/2025, however Rebecca already has a future dated salary increase as of 01/03/2025

Expected output:

Payload effective date: 2025-01-01

Position 1 should be included in the payload

Salary amendment 01/01/2025 should be included in the payload

Salary amendment 01/03/2025 should be included in the payload

Position 2 should not be included in the payload

Note: If requesting data for a leaver after their leave date, the payload will report last values where applicable

Data Field Name	iTrent Field	Format	Notes
customercode	Field not mapped in iTrent	String	Environment code Contained in payload header
effectivedate	Effective date of payload	Date	System effective date Contained in payload header
personid	Personal details / Person ref	String	
title	Personal details / Title	String	
initials		String	Derived from 3 forenames
forename1	Personal details / Forename	String	
forename2	Personal details / Forename2	String	
forename3	Personal details / Forename3	String	
surname	Personal details / Surname	String	
previousurname	Personal details / Previous surname	String	
preferredname	Personal details / Preferred name	String	
preferredsurname	Personal details / Preferred surname	String	
formattedname		String	Derived from Formatted Name Configuration
honours	Personal details / Honours	String	
birthdate	Key dates / Date of birth	Date	YYYY-MM-DD
contservicedate	Key dates / Reckonable service date	Date	YYYY-MM-DD
servicetype	Reckonable service details / Reckonable service type	String	Repeats for each reckonable service type
servicedate	Reckonable service details / date	Date	YYYY-MM-DD
maritalstatus	Sensitive information / Marital status	String	

Data Field Name	iTrent Field	Format	Notes
ethnicity	Sensitive information / Ethnic origin	String	
nationality	Sensitive information / Nationality	String	
gender	Personal details / Sex	String	To be converted to M / F or U
ninumber	Social security details / Social security no	String	UK legislation value
addressline1	Address details / Address line 1	String	Address Lines can be configured differently within the system
addressline2	Address details / Number / Street	String	Address Lines can be configured differently within the system
addressline3	Address details / Local area	String	Address Lines can be configured differently within the system
addressline4	Address details / POSTTOWN	String	Address Lines can be configured differently within the system
addressline5	Address details / COUNTRY	String	Address Lines can be configured differently within the system
addressline6	Address details / POSTCODE	String	Address Lines can be configured differently within the system
country	Address details / Country	String	
addressstartdate	Address details / Start date	Date	YYYY-MM-DD
addressenddate	Address details / end date	Date	YYYY-MM-DD
organisationstartdate	Personal details / Start date	Date	YYYY-MM-DD
organisationenddate	Leaver information / Leaving date	Date	YYYY-MM-DD
nokname	Next of kin details / Next of kin name	String	Repeats for each Next of Kin

Data Field Name	iTrent Field	Format	Notes
nokrelationship	Next of kin details / Relationship	String	
nokaddressline1	Next of kin details / Address line 1	String	Address Lines can be configured differently within the system
nokaddressline2	Next of kin details / Number / Street	String	Address Lines can be configured differently within the system
nokaddressline3	Next of kin details / Local area	String	Address Lines can be configured differently within the system
nokaddressline4	Next of kin details / POSTTOWN	String	Address Lines can be configured differently within the system
nokaddressline5	Next of kin details / COUNTRY	String	Address Lines can be configured differently within the system
nokaddressline6	Next of kin details / POSTCODE	String	Address Lines can be configured differently within the system
nokcountry	Next of kin details / Country	String	
dependants		Numeric	Derived count of NOK records Son / Daughter
ecname	Emergency contact details / Name	String	Repeats for each Emergency Contact
ecprimarycontact	Emergency contact details / Primary contact	String	T or F
eccontact	Emergency contact details / Contact at	String	
eccontactemail	Emergency contact details / Contact email	String	
ecrelationship	Emergency contact details / Relationship	String	
ecaddressline1	Emergency contact details / Address line 1	String	Address Lines can be configured differently within the system

Data Field Name	iTrent Field	Format	Notes
ecaddressline2	Emergency contact details / Number / Street	String	Address Lines can be configured differently within the system
ecaddressline3	Emergency contact details / Local area	String	Address Lines can be configured differently within the system
ecaddressline4	Emergency contact details / POSTTOWN	String	Address Lines can be configured differently within the system
ecaddressline5	Emergency contact details / COUNTRY	String	Address Lines can be configured differently within the system
ecaddressline6	Emergency contact details / POSTCODE	String	Address Lines can be configured differently within the system
eccountry	Emergency contact details / Country	String	
otheraddresstype	Person / Address details / Address type	String	Repeats for each current none mailing address
otheraddressline1	Person / Address details / Address line 1	String	Address Lines can be configured differently within the system
otheraddressline2	Person / Address details / Number / Street	String	Address Lines can be configured differently within the system
otheraddressline3	Address details / Local area	String	Address Lines can be configured differently within the system
otheraddressline4	Address details / POSTTOWN	String	Address Lines can be configured differently within the system
otheraddressline5	Address details / COUNTRY	String	Address Lines can be configured differently within the system
otheraddressline6	Address details / POSTCODE	String	Address Lines can be configured differently within the system

Data Field Name	iTrent Field	Format	Notes
othercountry	Address details / Country	String	
otheraddressstartdate	Address details / Start date	String	YYYY-MM-DD
otheraddressenddate	Address details / End date	String	YYYY-MM-DD
conttype	(At person level) Contact details / Means of contact	String	Repeats for all contacts
contvalue	(At person level) Contact details / Contact at	String	Repeats for all contacts
positionid	Position details / Position reference	String	Repeats for all positions
occupancyid	Occupancy details / Position occ. Reference	String	
positionname	Position details / Job title	String	
occupancystartdate	Occupancy details / Occupancy start	Date	YYYY-MM-DD
occupancyenddate	Occupancy details / Occupancy end	Date	YYYY-MM-DD
expoccupancyenddate	Occupancy details / Expected occupancy end date	Date	YYYY-MM-DD
location	Position details / Location	String	
structuregroup1	Position details / Structure group 1	String	
stucturegroup2	Position details / Structure group 2	String	
jobfamily	Position details / Job family	String	
costlevelname	Structure costing / Rule name	String	
costcode	Structure costing / Cost code	String	
costsplitpercent	Split / Percent	Numeric	
costsplitvalue	Split / Value	Numeric	
coststartdate	Structure costing / Start date	Date	YYYY-MM-DD
costenddate	Structure costing / End date	Date	YYYY-MM-DD

Data Field Name	iTrent Field	Format	Notes
meansofcontact	(At position level) Contact details / Means of contact	String	Repeats for all contacts
structurecontactat	(At position level) Contact details / Contact at	String	
structrecontactstartdate	(At position level) Contact details / Start date	Date	YYYY-MM-DD
structurecontactenddate	(At position level) Contact details / End date	Date	YYYY-MM-DD
TCItem	Terms & conditions / T&C item	String	Repeats for all T&C Items
TCChoice	Terms & conditions / Choice	String	
TCStartDate	Terms & conditions / Start date	Date	YYYY-MM-DD
TCEndDate	Terms & conditions / End date	Date	YYYY-MM-DD
reportingpositionname	Position details / Reports to	String	
reportingpositionid	Position details / Position reference	String	For position in Position Details / Reports to
reportingoccupantname		String	Formatted Name of Position Occupant
reportingoccupantid	Occupancy details / Position occ. Refence	String	For person in Position Details / Reports to
reportingoccupantemail	Person / Contact details / Contact at	String	Means of Contact identified as User e-mail address
reportingunit	Position details / Reporting unit	String	
reportingunitid	Unit details / Unit reference	String	For reportingunit
reportingunitloc	Unit details / Location	String	For reportingunit
reportingunitgroup1	Unit details / Structure group 1	String	For reportingunit
reportingunitgroup2	Unit details / Structure group 2	String	For reportingunit
reportingpost		String	

Data Field Name	iTrent Field	Format	Notes
reportingpostid	Post details / Post reference	String	
reportingpostloc	Post details / Location	String	
reportingpostgroup1	Post details / Structure group 1	String	
reportingpostgroup2	Post details / Structure group 2	String	
reportingmgrref	Personal details / Person ref	String	For person in Position Details / Reports to
category	Hours and basis details / Category	String	For position identified in positionid
employmentbasis	Hours and basis details / Basis	String	
employmenttype	Hours and basis details / Type	String	
contractedhours	Hours and basis details / Contractual hours	Numeric	
unitid	Unit details / Unit reference	String	Repeats for each unit level up to organisation
unitname	Unit details / Organisation unit	String	Repeats for each unit level up to organisation
unitlevel		Numeric	Derived for each level going up Repeats for each unit level up to organisation
unittype		String	Either UNIT or ORG Repeats for each unit level up to organisation
unitlocation	Unit details / Location	String	Repeats for each unit level up to organisation
unitgroup1	Unit details / Structure Group 1	String	Repeats for each unit level up to organisation
unitgroup2	Unit details / Structure Group 2	String	Repeats for each unit level up to organisation
unitworkflowgroup	Unit details / Structure workflow group	String	Repeats for each unit level up to organisation

Data Field Name	iTrent Field	Format	Notes
payrollrefno	Attach contract to payroll / Payroll number	String	
payrollname	Attach contract to payroll / Payroll name	String	
ftsalary	Salary details / FT Salary (Number)	Numeric	
salaryfrequency	Salary details / FT Salary (Drop Down)	String	
salaryeffectivedate	Salary details	Date	Effective date for start of current salary. YYYY-MM-DD
gradename	Salary details / Grade name	String	
paymenttable	Payscale values / Payment table	String	
ftsalarypoint	Payscale values / FT Salary (Scalepoint)	String	
ftsalaryvalue	Payscale values / FT Salary (Value)	Numeric	
protectedpoint	Payscale values / Protected (Scalepoint)	String	
protectedvalue	Payscale values / Protected (Value)	Numeric	
overrideminpoint	Payscale values / Override minimum (Scalepoint)	String	
overrideminvalue	Payscale values / Override minimum (Value)	Numeric	
overridecontributionpoint	Payscale values / Override contribution-related threshold (Scalepoint)	String	
overridecontributionvalue	Payscale values / Override contribution-related threshold (Value)	Numeric	
overridemaxpoint	Payscale values / Override maximum (Scalepoint)	String	
overridemaxvalue	Payscale values / Override maximum (Value)	Numeric	
gradetable	Rates (grade) / Grade payment table	String	
grademinpoint	Rates (grade) / Grade minimum (Scalepoint)	String	

Data Field Name	iTrent Field	Format	Notes
grademinvalue	Rates (grade) / Grade minimum (Value)	Numeric	
grademaxpoint	Rates (grade) / Grade maximum (Scalepoint)	String	
grademaxvalue	Rates (grade) / Grade maximum (Value)	Numeric	
gradecontributionpoint	Rates (grade) / Contribution-related threshold (Scalepoint)	String	
gradecontributionvalue	Rates (grade) / Contribution-related threshold (Value)	Numeric	
nextincrementdate	Payscale values / Next increment date	Date	YYYY-MM-DD
additionalincrementpoint	Payscale values / Additional increment points (Scalepoint)	Numeric	
proctedpayvalue	Salary Details / Protected rate of pay (Number)	Numeric	
protectedpayfrequency	Salary Details / Protected rate of pay (Drop Down)	String	
changereason	Payscale values / Change reason	String	
holidayentitlementtotal	Absence scheme table details / Entitlement	Numeric	
holidayentitlementunit	Absence scheme rules / Units for entitlement	String	
holidayschemestartdate	Absence scheme rules / Start (dd/mm)	Date	DD-MM
checkname	Check details / Name	String	
checkdate	Check details / Date checked	Date	YYYY-MM-DD
checkrenew	Check details / Renew date	Date	YYYY-MM-DD
checkstatus	Check details / Status	String	
skillname	Person / Skill details / Skill	String	
skillset	Person / Skill details / Skill set	String	
skillstartdate	Person / Skill details / Start date	Date	YYYY-MM-DD

Data Field Name	iTrent Field	Format	Notes
skillexpirydate	Person / Skill details / Skill expiry date	Date	YYYY-MM-DD
skillreviewdate	Person / Skill details / Next review date	Date	YYYY-MM-DD
skillscore	Person / Skill details / Score	String	
skillscoreeffdate	Person / Skill details / Score effective date	Date	YYYY-MM-DD
skillauthstatus		String	
reference	Person / Skill details / Skill reference	String	
subjectname	Person / Qualification details / Subject	String	Multiple
typename	Person / Qualification details / Type	String	Multiple
level	Person / Qualification details / Level	String	
grade	Person / Qualification details / Grade	String	
institutiontype	Person / Qualification details / Institution type	String	
placeoflearning	Person / Qualification details / Place of learning	String	
studycommencementdate	Person / Qualification details / Study commencement date	Date	YYYY-MM-DD
studyexpecteddate	Person / Qualification details / Study expected end date	Date	YYYY-MM-DD
dateobtained	Person / Qualification details / Date obtained	Date	YYYY-MM-DD
validuntil	Person / Qualification details / Valid until	Date	YYYY-MM-DD
qualauthstatus		String	

7.15.1 Employee record (date effective) Example Output

```
{
  "employeeerecord" : {
    "header" : {
      "customercode" : "String",
      "effectivedate" : "Date"
    },
    "person" : {
      "personid" : "String",
      "title" : "String",
      "initials" : "String",
      "forename1" : "String",
      "forename2" : "String",
      "forename3" : "String",
      "surname" : "String",
      "previoussurname" : "String",
      "preferredname" : "String",
      "preferredsurname" : "String",
      "formattedname" : "String",
      "honours" : "String",
      "birthdate" : "Date",
      "contservicedate" : "Date",
      "reckonabledates":{
        "reckonabledate":{
          "servicetype": "String",
          "servicedate": "Date"
        }
      },
      "maritalstatus" : "String",
      "ethnicity" : "String",
      "nationality" : "String",
      "gender" : "String",
      "ninumber" : "String",
      "addressline1" : "String",
      "addressline2" : "String",
      "addressline3" : "String",
      "addressline4" : "String",
      "addressline5" : "String",
      "addressline6" : "String",
      "country" : "String",
      "addressstartdate" : "Date",
      "addressenddate" : "Date",
      "organisationstartdate" : "Date",
      "organisationenddate" : "Date",
      "nextofkins":{
        "nextofkin":{
          "nokname": "String",
          "nokrelationship": "String",
          "nokaddressline1": "String",
          "nokaddressline2": "String",
          "nokaddressline3": "String",
          "nokaddressline4": "String",
          "nokaddressline5": "String",
          "nokaddressline6": "String",

```

```

    "nokcountry": "String"
  }
},
"dependants" : "Numeric",
"emergencycontacts": {
  "emergencycontact": {
    "ecname": "emergency Name",
    "ecprimarycontact": "T",
    "eccontact": "123",
    "eccontactemail": "123@123.123",
    "ecrelationship": "Father",
    "ecaddressline1": "EC Address 1",
    "ecaddressline2": "EC Address 2",
    "ecaddressline3": "EC Address 3",
    "ecaddressline4": "EC Address 4",
    "ecaddressline5": "EC Address 5",
    "ecaddressline6": "EC Address 6",
    "eccountry": "United Kingdom"
  }
},
"otheraddresses": {
  "otheraddress": {
    "otheraddresstype": "String",
    "otheraddressline1": "String",
    "otheraddressline2": "String",
    "otheraddressline3": "String",
    "otheraddressline4": "String",
    "otheraddressline5": "String",
    "otheraddressline6": "String",
    "othercountry": "String",
    "otheraddressstartdate": "Date",
    "otheraddressenddate": "Date"
  }
},
"contacts": {
  "contactdet": {
    "conttype": "String",
    "contvalue": "String"
  }
},
"positions" : {
  "position" : {
    "positionid" : "String",
    "occupancyid" : "String",
    "positionname" : "String",
    "occupancystartdate" : "Date",
    "occupancyenddate" : "Date",
    "expoccupancyenddate" : "Date",
    "location" : "String",
    "structuregroup1" : "String",
    "structuregroup2" : "String",
    "jobfamily" : "String",
    "costing": {
      "costlevel": [

```

```

    {
      "costlevelname": "String",
      "costcode": "String",
      "costsplitpercent": "Numeric",
      "costsplitvalue": "Numeric",
      "coststartdate": "Date",
      "costenddate": "Date"
    }
  ],
},
"structurecontacts": {
  "structurecontact": {
    "meansofcontact": "String",
    "structurecontactat": "String",
    "structurecontactstartdate": "Date",
    "structurecontactenddate": "Date"
  }
},
"TermsandConditions": {
  "TermandCondition": [
    {
      "TCItem": "String",
      "TCChoice": "String",
      "TCStartDate": "Date",
      "TCEndDate": "Date"
    }
  ]
},
"reportingpositionname": "String",
"reportingpositionid": "String",
"reportingoccupantname": "String",
"reportingoccupantid": "String",
"reportingoccupantemail": "String",
"reportingunit": "String",
"reportingunitid": "String",
"reportingunitloc": "String",
"reportingunitgroup1": "String",
"reportingunitgroup2": "String",
"reportingpost": "String",
"reportingpostid": "String",
"reportingpostloc": "String",
"reportingpostgroup1": "String",
"reportingpostgroup2": "String",
"reportingmgrref": "String",
"category": "String",
"employmentbasis": "String",
"employmenttype": "String",
"contractedhours": "Numeric",
"positionunit": {
  "unitid": "String",
  "unitname": "String",
  "unitlevel": "Numeric",
  "unittype": "String",
  "unitlocation": "String",
  "unitgroup1": "String",

```

```

    "unitgroup2" : "String",
    "unitworkflowgroup" : "String",
    "unittoorg" : {
    "unitid" : "String",
    "unitname" : "String",
    "unitlevel" : "Numeric",
    "unittype" : "ORG",
    "unitlocation" : "String",
    "unitgroup1" : "String",
    "unitgroup2" : "String",
    "unitworkflowgroup" : "String"
    }
  },
  "payrollrefno" : "String",
  "payrollname" : "String",
  "salarydetails" : {
    "salary" : {
      "ftsalary" : "Numeric",
      "salaryfrequency" : "String",
      "salarystartdate" : "Date",
      "gradename" : "String",
      "paymenttable" : "String",
      "ftsalarypoint" : "String",
      "ftsalaryvalue" : "Numeric",
      "protectedpoint" : "String",
      "protectedvalue" : "Numeric",
      "overrideminpoint" : "String",
      "overrideminvalue" : "Numeric",
      "overridecontributionpoint" : "String",
      "overridecontributionvalue" : "Numeric",
      "overridemaxpoint" : "String",
      "overridemaxvalue" : "Numeric",
      "gradetable" : "String",
      "grademinpoint" : "String",
      "grademinvalue" : "Numeric",
      "grademaxpoint" : "String",
      "grademaxvalue" : "Numeric",
      "gradecontributionpoint" : "String",
      "gradecontributionvalue" : "Numeric",
      "nextincrementdate" : "Date",
      "additionalincrementpoint" : "Numeric",
      "protectedpayvalue" : "Numeric",
      "protectedpayfrequency" : "String",
      "payscalechangereason" : "String"
    }
  }
  "holidays":{
    "holidayscheme":[
      {
        "holidayentitlementtotal": "Numeric",
        "holidayentitlementunit": "String",
        "holidayschemestartdate": "Date"
      }
    ]
  }
}

```

```

    }
  },
  "checks":{
    "check":{
      "checkname":"String",
      "checkdate":"Date",
      "checkrenew":"Date",
      "checkstatus":"String"
    }
  },
  "skills":{
    "skill":[
      {
        "skillname":"String",
        "skillset":"String",
        "skillstartdate":"Date",
        "skillexpirydate":"Date",
        "skillreviewdate":"Date",
        "skillscore":"String",
        "skillscoreeffdate":"Date",
        "skillauthstatus":"String",
        "reference":"String"
      }
    ]
  },
  "qualifications":{
    "qualification":{
      "subjects":{
        "subject":[
          {
            "subjectname":"String"
          }
        ]
      }
    }
  },
  "types":{
    "type":{
      "typename":"String"
    }
  },
  "level":"String",
  "grade":"String",
  "institutiontype":"String",
  "placeoflearning":"String",
  "studycommencementdate":"Date",
  "studyexpecteddate":"Date",
  "dateobtained":"Date",
  "validuntil":"Date",
  "qualauthstatus":"String"
}
}
}
}
}

```

7.16 Employee work schedule

Available as a request driven web service (GET) only.

Data Field Name	iTrent Field	Format	Notes
personid	Personal details / Person ref	String	
positionid	Position details / Position reference	String	Repeats for all positions
positionname	Position details / Job title	String	
patterntype	Pattern details / Type	String	Repeats for each Pattern
numberofdays	Pattern details / Number of days in this pattern	Numeric	
effectivedate		Date	Derived for each day of pattern starting today Repeats for each day of Pattern YYYY-DD-MM
dayofweek		String	Text description for the day derived from the effective date
workingpattern	Pattern Details / Pattern	Date	Value for the day associated with the effectivedate HH:MM
starttime	Shift pattern details / Start time	Date	Repeats for each shift HH:MM
endtime	Shift pattern details / End time	Date	Repeats for each shift HH:MM
unworked	Shift patten details / Unworked	Date	Repeats for each shift HH:MM

7.16.1 Employee Work Schedule Example Output

```
{
  "employeeworkschedule": {
    "person": {
      "personid": "String",
      "positions": {
        "position": {
          "positionid": "String",
          "positionname": "String",
          "pattern": {
            "patterntype": "String",
            "numberofdays": "Numeric",
            "days": {
```

```

"day": [
  {
    "effectivedate": "Date",
    "dayofweek": "String",
    "workingpattern": "Date",
    "shifts": {
      "shift": [
        {
          "starttime": "Date",
          "endtime": "Date",
          "unworked": "Date"
        },
        {
          "starttime": "Date",
          "endtime": "Date",
          "unworked": "Date"
        }
      ]
    }
  },
  {
    "effectivedate": "Date",
    "dayofweek": "String",
    "workingpattern": "Date",
    "shifts": {
      "shift": {
        "starttime": "Date",
        "endtime": "Date",
        "unworked": "Date"
      }
    }
  },
  {
    "effectivedate": "Date",
    "dayofweek": "String",
    "workingpattern": "Date",
    "shifts": {
      "shift": [
        {
          "starttime": "Date",
          "endtime": "Date",
          "unworked": "Date"
        },
        {
          "starttime": "Date",
          "endtime": "Date",
          "unworked": "Date"
        }
      ]
    }
  },
  {
    "effectivedate": "Date",
    "dayofweek": "String",
    "workingpattern": "Date",

```



```
"shifts": {
    "shift": [
        {
            "starttime": "Date",
            "endtime": "Date",
            "unworked": "Date"
        },
        {
            "starttime": "Date",
            "endtime": "Date",
            "unworked": "Date"
        }
    ]
}
},
{
    "effectivedate": "Date",
    "dayofweek": "String",
    "workingpattern": "Date",
    "shifts": {
        "shift": [
            {
                "starttime": "Date",
                "endtime": "Date",
                "unworked": "Date"
            },
            {
                "starttime": "Date",
                "endtime": "Date",
                "unworked": "Date"
            }
        ]
    }
},
{
    "effectivedate": "Date",
    "dayofweek": "String",
    "workingpattern": "Date"
},
{
    "effectivedate": "Date",
    "dayofweek": "String",
    "workingpattern": "Date"
}
]
}
}
}
}
}
```

7.17 Requisition Data Service

Available as a real-time outgoing web service (WDP) or a request driven web service (GET).

Data Field Name	iTrent Field	Format	Notes
requisitionreference	Requisition details / Requisition reference	String	
requisitionname	Requisition details / Requisition name	String	
startdate	Requisition details / Start date	Date	YYYY-MM-DD
enddate	Requisition details / End date	Date	YYYY-MM-DD
applicationclosingdate	Requisition details / Application closing date	Date	YYYY-MM-DD
recruitingmanager	Requisition details / Recruiting manager	String	Formatted name of recruiting manager
requisitionadministrator	Requisition details / Requisition administrator	String	Formatted name of requisition administrator
speculativeenquiries	Requisition details / Speculative enquiries	String	T or F
requisitioncategory	Requisition details / Requisition category/type	String	Repeated for each selected category
language	Requisition application form details / Language	String	3 letter code for selected language
publish	Requisition application form details / Publish	String	T or F
jobtitle	Requisition application form details / Job title	String	
jobdescription	Requisition application form details / Job description	String	Can contain encoded HTML
salarysearchvalue	Requisition application form details / Salary search value	Numeric	
Minimumsalary	Requisition application form details / Minimum salary	Numeric	
maximumsalary	Requisition application form details / Maximum Salary	Numeric	
formattedsalarydescription	Requisition application form details / Formatted salary description	String	Can include encoded HTML

Data Field Name	iTrent Field	Format	Notes
package	Requisition application form details / Package	String	
contractualhours	Requisition application form details / Contractual hours	Numeric	
basis	Requisition application form details / Basis	String	
region	Requisition application form details / Region	String	
location	Requisition application form details / Location	String	
intranetonly	Requisition application form details / Intranet only	String	T or F
keyword1	Requisition application form details / Keyword 1	String	
keyword2	Requisition application form details / Keyword 2	String	
keyword3	Requisition application form details / Keyword 3	String	
keyword4	Requisition application form details / Keyword 4	String	
webview	Requisition application form details / Web views	String	Repeats for each selected web view
link	Requisition application form details / URL link	String	

7.17.1 Requisition Data Service Example Output

```
{
  "RequisitionData": {
    "requisition": {
      "requisitionreference": "String",
      "requisitionname": "String",
      "startdate": "Date",
      "enddate": "Date",
      "applicationclosingdate": "Date",
      "recruitingmanager": "String",
      "requisitionadministrator": "String",
      "speculativeenquiries": "String",
      "vacancyptysrchs": {
        "vacancyptysrch": {
          "requisitioncategorytypes": {
            "requisitioncategorytype": "String"
          }
        }
      },
    },
  },
}
```

```
"language": "String",  
"publish": "String",  
"jobtitle": "String",  
"jobdescription": "String",  
"salarysearchvalue": "Numeric",  
"minimumsalary": "Numeric",  
"maximumsalary": "Numeric",  
"formattedsalarydescription": "String",  
"package": "String",  
"contractualhours": "Numeric",  
"basis": "String",  
"region": "String",  
"location": "String",  
"intranetonly": "String",  
"keyword1": "String",  
"keyword2": "String",  
"keyword3": "String",  
"keyword4": "String",  
"urlinks": {  
    "urlink": {  
        "webview": "String",  
        "link": "String"  
    }  
}  
}  
}  
}  
}
```

7.18 Requisition Data Service Version 2

Available as a request driven web service (GET) only.

Data Field Name	iTrent Field	Format	Notes
requisitionreference	Requisition details / Requisition reference	String	
requisitionname	Requisition details / Requisition name	String	
startdate	Requisition details / Start date	Date	YYYY-MM-DD
enddate	Requisition details / End date	Date	YYYY-MM-DD
applicationclosingdate	Requisition details / Application closing date	Date	YYYY-MM-DD
recruitingmanager	Requisition details / Recruiting manager	String	Formatted name of recruiting manager
requisitionadministrator	Requisition details / Requisition administrator	String	Formatted name of requisition administrator
speculativeenquiries	Requisition details / Speculative enquiries	String	T or F
lifecycle	Requisition details / Lifecycle	String	
vacancypositionreference	Vacancy details / Position reference	String	Position reference number of vacancies attached to requisition
requisitioncategory	Requisition details / Requisition category/type	String	Repeated for each selected category
language	Requisition application form details / Language	String	3 letter code for selected language
publish	Requisition application form details / Publish	String	T or F
jobtitle	Requisition application form details / Job title	String	
jobdescription	Requisition application form details / Job description	String	Can contain encoded HTML
salarysearchvalue	Requisition application form details / Salary search value	Numeric	
Minimumsalary	Requisition application form details / Minimum salary	Numeric	

Data Field Name	iTrent Field	Format	Notes
maximumsalary	Requisition application form details / Maximum Salary	Numeric	
formattedsalarydescription	Requisition application form details / Formatted salary description	String	Can include encoded HTML
package	Requisition application form details / Package	String	
contractualhours	Requisition application form details / Contractual hours	Numeric	
basis	Requisition application form details / Basis	String	
region	Requisition application form details / Region	String	
location	Requisition application form details / Location	String	
intranetonly	Requisition application form details / Intranet only	String	T or F
keyword1	Requisition application form details / Keyword 1	String	
keyword2	Requisition application form details / Keyword 2	String	
keyword3	Requisition application form details / Keyword 3	String	
keyword4	Requisition application form details / Keyword 4	String	
webview	Requisition application form details / Web views	String	Repeats for each selected web view
link	Requisition application form details / URL link	String	

7.18.1 Requisition Data Service Version 2 Example Output

```
{
  "RequisitionData" : {
    "requisition" : [
      {
        "requisitionreference" : "SBREQ0028",
        "requisitionname" : "Payroll Administrator",
        "startdate" : "2025-01-01",
        "enddate" : "",
        "applicationclosingdate" : "",
        "recruitingmanager" : "Mr Hallie Beck (PER0005)",
        "requisitionadministrator" : "Miss Sara Benson (SBPER0017)",
        "speculativeenquiries" : "F",
        "lifecycle" : "Admin life cycle",
        "vacancies" : {
          "vacancy" : [
            {
              "vacancypositionreference" : "POS0010"},
            {"vacancypositionreference" : "POS0002"} ]
          },
          "vacancyptysrchs" : {
            "vacancyptysrch" : [
              {
                "requisitioncategorytypes" : [
                  {
                    "requisitioncategorytype" : "Administrative"
                  }
                ],
                "language" : "USA",
                "publish" : "T",
                "jobtitle" : "Payroll Administrator",
                "jobdescription" : "<p class="customHTML">As a Payroll administrator, you will manage the entire payroll process, from data entry and calculations to preparing and distributing paychecks and managing employee benefits</span></p>",
                "salarysearchvalue" : "24000",
                "minimumsalary" : "23500",
                "maximumsalary" : "26000",
                "formattedsalarydescription" : "",
                "package" : "",
                "contractualhours" : "35.00",
                "basis" : "Full time",
                "region" : "East",
                "location" : "Nottingham",
                "intranetonly" : "F",
                "keyword1" : "PAYROLL",
                "keyword2" : "ADMIN",
                "keyword3" : "",
                "keyword4" : "",
                "urllinks" : {
                  "urllink" : [
                    {
                      "webview" : "AW iTrent New",
```

```
"link" : "http://mhr-svr0149/itrentdev_webrecruitment/wrd/run/ETREC179GF.open?WVID=9954211eKp&VACANCY_ID=0221625ebW"}]
```

7.19 User Defined Fields

Available as a request driven web service (GET) only.

Data Field Name	iTrent Field	Format	Notes
category	User defined category details / UDF Category	String	
udf		String	Format derived for the requested udfs for example <Person reference – formatted name>
<udffieldname>	User defined field details / Field name	String	Data field is field name
	UDF Details / <udffieldname>	<As Defined>	Value will be as entered for udf field
Messages			

7.19.1 UDF Example Output

```
{
  "itrent": {
    "udfs": [
      {
        "category": "String",
        "udf": "String",
        "MyField1": "<String>",
        "MyField2": "<Numeric>",
        "MyField3": "<Date>",
        "MyField4": "<String>"
      }
    ],
    "messages": []
  }
}
```


7.20 Grade and Payscale Details

Available as a request driven web service (GET) only.

Data Field Name	iTrent Field	Format	Notes
positionid	Position details / Position reference	String	
occupancyid	Occupancy details / Position occ. Reference	String	
positionname	Position details / Job title	String	
occupancystartdate	Occupancy details / Occupancy start	Date	YYYY-MM-DD
occupancyenddate	Occupancy details / Occupancy end	Date	YYYY-MM-DD
Effectivedate		Date	Repeats for each salary change date Derived value for start of inheritance salary details YYYY-MM-DD
Enddate		Date	Derived value for end of inheritance salary details YYYY-MM-DD
Grade	Salary details / Grade	String	
Paymenttable	Payscale values / Payment table	String	
Ftsalarypoint	Payscale values / FT Salary (Scalepoint)	String	
Ftsalaryvalue	Payscale values / FT Salary (Value)	Numeric	
Protectedpoint	Payscale values / Protected (Scalepoint)	String	
Protectedvalue	Payscale values / Protected (Value)	Numeric	
Overrideminpoint	Payscale values / Override minimum (Scalepoint)	String	
Overrideminvalue	Payscale values / Override minimum (Value)	Numeric	

Data Field Name	iTrent Field	Format	Notes
Overridecontributionpoint	Payscale values / Override contribution-related threshold (Scalepoint)	String	
Overridecontributionvalue	Payscale values / Override contribution-related threshold (Value)	Numeric	
Overridemaxpoint	Payscale values / Override maximum (Scalepoint)	String	
Overridemaxvalue	Payscale values / Override maximum (Value)	Numeric	
Gradetable	Rates (grade) / Grade payment table	String	
Grademinpoint	Rates (grade) / Grade minimum (Scalepoint)	String	
Grademinvalue	Rates (grade) / Grade minimum (Value)	Numeric	
Grademaxpoint	Rates (grade) / Grade maximum (Scalepoint)	String	
Grademaxvalue	Rates (grade) / Grade maximum (Value)	Numeric	
Gradecontributionpoint	Rates (grade) / Contribution-related threshold (Scalepoint)	String	
Gradecontributionvalue	Rates (grade) / Contribution-related threshold (Value)	Numeric	
Nextincrementdate	Payscale values / Next increment date	Date	YYYY-MM-DD
Additionalincrementpoint	Payscale values / Additional increment points (Scalepoint)	Numeric	
Proctedpayvalue	Salary Details / Protected rate of pay (Number)	Numeric	
Protectedpayfrequency	Salary Details / Protected rate of pay (Drop Down)	String	
Changereason	Payscale values / Change reason	String	

7.20.1 Grade and Payscale Example Output

```
{
  "grade": {
    "person": {
      "positions": {
        "position": {
          "positionid": "String",
          "occupancyid": "String",
          "positionname": "String",
          "occupancystartdate": "Date",
          "occupancyenddate": "Date",
          "payscaledetails": {
            "payscale": [
              {
                "effectivedate": "Date",
                "enddate": "Date",
                "grade": "String",
                "paymenttable": "String",
                "ftsalarypoint": "String",
                "ftsalaryvalue": "Numeric",
                "protectedpoint": "String",
                "protectedvalue": "Numeric",
                "overrideminpoint": "String",
                "overrideminvalue": "Numeric",
                "overridecontributionpoint": "String",
                "overridecontributionvalue": "Numeric",
                "overridemaxpoint": "String",
                "overridemaxvalue": "Numeric",
                "gradetable": "String",
                "grademinpoint": "String",
                "grademinvalue": "Numeric",
                "grademaxpoint": "String",
                "grademaxvalue": "Numeric",
                "gradecontributionpoint": "String",
                "gradecontributionvalue": "Numeric",
                "nextincrementdate": "Date",
                "additionalincrementpoint": "Numeric",
                "protectedpayvalue": "Numeric",
                "protectedpayfrequency": "String",
                "changereason": "String"
              ]
            }
          }
        }
      }
    }
  }
}
```

8. Web services audit

Audit is available for Web services functionality.

8.1 Session audit

Both the 'User login successful' and 'Request category not permitted' events will provide further detail in the session audit description as to what type of request was made by the user.

The 'Request category not permitted' event will generate if the web service user login details are correct, but the request category is not permitted for the user via the 'Web services user control details' configuration documented in section [2.2.3](#).

Session audit details MY WEBSERVICE USER		▼ MENU	↺	🖨
User name	MY WEBSERVICE USER			
Event type	User login successful			
Description	User request: Recruitment - REQUISITION successful			
Event date	24/05/2024			
Event time	09:23			
Session ID				
Function access name	UNKNOWN			
Workstation ID	172.19.116.28			
Remote IP address				
Universal date	24/05/2024			
Universal time	08:23			
Client machine time zone	GMT			

Session audit details MY WEBSERVICE USER		▼ MENU	↺	🖨
User name	MY WEBSERVICE USER			
Event type	Request category not permitted			
Description	Request: Core HR and structure - HRCORE			
Event date	25/04/2024			
Event time	11:23			
Session ID				
Function access name	UNKNOWN			
Workstation ID	172.19.112.53			
Remote IP address				
Universal date	25/04/2024			
Universal time	10:23			
Client machine time zone	GMT			

8.2 Transaction 'Read' audit

'Read' level audit can be enabled for web services. This will produce a transaction audit record containing the payload response of each web service request.

Audit administration -> System module audit policies -> Module transaction audit set up

To enable read audit for this purpose, the 'Read' option must be set to 'Full' via the 'Module transaction audit set up' page for Web services. By default, this will be set to 'Off'.

Web services

Module transaction audit set up

Web services

▼ MENU  

Read *

Full

▼

Save

Once enabled, web service requests will generate an audit record such as the below, detailing the exact information that was retrieved from iTrent for each request.

iTrent	15/07/2024						English
SEARCH FIND iTRENT PAGES							
Organisation							
1006283							
Transaction audit trail							
Select all Edit this group							
Web services data							
Web services data							
Web services data							
Web services data							
Web services data							
Web services data							
Web services data							
Web services data							
Web services data							
Web services data							
Web services data							
Web services data							
Web services data							
Web services data							

9. Special character output

Prior to Release 10.54 both workflow data publisher and RESTful APIs may not have produced an output if the payload contained special characters. These services have therefore been enhanced to support a wider set of special characters and diacritical marks.

The formatting of these characters between RESTful API and WDP outputs may differ, however these services have been enhanced to prevent 'breaking' and to ensure an output can be produced if the payload contains such characters.

Readers Comments

MHR's policy is to continue to improve its documentation. Items for inclusion or requests for amendments to this document should be emailed to product.design@mhrglobal.com