
Salted event tree, held on L0

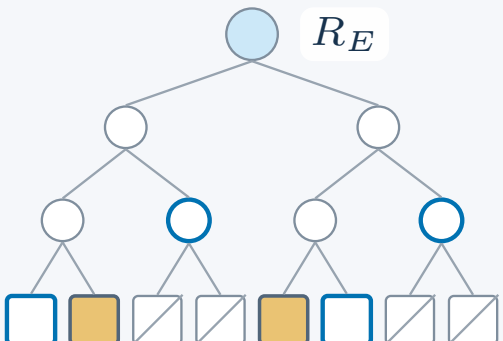

leaf i binds

$$\big(i,\ r_i,\ \mathsf{bytes}(e_i)\big)$$

$$r_i = \mathsf{HMAC}_{r_B}(\mathrm{tag}_r \| i)$$

$$D = \mathsf{H}(\mathrm{tag}_D, n, R_E)$$

Compliance view

opening bundle $\mathcal{V}$
selected e_i + salts r_i
sibling hashes
polygon (G, r_G)
credential leaf + path

never exported
k_N, secret s, nonce r_B
bytes and salts of all
unselected events

Regulator, importer or certifier

independent verifier
recomputes R_E,
D, c_G, R_C
checks receipt, anchor log,
program keys, code hash

accepts iff D matches the
Γ anchored on L1
credential-only or
polygon-only: rejected