Without iMargi
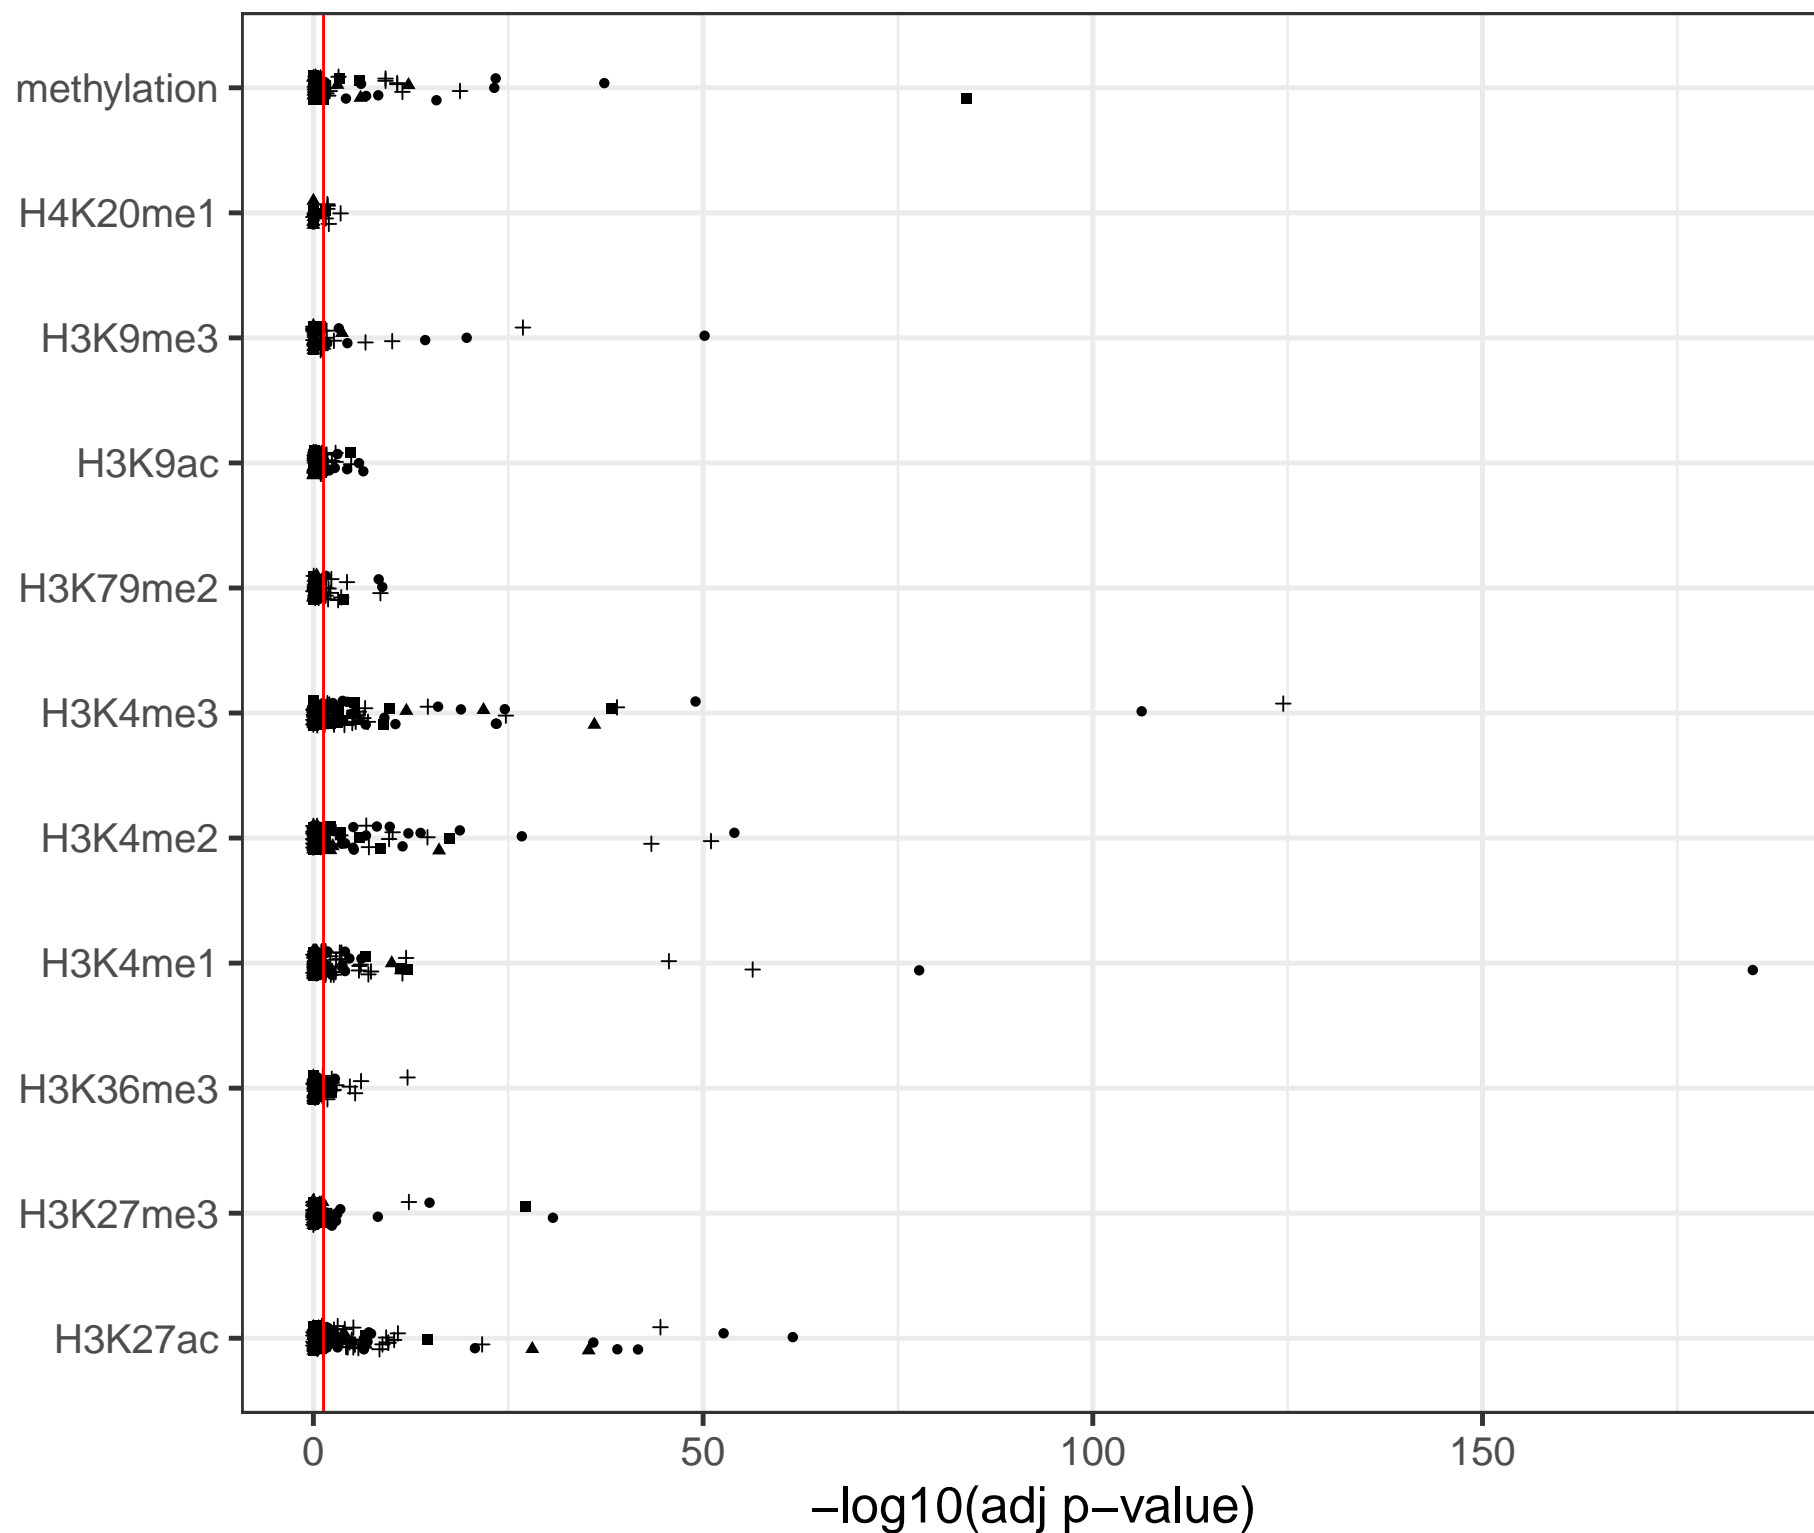
Number of cases with adj p−value < 0.05 = 326

Legend:
- • Eraser of a Repressive mark (er)
- ▲ Eraser of an Active mark (ea)
- ■ Writer of a Repressive mark (wr)
- + Writer of an Active mark (wa)

X-axis: −log10(adj p-value)

Y-axis categories (top to bottom): methylation, H4K20me1, H3K9me3, H3K9ac, H3K79me2, H3K4me3, H3K4me2, H3K4me1, H3K36me3, H3K27me3, H3K27ac