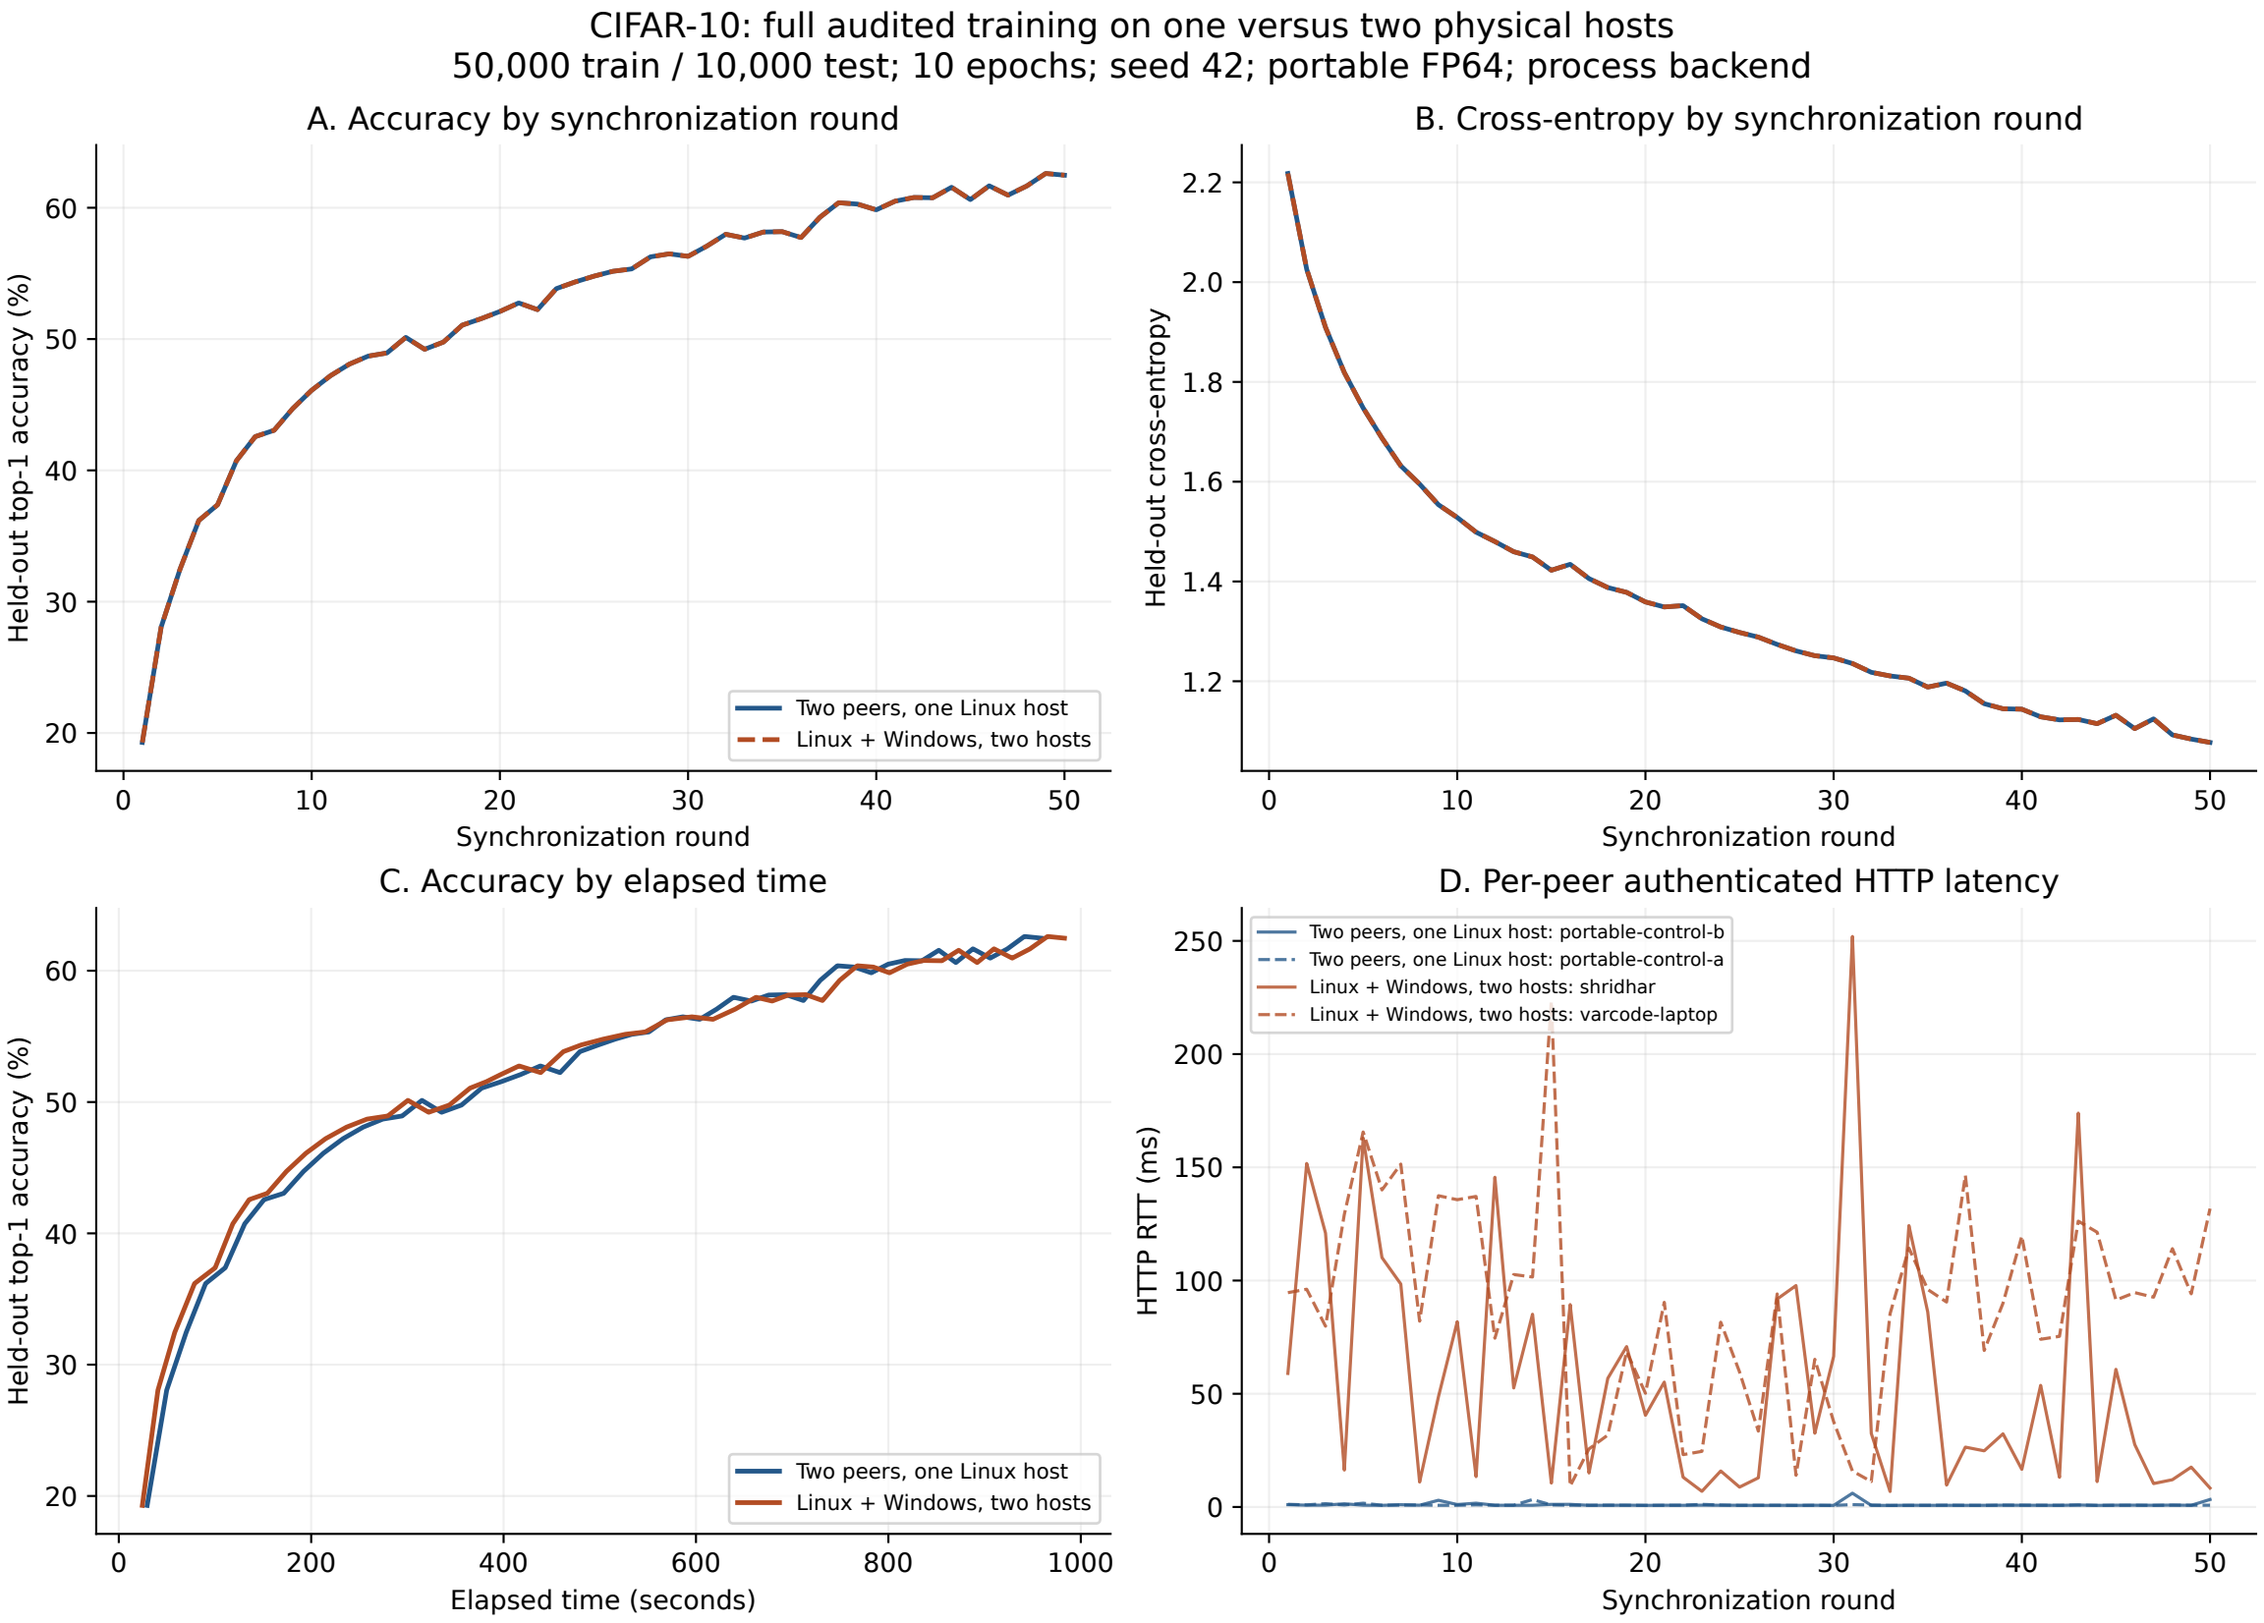
CIFAR-10: full audited training on one versus two physical hosts
50,000 train / 10,000 test; 10 epochs; seed 42; portable FP64; process backend
A. Accuracy by synchronization round
Held-out top-1 accuracy (%)
Synchronization round
Two peers, one Linux host
Linux + Windows, two hosts
B. Cross-entropy by synchronization round
Held-out cross-entropy
Synchronization round
C. Accuracy by elapsed time
Held-out top-1 accuracy (%)
Elapsed time (seconds)
Two peers, one Linux host
Linux + Windows, two hosts
D. Per-peer authenticated HTTP latency
HTTP RTT (ms)
Synchronization round
Two peers, one Linux host: portable-control-b
Two peers, one Linux host: portable-control-a
Linux + Windows, two hosts: shridhar
Linux + Windows, two hosts: varcode-laptop