

## Key concepts on Deep Neural Networks

Quiz, 10 questions

✓ **Congratulations! You passed!**

Next Item



1 / 1  
point

1.

What is the "cache" used for in our implementation of forward propagation and backward propagation?

- ☐ We use it to pass variables computed during backward propagation to the corresponding forward propagation step. It contains useful values for forward propagation to compute activations.
- ☐ It is used to cache the intermediate values of the cost function during training.
- ☒ We use it to pass variables computed during forward propagation to the corresponding backward propagation step. It contains useful values for backward propagation to compute derivatives.



**Correct**

Correct, the "cache" records values from the forward propagation units and sends it to the backward propagation units because it is needed to compute the chain rule derivatives.

- ☐ It is used to keep track of the hyperparameters that we are searching over, to speed up computation.



1 / 1  
point

2.

Among the following, which ones are "hyperparameters"? (Check all that apply.)

- ☐ activation values  $a^{[l]}$



**Un-selected is correct**

- ☐ number of iterations



**Correct**

- ☐ learning rate  $\alpha$



## Correct Key concepts on Deep Neural Networks

Quiz, 10 questions

☒

size of the hidden layers  $n^{[l]}$



Correct

☐

bias vectors  $b^{[l]}$



Un-selected is correct

☐

weight matrices  $W^{[l]}$



Un-selected is correct

☐

number of layers  $L$  in the neural network



Correct



1 / 1  
point

3.

Which of the following statements is true?

☒

The deeper layers of a neural network are typically computing more complex features of the input than the earlier layers.



Correct

☐

The earlier layers of a neural network are typically computing more complex features of the input than the deeper layers.



1 / 1  
point

4.

Vectorization allows you to compute forward propagation in an  $L$ -layer neural network without an explicit for-loop (or any other explicit iterative loop) over the layers  $l=1, 2, \dots, L$ . True/False?

☐

True

☒

False



Correct

Forward propagation propagates the input through the layers, although for shallow networks we may just write all

**Key concepts on Deep Neural Networks**

the layers:  $a^{[l]} = g^{[l]}(z^{[l]})$ ,  $z^{[l]} = W^{[l]}a^{[l-1]} + b^{[l]}$ , ...).



1 / 1  
point

5.

Assume we store the values for  $n^{[l]}$  in an array called layers, as follows: layer\_dims = [ $n_x$ , 4,3,2,1]. So layer 1 has four hidden units, layer 2 has 3 hidden units and so on. Which of the following for-loops will allow you to initialize the parameters for the model?



```
1 for(i in range(1, len(layer_dims)/2)):
2     parameter['W' + str(i)] = np.random.randn(layers[i], layers[i-1]) * 0.01
3     parameter['b' + str(i)] = np.random.randn(layers[i], 1) * 0.01
```



```
1 for(i in range(1, len(layer_dims)/2)):
2     parameter['W' + str(i)] = np.random.randn(layers[i], layers[i-1]) * 0.01
3     parameter['b' + str(i)] = np.random.randn(layers[i-1], 1) * 0.01
```



```
1 for(i in range(1, len(layer_dims))):
2     parameter['W' + str(i)] = np.random.randn(layers[i-1], layers[i]) * 0.01
3     parameter['b' + str(i)] = np.random.randn(layers[i], 1) * 0.01
```



```
1 for(i in range(1, len(layer_dims))):
2     parameter['W' + str(i)] = np.random.randn(layers[i], layers[i-1]) * 0.01
3     parameter['b' + str(i)] = np.random.randn(layers[i], 1) * 0.01
```



Correct




1 / 1  
point

6.

Consider the following neural network.

## Key concepts on Deep Neural Networks

Quiz, 10 questions

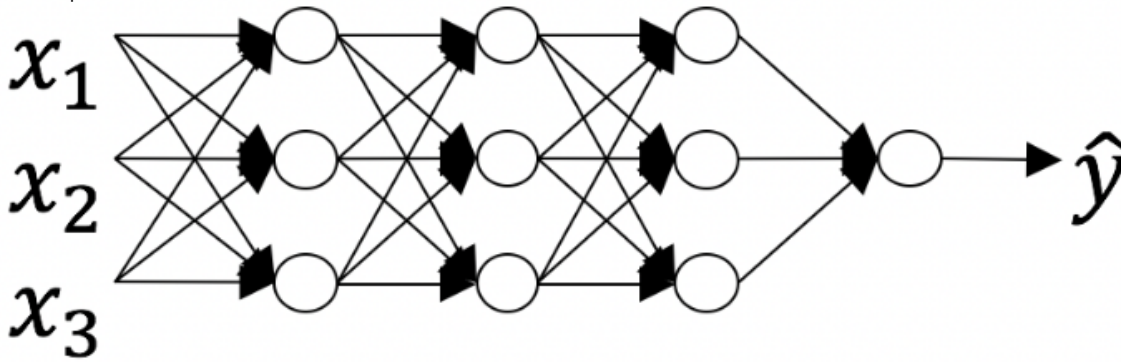

How many layers does this network have?

☒ The number of layers  $L$  is 4. The number of hidden layers is 3.



**Correct**

Yes. As seen in lecture, the number of layers is counted as the number of hidden layers + 1. The input and output layers are not counted as hidden layers.

☐ The number of layers  $L$  is 3. The number of hidden layers is 3.

☐ The number of layers  $L$  is 4. The number of hidden layers is 4.

☐ The number of layers  $L$  is 5. The number of hidden layers is 4.



1 / 1  
point

7.

During forward propagation, in the forward function for a layer  $l$  you need to know what is the activation function in a layer (Sigmoid, tanh, ReLU, etc.). During backpropagation, the corresponding backward function also needs to know what is the activation function for layer  $l$ , since the gradient depends on it. True/False?

☒ True



**Correct**

Yes, as you've seen in the week 3 each activation has a different derivative. Thus, during backpropagation you need to know which activation was used in the forward propagation to be able to compute the correct derivative.

☐ False



1 / 1  
point

8.

There are certain functions with the following properties:

## Key concepts on Deep Neural Networks

(i) To compute the function using a shallow network circuit, you will need a large network (where we measure size by the number of logic gates in the network), but (ii) To compute it using a deep network circuit, you need only an exponentially smaller network. True/False?

☒ True

Correct


☐ False



0 / 1  
point

9.

Consider the following 2 hidden layer neural network:

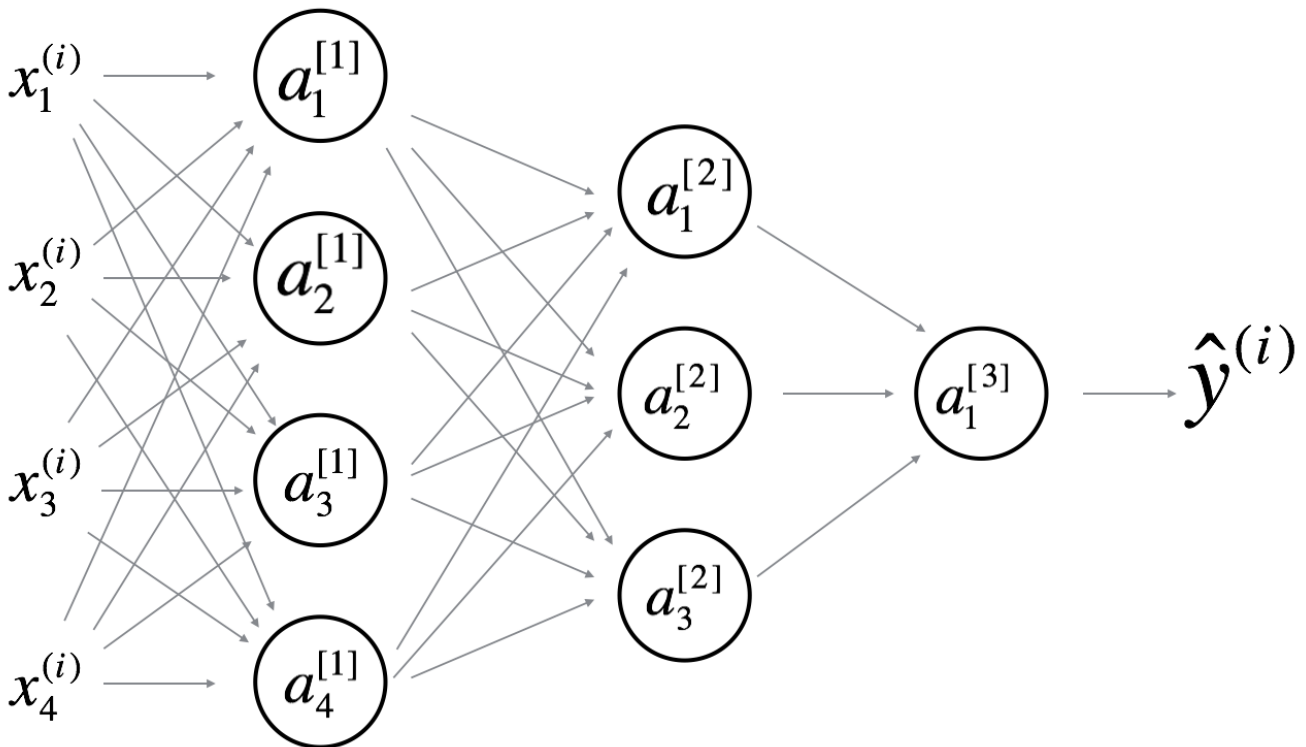

Which of the following statements are True? (Check all that apply).

☒  $W^{[1]}$  will have shape (4, 4)

Correct

Yes. More generally, the shape of  $W^{[l]}$  is  $(n^{[l]}, n^{[l-1]})$ .

☐  $b^{[1]}$  will have shape (4, 1)

## Key Concepts on Deep Neural Networks

Yes. More generally, the shape of  $b^{[l]}$  is  $(n^{[l]}, 1)$ .

☐  $W^{[1]}$  will have shape (3, 4)

Un-selected is correct

☐  $b^{[1]}$  will have shape (3, 1)

Un-selected is correct

☐  $W^{[2]}$  will have shape (3, 4)

Correct

Yes. More generally, the shape of  $W^{[l]}$  is  $(n^{[l]}, n^{[l-1]})$ .

☐  $b^{[2]}$  will have shape (1, 1)

Un-selected is correct

☐  $W^{[2]}$  will have shape (3, 1)

Un-selected is correct

☐  $b^{[2]}$  will have shape (3, 1)

Correct

Yes. More generally, the shape of  $b^{[l]}$  is  $(n^{[l]}, 1)$ .

☐  $W^{[3]}$  will have shape (3, 1)

Un-selected is correct

☐  $b^{[3]}$  will have shape (1, 1)


This should be selected

☐  $W^{[3]}$  will have shape (1, 3)

Correct

Yes. More generally, the shape of  $W^{[l]}$  is  $(n^{[l]}, n^{[l-1]})$ .

☐

  $b^{[3]}$  will have shape (3, 1)

## Key concepts on Deep Neural Networks

Quiz, 10 questions  
**Un-selected is correct**



1 / 1  
point

10.

Whereas the previous question used a specific network, in the general case what is the dimension of  $W^{[l]}$ , the weight matrix associated with layer  $l$ ?



$W^{[l]}$  has shape  $(n^{[l]}, n^{[l-1]})$



**Correct**

True



$W^{[l]}$  has shape  $(n^{[l-1]}, n^{[l]})$



$W^{[l]}$  has shape  $(n^{[l+1]}, n^{[l]})$



$W^{[l]}$  has shape  $(n^{[l]}, n^{[l+1]})$