LAB EXERCISE – 1

```
class Student{
   /*  Create a class Student with student ID, na
   me and age. Create three student objects and display
   their details.*/

   int studentid;
   String name;
   int age;


   void display(){
        System.out.println("name : "+name);
        System.out.println("id : "+studentid);
        System.out.println("age : "+age);
     }

   public static void main(String[] args){
     Student s1 = new Student();
     s1.studentid = 30016;
     s1.name = "hamsini cherukuri";
     s1.age = 25;



s1.display();

     }
}
```

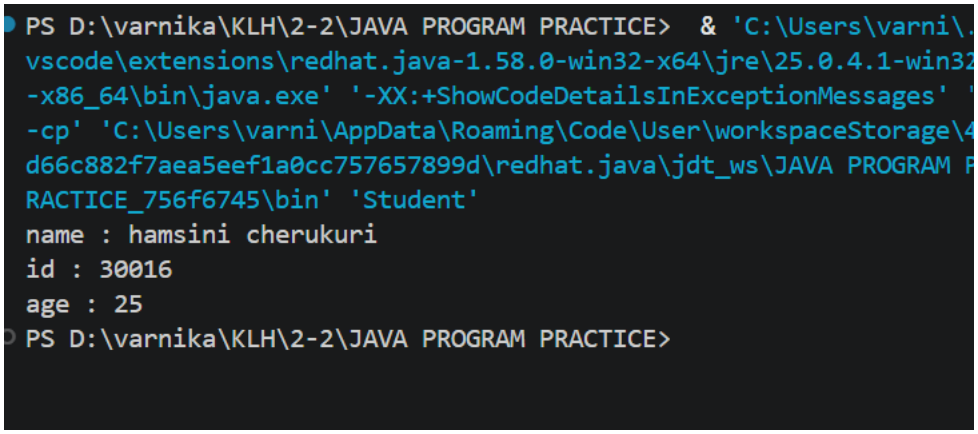


```
public class Employee {
   /*Create an Employee class with employee ID,
    name and salary. Initialize the
    values using a constructor and display employee details. */

    int employeeID;
    String name;
    int salary;

    Employee( int id, String n, int s){
    employeeID = id;
    name = n;
    salary = s;
    }

    void display(){
      System.out.println("Name: "+name);
      System.out.println("id: "+employeeID);
      System.out.println("salary: "+salary);

    }
```

```
    public static void main (String[] args) {
      Employee e1 = new Employee(30016, "hamsini cherukuri", 100000);
      Employee e2 = new Employee(30288, "vennela eadala", 200000);

      e1.display();
      e2.display();

    }

}
```

```
PS D:\varnika\KLH\2-2\JAVA PROGRAM PRACTICE>  d:; cd 'd:\varnika\
KLH\2-2\JAVA PROGRAM PRACTICE'; & 'C:\Users\varni\.vscode\extensi
ons\redhat.java-1.58.0-win32-x64\jre\25.0.4.1-win32-x86_64\bin\ja
va.exe' '-agentlib:jdwp=transport=dt_socket,server=n,suspend=y,ad
dress=localhost:55518' '-XX:+ShowCodeDetailsInExceptionMessages'
'-cp' 'C:\Users\varni\AppData\Roaming\Code\User\workspaceStorage\
4d66c882f7aea5eef1a0cc757657899d\redhat.java\jdt_ws\JAVA PROGRAM
PRACTICE_756f6745\bin' 'Employee'
Name: hamsini cherukuri
id: 30016
salary: 100000
Name: vennela eadala
id: 30288
salary: 200000
PS D:\varnika\KLH\2-2\JAVA PROGRAM PRACTICE>
```

```
public class BankAccount {
   /*Create a BankAccount class with account number
   and balance. Implement deposit and withdrawal methods. */
   int accno;
   double balance;

   BankAccount(int n, double b){
```

```
    accno= n;
    balance = b;
}

void deposit (double d){
    balance = balance+d;
    System.out.println("deposited amount : "+d);
}

void withdraw(double d ){
    if(d<=balance){
        balance = balance-d;
        System.out.println("withdrawn amount : "+d);
    } else {
        System.out.println("insufficient balance");
    }
}

void display(){
    System.out.println("account number : "+accno);
    System.out.println("account balance : "+balance);
}

public static void main(String[] args){
    BankAccount a1 = new BankAccount(30017,2345422.522);
    a1.display();
    a1.deposit(86433.23);
    a1.display();
```

```
    a1.withdraw(3421);
    a1.display();
  }
```

```
PRACTICE_756f6745\bin' 'BankAccount'
account number : 30017
account balance : 2345422.522
deposited amount : 86433.23
account number : 30017
account balance : 2431855.752
withdrawn amount : 3421.0
account number : 30017
account balance : 2428434.752
PS D:\varnika\KLH\2-2\JAVA PROGRAM PRACTICE>
```

```
}

public class Rectangle {
  /*Create a Rectangle class with length and width.
   Calculate and display its area and perimeter */

   double length;
   double width;


   Rectangle(double l, double w){
     length=l;
     width=w;
   }

   void area (){
     double area = length*width;
     System.out.println("area : "+area);
   }
```

```
    void perimeter(){
      double p = 2*(length+width);
      System.out.println("Perimeter : "+p);
    }

    public static void main(String[] args){
      Rectangle r = new Rectangle(34.56,67.43 );
      r.area();
      r.perimeter();
    }

}
```

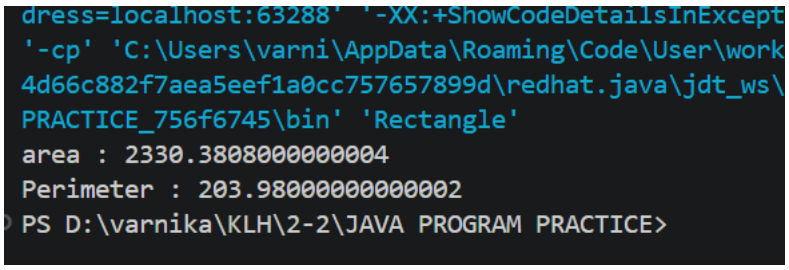


```
class Book {
int bookId;
String bookName;
double bookPrice;

Book(int id, String name, double price) {
   bookId = id;
   bookName = name;
   bookPrice = price;
```

```
}

void displayDetails() {
   System.out.println("Book ID: " + bookId);
   System.out.println("Book Name: " + bookName);
   System.out.println("Book Price: " + bookPrice);
}

public static void main(String[] args) {
   Book book1 = new Book(201, "bookrandom", 450);
   Book book2 = new Book(202, "abc", 500);

   book1.displayDetails();
   System.out.println();
   book2.displayDetails();
}

}
```

```
4d66c882f7aea5eef1a0cc757657899d\redhat.java\jdt_ws\
PRACTICE_756f6745\bin' 'Book'
Book ID: 201
Book Name: bookrandom
Book Price: 450.0

Book ID: 202
Book Name: abc
Book Price: 500.0
PS D:\varnika\KLH\2-2\JAVA PROGRAM PRACTICE>
```