
Variance-Corrected Multi-Asset Equity Simulation with Hybrid Hidden Markov Marginals

Abdulrahman Alswaidan

Robert Frederick Smith School of Chemical and Biomolecular Engineering
Cornell University, Ithaca, NY 14850
aa2725@cornell.edu

Jeffrey D. Varner*

Robert Frederick Smith School of Chemical and Biomolecular Engineering
Cornell University, Ithaca, NY 14850
jdv27@cornell.edu

Abstract

Synthetic multi-asset equity data must reproduce each asset’s return distribution and its relationship with the market. Reusing a generator fitted to full asset returns creates a problem: adding its draws to a market factor counts market variance twice. We derived a correction that centers and rescales each draw over a fixed horizon before adding the market factor, allowing reuse without fitting a second generator to regression residuals. We tested the correction on 423 non-market assets in a 424-asset United States equity and exchange-traded-fund universe, using hidden Markov generators with heavy-tailed emissions. The corrected paths retained heavy tails and recovered the calibrated market loadings with low error. On 416 complete asset histories held out from 2025, the correction improved the mean Kolmogorov–Smirnov pass rate over naive composition and brought the median ratio of synthetic to observed variance close to one. Its one-day left-tail 99% Value-at-Risk exceedance rate, using thresholds pooled across separate simulated paths, was 1.12%, compared with 1.16% for the residual-fit hidden Markov comparator and a nominal rate of 1%. We also tested a jump-duration mechanism that extended visits to extreme-return states and improved volatility clustering for the broad-market exchange-traded fund with ticker SPY. The multi-asset correction remained effective with jumps enabled, but transferring the SPY jump settings improved temporal fit in training and worsened it in the 2025 holdout. The method provides a way to reuse fitted asset generators for daily-fit comparisons. Its zero-sum residual constraint removes terminal residual uncertainty, and unmodeled dependence among asset-specific residuals can lead to overstated rebalancing returns. Code, cached inputs, result summaries, and instructions for fitting the per-asset models accompany the paper.

Keywords: hidden Markov model; jump-duration mechanism; single-index model; synthetic financial data; variance correction; Value-at-Risk coverage check; volatility clustering; heavy-tailed marginals.

*Corresponding author.

1 Introduction

Researchers and practitioners use synthetic equity paths to test risk models, evaluate portfolio strategies, and examine market scenarios beyond those observed in a historical sample [1, 2]. A multi-asset simulator must represent both the behavior of each asset and the relationships among assets. Factor models link many assets through a shared market path, a time series of market returns [3–5]. The simplest of these, the single-index model, separates each asset’s return into an intercept, a market component scaled by the asset’s fitted loading, and a zero-mean asset-specific residual. A synthetic asset path can then be composed by adding a simulated residual to the intercept and market component. If single-asset generators have already been fitted to each asset’s full returns, their paths might be reused as residuals. Each generator, however, already represents its asset’s total variance, including the part driven by the market. Adding its paths to the market component therefore counts market variance a second time. Subtracting each path’s mean removes its mean shift but leaves this excess variance. Fitting a second generator to each asset’s regression residuals avoids the problem but repeats the fitting for every asset. Reusing the existing generators would avoid that second fit, provided their paths could be transformed to supply only the residual contribution. The question is whether such a transformation can control the mean and variance of the composed paths while retaining the generator’s heavy tails and volatility clustering.

The transformation is useful only if each generator reproduces the behavior of its own asset. We illustrate the features a generator must capture with the broad-market exchange-traded fund with ticker SPY, which also supplied the market path in our multi-asset experiments. Its 2014–2024 returns show heavy tails and volatility clustering (Fig. 1). Most returns lie close to zero, but extreme values occur much more often than a Gaussian model predicts (Fig. 1a,b), a widely documented feature of financial returns [6, 7]. Raw returns show little correlation across days, while absolute returns remain positively correlated across many lags (Fig. 1c,d). Large and small absolute returns therefore cluster in time, a property that synthetic financial data often miss even when their return histogram appears realistic [8]. To represent heavy tails and volatility clustering, a hidden Markov model (HMM) draws returns from state-dependent distributions and uses transitions between states to represent temporal behavior [9, 10]. Each state in the model used here has a heavy-tailed Student- t return distribution, and the next state depends only on the current state, not on earlier returns. Fitted to SPY, the model leaves states with the most negative or positive mean returns quickly, and the autocorrelation of its absolute returns decays faster than in the data. A duration mechanism that occasionally keeps drawing from extreme-return states for consecutive days can slow that decay [11]. Adding the market component, however, changes the distribution and temporal behavior of the composed returns. An improvement in a single-asset generator must therefore be checked again after composition.

In this study, we developed a variance correction to reuse full-return generators in a single-index model without counting market variance twice. The correction centered and rescaled each simulated path to remove the mean shift and account for the variance supplied by the market component (Fig. 4). We applied it to heavy-tailed hidden Markov generators for the 423 non-market assets in a 424-asset universe, using 2014–2024 for fitting and 2025 as a holdout. We compared the correction with naive composition, which centered the paths without rescaling, with Gaussian residuals, and with generators fitted directly to regression residuals. The correction improved agreement with observed return distributions over naive composition while retaining heavy tails in training (Table 3). With all fits held fixed, the correction also improved distributional fit over naive composition and brought the median ratio of synthetic to observed variance close to one on the 416 assets with complete holdout histories (Table 4). The residual-fit hidden Markov generator and the correction gave similar agreement with observed return distributions in both periods. Without the duration mechanism, the correction left absolute-return autocorrelation error essentially unchanged from naive composition (Table 6). Transferring SPY’s duration settings to the composed paths improved their autocorrelation agreement in training but worsened it in the holdout (Table 6). The correction imposed a zero residual sum over each simulated path, removing cumulative residual uncertainty at the path endpoint. Neither reuse nor residual fitting modeled dependence among different assets’ residuals, which portfolio evaluation also requires [12, 13]. These results support reuse as a practical option for daily-return comparisons when full-return generators already exist.

2 Related Work

Single-asset return models treat changing volatility, market regimes, and extreme moves in different ways. Autoregressive conditional heteroskedasticity (ARCH) and generalized autoregressive conditional heteroskedasticity (GARCH) models allow conditional variance to change over time [14, 15]. Even with Gaussian innovations, the changing variance can produce an unconditional return distribution with excess kurtosis. Heavy-tailed innovations can improve the tail fit when Gaussian GARCH understates the frequency of extreme returns. Stochastic-volatility models make volatility a latent process [16–18]. Jump-diffusion models add discontinuous price moves [19, 20], but a jump component alone does not explain persistent volatility. Markov-switching ARCH and GARCH models combine discrete regimes with changing conditional variance [21, 22]. Hidden-state models represent returns with a small number of market regimes. In a hidden Markov model (HMM), each latent state has a separate return distribution. Gaussian-emission HMMs can reproduce heavy tails and weak raw-return autocorrelation, but may still miss volatility clustering [23, 10]. Hidden semi-Markov models allow more flexible state durations and can improve volatility persistence [11]. An HMM does not create a jump process by itself. Rare extreme moves must come from the state-dependent return distributions or from a transition rule designed for such events. Deep generative models learn return distributions and temporal features without specifying a small set of market regimes or a parametric return process. Generative adversarial networks (GANs) are one class of deep generative model. Quant GANs have reproduced several financial time-series features, including volatility clustering and leverage effects [24]. Sig-Wasserstein GANs use path signatures to learn features that depend on the order of observations [25]. In contrast, evaluations of GAN paths, including paths from the time-series generative adversarial network (TimeGAN), have found too little autocorrelation in absolute returns [26–28]. The conflicting results show that flexible architectures do not guarantee a match to financial stylized facts. Model design, training, and evaluation all matter [1, 8].

Multi-asset generation also requires a model of cross-asset dependence. Multivariate GARCH models estimate time-varying covariance matrices. The dynamic conditional correlation model reduces the number of parameters by separating individual volatility models from correlation dynamics [29, 30]. Copulas separate each asset’s return distribution from the dependence model. Dynamic copulas allow cross-asset dependence to change over time, while vine copulas provide flexible high-dimensional constructions [31, 32]. Factor models reduce dimension by linking each asset to a small number of shared factors [3–5]. Shared-state HMMs and multivariate GANs can also generate joint market moves [33, 34]. A standard factor model can resample historical residuals or fit a separate residual generator for every asset. This paper addresses a narrower problem. We start with single-asset generators already fitted to full returns and ask whether they can be reused in a factor model. The relevant comparison is with methods fitted directly to regression residuals: those methods remove the market component before fitting, whereas reuse adjusts an existing full-return draw during composition. Neither approach specifies cross-asset residual dependence unless that dependence is modeled separately.

3 Methods

We fitted a single-asset generator for each asset and combined the generated paths with a variance-corrected single-index model. The training data contained 424 United States-listed equities and exchange-traded funds observed from 2014 through 2024, and data from 2025 served as a holdout. The single-asset analysis focused on the broad-market exchange-traded fund with ticker SPY. It used 2,767 daily volume-weighted average prices for fitting, which yielded 2,766 growth rates, and the next 250 prices from 2025, which yielded 249 holdout growth rates. The multi-asset analysis used daily closing prices for all assets, with SPY as the market, so SPY had two fitted generators: one on volume-weighted prices for the single-asset analysis and one on closing prices for the market path. Of the other 423 assets in the training universe, 416 had complete 2025 histories and were included in the multi-asset holdout evaluation. We defined the excess growth rate $G_{i,j}$ for ticker i between trading days $j - 1$ and j from prices $P_{i,j-1}$ and $P_{i,j}$.

$$G_{i,j} \equiv \left(\frac{1}{\Delta t} \right) \ln \left(\frac{P_{i,j}}{P_{i,j-1}} \right) - r_f. \quad (1)$$

Here, $\Delta t = 1/252$ is the fraction of a trading year spanned by one trading day, and r_f is a constant continuously compounded risk-free rate. The excess growth rate has units of year^{-1} ; multiplied by

Δt , it gives a daily log excess return, which is additive across days under continuous compounding. We used $r_f = 0.043$ for the SPY training period and $r_f = 0.0421$ for its 2025 holdout, based on Treasury Separate Trading of Registered Interest and Principal of Securities (STRIPS) bond yields. For the multi-asset closing-price experiments, we set $r_f = 0$ in both windows, so their growth rates were annualized log returns rather than excess growth rates. Because r_f is constant, this choice shifts each series by a constant and leaves its variance and the regression slopes unchanged.

3.1 Per-asset hidden Markov marginal generator

For each asset, the hidden Markov generator divided the range of growth rates, which we also call returns, into $N = 100$ ordered intervals and treated the interval that contained a day’s return as that day’s state (Table 1). We write t for the day index j and omit the ticker index i when discussing one asset. At each simulated time step, the model first selected a state and then drew a return from that state’s distribution (Fig. 2). We represented the model as $\mathcal{M} = (\mathcal{S}, \mathcal{O}, \mathbf{T}, \mathbf{E}, \bar{\pi})$ [9]. The hidden state $S_t \in \mathcal{S} = \{1, \dots, N\}$ identifies the interval on trading day t , and the observation space $\mathcal{O} \subset \mathbb{R}$ contains the excess growth rates G_t of Eq. (1). The transition matrix $\mathbf{T}$ sets the probabilities of moving between states, $\mathbf{E}$ gives the return distribution within each state, and $\bar{\pi}$ gives the initial state probabilities. We ordered the states from the most negative to the most positive returns and placed their boundaries at the quantiles of a Laplace distribution, fitted to the asset’s in-sample returns, at the equally spaced probability levels k/N . We used the Laplace distribution because its sharp peak matches the concentration of small price movements in Fig. 1a [35, 36]. Its quantile function also has a closed form, so the boundaries for all 424 tickers required no iterative fitting [37]. Specifically, $Q_k = F_L^{-1}(k/N; \mu_L, b_L)$, where F_L^{-1} is the Laplace quantile function and μ_L and b_L are the fitted location and scale. We set $Q_0 = -\infty$ and $Q_N = +\infty$ and assigned return G_t to state k when $Q_{k-1} \leq G_t < Q_k$. Because each training return determines its state, the fitted state sequence is known; the states are hidden only in simulated paths, where the model generates the state sequence and reports only the returns.

The within-state emission followed a location-scale Student- t distribution:

$$G_t \mid S_t = k \sim \mu_k + \sigma_k \cdot t_\nu, \quad \nu = 5, \quad (2)$$

where t_ν denotes a standard Student- t random variable with ν degrees of freedom. For observations assigned to state k , we used the sample mean for μ_k and the sample standard deviation for σ_k , subject to two fallback rules. A state with fewer than two observations used the mean and standard deviation of that asset’s full training series. A state with at least two observations and sample standard deviation below 10^{-12} yr^{-1} retained its state mean but used the full-series standard deviation as its scale. These exceptions kept emission parameters defined but could broaden states containing repeated returns (Online Appendix S12); neither applied to SPY, whose states all held many observations. The same rules applied to the generators that the multi-asset comparison fitted to regression residuals. A standard t_ν has variance $\nu/(\nu - 2)$, so σ_k is a scale parameter rather than the emission standard deviation. At $\nu = 5$, each state’s emission standard deviation is $\sigma_k \sqrt{5/3}$, larger than the sample standard deviation of the returns assigned to that state. The emission is not truncated to the state’s interval, so a simulated return can fall outside it. We selected $\nu = 5$ from a sensitivity sweep and used $\nu = \infty$, which gives Normal emissions, as a baseline; Table 1 gives the explored range. For SPY, holding the rest of the model fixed, the Student- t emission raised simulated kurtosis toward the observed value and raised the Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) pass rates relative to the Normal emission (Table S2). A pass rate is the percentage of simulated paths whose two-sample test against the observed returns gave $p > 0.05$.

We estimated the transition matrix $\mathbf{T}$ by counting observed transitions between consecutive states and dividing each row by its total count. A state with no observed outgoing transition used a uniform row, $\mathbf{T}_{k,j} = 1/N$ for every destination state j . Because the training state sequence is known, these row frequencies are the maximum-likelihood estimates, and counting avoided the initialization sensitivity of iterative expectation-maximization [37]. We obtained the initial-state distribution $\bar{\pi}$ by solving $\bar{\pi}\mathbf{T} = \bar{\pi}$ with $\sum_k \bar{\pi}_k = 1$ [38, 39]. Because $\mathbf{T}$ was estimated by counting, $\bar{\pi}$ equals the vector of in-sample state frequencies up to end effects, so the model’s stationary growth-rate distribution is the frequency-weighted mixture of the state emission distributions. The counted probability of remaining in the same state was low (Online Appendix S4.4), but volatility clustering requires the chain to stay in the tail region, not in one state. Counting reproduces the observed frequencies of consecutive state pairs. At longer lags, however, the chain’s absolute-return autocorrelation decays

geometrically at a rate set by the counted matrix, much faster than the slow decay in Fig. 1d. The counted chain therefore forgets within a few steps whether it was in the tails and cannot reproduce the observed volatility clustering [11]. Online Appendix S4 derives the fitted generator’s stationary law and autocorrelation structure and quantifies both this rapid mixing and the autocorrelation added by the jump mechanism.

We added jump episodes to extend visits to extreme-return states and call the resulting generator the hidden Markov model with jumps (HMM-WJ). When no jump episode was active, a jump was triggered with probability ϵ at each step, and its duration was drawn as $K \sim \text{Poisson}(\lambda)$, where λ is the mean episode length [40]. A draw of $K = 0$ produced no episode, and the chain made an ordinary transition. For $K > 0$, the episode consisted of K *forced tail steps*, beginning with the step that triggered it. At each forced step, the model replaced the ordinary transition by first choosing one of two tail sets and then drawing a state uniformly from that set. The set $\mathcal{S}_- = \{1, \dots, N_{\text{tail}}\}$ contained the most negative states, and $\mathcal{S}_+ = \{N - N_{\text{tail}} + 1, \dots, N\}$ contained the most positive states. The model chose the negative set with probability p_{neg} and the positive set otherwise. Because p_{neg} is slightly above one half, negative extreme returns occurred slightly more often than positive ones. The choice was repeated at each forced step, so one episode can contain returns of both signs. Table 1 lists ϵ , λ , p_{neg} , and N_{tail} ; we tuned ϵ and λ and fixed p_{neg} and N_{tail} . Jump-diffusion models use Poisson arrivals to add instantaneous price jumps [19, 20]. Our model instead uses the Poisson distribution for the episode length, and an episode is a sustained visit to the tail states rather than a single price move. Setting $\epsilon = 0$ removes the mechanism; we call this variant the hidden Markov model with no jumps (HMM-NJ). Two closed-form approximations describe how much of a path, and how many paths, the mechanism affects (Online Appendix S4). Forced steps occupy a long-run fraction of approximately $\epsilon\lambda/(1 + \epsilon\lambda)$ of all steps. A path of T steps contains at least one episode with probability approximately $1 - e^{-\epsilon T}$, so ϵ sets how many paths contain an episode, while λ sets how long an episode lasts. The jump-augmented process is Markov only in the pair formed by the state and the number of remaining forced steps. The solved $\bar{\pi}$ is therefore the exact stationary distribution of the ordinary chain but only an approximate stationary start for the jump-augmented process. The full simulation procedure appears in Algorithm 1. Each step followed **T** or continued a jump episode and then drew a return from the selected state’s emission distribution.

We tuned the jump probability ϵ and mean duration λ on the volume-weighted SPY training series to match its absolute-return autocorrelation and excess kurtosis [6, 7, 10]; the multi-asset comparisons either disabled jumps or transferred the SPY values to the closing-price generators (Table 1). A path with no episode follows HMM-NJ, so its autocorrelation and kurtosis errors do not depend on (ϵ, λ) . We scored only *jump-active* paths, those containing at least one episode [40], so the objective measures how well an episode reproduces the observed statistics, not how often episodes occur. At each point of a grid of (ϵ, λ) values, we simulated 200 independent paths of 2,766 trading days. We minimized an objective that averaged, over the jump-active paths, the squared errors in the autocorrelation function (ACF) of absolute returns through lag L plus a weighted squared error in excess kurtosis:

$$J(\epsilon, \lambda) = \frac{1}{|\mathcal{R}_J|} \sum_{r \in \mathcal{R}_J} \left[\sum_{\tau=1}^L (\text{ACF}_{\text{obs}}(\tau) - \text{ACF}_r(\tau))^2 + w_\kappa (\kappa_{\text{obs}} - \kappa_r)^2 \right], \quad (3)$$

where $\mathcal{R}_J$ is the set of jump-active simulated paths, $\text{ACF}_{\text{obs}}(\tau)$ and κ_{obs} are the empirical absolute-growth autocorrelation at lag τ and excess kurtosis, $\text{ACF}_r(\tau)$ and κ_r are the corresponding values for path r , and w_κ sets the relative weight of the kurtosis error. When ϵ is small, as at the selected value, most jump-active paths contain a single episode, whose forced steps make up a fraction of about λ/T of the path. The episode adds a slowly decaying component to the absolute-return autocorrelation, and λ sets both its height and the number of lags over which it persists. The kurtosis penalty limits λ , because forced steps make tail returns common within a path rather than rare; they raise the variance proportionally more than the fourth moment and so lower the path kurtosis. The parameter ϵ acts mainly through the share of paths that contain an episode, which the restriction to jump-active paths removes. The objective therefore constrains ϵ only weakly, and the selected ϵ lay at the lower edge of its search range (Table 1; Online Appendix S4.6). The search ranges, w_κ , L , and the remaining hyperparameters are reported in Table 1. We fixed the selected hyperparameters before running the generator comparisons and the holdout evaluation.

Beyond the Normal-emission variant, we compared HMM-WJ with two benchmarks that model persistence differently. A hidden semi-Markov model (HSMM) baseline adapted from Bulla and

Algorithm 1 Hidden Markov model with jumps (HMM-WJ) single-asset marginal generator.

Require: Fitted parameters $(\mathbf{T}, \mathbf{E}, \bar{\pi}, \epsilon, \lambda, p_{\text{neg}}, N_{\text{tail}})$; horizon T ; tail sets $\mathcal{S}_- = \{1, \dots, N_{\text{tail}}\}$ and $\mathcal{S}_+ = \{N - N_{\text{tail}} + 1, \dots, N\}$.
Ensure: State sequence $\{S_t\}_{t=1}^T$ and growth-rate path $\{G_t\}_{t=1}^T$.
1: Draw $S_1 \sim \bar{\pi}$; draw $G_1 \sim \mu_{S_1} + \sigma_{S_1} t_5$; $k \leftarrow 0$ {stationary start; k : remaining forced-step counter}
2: **for** $t = 2, \dots, T$ **do**
3: **if** $k > 0$ **then**
4: $\mathcal{J} \leftarrow \mathcal{S}_-$ w.p. p_{neg} , else $\mathcal{S}_+$; $S_t \sim \text{Uniform}(\mathcal{J})$; $k \leftarrow k - 1$ {forced tail step; sign drawn per step}
5: **else if** $\text{Uniform}(0, 1) > \epsilon$ **then**
6: $S_t \sim \mathbf{T}_{S_{t-1}, \cdot}$ {standard Markov transition}
7: **else**
8: $K \sim \text{Poisson}(\lambda)$ {trigger jump; K is the episode length}
9: **if** $K = 0$ **then**
10: $S_t \sim \mathbf{T}_{S_{t-1}, \cdot}$ { $K = 0$: no forced steps, standard transition}
11: **else**
12: $\mathcal{J} \leftarrow \mathcal{S}_-$ w.p. p_{neg} , else $\mathcal{S}_+$; $S_t \sim \text{Uniform}(\mathcal{J})$; $k \leftarrow \min(K - 1, T - t)$ {first forced step; K steps total, sign per step}
13: **end if**
14: **end if**
15: Draw $G_t \sim \mu_{S_t} + \sigma_{S_t} t_5$ {Eq. (2)}
16: **end for**

Bulla [11] lengthens state visits through explicit dwell-time distributions instead of jump episodes (Table S2; Online Appendix S5). The Normal-emission comparison isolated the effect of heavy-tailed emissions, and the HSMM comparison contrasted explicit dwell times with the jump-duration mechanism, although the HSMM also used 8 states rather than 100 and so differed in more than its duration model. To compare the hidden Markov generator with a neural autoregressive model, we included a gated recurrent unit (GRU) benchmark (Table 2). The network took a 50-return input window and had two recurrent layers of 64 hidden units each. We standardized the training series with its mean and standard deviation, and separate output heads predicted the mean and log variance of the next standardized return. We fitted the network on training SPY only, selected weights by training loss, and sampled recursively from the predicted Gaussian distributions. Online Appendix S3.2 specifies the optimizer, stopping rule, initialization, and recorded computational environment. We scored all single-asset generators, including these benchmarks, by their KS and AD pass rates and by the mean absolute error between the observed and the ensemble-average simulated absolute-return autocorrelation functions (ACF-MAE), over lags 1–252 in training and 1–248 in the 249-day holdout (Eq. (S21) in Online Appendix S3).

3.2 Variance-corrected multi-asset composition

The single-asset model generated each ticker separately and did not specify cross-asset dependence. For the multi-asset model, we added a shared market path as a common factor, using the single-index model (SIM) of Sharpe [3]. We write $g_i(t)$ for the growth rate $G_{i,t}$ of asset i on days $t = 1, \dots, T$. The horizon T is 2,766 days in the training comparisons and 249 days in the holdout. The same symbols denote observed paths when we estimate parameters and synthetic paths when we compose them:

$$g_i(t) = \alpha_i + \beta_i g_m(t) + \varepsilon_i(t), \quad t = 1, \dots, T. \quad (4)$$

Here α_i is the intercept for asset i , g_m is the growth-rate path of the market, SPY, β_i is the asset's market loading, and ε_i is its asset-specific residual path. We use ε_i for the residual path and ϵ for the jump probability in the single-asset model. We estimated the intercept and market loading (α_i, β_i) from observed data by ordinary least squares (OLS). The choice of ε_i determined the composition method. A standard SIM draws independent Gaussian residuals with the variance estimated by OLS. These Gaussian residuals preserve the fitted market relationship but lack the heavy tails, and with jumps enabled the volatility clustering, that the single-asset generator produces. We called the Gaussian-residual method *Gaussian SIM* and used it as one of the compared methods.

Naive full-path composition. Using a full synthetic growth-rate path $\tilde{g}_i$ drawn from the asset's own single-asset generator, the *generator draw*, directly as the residual would give:

$$g_i = \alpha_i + \beta_i g_m + \tilde{g}_i. \quad (5)$$

The fitted intercept and market term already set the conditional mean of asset i , while the generator draw generally has $\mathbb{E}[\tilde{g}_i] \neq 0$. Equation (5) therefore has conditional mean $\alpha_i + \mathbb{E}[\tilde{g}_i] + \beta_i g_m$, not $\alpha_i + \beta_i g_m$. We therefore centered every generator draw before composition, subtracting its realized path mean:

$$\bar{\tilde{g}}_i \equiv \frac{1}{T} \sum_{t=1}^T \tilde{g}_i(t), \quad \tilde{g}_i^c(t) \equiv \tilde{g}_i(t) - \bar{\tilde{g}}_i. \quad (6)$$

Therefore, $T^{-1} \sum_t \tilde{g}_i^c(t) = 0$ exactly. Subtracting the realized rather than the population mean makes the centering exact on every path. Subtracting a constant leaves both the sample variance and the sample covariance with g_m unchanged. We used the centered construction $g_i = \alpha_i + \beta_i g_m + \tilde{g}_i^c$, which corrects the mean but not the variance, as the *naive benchmark* in all comparisons. The sample variance of each draw, $\sigma_{\text{gen},i}^2 = \text{Var}(\tilde{g}_i) = \text{Var}(\tilde{g}_i^c)$, is the *generator variance*; it is recomputed for every draw. It already represents the asset's total variance, so adding the market term adds market variance a second time. During composition, g_m was the observed SPY path in the training comparison and a path simulated from SPY's closing-price generator in the holdout and jump comparisons, with one market path per replication shared by all assets, and in both cases it was independent of the asset draws. The covariance of a centered draw with the market path is zero in population and close to zero on a long realized path. We approximated the naive composed variance accordingly:

$$\text{Var}(g_i) \approx \beta_i^2 \sigma_m^2 + \sigma_{\text{gen},i}^2, \quad \text{Cov}(\tilde{g}_i^c, g_m) \approx 0, \quad (7)$$

where $\sigma_m^2 = \text{Var}(g_m)$ is the sample variance of the market path used in composition. The naive composed variance therefore exceeds the generator variance by $\beta_i^2 \sigma_m^2$, an excess that grows with the square of the market loading.

Variance correction. We set $\sigma_{\text{gen},i}^2$ as the target total variance for asset i . The market term contributed $\beta_i^2 \sigma_m^2$, so the residual term could contribute only the remaining variance. We defined s_i as the nonnegative asset-specific residual scale, set $\varepsilon_i = s_i \tilde{g}_i^c$, and required $\text{Var}(\beta_i g_m + s_i \tilde{g}_i^c) = \sigma_{\text{gen},i}^2$. Under the zero-covariance assumption, solving for s_i gives the correction:

$$s_i^2 = 1 - \frac{\beta_i^2 \sigma_m^2}{\sigma_{\text{gen},i}^2} \quad (8)$$

We call the market term's share of the target variance the *market loading ratio*:

$$\rho_i \equiv \frac{\beta_i^2 \sigma_m^2}{\sigma_{\text{gen},i}^2}, \quad (9)$$

so that $s_i^2 = 1 - \rho_i$ under the zero-covariance assumption. At $\rho_i = 1$, the rule of Eq. (8) leaves no asset-specific variance; for $\rho_i > 1$, it has no real-valued solution.

With the observed variances, ρ_i would equal the coefficient of determination of the regression, which is below one. Because ρ_i instead uses the generator and market-path variances, it can reach or exceed one when the generator variance is low or the market path is more volatile than the observed SPY training series, particularly for assets with large β_i . We therefore required the asset-specific draw to contribute at least a fraction f of the target variance, the *floor*, and set $\rho_i^{\max} = 1 - f$. We applied the correction through an *effective loading* β_i^{eff} , the loading used in composition, which equals β_i unless $\rho_i > \rho_i^{\max}$:

$$\beta_i^{\text{eff}} = \begin{cases} \beta_i & \text{if } \rho_i \leq \rho_i^{\max} \\ \text{sign}(\beta_i) \sqrt{(1-f) \frac{\sigma_{\text{gen},i}^2}{\sigma_m^2}} & \text{if } \rho_i > \rho_i^{\max} \end{cases} \quad s_i^2 = \begin{cases} 1 - \rho_i & \text{if } \rho_i \leq \rho_i^{\max} \\ f & \text{if } \rho_i > \rho_i^{\max} \end{cases} \quad (10)$$

We call the second case of Eq. (10) the *clipped case*. In it, the correction reduced the magnitude of the loading but kept the sign of the calibrated β_i . We used $f = 0.10$, so the asset-specific draw

contributed at least 10% of the target variance for every asset under this rule (Table 1). We retained the fitted intercept α_i when clipping changed the loading. Because the scaled residual had zero sample mean, the composed mean was $\bar{g}_i = \alpha_i + \beta_i^{\text{eff}} \bar{g}_m$, where $\bar{g}_m$ is the mean of the market path. Clipping therefore changed the mean by $(\beta_i^{\text{eff}} - \beta_i) \bar{g}_m$ relative to the calibrated linear mean on that same market path. The clipped case thus kept the intercept and the target variance and set the residual share to exactly f , but changed the loading and, unless $\bar{g}_m = 0$, the mean. Online Appendix S8.1 examines the substitution of a full-return draw for the residual: it derives what the construction preserves exactly and how much of the generator’s excess kurtosis survives composition as ρ_i grows.

High- R^2 index trackers. The coefficient of determination $R_{i,\text{real}}^2$, from the OLS regression of the observed asset on observed SPY, measures the fraction of the asset’s variance explained by the market. The rule of Eq. (10) targets total generator variance, not $R_{i,\text{real}}^2$. Under the zero-covariance assumption, the composed R^2 under that rule equals ρ_i , capped at $1 - f$ by the floor. It therefore cannot exceed $1 - f$, and it matches $R_{i,\text{real}}^2$ only when $\sigma_m^2 / \sigma_{\text{gen},i}^2$ equals the ratio of the observed SPY variance to the observed asset variance. Index-tracking funds, such as the Nasdaq-100 fund QQQ and the S&P 500 growth fund SPYG, have R^2 against SPY close to or above the cap $1 - f$, so that rule could not reliably reproduce their co-movement with the market. We therefore used two branches: the rule of Eq. (10), the *variance-preserving branch*, for most assets, and a separate *R^2 -preserving branch* when $R_{i,\text{real}}^2$ was at least R_{preserve}^2 . We set $R_{\text{preserve}}^2 = 0.80$, which lies in a wide gap of the observed R^2 distribution between the index trackers and all other assets in our universe (Online Appendix S8). This branch keeps $\beta_i^{\text{eff}} = \beta_i$ and uses the same market-path variance σ_m^2 as the variance-preserving branch. We computed the residual variance required to recover $R_{i,\text{real}}^2$ under the zero-covariance assumption:

$$\sigma_{\varepsilon,\text{target}}^2 = \beta_i^2 \sigma_m^2 \cdot \frac{1 - R_{i,\text{real}}^2}{R_{i,\text{real}}^2} \quad (11)$$

We rescaled the generator draw to the target residual variance:

$$\varepsilon_i = \left(\sqrt{\frac{\sigma_{\varepsilon,\text{target}}^2}{\sigma_{\text{gen},i}^2}} \right) \tilde{g}_i^c. \quad (12)$$

This branch preserves $R_{i,\text{real}}^2$ rather than the generator variance: the composed variance becomes $\beta_i^2 \sigma_m^2 / R_{i,\text{real}}^2$. The scale factor in Eq. (12) exceeds one when the generator variance is below the target residual variance; the composed variance then exceeds the generator variance.

Complete composition rule. The complete rule has three outcomes, recorded by the branch flag b_i in Algorithm 2. Index trackers used the R^2 -preserving branch; all other assets used the variance-preserving branch, with the calibrated loading or, in the clipped case, a reduced loading. Each composed path is then $g_i = \alpha_i + \beta_i^{\text{eff}} g_m + \varepsilon_i$. We call this complete rule the *hybrid* composition, the label used in the tables and figures, and all results reported for the variance correction refer to it. Membership in the R^2 -preserving branch depends only on $R_{i,\text{real}}^2$ and is fixed for each asset. Everything else is computed per draw: because $\sigma_{\text{gen},i}^2$ is recomputed for each draw, so are s_i , ρ_i , and β_i^{eff} , and one asset can be clipped in some draws and not in others. Because the draws are independent of the market path, OLS estimates from composed paths converge, as the horizon grows, to the intercept α_i and the effective loading β_i^{eff} , which equals β_i unless the draw is clipped. The variance target and the loading recovery are exact only when the sample covariance between the draw and the market path is zero; on a finite path, they deviate by that covariance term (Online Appendix S8). Because centering and scaling fix the residual sum, every branch imposes a zero residual sum over the horizon T , which is stronger than a zero population mean. For a fixed market path and effective loading, the terminal cumulative log return therefore has no asset-specific residual uncertainty, although daily and intermediate returns still vary. In the clipped case, the effective loading depends on the variances of each draw, so it can vary between draws and produce terminal variation through the market term. Because centering and scaling use statistics of the entire draw, the construction also depends on the chosen horizon. We therefore evaluated it as a constrained finite-horizon construction for daily distributional fit and recovery of the market loading; it does not preserve cumulative residual uncertainty.

The construction links assets only through same-day market returns. A large market move can therefore affect several assets together, but the rule does not separately fit lead–lag effects or a common volatility factor in the residuals. Algorithm 2 also allows an optional rank reorder that adds residual dependence across assets; the six-method comparison did not use it. The reorder draws one joint vector per day from a copula fitted to the observed OLS residuals and permutes each asset’s residual values over days so that their ranks over time match the ranks of that asset’s copula coordinate. The reorder imposes cross-asset residual dependence and keeps each path’s values and variance, but it replaces the generator’s day-to-day ordering and with it any volatility clustering in the draw.

Algorithm 2 Hybrid single-index model (SIM) composition with variance correction.

Require: Nonconstant $g_m, \tilde{g}_i \in \mathbb{R}^T, i = 1, \dots, N$; each $\tilde{g}_i$ is independent of g_m .

Require: Parameters $(\alpha_i, \beta_i, R_{i,\text{real}}^2)$; floor $f \in (0, 1)$; threshold $R_{\text{preserve}}^2 \in (0, 1]$.

Ensure: Composed paths $g_i \in \mathbb{R}^T$ and branch flags b_i .

```

1:  $\sigma_m^2 \leftarrow \text{Var}(g_m)$ .
2: for each asset  $i = 1, \dots, N$  do
3:    $\sigma_{\text{gen},i}^2 \leftarrow \text{Var}(\tilde{g}_i)$ ;  $\tilde{g}_i^c \leftarrow \tilde{g}_i - \bar{\tilde{g}}_i$ .
4:   if  $R_{i,\text{real}}^2 \geq R_{\text{preserve}}^2$  then
5:      $v_i \leftarrow \beta_i^2 \sigma_m^2 (1 - R_{i,\text{real}}^2) / R_{i,\text{real}}^2$ .
6:      $s_i \leftarrow \sqrt{v_i / \sigma_{\text{gen},i}^2}$ ;  $\beta_i^{\text{eff}} \leftarrow \beta_i$ ;  $b_i \leftarrow \text{R2-PRESERVE}$ .
7:   else
8:      $\rho_i \leftarrow \beta_i^2 \sigma_m^2 / \sigma_{\text{gen},i}^2$ 
9:     if  $\rho_i \leq 1 - f$  then
10:       $s_i \leftarrow \sqrt{1 - \rho_i}$ ;  $\beta_i^{\text{eff}} \leftarrow \beta_i$ ;  $b_i \leftarrow \text{VARIANCE}$ .
11:    else
12:       $s_i \leftarrow \sqrt{f}$ ;  $\beta_i^{\text{eff}} \leftarrow \text{sign}(\beta_i) \sqrt{(1 - f) \sigma_{\text{gen},i}^2 / \sigma_m^2}$ .
13:       $b_i \leftarrow \text{CLIPPED}$ .
14:    end if
15:  end if
16:   $\varepsilon_i \leftarrow s_i \tilde{g}_i^c$ .
17: end for
18: Optional: jointly rank-reorder  $\{\varepsilon_i\}_{i=1}^N$ .
19: for each asset  $i = 1, \dots, N$  do
20:    $g_i \leftarrow \alpha_i + \beta_i^{\text{eff}} g_m + \varepsilon_i$ 
21: end for

```

{Eq. (4)}

Evaluation protocol. To test variance correction against alternative residual models, we compared six composition methods using a dataset of 424 United States equities and exchange-traded funds from Polygon.io (Table 3). Each ticker had 2,767 daily closing prices from January 2014 through December 2024, yielding 2,766 growth rates; this complete-case selection conditioned the analysis on survival and data coverage. We fitted the same hidden Markov generator to each asset, including SPY (Table 1; $r_f = 0$), and regressed the other 423 assets on observed SPY to estimate $\alpha_i, \beta_i, R_{i,\text{real}}^2$, and residual variance. All generators had jumps disabled to isolate composition from jump calibration. The naive and hybrid methods shared a centered full-return draw, with variance correction applied only by the hybrid method (Algorithm 2). Four alternatives generated residuals from a Gaussian distribution, a residual-fit hidden Markov model (labeled JumpHMM-on-residuals), a stationary block bootstrap, or a GARCH(1,1)- t model, and added them to $\alpha_i + \beta_i g_m$ without centering or rescaling. Comparator fitting and eligibility rules are given in Online Appendix S3.1; 30 non-stationary GARCH fits left 393 eligible assets for that method. Using observed SPY as the common market path, we ran 100 replications per asset with seed 1234 and pooled training scores across tickers. We measured factor recovery by the absolute OLS errors $|\hat{\alpha} - \alpha_i|$, $|\hat{\beta} - \beta_i|$, and $|\hat{R}^2 - R_{i,\text{real}}^2|$, and naive and hybrid variance preservation by the composed-to-generator variance ratio. Distributional scores were KS and AD pass rates, Wasserstein-1 distance, excess kurtosis, and the Hill index of absolute returns (Online Appendix S3). Because only naive and hybrid forced the residual mean to zero, a paired centering control on the common 393 assets separated this constraint from model fitting (Table S5; Online Appendix S10).

To test performance without refitting, we froze all 2014–2024 fits and evaluated 100 simulated paths per asset against the 249 growth rates observed in 2025 (Table 4). Complete holdout histories were available for 416 assets, including 386 with accepted GARCH fits. Each replication used one simulated 249-day no-jump SPY path shared across asset compositions. The correction used the observed training market variance in Eqs. (8)–(12), while each asset’s generator variance remained draw-specific. Consequently, variation in simulated market variance could move composed variance away from the generator target even at zero sample cross-covariance. Observed 2025 returns were used only for scoring. We repeated the KS, AD, Wasserstein-1, and kurtosis evaluations and measured variance for all six methods relative to observed 2025 variance. Because goodness-of-fit tests have less power on short samples, we also compared the same simulated paths with randomly selected

contiguous 249-day blocks of observed training returns as a length-matched training reference. We averaged replications within ticker before summarizing across tickers, giving each asset equal weight.

To estimate one-day Value-at-Risk (VaR) thresholds without relying on a single short path, we pooled daily log returns, Δt times the growth rates, from 5,000 separately composed 249-day paths per asset and method (Table 5). Each replication shared one simulated SPY path across assets and methods and followed the holdout centering and scaling conventions. We fixed the 95% and 99% coverage thresholds before scoring observed 2025 returns; no holdout data entered fitting or threshold calibration. These unconditional thresholds describe a uniformly selected day within the 249-day construction, retain its horizon dependence, and do not remove the zero-sum residual constraint of naive and hybrid paths. We reported mean exceedance rates and cross-ticker standard deviations descriptively, without treating dependent days or assets sharing a market as independent replications. Pool-size convergence and an independent simulation check are reported in Online Appendix S11.

Jump-enabled multi-asset comparison. To test whether the temporal benefit of the single-asset jump mechanism survived composition, we compared naive and hybrid composition under three jump settings (Table 6). Unlike the six-method comparison, which used observed SPY in training, this comparison simulated the SPY market path in both the 2,766-day training window and the 249-day holdout, so a jump setting could apply to the market generator. Jumps were disabled, enabled only in the SPY market generator, or enabled in both SPY and every asset generator. We froze the closing-price hidden Markov generators and SIM calibrations of the six-method comparison. Enabled models received the SPY settings of Table 1, $(\epsilon, \lambda) = (10^{-4}, 90)$, $p_{\text{neg}} = 0.52$, and $N_{\text{tail}} = 5$, without per-asset tuning. These settings were tuned on volume-weighted SPY prices and applied here to generators fitted to closing prices. At these settings, most paths contain no episode, especially over the 249-day holdout, so the jump effects are carried by a minority of paths. In both windows and for all three jump settings, the correction used each simulated market path’s variance and each asset draw’s variance. This differs from the six-method holdout, which fixed the market variance at its training value.

For each jump setting, naive and hybrid composition received the same asset and market draws, and one market path was shared across all assets in each replication. We generated 250 paths for each of four seeds (1234, 2345, 3456, and 4567), giving 1,000 replications per asset, setting, and method. We used a path-level version of ACF-MAE, computed on each path and then averaged across paths (Eq. (S22) in Online Appendix S3); the single-asset ACF-MAE instead averages the path ACFs before measuring the error. We used lags 1–25, the lag window of the tuning objective, with lags 1–60 as a secondary check, and repeated the marginal and variance diagnostics. The temporal scores of the single-asset and jump comparisons therefore have different estimands and cannot be compared directly. We included all paths, not only jump-active ones, in the summaries; jump-active subsets only described the mechanism (Online Appendix S9). For Monte Carlo uncertainty, we averaged each metric across tickers within each replication, which kept assets together under their shared market path. Jump settings were paired by replication, sharing the draws of any component whose jump setting did not change, and the approximate 95% confidence intervals were the mean of the 1,000 replication-level differences plus or minus 1.96 standard errors (Table S4). These intervals describe simulation uncertainty conditional on the fitted models and observed histories, not uncertainty across market regimes.

4 Results

4.1 Single-asset generator validation

The SPY returns had heavy tails and persistent absolute-return autocorrelation in both the training and holdout windows, providing two targets for generator validation (Fig. 1; Online Appendix S4). Individual raw-return correlations were small, although the Ljung–Box test detected joint serial dependence. We compared HMM-WJ with seven alternatives on the training window, using 1,000 paths of 2,766 trading days (Table 2; Fig. 3). The alternatives were independent bootstrap, Gaussian, and Laplace draws; HMM-NJ; GARCH(1,1) with Gaussian innovations; the GRU benchmark [41]; and the HSMM baseline adapted from Bulla and Bulla [11]. Both HMM variants had KS pass rates within about one percentage point of the fitted Laplace baseline but came much closer to the observed excess kurtosis, which Laplace underestimated at 3.0 against 7.7. Both also had lower Wasserstein-1 distances than Laplace, whereas Laplace had the lowest Hellinger distance among the fitted generators.

Bootstrap resampling passed every KS test while reusing the observed returns, and Gaussian sampling passed neither distribution test. The GARCH model had the lowest mean absolute error between the observed and ensemble-average absolute-return autocorrelation functions (ACF-MAE) but rarely passed the distribution tests. The GRU also had lower ACF-MAE than the HMM variants but rarely passed the distribution tests. The HSMM passed 82% of KS tests, underestimated excess kurtosis by more than one third, and had the same ACF-MAE as HMM-NJ despite its flexible state durations. A controlled emission ablation confirmed that Student- t emissions brought HMM-WJ excess kurtosis closer to the observed value than Normal emissions (Table S2). The HMM variants therefore captured heavy tails well, but no fitted generator led on every metric.

Jump episodes improved temporal fit at a small cost in marginal fit in training (Table 2; Fig. 3b). Under the counted transition matrix, every state had an expected residence time of 1–2 steps, and absolute-return autocorrelation decayed to near zero by lag 5 (Online Appendix S4.4). Calibration selected mean episode duration $\lambda = 90$ and jump probability $\epsilon = 10^{-4}$ (Table 1). About 24% of training-length HMM-WJ paths contained an episode; paths without one were equivalent to HMM-NJ (Online Appendix S4.5). Across all paths, ACF-MAE fell from 0.059 for HMM-NJ to 0.053 for HMM-WJ, with small reductions in KS and AD pass rates. The episode frequency and jump-active autocorrelation agreed with the generator calculations (Table S1; Online Appendix S4.6). The calibration objective scored only jump-active paths, so it weakly identified ϵ and selected the smallest grid value; the roughly one-quarter episode share followed from that value and the path length, rather than being a calibration target. Likewise, λ was a fitted duration, not an estimate of observed high-volatility spell lengths. Supporting sweeps showed that this tradeoff depended on both the jump-active share and the state count: increasing either improved autocorrelation fit but reduced distribution-test pass rates (Online Appendix S4.6; Online Appendix S6). The primary choice $N = 100$ balanced the training metrics, but the state-count sweep used SPY alone and did not establish a suitable resolution for other assets or shorter histories (Online Appendix S6).

The frozen HMM variants retained high distribution-test pass rates on the 249 held-out SPY returns from 2025, although the short sample limited discrimination among generators (Table 2; Online Appendix S4.5). We compared those returns with 249-day simulated paths. The KS pass rates were 96.6% for HMM-NJ and 95.4% for HMM-WJ, but weaker generators also passed more often than in the longer training comparison. Few paths contained an episode at $\epsilon = 10^{-4}$, so the holdout mainly tested the no-jump dynamics shared by the two variants (Online Appendix S4.5). The fitted Laplace baseline matched or exceeded both on KS and AD pass rates and had equal or smaller Wasserstein-1 and Hellinger distances. Its excess kurtosis of 2.8, however, remained well below the observed 6.9, whereas both HMM variants reached 6.2. Repeating HMM-WJ fitting and calibration for NVDA, JNJ, and JPM gave training KS pass rates near 99% for all three, but holdout rates ranged from 74.0% for JNJ to 97.7% for NVDA (Online Appendix S7). The single-asset evidence supported heavy-tail representation, but did not establish uniform holdout fit across assets or metrics. The six-method composition comparison used the no-jump variant to avoid per-ticker jump calibration, and a separate multi-asset comparison tested the transfer of SPY’s jump settings.

4.2 Variance-corrected multi-asset composition

We tested whether hybrid composition preserved generator variance while recovering the calibrated market loading across the 423 non-market assets of the training universe (Table 3; Fig. 4). The six-method comparison included GARCH(1,1)- t on the 393 assets with eligible fits. With observed training SPY as the market path, the index trackers QQQ and SPYG used the R^2 -preserving branch, and the other 421 assets, which we call non-tracker assets, used the variance-preserving branch without clipping (Online Appendix S8). The two trackers targeted the calibrated R^2 rather than the generator variance, so we marked them separately (Fig. 4). We paired each composed path with its uncomposed generator draw to measure the ratio of composed to generator variance directly. Across the non-tracker assets, the median of the per-ticker median ratios was 1.3171 for naive composition and 1.0001 for hybrid composition, and the hybrid ticker medians ranged from 0.9933 to 1.0072 (Fig. 4b). Individual hybrid paths still varied around the target, because the correction assumes zero covariance between the scaled asset draw and the market path, whereas a finite path has a small nonzero sample covariance. Across non-tracker hybrid paths, the median absolute departure of the variance ratio from one was 1.12%, and its 95th percentile was 3.41% (Fig. 4b). The correlation between generator draws and the observed market path averaged near zero for every asset (Online Appendix S1), which supported the zero-covariance assumption on average but not on each path.

The methods differed more in distributional fit than in factor recovery (Table 3; Fig. S1). All six methods had median absolute β errors between 0.017 and 0.022. Naive and hybrid composition had a median absolute intercept error of 0.002 yr^{-1} , an order of magnitude below the other methods, because their centered residual paths reproduced the observed training asset means exactly when combined with observed SPY without clipping. Refitting OLS left an intercept error equal to the loading error times the market mean. The small intercept errors thus followed from centering, not from predicting asset means. Gaussian SIM had the lowest median R^2 error but almost never passed the distribution tests, and its median excess kurtosis was an order of magnitude below the observed median of about 13. Hybrid composition passed 73.6% of KS comparisons, against 7.1% for naive composition, and its advantage held across the calibrated β range. Its own pass rate nonetheless fell from 87.6% in the lowest β quartile to 65.9% in the highest (Fig. 4a; Table S3). A larger market variance share may help explain this trend by diluting the asset generator’s shape (Online Appendix S8.1). Hybrid composition retained heavy tails, with median excess kurtosis of 7.2 and a median Hill estimate of 0.37, reported as the reciprocal tail index so that larger values indicate heavier tails (Fig. S1). The excess-kurtosis shortfall was also present under naive composition, whose median was similar. Hybrid composition’s median R^2 error fell between those of the naive and Gaussian methods, because its variance-preserving branch targeted generator variance rather than observed R^2 .

Direct residual fitting was competitive with reuse, and controlling for residual centering favored the residual-fit HMM and block bootstrap (Tables 3 and S5). Under each method’s native mean treatment, JumpHMM-on-residuals passed 75.8% of KS comparisons, slightly above hybrid composition; block bootstrap passed 73.3% and GARCH(1,1)- t passed 67.4%. The residual-fit HMM and block bootstrap had slightly lower Wasserstein distances than hybrid composition. The residual-fit HMM also closely matched hybrid composition in excess kurtosis and Hill estimate, whereas block bootstrap and GARCH produced lighter tails. Only naive and hybrid composition centered their residual draws, so we repeated the comparison after centering all six methods on the common 393-asset set (Table S5). The hybrid KS pass rate stayed at 74.4% because its paths were already centered; the JumpHMM-on-residuals rate rose from 75.8% to 78.4%, and block bootstrap rose from 73.5% to 76.7%. Both residual methods also had higher AD pass rates and lower Wasserstein distances than hybrid composition after centering. The control brought every method’s median intercept error to 0.002 yr^{-1} while leaving variance, recovered loading, R^2 , and excess kurtosis unchanged. A separate training diagnostic found that emission fallback rules also disadvantaged the full-return methods on 39 assets but affected none of the residual-fit models (Table S6; Online Appendix S12). Using empirical scales in their populated zero-return states implied an aggregate hybrid KS gain of about one percentage point, less than the gap to JumpHMM-on-residuals. The main comparisons retained the original rule because this alternative had no holdout validation (Online Appendix S12). Together, these checks supported variance correction over naive reuse without a second fit, but did not establish an advantage over direct residual fitting.

4.3 Holdout performance and VaR coverage

To test out-of-sample generalization without refitting or look-ahead bias, we froze the fitted models and SIM parameters before evaluating them against 416 complete asset histories from 2025 (Table 4). Hybrid composition reached an 87.0% mean cross-ticker KS pass rate, against 83.5% for naive composition. Its median ratio of synthetic to observed 2025 variance was 0.97, whereas naive composition inflated that ratio to 1.29. The JumpHMM-on-residuals method reached an 86.2% KS pass rate and a slightly lower median W_1 than hybrid composition. As in training, these holdout comparisons used each method’s native mean treatment, and no common-centering control was run on the holdout. Higher holdout pass rates did not by themselves establish better generation: all methods passed more often than in training, and the gap between hybrid and naive composition narrowed (Tables 3 and 4). For every method, pass rates against matched-length 249-day training blocks lay between the full-length training and 2025 rates, consistent with lower test power in shorter samples contributing to the rise. Those blocks also used simulated rather than observed SPY, so the comparison did not isolate sample length or fully explain the 2025 increase. Nor did improvement hold for every asset: about three quarters of hybrid tickers passed more often in 2025 than against their matched training blocks and one quarter passed less often, and every method retained a lower tail of weakly fitted tickers (Fig. 5).

To test whether the holdout improvement over naive composition extended to reliable tail thresholds, we estimated per-ticker one-day left-tail Value-at-Risk (VaR) thresholds from 5,000 separate 249-day

paths and counted exceedances on the observed 2025 histories (Table 5). The coverage level $\alpha = 0.95$ has a nominal exceedance rate of $1 - \alpha = 5\%$ and gave each asset about 12 expected exceedances. At that level, hybrid composition had a mean exceedance rate of 5.48%, closer to nominal than the 4.04% of naive composition. At $\alpha = 0.99$, the hybrid rate of 1.12% and the naive rate of 0.88% lay equally close to the 1% nominal rate on opposite sides. The JumpHMM-on-residuals method had rates of 5.62% and 1.16%, close to hybrid composition, and Gaussian SIM had the largest 99% rate at 1.72%. Doubling the threshold pool from 2,500 to 5,000 paths changed every method’s mean exceedance rate by less than 0.006 percentage points at either coverage level (Online Appendix S11). The advantage of hybrid over naive composition thus appeared at the 95% level but not at the 99% level. Neither comparison established a ranking, because each asset contributed few exceedances, only about 2–3 expected at the 99% level, and all assets shared one market period, so their exceedances were not independent. The hybrid mean exceedance rates were above nominal at both coverage levels, and this descriptive check could not confirm threshold calibration. The cross-asset standard deviations of the exceedance rates described how realized rates varied among assets; they did not test miscalibration or validate coverage in other periods.

4.4 Jump-enabled multi-asset composition

Transferring SPY’s jump settings improved temporal fit in training but worsened it in the 2025 holdout (Table 6, where hybrid composition is labeled Corrected). We compared jumps disabled, market-only jumps, and market-plus-asset jumps under naive and hybrid composition, without per-asset tuning. This experiment simulated the market in both windows and used each market path’s variance in the correction, so its baseline differed from the six-method comparisons. Its ACF-MAE was calculated for each path and then averaged, unlike the single-asset error calculated from the ensemble-average autocorrelation. Under hybrid composition, market-only jumps reduced the training 25-lag ACF-MAE by 5.3%; the 95% Monte Carlo interval excluded zero. The KS pass rate fell by 0.3 percentage points, with an interval that included zero (Table S4). Adding asset jumps reduced ACF-MAE by 14.6% relative to no jumps but lowered the KS pass rate from 73.9% to 61.7%, a much larger marginal-fit cost than for SPY, whose settings were tuned. In the holdout, market-only and market-plus-asset jumps instead raised the 25-lag ACF-MAE by 2.7% and 6.9%. Both 95% Monte Carlo intervals excluded zero, and the 60-lag errors also rose (Tables 6 and S4). Holdout KS pass rates changed little with market-only jumps; with both market and asset jumps, they fell by about 1.5 percentage points relative to no jumps. Across all settings and both windows, the mean ratio of composed to generator variance under hybrid composition remained within 0.05% of one. This aggregate included the trackers, whose branch targeted R^2 rather than generator variance, and did not establish preservation for every asset. Only 2.2% of simulated one-year market paths contained an episode (Online Appendix S9), limiting evidence about market jumps; the single observed holdout year also could not establish performance in other market periods.

4.5 Sensitivity analyses

We examined how the branch-selection threshold R^2_{preserve} assigned assets to branches in the observed universe and whether any value of the variance floor f triggered clipping (Online Appendix S8). The R^2 -preserving branch applied only to QQQ and SPYG, whose hybrid compositions passed every KS test in training. The highest- R^2 asset outside these trackers, the individual stock BLK, fell about 0.16 below the 0.80 threshold, so the assignment did not depend on a narrow margin. Across the explored thresholds from 0.70 to 0.90 at the default floor, only the QQQ assignment changed, moving to the variance-preserving branch at 0.90. At the default threshold, no value of f from 0.05 to 0.30 caused any asset to be clipped. The empirical evaluation of the R^2 -preserving branch was therefore limited to two assets, and the observed market variance never activated clipping.

A synthetic Gaussian check supplemented the two real assets using the R^2 -preserving branch: across the tested grid, median recovered loadings and R^2 differed from their supplied targets by at most 0.0011 and 0.0017, respectively (Online Appendix S8). Each reference series combined the observed training SPY path with an independent Gaussian residual whose variance gave the target R^2 under Eq. (11). The composer received the true loading and R^2 , a second independent Gaussian draw, and the target residual variance, which made the residual scale in Eq. (12) exactly one. Every composed series passed the KS comparison with its reference, but their shared SPY path made the samples dependent, so the pass rates were descriptive rather than calibrated tests. The grid checked

implementation and finite-sample accuracy under this restricted construction; it did not exercise full-return HMM fitting, non-unit residual scaling, or simulated market paths.

Increasing market volatility activated clipping for most assets, although no path clipped under the observed market variance (Online Appendix S8). A larger market variance raises the market loading ratio ρ_i , the market’s share of the target variance; on the variance-preserving branch, clipping begins when $\rho_i > 1 - f$. To measure when clipping activates, we multiplied deviations of the observed training SPY path from its mean by $\gamma \in \{1, 2, 3\}$, which preserved the market mean and multiplied its standard deviation by γ . We then recomposed all 423 assets with the scaled path’s variance in the correction, holding the fitted marginals, intercepts, and calibrated loadings fixed (Online Appendix S8). Clipping applied to no composed path at $\gamma = 1$ and to 76.4% and 95.2% of composed paths at $\gamma = 2$ and 3. Because clipped paths retained their fitted intercepts while the market mean stayed unchanged and nonzero, their means shifted by $(\beta_i^{\text{eff}} - \beta_i)\bar{g}_m$ by construction. The stress test therefore characterized when clipping activated and how it moved asset means; it did not evaluate fit under the scaled markets.

5 Discussion

Synthetic generators of equity returns should reproduce three stylized facts: heavy tails, weak autocorrelation in raw returns, and volatility clustering (Fig. 1). We used heavy-tailed hidden Markov generators with optional jump episodes to represent these features, then examined their reuse in a multi-asset model with a shared market path. We developed a correction that centers and rescales each generator’s draws to avoid counting market variance twice, without refitting to regression residuals (Fig. 4; Table 3). Training and 2025 holdout comparisons tested distributional fit and whether single-asset improvements in volatility clustering survived composition.

The correction’s practical value was avoiding a separate residual fit while improving variance and distributional agreement over naive composition (Fig. 4; Table 3). The corrected method passed 73.6% of full-length training KS comparisons and retained heavy tails. On the 2025 holdout, it raised the mean cross-ticker KS pass rate from 83.5% under centered naive composition to 87.0% and brought the median ratio of synthetic to observed variance to 0.97 (Table 4). The improvement therefore persisted beyond the fitting period. Direct residual fitting remained competitive: JumpHMM-on-residuals had a slightly higher pass rate in training and a slightly lower rate in the holdout. When all methods’ residual draws were centered over the same training horizon on the common asset set, JumpHMM-on-residuals and block bootstrap both outperformed the corrected method on distribution-test pass rates and Wasserstein distance (Table S5). Before centering was matched, the comparison with residual-fit methods therefore partly reflected different constraints on simulated residual means. For corrected composition, some assets had lower pass rates in the holdout than against matched-length training blocks. Reuse thus offered a way to improve on naive composition without refitting, but did not establish a distributional advantage over fitting the residuals themselves.

The jump comparison showed that improving the single-asset generator did not automatically improve the composed paths (Tables 2 and 6). On SPY, the generator with jumps reduced absolute-return autocorrelation error relative to its no-jump counterpart while retaining high distributional pass rates. Other generators achieved lower autocorrelation error or higher pass rates, so temporal and marginal fit still required separate assessment. With multi-asset composition, market-only jumps improved training temporal fit with little change in the KS pass rate, whereas adding asset-level episodes produced a larger temporal improvement at a substantial marginal-fit cost. Both settings increased autocorrelation error in 2025, despite the mean composed-to-generator variance ratio remaining near one (Table 6). Variance control therefore did not ensure that the transferred temporal behavior matched the data. These tests transferred one SPY calibration from volume-weighted average prices to closing-price models. The asset episodes also came from full-return models and were not identified separately as idiosyncratic events. Separate calibrations for NVDA, JNJ, and JPM had strong in-sample fit, but three assets did not establish a general calibration rule (Online Appendix S7). Per-asset tuning or distinct shared and asset-specific episode models could change the tradeoff, but neither was tested in the composition comparison.

Preserving total variance did not preserve the complete return distribution, and corrected fit varied with market exposure (Fig. 4; Table S3). Corrected KS pass rates fell from 87.6% in the lowest β quartile to 65.9% in the highest, consistent with a larger market contribution diluting the asset

generator’s shape. The correction accounted for variance supplied by the market, but combining two independent return distributions still changed the shape of the composed returns. Clipping, the reduction of the market loading to retain some residual variance, was unnecessary at observed market variance but activated for most assets when market volatility was doubled or tripled (Online Appendix S8). That stress transformation preserved the market mean. Reducing the loading while retaining the fitted intercept changed the asset mean by $(\beta_i^{\text{eff}} - \beta_i)\bar{g}_m$, where $\bar{g}_m$ is the market mean. The clipped branch therefore targeted total variance while retaining a minimum residual contribution, at the cost of changing the calibrated loading and mean. The stress test did not establish realistic return distributions under the scaled markets. Variance correction therefore required separate checks of distributional shape and calibrated market exposure.

The correction supported daily-return comparisons, but broader simulation uses require additional modeling and validation. The alternative correction for market trackers targeted their calibrated R^2 , the fraction of return variance explained by the market. Only two observed assets tested it; a Gaussian simulation checked its formula without fitting full-return generators (Online Appendix S8). Allowing states whose training observations were identical to generate nearly constant returns improved training fit (Table S6). For those states, the main comparisons retained emissions scaled by the asset’s full-series spread, and the alternative still needs holdout validation. Improved marginal fit did not establish reliable tail coverage: the corrected method and JumpHMM-on-residuals had pooled-threshold one-day left-tail 99% VaR exceedance rates of 1.12% and 1.16%, against a nominal 1% (Table 5). More simulated paths improved threshold precision without supplying more observed extreme events; the 249-day holdout was too short for a precise ranking and covered only one shared market period. Serial dependence also limited the interpretation of KS and AD pass rates, whose tests assume independent observations. Variance accounting also assumed independent asset and market draws; nonzero covariance would require an additional cross-term. For portfolio applications, a shared market path did not supply the sector and style dependence omitted by the evaluated independent residual draws (Algorithm 2; Online Appendix S2). Omitting positive residual covariance can overstate the diversification return from periodic rebalancing [42, 13, 43], including for residual-fit baselines that draw residuals independently. A synchronized multivariate block bootstrap, residual factor model, or copula could address that omission, but the resulting dependence needs direct evaluation. Per-path centering imposed a separate limitation: each residual sum was zero at the chosen horizon, leaving no residual uncertainty in terminal cumulative log returns conditional on the market path and effective loading (Online Appendix S8). Portfolio and cumulative-risk applications therefore require both a joint residual model and a construction that retains cumulative residual variation.

6 Conclusion

We developed a variance-corrected single-index method that centers and rescales full-return draws for reuse without counting market variance twice or fitting separate residual generators (Fig. 4; Table 3). The method retained heavy tails and improved distributional fit over centered naive composition in training and the 2025 holdout (Table 4), but did not establish an advantage over direct residual fitting. Transferring SPY’s jump settings improved temporal fit in training but worsened it in the holdout (Table 6), showing that single-asset temporal gains did not transfer reliably. These findings support reuse for daily-return comparisons, without establishing calibrated tail coverage (Table 5) or validating broader risk applications. Independent residual draws omitted cross-asset dependence, and per-path centering removed residual uncertainty from terminal cumulative log returns conditional on the market path and the loading used in composition. Portfolio and cumulative-risk applications therefore require a joint residual model and a construction that retains cumulative residual variation.

Acknowledgments

The authors thank the eCornell artificial intelligence (AI) in Finance program participants for discussions that motivated this work, and Polygon.io for access to the 2014 to 2024 United States equity and exchange-traded-fund daily price histories used in the experiments. Computations were run on a single laptop; no shared-resource allocation was required.

Author contributions. A.A. designed the hybrid hidden Markov marginal generator, performed the single-asset experiments and validation analyses, and contributed to the manuscript. J.D.V.

designed the variance-corrected single-index composition, performed the multi-asset experiments and downstream Value-at-Risk validation, released the code, and contributed to the manuscript.

Competing interests. The authors declare no competing interests.

Code and data availability. The experiment scripts, evaluation code (six-method comparison and Value-at-Risk coverage check), cached inputs and result summaries, and instructions for regenerating the fitted per-asset models are provided in the paper repository (<https://github.com/varnerlab/HMM-w-jumps-paper>); the underlying model-fitting library is released separately as JumpHMM.jl (<https://github.com/varnerlab/JumpHMM.jl>), pinned as a dependency of the experiment code.

Generative artificial intelligence use. During the preparation of this work, the authors used OpenAI Codex to assist with language editing, consistency checks, LaTeX formatting, and the implementation and checking of experiment code. The authors reviewed and edited the assisted work and take full responsibility for the content of the publication.

References

- [1] Samuel A. Assefa, Danial Dervovic, Mahmoud Mahfouz, Robert E. Tillman, Prashant Reddy, and Manuela Veloso. Generating synthetic data in finance: Opportunities, challenges and pitfalls. In *Proceedings of the First ACM International Conference on AI in Finance*, pages 1–8, 2020. doi: 10.1145/3383455.3422554.
- [2] James Jordon, Lukasz Szpruch, Florimond Houssiau, Mirko Bottarelli, Giovanni Cherubin, Carsten Maple, Samuel N. Cohen, and Adrian Weller. Synthetic data: What, why and how? *arXiv preprint arXiv:2205.03257*, 2022.
- [3] William F. Sharpe. A simplified model for portfolio analysis. *Management Science*, 9(2): 277–293, 1963. doi: 10.1287/mnsc.9.2.277.
- [4] Stephen A. Ross. The arbitrage theory of capital asset pricing. *Journal of Economic Theory*, 13(3):341–360, 1976. doi: 10.1016/0022-0531(76)90046-6.
- [5] Eugene F. Fama and Kenneth R. French. Common risk factors in the returns on stocks and bonds. *Journal of Financial Economics*, 33(1):3–56, 1993. doi: 10.1016/0304-405X(93)90023-5.
- [6] Benoit Mandelbrot. The variation of certain speculative prices. *The Journal of Business*, 36(4): 394–419, 1963.
- [7] R. Cont. Empirical properties of asset returns: Stylized facts and statistical issues. *Quantitative Finance*, 1(2):223–236, 2001. doi: 10.1080/713665670.
- [8] Michael Stenger, André Bauer, Thomas Prantl, Robert Leppich, Nathaniel Hudson, Kyle Chard, Ian Foster, and Samuel Kounev. Thinking in categories: A survey on assessing the quality for time series synthesis. *Journal of Data and Information Quality*, 16(2):1–32, 2024. doi: 10.1145/3666006.
- [9] L. Rabiner and B. Juang. An introduction to hidden Markov models. *IEEE ASSP Magazine*, 3(1):4–16, 1986. doi: 10.1109/MASSP.1986.1165342.
- [10] Tobias Rydén, Timo Teräsvirta, and Stefan Åsbrink. Stylized facts of daily return series and the hidden Markov model. *Journal of Applied Econometrics*, 13(3):217–244, 1998. doi: 10.1002/(SICI)1099-1255(199805/06)13:3<217::AID-JAE476>3.0.CO;2-V.
- [11] Jan Bulla and Ingo Bulla. Stylized facts of financial time series and hidden semi-Markov models. *Computational Statistics & Data Analysis*, 51(4):2192–2209, 2006. doi: 10.1016/j.csda.2006.07.021.
- [12] Paul Embrechts, Alexander J. McNeil, and Daniel Straumann. Correlation and dependence in risk management: Properties and pitfalls. In *Risk Management: Value at Risk and Beyond*, pages 176–223. Cambridge University Press, 2002. doi: 10.1017/CBO9780511615337.008.
- [13] Paul Bouchev, Vassilii Nemtchinov, and Ting-Kam Leonard Wong. Volatility harvesting in theory and practice. *Journal of Wealth Management*, 18(3):89–100, 2015. doi: 10.3905/jwm.2015.18.3.089.
- [14] Robert F. Engle. Autoregressive conditional heteroscedasticity with estimates of the variance of United Kingdom inflation. *Econometrica*, 50(4):987–1007, 1982.
- [15] Tim Bollerslev. Generalized autoregressive conditional heteroskedasticity. *Journal of Econometrics*, 31(3):307–327, 1986. doi: 10.1016/0304-4076(86)90063-1.
- [16] Elias M. Stein and Jeremy C. Stein. Stock price distributions with stochastic volatility: An analytic approach. *The Review of Financial Studies*, 4(4):727–752, 1991.
- [17] Steven L. Heston. A closed-form solution for options with stochastic volatility with applications to bond and currency options. *The Review of Financial Studies*, 6(2):327–343, 1993. doi: 10.1093/rfs/6.2.327.
- [18] Sangjoon Kim, Neil Shephard, and Siddhartha Chib. Stochastic volatility: Likelihood inference and comparison with ARCH models. *The Review of Economic Studies*, 65(3):361–393, 1998.

- [19] Robert C. Merton. Option pricing when underlying stock returns are discontinuous. *Journal of Financial Economics*, 3(1-2):125–144, 1976. doi: 10.1016/0304-405X(76)90022-2.
- [20] S. G. Kou. A jump-diffusion model for option pricing. *Management Science*, 48(8):1086–1101, 2002. doi: 10.1287/mnsc.48.8.1086.166.
- [21] James D. Hamilton and Raul Susmel. Autoregressive conditional heteroskedasticity and changes in regime. *Journal of Econometrics*, 64(1–2):307–333, 1994. doi: 10.1016/0304-4076(94)90067-1.
- [22] Franc Klaassen. Improving GARCH volatility forecasts with regime-switching GARCH. *Empirical Economics*, 27(2):363–394, 2002. doi: 10.1007/s001810100100.
- [23] James D. Hamilton. A new approach to the economic analysis of nonstationary time series and the business cycle. *Econometrica*, 57(2):357–384, 1989. doi: 10.2307/1912559.
- [24] Magnus Wiese, Robert Knobloch, Ralf Korn, and Peter Kretschmer. Quant GANs: Deep generation of financial time series. *Quantitative Finance*, 20(9):1419–1440, 2020. doi: 10.1080/14697688.2020.1730426.
- [25] Hao Ni, Lukasz Szpruch, Marc Sabate-Vidales, Baoren Xiao, Magnus Wiese, and Shujian Liao. Sig-wasserstein GANs for time series generation. In *Proceedings of the Second ACM International Conference on AI in Finance*, pages 1–8. ACM, 2021. doi: 10.1145/3490354.3494393.
- [26] Shuntaro Takahashi, Yu Chen, and Kumiko Tanaka-Ishii. Modeling financial time-series with generative adversarial networks. *Physica A: Statistical Mechanics and Its Applications*, 527: 121261, 2019. doi: 10.1016/j.physa.2019.121261.
- [27] Jinsung Yoon, Daniel Jarrett, and Mihaela van der Schaar. Time-series generative adversarial networks. In *Advances in Neural Information Processing Systems*, volume 32, pages 5509–5519, 2019.
- [28] Sohyeon Kwon and Yongjae Lee. Can GANs learn the stylized facts of financial time series? In *Proceedings of the 5th ACM International Conference on AI in Finance*, pages 126–133, 2024. doi: 10.1145/3677052.3698661.
- [29] Robert Engle. Dynamic conditional correlation: A simple class of multivariate generalized autoregressive conditional heteroskedasticity models. *Journal of Business & Economic Statistics*, 20(3):339–350, 2002. doi: 10.1198/073500102288618487.
- [30] Luc Bauwens, Sébastien Laurent, and Jeroen V. K. Rombouts. Multivariate GARCH models: A survey. *Journal of Applied Econometrics*, 21(1):79–109, 2006. doi: 10.1002/jae.842.
- [31] Andrew J. Patton. Modelling asymmetric exchange rate dependence. *International Economic Review*, 47(2):527–556, 2006. doi: 10.1111/j.1468-2354.2006.00387.x.
- [32] Kjersti Aas, Claudia Czado, Arnoldo Frigessi, and Henrik Bakken. Pair-copula constructions of multiple dependence. *Insurance: Mathematics and Economics*, 44(2):182–198, 2009.
- [33] José G. Dias, Jeroen K. Vermunt, and Sofia Ramos. Mixture hidden Markov models in finance research. In *Advances in Data Analysis, Data Handling and Business Intelligence*, pages 451–459. Springer, 2010. doi: 10.1007/978-3-642-01044-6_41.
- [34] Matteo Rizzato, Julien Wallart, Christophe Geissler, Nicolas Morizet, and Noureddine Boumlaik. Generative adversarial networks applied to synthetic financial scenarios generation. *Physica A: Statistical Mechanics and its Applications*, 623:128899, 2023. doi: 10.1016/j.physa.2023.128899.
- [35] Samuel Kotz, Tomasz J. Kozubowski, and Krzysztof Podgórski. *The Laplace Distribution and Generalizations: A Revisit with Applications to Communications, Economics, Engineering, and Finance*. Birkhauser, 2001. ISBN 9780817641665.
- [36] David Toth and Bruce Jones. Against the norm: Modeling daily stock returns with the Laplace distribution. *arXiv preprint arXiv:1906.10325*, 2019.

- [37] Jeff A. Bilmes. A gentle tutorial of the EM algorithm and its application to parameter estimation for Gaussian mixture and hidden Markov models. Technical Report TR-97-021, International Computer Science Institute, 1998.
- [38] James D. Hamilton. Regime switching models. *The New Palgrave Dictionary of Economics*, pages 11421–11426, 2018. doi: 10.1057/978-1-349-95189-5_2459.
- [39] Charles M. Grinstead and J. Laurie Snell. *Introduction to Probability*. American Mathematical Society, 1997.
- [40] Paul Glasserman. *Monte Carlo Methods in Financial Engineering*. Springer, 2003. doi: 10.1007/978-0-387-21617-1.
- [41] Kyunghyun Cho, Bart van Merriënboer, Caglar Gulcehre, Dzmitry Bahdanau, Fethi Bougares, Holger Schwenk, and Yoshua Bengio. Learning phrase representations using RNN encoder-decoder for statistical machine translation. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1724–1734. Association for Computational Linguistics, 2014. doi: 10.3115/v1/D14-1179.
- [42] David G. Booth and Eugene F. Fama. Diversification returns and asset contributions. *Financial Analysts Journal*, 48(3):26–32, 1992. doi: 10.2469/faj.v48.n3.26.
- [43] Harry M. Markowitz. Investment for the long run: New evidence for an old rule. *Journal of Finance*, 31(5):1273–1286, 1976. doi: 10.1111/j.1540-6261.1976.tb03213.x.
- [44] A. N. Kolmogorov. Sulla determinazione empirica di una legge di distribuzione. *Giornale dell’Istituto Italiano degli Attuari*, 4:83–91, 1933.
- [45] N. Smirnov. Table for estimating the goodness of fit of empirical distributions. *The Annals of Mathematical Statistics*, 19(2):279–281, 1948.
- [46] Theodore W. Anderson and Donald A. Darling. Asymptotic theory of certain “goodness of fit” criteria based on stochastic processes. *The Annals of Mathematical Statistics*, 23(2):193–212, 1952.
- [47] Dimitris N. Politis and Joseph P. Romano. The stationary bootstrap. *Journal of the American Statistical Association*, 89(428):1303–1313, 1994. doi: 10.1080/01621459.1994.10476870.

Tables

Table 1: **Hidden Markov model with jumps (HMM-WJ) and single-index model (SIM) composition hyperparameters.** Values used for the main SPY analysis, explored ranges, and locations of sensitivity checks. For the primary six-method SIM comparison, we set $\epsilon = 0$ instead of the SPY value. The separate jump-enabled comparison transferred the listed SPY settings to enabled models. The cross-asset validation used per-ticker (ϵ^*, λ^*) values for NVDA, JNJ, and JPM (Online Appendix S7).

Symbol	Description	SPY value	Explored range
<i>State partition and emission</i>			
N	Laplace-quantile states	100	$\{30, \dots, 200\}$, Online Appendix S6
ν	Student- t emission degrees of freedom	5	$\{3, \dots, 30, \infty\}$
<i>Jump-duration override</i>			
ϵ	jump probability per step	10^{-4}	$[10^{-4}, 2.5 \times 10^{-2}]$, Eq. (3)
λ	mean jump-episode duration (steps)	90	$[10, 160]$, Eq. (3)
p_{neg}	probability a jump targets $\mathcal{S}_-$	0.52	fixed
N_{tail}	quantile states per tail set	5	fixed (at $N = 100$)
w_κ	kurtosis-penalty weight, Eq. (3)	0.20	fixed
L	autocorrelation lag window, Eq. (3)	25 days	fixed
<i>SIM composition</i>			
f	idiosyncratic variance floor	0.10	$\{0.05, \dots, 0.30\}$
R_{preserve}^2	branch-selection threshold	0.80	$\{0.70, \dots, 0.90\}$

Table 2: **In-sample and out-of-sample model comparison for SPY.** Results summarize 1,000 simulated paths. Values in parentheses are Monte Carlo standard errors conditional on the fitted model and observed history, and bold entries are best among the fitted generative models within each panel; the empirical bootstrap is excluded from this highlighting. Metric definitions and standard-error calculations are given in Online Appendix S3.

Model	KS (%)	AD (%)	κ	ACF-MAE	Coverage (%)	W_1	Hellinger
<i>In sample: 2014–2024 (2,766 days; observed $\kappa = 7.715$)</i>							
Bootstrap	100.0 (<0.1)	99.7 (0.2)	7.6 (0.08)	0.060 (<0.001)	100.0 (<0.1)	0.062 (0.001)	0.042 (<0.001)
Gaussian	0.0 (<0.1)	0.0 (<0.1)	−0.0 (<0.01)	0.060 (<0.001)	13.1 (0.1)	0.399 (0.001)	0.148 (<0.001)
Laplace	98.4 (0.4)	96.8 (0.6)	3.0 (0.02)	0.060 (<0.001)	78.8 (1.0)	0.119 (0.001)	0.069 (<0.001)
GARCH(1,1)	5.5 (0.7)	1.9 (0.4)	8.2 (0.37)	0.031 (0.001)	29.3 (1.4)	0.304 (0.006)	0.100 (0.001)
GRU	0.6 (0.2)	0.2 (0.1)	5.7 (0.16)	0.036 (<0.001)	17.2 (0.5)	0.421 (0.003)	0.134 (<0.001)
HSMM	82.0 (1.2)	42.5 (1.6)	4.8 (0.08)	0.059 (<0.001)	68.7 (1.1)	0.176 (0.001)	0.113 (<0.001)
HMM-NJ	99.3 (0.3)	98.2 (0.4)	8.1 (0.14)	0.059 (<0.001)	100.0 (<0.1)	0.081 (0.001)	0.072 (<0.001)
HMM-WJ	98.3 (0.4)	94.8 (0.7)	7.5 (0.09)	0.053 (<0.001)	100.0 (<0.1)	0.097 (0.001)	0.074 (<0.001)
<i>Out of sample: 2025 (249 days; observed $\kappa = 6.867$)</i>							
Bootstrap	97.4 (0.5)	98.5 (0.4)	6.0 (0.18)	0.043 (<0.001)	100.0 (<0.1)	0.232 (0.002)	0.205 (0.001)
Gaussian	62.2 (1.5)	46.3 (1.6)	−0.0 (<0.01)	0.043 (<0.001)	36.4 (1.9)	0.452 (0.002)	0.235 (0.001)
Laplace	96.7 (0.6)	98.1 (0.4)	2.8 (0.05)	0.043 (<0.001)	99.0 (0.4)	0.242 (0.002)	0.207 (0.001)
GARCH(1,1)	80.3 (1.3)	72.0 (1.4)	1.6 (0.07)	0.026 (<0.001)	96.0 (1.3)	0.507 (0.018)	0.232 (0.001)
GRU	71.8 (1.4)	44.8 (1.6)	2.9 (0.10)	0.033 (<0.001)	77.8 (2.9)	0.488 (0.005)	0.240 (0.001)
HSMM	96.2 (0.6)	96.7 (0.6)	4.1 (0.13)	0.042 (<0.001)	100.0 (0.2)	0.287 (0.002)	0.239 (0.001)
HMM-NJ	96.6 (0.6)	96.1 (0.6)	6.2 (0.15)	0.041 (<0.001)	100.0 (<0.1)	0.259 (0.003)	0.207 (0.001)
HMM-WJ	95.4 (0.7)	95.3 (0.7)	6.2 (0.15)	0.040 (<0.001)	100.0 (<0.1)	0.275 (0.005)	0.210 (0.001)

Model abbreviations are generalized autoregressive conditional heteroskedasticity (GARCH), gated recurrent unit (GRU), hidden semi-Markov model (HSMM), hidden Markov model with no jumps (HMM-NJ), and hidden Markov model with jumps (HMM-WJ). Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) report pass rates at $\alpha = 0.05$; coverage is the fraction of the 99 observed quantiles at levels $0.01, \dots, 0.99$ inside their pointwise synthetic 90% envelopes. κ is simulated excess kurtosis. Mean absolute error in the autocorrelation function (ACF-MAE) compares the observed ACF of $|G_t|$ with the mean ACF over paths, using lags 1–252 in training and 1–248 in the holdout. Larger values are preferred for KS, AD, and coverage; smaller values are preferred for ACF-MAE, W_1 , and Hellinger distance; κ is compared with the observed value.

Table 3: **Aggregate training scorecard with 100 replications per ticker.** Errors, distances, and tail metrics are medians per method. Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) pass fractions are pooled across replications. $|\hat{\alpha} - \alpha|$, $|\hat{\beta} - \beta|$, and $|\hat{R}^2 - R_{\text{real}}^2|$: absolute deviation between ordinary least-squares (OLS) recovery and calibration (intercept error has units of yr^{-1}). KS pass and AD pass: fraction of replications whose two-sample test against the real marginal exceeds $p = 0.05$. W_1 : Wasserstein-1 distance to the real marginal. κ : sample excess kurtosis. Hill: tail-index estimate on the upper 5% of $|g|$. SIM denotes the single-index model, and GARCH denotes generalized autoregressive conditional heteroskedasticity. The GARCH method covered 393 non-market tickers; the other five methods covered 423.

Method	$ \hat{\alpha} - \alpha $	$ \hat{\beta} - \beta $	$ \hat{R}^2 - R_{\text{real}}^2 $	KS pass (%)	AD pass (%)	W_1	κ	Hill
Naive	0.002	0.022	0.087	7.1	3.5	0.700	7.767	0.369
Gaussian SIM	0.048	0.017	0.008	0.6	0.5	0.682	1.427	0.217
Hybrid	0.002	0.018	0.021	73.6	64.6	0.249	7.165	0.365
JumpHMM-on-residuals	0.049	0.018	0.015	75.8	70.7	0.232	7.262	0.365
Block bootstrap	0.042	0.017	0.020	73.3	66.8	0.232	6.675	0.330
GARCH(1,1)- t	0.047	0.017	0.036	67.4	61.4	0.267	6.069	0.317

Table 4: **Frozen-parameter multi-asset evaluation on the 2025 holdout.** Results cover 416 non-market tickers and 100 replications per ticker; generalized autoregressive conditional heteroskedasticity (GARCH) covers 386 tickers. Pass rates are first averaged within ticker and then across tickers. The *matched in-sample (IS)* columns compare each synthetic path with a randomly selected contiguous 249-day block from the 2014–2024 training history, matching the holdout sample length. W_1 and the variance ratio are medians across ticker-level medians; the variance ratio is synthetic variance divided by observed 2025 variance. The hybrid correction used the training-period market variance and each simulated asset draw’s variance.

Method	KS pass (%)		AD pass (%)		W_1 (2025)	variance ratio
	matched IS	2025	matched IS	2025		
Naive	69.4	83.5	54.8	71.6	0.877	1.29
Gaussian SIM	57.4	73.9	44.9	64.6	0.866	0.97
Hybrid	78.8	87.0	66.2	79.7	0.716	0.97
JumpHMM-on-residuals	77.9	86.2	65.6	80.1	0.708	0.98
Block bootstrap	76.3	84.0	64.0	76.5	0.715	0.90
GARCH(1,1)- t	74.5	82.6	62.6	75.0	0.733	0.91

Table 5: **Out-of-sample per-ticker one-day left-tail Value-at-Risk coverage across the six composition methods.** For each asset and coverage level α , one VaR threshold was estimated from 1,245,000 daily log returns pooled across 5,000 separate 249-day paths with frozen parameters. Exceedances were counted on the observed 2025 history. The hybrid correction retained the training-period market variance convention of Table 4. *rate*: mean per-asset exceedance rate (nominal: $1 - \alpha$). Standard deviation (SD) describes cross-asset dispersion in percentage points; it is not a standard error. Coverage summaries are descriptive.

Method	Assets	$\alpha = 0.95$		$\alpha = 0.99$	
		rate (%)	SD (pp)	rate (%)	SD (pp)
Naive	416	4.04	2.08	0.88	0.70
Gaussian SIM	416	4.65	2.22	1.72	1.08
Hybrid	416	5.48	2.45	1.12	0.81
JumpHMM-on-residuals	416	5.62	2.55	1.16	0.81
Block bootstrap	416	5.50	2.52	1.28	0.87
GARCH(1,1)- t	386	5.07	2.45	1.20	0.89

Table 6: **Jump settings under naive and corrected multi-asset composition.** Each setting used 1,000 replications per asset across four seeds, with identical asset and market draws for the two composition methods. SPY was simulated in both windows, and the correction used each simulated market path’s variance and each asset draw’s variance. Entries are equal-weight cross-ticker means of per-path metrics. Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) report non-rejection rates at $\alpha = 0.05$. ACF_{25} and ACF_{60} are absolute-return autocorrelation errors through lags 25 and 60, calculated within each path before averaging over replications and assets; lower values indicate better temporal fit. $V_{\text{gen}} = \text{Var}(g_i)/\sigma_{\text{gen},i}^2$ compares composed variance with the active generator’s variance, rather than observed variance.

Jump setting	Method	KS (%)	AD (%)	ACF_{25}	ACF_{60}	V_{gen}
<i>Training: 2014–2024, 423 assets, 2,766 days</i>						
Off	Naive	6.93	3.38	0.13585	0.09492	1.33273
Off	Corrected	73.94	68.54	0.13569	0.09485	1.00011
Market only	Naive	6.28	3.18	0.13197	0.09208	1.34938
Market only	Corrected	73.64	67.81	0.12844	0.08969	1.00032
Market + assets	Naive	5.25	2.56	0.11727	0.08264	1.33445
Market + assets	Corrected	61.68	53.33	0.11581	0.08154	1.00018
<i>Holdout: 2025, 416 assets, 249 days</i>						
Off	Naive	82.38	70.14	0.07322	0.06683	1.36081
Off	Corrected	85.92	78.76	0.07330	0.06687	1.00041
Market only	Naive	81.76	69.60	0.07347	0.06698	1.36638
Market only	Corrected	85.88	78.72	0.07525	0.06796	1.00045
Market + assets	Naive	80.27	68.19	0.07672	0.06885	1.36032
Market + assets	Corrected	84.43	77.21	0.07832	0.06973	1.00039

Figures

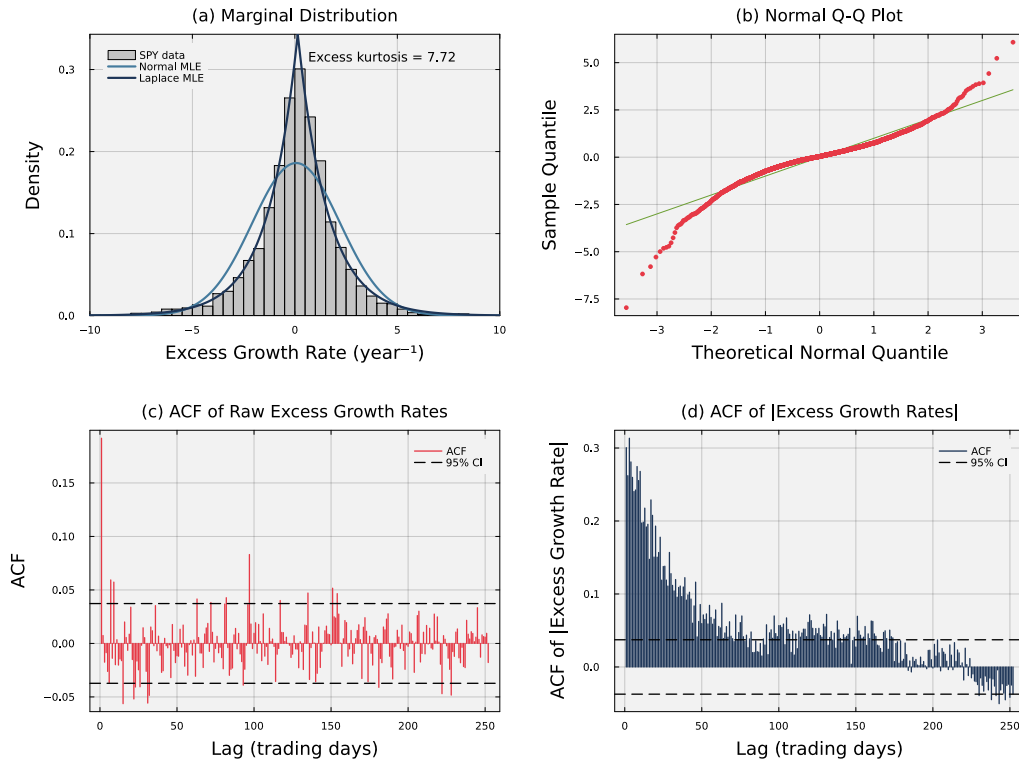


Figure 1: **Empirical stylized facts of SPY daily excess growth rates (2014–2024).** Panel (a) shows the heavy-tailed return density; the Laplace maximum-likelihood fit tracks the empirical peak and tails while the Gaussian fit does not. Panel (b) shows departure from the diagonal in a normal quantile-quantile plot at both extremes. Panel (c) shows the autocorrelation function of raw excess growth rates. Individual correlations are small, although the Ljung–Box test detects joint serial dependence. Panel (d) shows the autocorrelation function of absolute excess growth rates, which decays slowly across the reported lags.

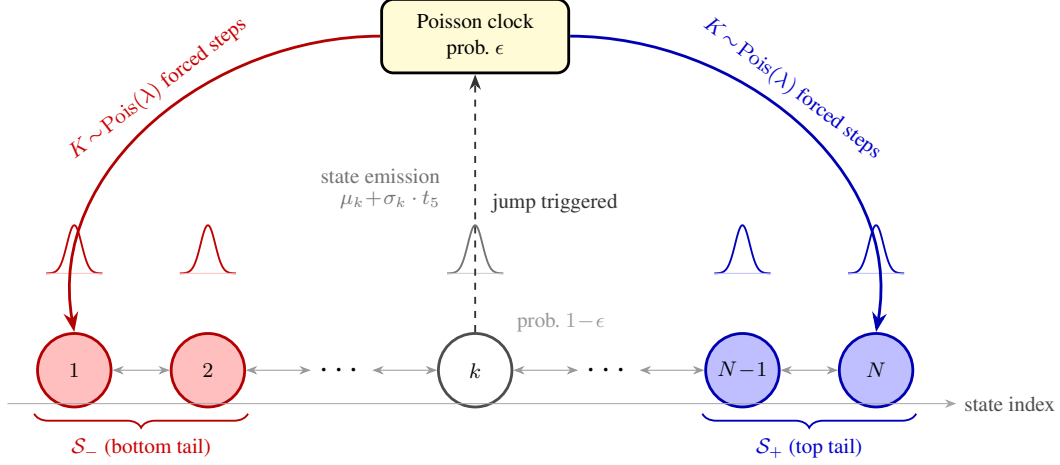


Figure 2: **Architecture of the hidden Markov model with jumps (HMM-WJ).** When no jump episode is active, the chain transitions according to the empirical transition matrix $\mathbf{T}$ with probability $1 - \epsilon$ (thin bidirectional arrows) or enters a Poisson jump episode with probability ϵ (dashed upward arrow to the Poisson clock). During an episode, each of the $K \sim \text{Poisson}(\lambda)$ forced steps independently draws the bottom tail set $\mathcal{S}_-$ (red, lowest-valued states) with probability p_{neg} or the top tail set $\mathcal{S}_+$ (blue, highest-valued states) otherwise. Ordinary transitions then resume. Small bell curves above each state show the state-conditional location-scale Student- t ($\nu = 5$) emission distribution. Tail sets are defined as the N_{tail} lowest- and highest-quantile states under the Laplace quantile partition.

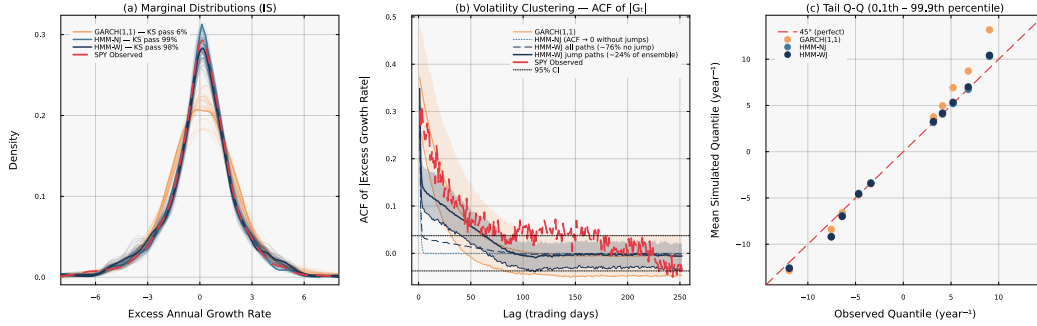


Figure 3: **Head-to-head in-sample model comparison for SPY** ($N = 100, 1,000$ simulated paths). *Panel (a):* marginal density of excess growth rates with in-sample Kolmogorov–Smirnov (KS) pass rates annotated per generator. *Panel (b):* mean autocorrelation function (ACF) of $|G_t|$ at lags 1–252. For the hidden Markov model with jumps (HMM-WJ), the solid curve and its 10th–90th percentile band use jump-active paths; the dashed curve averages all paths. The generalized autoregressive conditional heteroskedasticity (GARCH) band also gives path percentiles. Horizontal dotted lines are the white-noise references $\pm 1.96/\sqrt{2,766}$. *Panel (c):* tail quantile-quantile plot at the 0.1st–99.9th percentile region per generator.

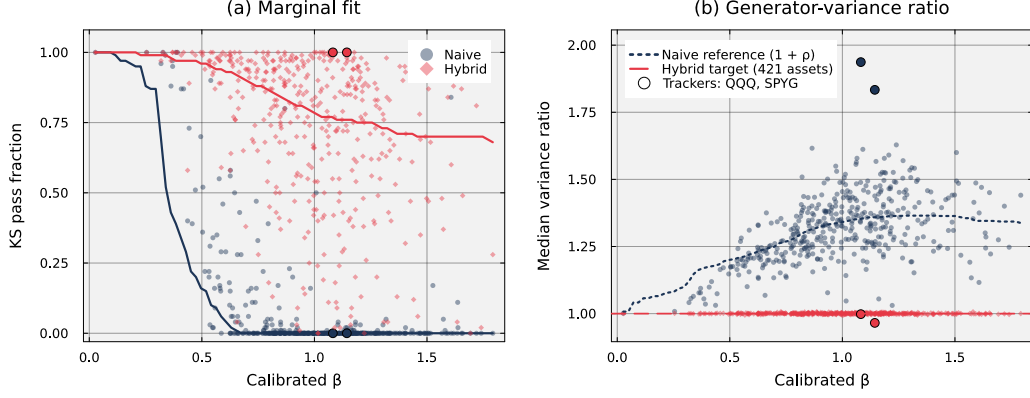


Figure 4: Marginal fit and generator-variance preservation under paired composition. We used 100 paired paths of 2,766 observations for each of 423 non-market assets, with the observed 2014–2024 SPY market path and jumps disabled. Blue circles denote naive composition; red diamonds denote hybrid composition. Outlined circles mark the tracker assets QQQ and SPYG in the corresponding method color. *Panel (a)*: each point is the fraction of paths passing the Kolmogorov–Smirnov (KS) test against the observed asset returns at $\alpha = 0.05$. *Panel (b)*: each point is the median of the 100 ratios $\text{Var}(g_i)/\sigma_{\text{gen},i}^2$, with the denominator measured from the same uncomposed generator draw. The dashed line marks the hybrid target of one for the 421 non-tracker assets. Trackers instead target $\beta_i^2 \sigma_m^2 / R_{\text{real},i}^2$ and need not lie on that line. The dotted curve summarizes the per-ticker medians of the naive reference $1 + \rho_i$, where $\rho_i = \beta_i^2 \sigma_m^2 / \sigma_{\text{gen},i}^2$ is computed per draw. This reference omits the finite-path covariance term. Solid curves in panel (a) and the dotted curve in panel (b) are Gaussian-kernel weighted medians over non-tracker assets, with bandwidth 0.15 in calibrated β . For non-tracker hybrid paths, the median and 95th percentile of $|\text{Var}(g_i)/\sigma_{\text{gen},i}^2 - 1|$ were 1.12% and 3.41%; ticker medians therefore conceal individual-path variation. The annualized variance of the observed market path was $\Delta t \sigma_m^2 = 0.030 \text{ yr}^{-1}$.

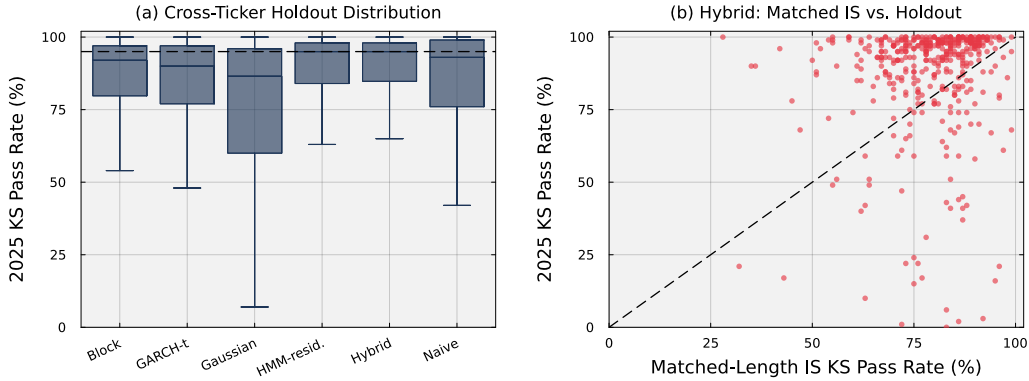


Figure 5: Cross-ticker distribution of frozen-parameter out-of-sample marginal fit. Panel (a) shows the distribution of per-ticker 2025 Kolmogorov–Smirnov (KS) pass rates across 100 replications; the dashed line marks 95%. Panel (b) compares each ticker’s hybrid KS pass rate against a matched-length training block with its pass rate against the 2025 holdout. The diagonal denotes equal performance.

Online Appendix

S1 Empirical cross-term diagnostic

The variance correction of Eq. (8) assumes $\text{Cov}(\tilde{g}_i^c, g_m) \approx 0$, allowing the variance derivation to omit the cross-term. Each generator draw is simulated independently of the market path, so this covariance is zero in population, but on a finite path its sample value is not. We measured the size of the sample cross-term for three residual sources: the full-return hidden Markov generator (JumpHMM) used by hybrid and naive composition, the residual-fit JumpHMM generator used by the JumpHMM-on-residuals method, and the Gaussian residual draw of the Gaussian single-index model (SIM). For each of the 423 non-market tickers, we sampled $R = 100$ training-length growth-rate paths $\tilde{g}_i^{(r)}$ from each source and computed the sample correlation of each centered draw with the observed training growth-rate path g_m of the broad-market exchange-traded fund SPY, averaged over the R draws:

$$\text{cov}_i^{\text{norm}} = \frac{1}{R} \sum_{r=1}^R \frac{\text{Cov}((\tilde{g}_i^{(r)})^c, g_m)}{\sigma_{\text{gen},i}^{(r)} \sigma_m}, \quad (\text{S1})$$

where $\sigma_{\text{gen},i}^{(r)}$ is the sample standard deviation of draw r . Centering leaves covariance unchanged. The universe means were 1.53×10^{-4} , 6.58×10^{-5} , and 2.26×10^{-4} for the full-return, residual-fit, and Gaussian sources, respectively, and the per-ticker values of all three ranged from -0.0061 to 0.0061 . For independent series with weak serial correlation and 2,766 observations, the sample correlation has standard deviation near $1/\sqrt{2,766} \approx 0.019$, the spread we observed across single draws, so an average over 100 draws has standard deviation near 0.002. The averages were consistent with sampling noise; individual paths still had nonzero cross-terms and therefore matched their variance targets only approximately.

S2 Rebalancing under independent residuals

To identify the portfolio consequence of independent residuals, we derive the diversification return of a daily-rebalanced portfolio. Matching generator variance also matches empirical variance only when the generator reproduces it; neither condition restores cross-asset residual covariance. Residual paths retain their own temporal structure but are generated independently across assets. Consider a daily-rebalanced portfolio with constant target weights $w_i \geq 0$, $\sum_i w_i = 1$, reset to those weights at the start of each trading day. Throughout this derivation $g_i(t)$ is the annualized log-growth rate of Eq. (1), so the per-period log return on asset i is $g_i(t) \Delta t$ with $\Delta t = 1/252$ yr. The wealth process is:

$$W_t = W_{t-1} \sum_i w_i \exp(g_i(t) \Delta t), \quad (\text{S2})$$

so the per-step log return on the portfolio is $\log(W_t/W_{t-1}) = \log \sum_i w_i \exp(g_i(t) \Delta t)$. Write g_i for $g_i(t)$. A second-order Taylor expansion of the exponential about zero is $\exp(g_i \Delta t) = 1 + g_i \Delta t + \frac{1}{2}(g_i \Delta t)^2 + O((g_i \Delta t)^3)$. Substituting it into each summand of $\sum_i w_i \exp(g_i \Delta t)$ gives:

$$\begin{aligned} \sum_i w_i \exp(g_i \Delta t) &= \sum_i w_i \left[1 + g_i \Delta t + \frac{1}{2}(g_i \Delta t)^2 + O((g_i \Delta t)^3) \right] && (\text{Taylor}) \\ &= \sum_i w_i + \Delta t \sum_i w_i g_i + \frac{1}{2}(\Delta t)^2 \sum_i w_i g_i^2 + O((g_i \Delta t)^3) && (\text{distribute}) \\ &= 1 + \Delta t \sum_i w_i g_i + \frac{1}{2}(\Delta t)^2 \sum_i w_i g_i^2 + O((g_i \Delta t)^3). && (\sum_i w_i = 1) \end{aligned} \quad (\text{S3})$$

A second-order Taylor expansion of $\log(1+x)$ about $x=0$ gives $\log(1+x) = x - \frac{1}{2}x^2 + O(x^3)$. Identifying $1+x$ with the right-hand side of Eq. (S3), the part beyond one is $x := \Delta t \sum_i w_i g_i +$

$\frac{1}{2}(\Delta t)^2 \sum_i w_i g_i^2$, and squaring keeps only the leading $(\Delta t)^2$ term: $x^2 = (\Delta t)^2 (\sum_i w_i g_i)^2 + O((\Delta t)^3)$ because the cross term has an extra Δt factor. Substitution gives:

$$\begin{aligned}
\log \frac{W_t}{W_{t-1}} &= \log \left(1 + x + O((g \Delta t)^3) \right) \\
&= x - \frac{1}{2} x^2 + O(x^3) \\
&= \Delta t \sum_i w_i g_i + \frac{1}{2} (\Delta t)^2 \sum_i w_i g_i^2 \\
&\quad - \frac{1}{2} (\Delta t)^2 \left(\sum_i w_i g_i \right)^2 + O((g \Delta t)^3) \\
&= \Delta t \sum_i w_i g_i + \frac{1}{2} (\Delta t)^2 \left[\sum_i w_i g_i^2 \right. \\
&\quad \left. - \left(\sum_i w_i g_i \right)^2 \right] + O((g \Delta t)^3). \tag{S4}
\end{aligned}$$

Dividing by Δt gives the annualized portfolio growth rate $g_p(t) := \Delta t^{-1} \log(W_t/W_{t-1})$:

$$g_p = \sum_i w_i g_i + \frac{1}{2} \Delta t \left(\sum_i w_i g_i^2 - \left(\sum_i w_i g_i \right)^2 \right) + O((\Delta t)^2). \tag{S5}$$

To obtain expected annualized portfolio growth, we restored the time argument and took unconditional expectations of Eq. (S5) under stationarity. Define the mean and variance of each asset's annualized growth rate:

$$\mu_i := \mathbb{E}(g_i(t)), \quad \sigma_i^2 := \text{Var}(g_i(t)), \tag{S6}$$

the covariance of the annualized rates $\Sigma_{ij} := \text{Cov}(g_i(t), g_j(t))$, and the portfolio variance $\sigma_p^2 := \text{Var}(\sum_i w_i g_i(t)) = w^\top \Sigma w$. The squared terms $\sum_i w_i g_i(t)^2$ and $(\sum_i w_i g_i(t))^2$ in the $O(\Delta t)$ correction expand using the following identity for any X with finite second moment:

$$\mathbb{E}(X^2) = \mathbb{E}(X)^2 + \text{Var}(X). \tag{S7}$$

Applying this identity to $X = g_i(t)$ and summing against w_i gives:

$$\begin{aligned}
\mathbb{E} \left(\sum_i w_i g_i(t)^2 \right) &= \sum_i w_i \mathbb{E}(g_i(t)^2) && \text{(linearity)} \\
&= \sum_i w_i [\mu_i^2 + \sigma_i^2] && \text{(by Eq. (S7))} \\
&= \sum_i w_i \mu_i^2 + \sum_i w_i \sigma_i^2. \tag{S8}
\end{aligned}$$

Applying the identity to $X = \sum_i w_i g_i(t)$, whose mean is $\sum_i w_i \mu_i$ and whose variance is σ_p^2 , gives:

$$\begin{aligned}
\mathbb{E} \left(\left(\sum_i w_i g_i(t) \right)^2 \right) &= \mathbb{E} \left(\sum_i w_i g_i(t) \right)^2 + \text{Var} \left(\sum_i w_i g_i(t) \right) && \text{(by Eq. (S7))} \\
&= \left(\sum_i w_i \mu_i \right)^2 + \sigma_p^2. \tag{S9}
\end{aligned}$$

We substituted Eqs. (S8)–(S9) into the expectation of Eq. (S5) and grouped the variance and mean contributions as follows:

$$\begin{aligned}
\mathbb{E}(g_p) &= \sum_i w_i \mu_i + \underbrace{\frac{1}{2} \Delta t \left(\sum_i w_i \sigma_i^2 - \sigma_p^2 \right)}_D \\
&\quad + \frac{1}{2} \Delta t \left[\sum_i w_i \mu_i^2 - \left(\sum_i w_i \mu_i \right)^2 \right] + O((\Delta t)^2), \tag{S10}
\end{aligned}$$

the Booth–Fama decomposition, to second order, of the growth of a daily-rebalanced portfolio in annualized growth-rate units [42, 43]. The middle term, D , is the diversification return. The moments μ_i and σ_i^2 of the annualized rates have units yr^{-1} and yr^{-2} respectively; the products $\Delta t \sigma_i^2$ and $\Delta t \sigma_p^2$ in Eq. (S10) are the annualized variances (yr^{-1}). The third term in Eq. (S10) is the cross-sectional dispersion of the per-asset means, of order $\Delta t \mu^2$, while D is of order $\Delta t \sigma^2$. For SPY, μ^2 lies more than two orders of magnitude below σ^2 (Online Appendix S4), and we drop the third term, treating the same ordering as typical of daily equity growth rates. The realized annualized compound growth rate is $\bar{g}_p = (T \Delta t)^{-1} \log(W_T/W_0) = T^{-1} \sum_t g_p(t)$. If the composed growth rates form a stationary ergodic process, $\bar{g}_p$ converges to $\mathbb{E}(g_p)$ by the ergodic theorem. This limit depends on the single-date joint law of $(g_i(t))_i$, not residual serial dependence. Finite-horizon centering and scaling are outside this stationary-process argument.

To show that D is non-negative, we rewrote the bracket in D as a sum over asset pairs. Expanding the portfolio variance, using $1 - w_i = \sum_{j \neq i} w_j$ for weights summing to one, and collecting each pair once gives:

$$\begin{aligned}
\sum_i w_i \sigma_i^2 - \sigma_p^2 &= \sum_i w_i \sigma_i^2 - \sum_i w_i^2 \sigma_i^2 - 2 \sum_{i < j} w_i w_j \Sigma_{ij} \quad (\text{expand } \sigma_p^2) \\
&= \sum_i w_i (1 - w_i) \sigma_i^2 - 2 \sum_{i < j} w_i w_j \Sigma_{ij} \quad (\text{collect}) \\
&= \sum_i \sum_{j \neq i} w_i w_j \sigma_i^2 - 2 \sum_{i < j} w_i w_j \Sigma_{ij} \quad (1 - w_i = \sum_{j \neq i} w_j) \\
&= \sum_{i < j} w_i w_j (\sigma_i^2 + \sigma_j^2 - 2 \Sigma_{ij}) \quad (\text{pair terms}) \\
&= \sum_{i < j} w_i w_j \text{Var}(g_i - g_j), \quad (\text{variance of a difference}) \quad (\text{S11})
\end{aligned}$$

so that:

$$D = \frac{1}{2} \Delta t \sum_{i < j} w_i w_j \text{Var}(g_i - g_j) \geq 0. \quad (\text{S12})$$

For positive-weight asset pairs, D vanishes only when $\text{Var}(g_i - g_j) = 0$, or when all weight is on one asset. Rebalancing converts cross-sectional dispersion into compounded growth, the variance bonus described by Markowitz [43] and the diversification return of Booth and Fama [42].

To separate market and residual contributions to the diversification return, we substituted the single-index decomposition $g_i(t) = \alpha_i + \beta_i g_m(t) + \varepsilon_i(t)$ into Eq. (S12), with market variance $\sigma_m^2 := \text{Var}(g_m(t))$, per-asset residual variance $\sigma_{\varepsilon,i}^2 := \text{Var}(\varepsilon_i(t))$, and $\text{Cov}(g_m, \varepsilon_i) = 0$ (the population assumption checked in Online Appendix S1). Here the loadings are fixed and unclipped, as in the observed-market training comparison. The pairwise difference variance is:

$$\text{Var}(g_i - g_j) = (\beta_i - \beta_j)^2 \sigma_m^2 + \text{Var}(\varepsilon_i - \varepsilon_j). \quad (\text{S13})$$

The zero market-residual covariance splits diversification return into market and idiosyncratic components:

$$D = \underbrace{\frac{1}{2} \Delta t \sigma_m^2 \sum_{i < j} w_i w_j (\beta_i - \beta_j)^2}_{D_{\text{mkt}}} + \underbrace{\frac{1}{2} \Delta t \sum_{i < j} w_i w_j \text{Var}(\varepsilon_i - \varepsilon_j)}_{D_\varepsilon}, \quad (\text{S14})$$

The market term D_{mkt} contains the weighted variance of β . Applying Eq. (S11) with β_i in place of g_i gives:

$$\begin{aligned}
\sum_{i < j} w_i w_j (\beta_i - \beta_j)^2 &= \sum_i w_i (1 - w_i) \beta_i^2 - 2 \sum_{i < j} w_i w_j \beta_i \beta_j \quad (\text{pair identity}) \\
&= \sum_i w_i \beta_i^2 - \left(\sum_i w_i^2 \beta_i^2 + 2 \sum_{i < j} w_i w_j \beta_i \beta_j \right) \quad (\text{regroup}) \\
&= \sum_i w_i \beta_i^2 - \left(\sum_i w_i \beta_i \right)^2, \quad (\text{square of a sum}) \quad (\text{S15})
\end{aligned}$$

so $D_{\text{mkt}} = \frac{1}{2} \Delta t \sigma_m^2 [\sum_i w_i \beta_i^2 - (\sum_i w_i \beta_i)^2]$, half the weighted variance of β scaled by the annualized market variance $\Delta t \sigma_m^2$. Across the 423 non-market tickers, the calibrated β distribution spans $[0.03, 1.79]$ (Online Appendix S8). A weighted variance is at most one quarter of the squared range, so $D_{\text{mkt}} \leq \frac{1}{8} \Delta t \sigma_m^2 (1.79 - 0.03)^2$. The SPY closing-price series used for the multi-asset universe has annualized variance $\Delta t \sigma_m^2 = 0.030 \text{ yr}^{-1}$ (Fig. 4), at which D_{mkt} is at most 0.012 yr^{-1} , or 1.2 percentage points per year. For long-only weights on this universe, any diversification return above this bound must include an idiosyncratic contribution D_ε . In the synthetic construction, residual paths are generated independently across assets, so $\text{Var}(\varepsilon_i - \varepsilon_j) = \sigma_{\varepsilon,i}^2 + \sigma_{\varepsilon,j}^2$ and, by the same pair identity, $D_\varepsilon = \frac{1}{2} \Delta t \sum_i w_i (1 - w_i) \sigma_{\varepsilon,i}^2$, a weighted sum of the annualized idiosyncratic variances $\Delta t \sigma_{\varepsilon,i}^2$.

At fixed same-date moments, serial dependence does not change the second-order D . Under zero market-residual covariance, Eq. (8) chooses s_i so that the composed variance $\beta_i^2 \sigma_m^2 + \sigma_{\varepsilon,i}^2$ equals the generator variance $\sigma_{\text{gen},i}^2$, and any residual generator with the same contemporaneous variances and covariances gives the same D . As an illustration, consider a stationary first-order autoregressive [AR(1)] residual $\varepsilon_i(t) = \phi \varepsilon_i(t-1) + \eta_i(t)$ with independent and identically distributed innovations η_i whose variance is chosen so that $\text{Var}(\varepsilon_i) = \sigma_{\eta,i}^2 / (1 - \phi^2) = \sigma_{\varepsilon,i}^2$. The parameter ϕ leaves the variance at a single date unchanged, so it leaves the second-order approximation to $\mathbb{E}(g_p)$ in Eqs. (S10) and (S14) unchanged. It does change sampling noise: for an uncentered stationary AR(1) residual with variance σ_ε^2 , the variance of the sample mean is approximately $T^{-1} \sigma_\varepsilon^2 (1 + \phi) / (1 - \phi)$. By contrast, omitted positive cross-asset residual covariance lowers real $\text{Var}(\varepsilon_i - \varepsilon_j)$ below the independent-generator value $\sigma_{\varepsilon,i}^2 + \sigma_{\varepsilon,j}^2$, so matching marginal variances can overstate D_ε . We did not measure this excess. Isolating it requires a joint-residual comparison with fixed marginals and allocation; a gap from realized portfolio returns also includes finite-horizon sampling and second-order approximation error [13].

S3 Validation metric definitions

To distinguish marginal agreement from temporal agreement, we used separate distributional, tail, and autocorrelation summaries (Tables 2 and 6). For one observed series $x = (x_1, \dots, x_n)$ and R synthetic paths $y^{(r)}$ of the same length, each distributional comparison used one complete synthetic path and the fixed observed history. The two-sample Kolmogorov–Smirnov (KS) statistic is the largest absolute difference between their empirical cumulative distribution functions, $D_{\text{KS}} = \sup_z |F_x(z) - F_{y^{(r)}}(z)|$ [44, 45]. The Anderson–Darling (AD) comparison gives greater weight to differences near the tails [46]. We used the approximate two-sample KS test and the modified, tie-aware two-sample AD calculation in `HypothesisTests.jl`, with asymptotic p -values. A path passed when $p > 0.05$, and the pass percentage was 100 times the fraction of passing paths. Pass rates are descriptive because returns are dependent and training comparisons reuse the fitting history. Independent simulations supply independent indicators conditional on that history and fit, not new historical evidence or proof of a shared distribution.

To quantify marginal discrepancies without a pass threshold, we computed Wasserstein-1 and histogram Hellinger scores for each path (Table 2). Let $x_{(j)}$ and $y_{(j)}^{(r)}$ denote the j th order statistics in increasing order. Because each synthetic path has the same length as the observed series, the Wasserstein-1 distance is:

$$W_1(x, y^{(r)}) = \frac{1}{n} \sum_{j=1}^n |x_{(j)} - y_{(j)}^{(r)}|. \quad (\text{S16})$$

It has the growth-rate units yr^{-1} . For each Hellinger comparison, we formed 50 equally spaced bins between the minimum and maximum of the pooled pair of samples. Let p_b and q_b be the observed and simulated bin counts divided by the sample length n . The histogram score is:

$$H(x, y^{(r)}) = \left[\frac{1}{2} \sum_{b=1}^{50} (\sqrt{p_b} - \sqrt{q_b})^2 \right]^{1/2}. \quad (\text{S17})$$

All bins included their lower edge and excluded their upper edge, omitting the pooled maximum; the sample containing that maximum has weights summing to slightly less than one. This histogram

approximation is best compared within a window because pair-specific edges and sample length affect it. Smaller scores indicate closer marginal agreement.

To describe tail shape, we computed excess kurtosis for each synthetic path and compared its mean over paths with the observed value (Table 2); the composition tables report medians instead. With $m_p(x) = n^{-1} \sum_{t=1}^n (x_t - \bar{x})^p$, the estimator was $\kappa(x) = m_4(x)/m_2(x)^2 - 3$, without a finite-sample bias correction. The composition scorecard also used the Hill index of absolute returns (Table 3). Let $X_{(1)} \geq \dots \geq X_{(n)}$ be decreasingly ordered absolute returns and $k = \max\{2, \lfloor 0.05n \rfloor\}$. The implemented upper-tail estimator is:

$$\hat{\xi} = \frac{1}{k-1} \sum_{j=1}^{k-1} \log \left(\frac{X_{(j)}}{X_{(k)}} \right). \quad (\text{S18})$$

The estimate $\hat{\xi}$ is the reciprocal of the conventional tail index, so larger values indicate a heavier absolute-return tail; the threshold $X_{(k)}$ must be positive. We also measured whether simulation envelopes bracketed 99 observed quantiles (Table 2). For $u_j = j/100$, $j = 1, \dots, 99$, let $Q_x(u_j)$ be the observed sample quantile and $Q_r(u_j)$ the corresponding quantile of path r . Let L_j and U_j be the 5th and 95th percentiles of $\{Q_r(u_j) : r = 1, \dots, R\}$. All quantiles used linear interpolation between order statistics, the common software default (type 7). The reported quantile-envelope coverage is:

$$C = \frac{100}{99} \sum_{j=1}^{99} \mathbf{1}\{L_j \leq Q_x(u_j) \leq U_j\}. \quad (\text{S19})$$

Larger values mean that more observed quantiles lie inside the pointwise envelopes, which also depends on envelope width; this is neither Value-at-Risk exceedance coverage nor simultaneous confidence coverage.

To quantify persistence in return magnitude, we used the sample autocorrelation function (ACF) of absolute returns. Each series was centered by its own full-series absolute-return mean, $\bar{a}_x = n^{-1} \sum_t |x_t|$. At lag ℓ , the calculation was:

$$a_\ell(x) = \frac{\sum_{t=1}^{n-\ell} (|x_t| - \bar{a}_x)(|x_{t+\ell}| - \bar{a}_x)}{\sum_{t=1}^n (|x_t| - \bar{a}_x)^2}. \quad (\text{S20})$$

The denominator used all n observations, with no lag-dependent rescaling. Both error scores below start at lag one. The single-asset comparison measured the error of the ensemble-average ACF (Table 2). For a lag limit L , that mean absolute error is:

$$E_L^{\text{ensemble}} = \frac{1}{L} \sum_{\ell=1}^L \left| a_\ell(x) - \frac{1}{R} \sum_{r=1}^R a_\ell(y^{(r)}) \right|. \quad (\text{S21})$$

We used $R = 1,000$ and $L = \min(252, n-1)$: lags 1–252 for the 2,766-observation training series and 1–248 for the 249-observation holdout. This evaluation lag limit is separate from the 25-lag window of the tuning objective in Eq. (3). The state-resolution and emission comparisons (Online Appendix S6; Table S2) used the same ensemble convention. The multi-asset jump comparison instead measured error within each path before averaging (Table 6). For one asset, its mean path error is:

$$E_L^{\text{path}} = \frac{1}{R} \sum_{r=1}^R \left[\frac{1}{L} \sum_{\ell=1}^L |a_\ell(x) - a_\ell(y^{(r)})| \right]. \quad (\text{S22})$$

We used $L = 25$ and 60 in both windows and averaged these scores over assets. The fallback sensitivity check also reported this path score with $L = 25$ (Table S6). At a common lag limit and on the same paths, the triangle inequality gives $E_L^{\text{ensemble}} \leq E_L^{\text{path}}$: averaging the curves can cancel errors of opposite sign. The path score includes sampling noise that ensemble averaging can cancel. The experiments also use different lag limits, histories and assets, so their error magnitudes are not directly comparable.

To describe simulation uncertainty in the single-asset comparison, we used a standard-error method suited to each statistic (Table 2). For a pass fraction $\hat{p}$, the reported binomial standard error was $100\sqrt{\hat{p}(1-\hat{p})/R}$ percentage points. This estimate is zero when every path passes or fails; it does

not establish that the underlying pass probability is exactly zero or one. For kurtosis, Wasserstein distance, and Hellinger score, the standard error was the sample standard deviation of the R path scores divided by $\sqrt{R}$. For ensemble ACF error and quantile-envelope coverage, we used 500 bootstrap resamples of the R path indices, each of size R with replacement. Each resample retained entire paths and recomputed the statistic across all lags or quantile levels. The standard error was the sample standard deviation of those 500 recomputed values, without a further division by $\sqrt{500}$. All these errors condition on one observed history and a fixed fitted model; they omit uncertainty in fitting, model selection, and market regimes. For multi-asset contrasts, we averaged within each of 1,000 shared-market replications before differencing settings; the standard deviation of those differences divided by $\sqrt{1,000}$ preserved the market dependence within each unit (Online Appendix S9).

S3.1 Six-method composition evaluation

The four residual-based comparators used the observed asset’s ordinary least-squares (OLS) residuals to set their distributions (Table 3). The Gaussian single-index model (SIM) used independent Gaussian draws with the OLS residual variance. The residual-fit hidden Markov model, labeled JumpHMM-on-residuals after the software package, fitted a no-jump generator to a synthetic price path obtained by exponentiating cumulative residuals multiplied by the daily time step. The Politis–Romano stationary bootstrap [47] used a mean block length of 50 days in both training and holdout. The generalized autoregressive conditional heteroskedasticity model, GARCH(1,1)- t , fitted conditional variance to the residual series [15]. We accepted a fit only if optimization converged, the likelihood and coefficients were finite, the variance intercept was positive, and the nonnegative ARCH and GARCH coefficients summed to less than one. The Student- t degrees of freedom had to exceed two, the unconditional variance had to be finite and positive, and a trial simulated path had to be finite and nonconstant. All 423 optimizations converged, but 30 failed the coefficient-sum condition, leaving 393 eligible assets. All four residual comparators entered composition without further centering or rescaling. The scores reflect branch-specific targets. Lower absolute OLS errors indicated closer recovery, but on the hybrid variance-preserving branch the composed R^2 approached the draw’s ρ_i , capped at $1 - f$, rather than $R_{i,\text{real}}^2$. Its R^2 error therefore mainly measured this designed shift; loading error also included any change made by clipping. A composed-to-generator variance ratio of one indicated equal variances, which the R^2 -preserving branch did not target. We omitted cross-sectional rank reordering to test each ticker’s marginal construction and scored volatility clustering separately in the jump-enabled comparison. The paired centering control isolated differences in residual-mean constraints (Online Appendix S10).

S3.2 Gated recurrent unit benchmark

To provide an autoregressive neural benchmark, we used a gated recurrent unit (GRU) network to predict the distribution of the next SPY growth rate from the preceding 50 values (Table 2). We standardized the training series using its mean and population standard deviation and reused these two values unchanged to standardize inputs and to convert generated values back to growth rates. The network had two GRU layers with 64 hidden units per layer, dropout probability 0.1 between layers during training, and separate linear heads for a conditional mean and log variance. Both heads read the last hidden output of each input window, and the network had 37,954 trainable parameters. For the standardized target z_t that follows a window, with predicted mean m_t and predicted log variance v_t , the training loss was the Gaussian negative log-likelihood with its constant term omitted:

$$\mathcal{L} = \frac{1}{2B} \sum_{t \in \mathcal{B}} [v_t + (z_t - m_t)^2 \exp(-v_t)], \quad (\text{S23})$$

where $\mathcal{B}$ is a training batch containing $B = 256$ windows. The 2,766 training observations supplied 2,716 overlapping input-target pairs. Each epoch shuffled these pairs and used ten complete batches; the final incomplete batch was dropped. The Adam optimizer used an initial learning rate of 10^{-3} , default moment decay rates (0.9, 0.999), and no weight decay. We clipped the gradient norm at one and halved the learning rate whenever mean training loss had not improved for 15 epochs, down to a minimum learning rate of 10^{-5} . Training ran for at most 200 epochs. We retained weights whenever mean training loss improved by more than 10^{-4} and would have stopped after 40 epochs without such improvement. The fit completed 200 epochs, selecting epoch 199. Model selection used training loss, with no separate validation split; the 2025 holdout played no part in fitting or selection.

To generate each path, we disabled dropout and drew its initial window uniformly from the 2,716 observed training input windows. At each step, we passed the current 50 values through the network with a fresh zero hidden state, sampled a Gaussian value with mean m_t and standard deviation $\max\{\exp(v_t/2), 10^{-6}\}$, and rolled the window forward, dropping its oldest value and appending the draw. A path consisted of the generated values only, with no burn-in, and the fixed training normalization was inverted afterward. The Python benchmark seeded NumPy and PyTorch with 1234 before training. Generation then used the continuing NumPy stream, without reseeding, for 1,000 training-length paths followed by 1,000 holdout-length paths from the same fitted network. Pinned dependencies, trained weights and generation records accompany the benchmark in the repository. The benchmark is one fitted network, so its reported Monte Carlo standard errors do not measure variation across training seeds or neural architectures.

S4 Derivation of the single-asset generator

The following derivations connect the fitted generator to its marginal and temporal behavior. The hidden Markov model with jumps (HMM-WJ), its no-jump restriction (HMM-NJ), and their symbols follow the main-text definitions in Eq. (2) and Algorithm 1. Unless noted otherwise, numerical values evaluate the closed-form expressions at the fitted SPY model of Table 1: $N = 100$ states, Student- t degrees of freedom $\nu = 5$, jump probability $\epsilon = 10^{-4}$, mean episode duration $\lambda = 90$ steps, tail-selection probability $p_{\text{neg}} = 0.52$, tail-set size $N_{\text{tail}} = 5$, and $T = 2,766$ daily excess growth rates from volume-weighted average prices in 2014–2024. Ljung–Box tests on raw returns at lag 20 gave $p < 0.001$ in training and $p = 0.019$ in the 249-day 2025 holdout, despite small individual lag correlations. The training series has annualized volatility $\sigma(G_t)\sqrt{\Delta t}$, about 13.5%, whereas $\sigma(G_t)$ itself has units yr^{-1} . Table S1 collects the closed-form quantities evaluated at these values beside their sample or simulated counterparts.

Table S1: **Closed-form quantities of the fitted SPY generator against sample and simulated values.** Entries evaluate the expressions below at the fitted SPY model of Table 1; jump-path entries use the stated single-episode and finite-horizon approximations. Sample values are computed from the in-sample SPY series; simulated values use 400 in-sample-length paths for the jump-episode quantities (forced-step fraction, jump-path probability, and forced fraction within a jump path) and 1,000 paths for mean sample skewness. The sup-distance entry is the largest gap between the no-jump model’s stationary distribution function and the in-sample empirical distribution function; for comparison, the two-sample Kolmogorov–Smirnov critical value used by the path-level tests at $\alpha = 0.05$ for two samples of $T = 2,766$ observations is $1.358\sqrt{2/T} = 0.0365$. Observed autocorrelations are those of the in-sample series shown in Fig. 1d. Stationary moments describe the no-jump mixture unless labeled otherwise. Here $A_t = |G_t|$ and θ_2 is the transition matrix’s second-largest eigenvalue in modulus.

Quantity	Closed form at the fit	Sample or simulation
<i>Stationary law and moments</i>		
State occupancy count, smallest and largest (of $T = 2,766$)	–	16, 47
Occupancy frequency $\hat{\pi}_k$, smallest and largest	–	0.0058, 0.017
$\max_k \bar{\pi}_k - \hat{\pi}_k $	3.7×10^{-4}	–
Mean (yr^{-1})	0.0636	0.0631
$\sup_x F_{\text{mix}}(x) - \hat{F}_T(x) $	0.0045	–
Within-state variance V_w (yr^{-2}), share of sample variance	0.17, 3.6%	–
Variance (yr^{-2}), Student- t emissions	4.72	4.60
Variance (yr^{-2}), Gaussian emissions	4.61	4.60
Standard deviation (yr^{-1}), Student- t emissions	2.17	2.14
Excess kurtosis, Student- t emissions	8.34	7.72
Excess kurtosis, Gaussian emissions	5.82	7.72
Skewness, HMM-NJ (1,000 simulated paths)	–	–0.76
Skewness, HMM-WJ (1,000 simulated paths)	–	–0.73
<i>Dependence without jumps</i>		
$ \theta_2 $, smallest lag with $ \theta_2 ^\tau < 0.01$	0.253, lag 4	–
ACF of $ G_t $ at lag 1, no jumps	0.26	0.30 (observed)
ACF of $ G_t $ at lag 3, no jumps	0.021	0.31 (observed)
ACF of $ G_t $ at lag 5, no jumps	0.001	0.26 (observed)
ACF of $ G_t $ at lag 25, no jumps	< 0.001	0.14 (observed)
<i>Jump-episode arithmetic</i>		
Forced-step fraction π_J	0.0089	0.0088 (400 paths)
Jump-path probability	24.2%	24.8% (99 of 400)
Forced fraction within a jump path	3.3% (λ/T)	3.6%
Forced-step standard deviation (yr^{-1})	5.38	–
Mean absolute return, forced $\bar{a}_J$ and free $\bar{a}$ (yr^{-1})	4.96, 1.47	–
$\text{Var}(A_t)$, single-episode conditioning	3.01	–
Predicted jump-path ACF plateau	0.13	–
Excess kurtosis, single-episode jump path	7.20	–
Variance inflation from forced steps, single-episode jump path	17%	–

S4.1 Generative law

The no-jump model generates a hidden state path $S_0, \dots, S_T$ on $\{1, \dots, N\}$ and observations $G_1, \dots, G_T$ with the joint density:

$$p(s_0, \dots, s_T, g_1, \dots, g_T) = \bar{\pi}_{s_0} \prod_{t=1}^T \mathbf{T}_{s_{t-1}, s_t} f_{s_t}(g_t), \quad (\text{S24})$$

where $\bar{\pi}_{s_0}$ is the initial probability of state s_0 , $\mathbf{T}_{s_{t-1}, s_t}$ is the probability of moving from state s_{t-1} to state s_t , and f_k is the emission density of state k ; bold $\mathbf{T}$ is the transition matrix and italic T the number of observations. Because $\bar{\pi}$ is stationary for $\mathbf{T}$, starting from an unemitted $S_0 \sim \bar{\pi}$ gives $S_1 \sim \bar{\pi}$, the same law as drawing S_1 from $\bar{\pi}$ and emitting it, as Algorithm 1 does. Under Eq. (2), f_k is the location-scale Student- t density:

$$f_k(g) = \frac{1}{\sigma_k} \psi_\nu \left(\frac{g - \mu_k}{\sigma_k} \right), \quad \psi_\nu(x) = \frac{\Gamma(\frac{\nu+1}{2})}{\sqrt{\nu\pi} \Gamma(\frac{\nu}{2})} \left(1 + \frac{x^2}{\nu} \right)^{-\frac{\nu+1}{2}}, \quad (\text{S25})$$

where ψ_ν is the density of a standard Student- t random variable with ν degrees of freedom, Γ is the gamma function, and (μ_k, σ_k) are the location and scale of state k . Given the state path, emissions are independent; serial dependence therefore comes from the state path [9].

The jump-augmented model enlarges the hidden state. Let $J_t \in \{0, 1, 2, \dots\}$ count the forced steps remaining after time t , starting from $J_0 = 0$, and let u be the forced-step state distribution, which mixes uniform draws over the two tail sets:

$$u_k = \begin{cases} p_{\text{neg}}/N_{\text{tail}} & k \in \mathcal{S}_-, \\ (1 - p_{\text{neg}})/N_{\text{tail}} & k \in \mathcal{S}_+, \\ 0 & \text{otherwise.} \end{cases} \quad (\text{S26})$$

Writing $p_K(m) = e^{-\lambda} \lambda^m / m!$ for the Poisson probability of episode length m and $\mathbf{1}\{\cdot\}$ for the indicator function, the pair (S_t, J_t) evolves by the transition kernel:

$$\begin{aligned} \Pr(S_t = k, J_t = j \mid S_{t-1} = s, J_{t-1} = i) \\ = \begin{cases} u_k \mathbf{1}\{j = i - 1\} & i \geq 1, \\ (1 - \epsilon + \epsilon e^{-\lambda}) \mathbf{T}_{s,k} \mathbf{1}\{j = 0\} + \epsilon p_K(j + 1) u_k & i = 0, \end{cases} \end{aligned} \quad (\text{S27})$$

and the emission draw depends only on the first coordinate, $G_t \sim f_{S_t}$. While an episode is active ($i \geq 1$), the next state is an independent draw from u and the counter decrements; the tail set and the state within it are re-drawn at every forced step. While no episode is active ($i = 0$), the chain either takes an ordinary transition (no trigger, or a trigger whose Poisson draw returns zero) or starts an episode of length $j + 1 \geq 1$ whose first forced step occurs immediately. The pair (S_t, J_t) is therefore itself a Markov chain, and the HMM-WJ generator is a hidden Markov model on the enlarged state space $\{1, \dots, N\} \times \{0, 1, 2, \dots\}$. Algorithm 1 implements Eq. (S27) with the episode counter truncated at the simulation horizon. It emits the initial draw from $\bar{\pi}$ as the first observation and applies the kernel from the second step onward, so the first observed day can never be a forced step; this is the only way its path law differs from the kernel's. When an episode ends, ordinary transitions resume from the last forced tail state, so the chain returns to the central states through the tail rows of $\mathbf{T}$. This return links an episode to the free steps that follow it.

S4.2 Estimators and the one-step empirical law

The partition, transitions, emissions and initial law are estimated from sample summaries; the fitted law need not reproduce the observed return moments. For observations $G_1, \dots, G_T$, the Laplace log-likelihood with location μ_L and scale b_L is:

$$\ell(\mu_L, b_L) = -T \ln(2b_L) - \frac{1}{b_L} \sum_{t=1}^T |G_t - \mu_L|. \quad (\text{S28})$$

For any fixed $b_L > 0$, maximizing ℓ over μ_L minimizes $\sum_t |G_t - \mu_L|$, so $\hat{\mu}_L$ is the sample median. Setting the b_L derivative to zero at $\hat{\mu}_L$ gives:

$$\begin{aligned} \frac{\partial \ell}{\partial b_L} &= -\frac{T}{b_L} + \frac{1}{b_L^2} \sum_{t=1}^T |G_t - \hat{\mu}_L| = 0 & (\text{first-order condition}) \\ \hat{b}_L &= \frac{1}{T} \sum_{t=1}^T |G_t - \hat{\mu}_L|, & (\text{solve for } b_L) \end{aligned} \quad (\text{S29})$$

the mean absolute deviation about the median. The state boundaries then invert the fitted Laplace cumulative distribution function (CDF) [35]. The Laplace CDF is piecewise exponential:

$$F_L(x) = \begin{cases} \frac{1}{2} \exp((x - \hat{\mu}_L)/\hat{b}_L) & x \leq \hat{\mu}_L, \\ 1 - \frac{1}{2} \exp(-(x - \hat{\mu}_L)/\hat{b}_L) & x > \hat{\mu}_L, \end{cases} \quad (\text{S30})$$

and setting $F_L(Q_k) = k/N$ and solving the lower branch for $k \leq N/2$ and the upper branch for $k \geq N/2$ gives the closed-form boundaries:

$$\begin{aligned} \frac{k}{N} &= \frac{1}{2} e^{(Q_k - \hat{\mu}_L)/\hat{b}_L} \implies Q_k = \hat{\mu}_L + \hat{b}_L \ln \frac{2k}{N}, & (\text{lower branch}) \\ \frac{k}{N} &= 1 - \frac{1}{2} e^{-(Q_k - \hat{\mu}_L)/\hat{b}_L} \implies Q_k = \hat{\mu}_L - \hat{b}_L \ln \left(2 - \frac{2k}{N}\right). & (\text{upper branch}) \end{aligned} \quad (\text{S31})$$

The states are equiprobable under the fitted Laplace, not under the empirical distribution, so the in-sample state counts are not uniform: across the 100 SPY states, they range from 16 to 47 of the 2,766 observations (Table S1). For SPY, every state therefore held at least 16 observations with a nonzero spread, and neither fallback rule for the emission parameters applied.

Row counting gives the maximum likelihood estimator (MLE) for the transition likelihood conditional on the initial assigned state. For the assigned state sequence $s_1, \dots, s_T$, let n_{jk} count the transitions from state j to state k and let $n_{j\cdot} = \sum_k n_{jk}$ be the row total. The likelihood of the transition parameters factorizes over rows into multinomials, and maximizing the log-likelihood subject to each row summing to one, with multiplier c_j for row j , uses the Lagrangian:

$$\mathcal{L} = \sum_{j,k} n_{jk} \ln \mathbf{T}_{jk} + \sum_j c_j \left(1 - \sum_k \mathbf{T}_{jk}\right), \quad (\text{S32})$$

whose first-order conditions solve as follows:

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \mathbf{T}_{jk}} &= \frac{n_{jk}}{\mathbf{T}_{jk}} - c_j = 0 && \text{(first-order condition)} \\ \mathbf{T}_{jk} &= \frac{n_{jk}}{c_j} && \text{(solve for } \mathbf{T}_{jk} \text{)} \\ c_j &= \sum_k n_{jk} = n_{j\cdot} && \text{(row constraint } \sum_k \mathbf{T}_{jk} = 1 \text{)} \\ \hat{\mathbf{T}}_{jk} &= \frac{n_{jk}}{n_{j\cdot}} && \text{(counted estimator)} \end{aligned} \quad (\text{S33})$$

For a row with $n_{j\cdot} > 0$, the first-order condition applies to cells with positive counts. A cell with $n_{jk} = 0$ adds nothing to the log-likelihood, so any probability placed on it is taken from observed transitions and lowers the likelihood; its maximizer is therefore $\hat{\mathbf{T}}_{jk} = 0$, which the same formula returns. When $n_{j\cdot} = 0$, the observations do not identify that row. The implementation sets every entry to $1/N$; this is a fallback choice, not an estimate of an observed transition frequency. Multiplying $\hat{\mathbf{T}}_{jk}$ by the empirical origin frequency $n_{j\cdot}/(T-1)$ recovers $n_{jk}/(T-1)$, the empirical frequency of the state pair (j, k) . Paired with the empirical origin frequencies, the counted estimator therefore reproduces the in-sample joint law of (S_{t-1}, S_t) exactly; everything it asserts about longer horizons is the Chapman–Kolmogorov extension $\mathbf{T}^T$ of that one-step law [37, 39]. The third estimator sets the emission parameters: within each state with at least two observations and sample standard deviation at least 10^{-12} yr^{-1} , μ_k and σ_k are the sample mean and standard deviation of the assigned observations. Otherwise, the implementation uses the fallback rules stated in the main text and written out in Eq. (S55) of Online Appendix S12. In either case, σ_k enters Eq. (S25) as the scale, so the emission standard deviation is $\sigma_k \sqrt{\nu/(\nu-2)}$. The law of total variance in the next subsection quantifies the aggregate effect of this scale convention (Eq. (S37)).

The stationary initial distribution is close to empirical state occupancy for the fitted SPY chain. Let n_k count the observations assigned to state k over the T observations, and let $\hat{\pi}_k = n_k/T$ be the occupancy frequency. The number of transitions out of state j satisfies $n_{j\cdot} = n_j - \mathbf{1}\{s_T = j\}$, and the number of transitions into state k satisfies $n_{\cdot k} = n_k - \mathbf{1}\{s_1 = k\}$, because only the last observation opens no transition and only the first closes none. Substituting both identities, with italic T the number of observations, gives:

$$\begin{aligned} (\hat{\pi} \hat{\mathbf{T}})_k &= \sum_j \frac{n_j}{T} \cdot \frac{n_{jk}}{n_{j\cdot}} && \text{(definitions)} \\ &= \sum_j \frac{n_j}{T} \cdot \frac{n_{jk}}{n_{j\cdot}} + \sum_j \frac{\mathbf{1}\{s_T = j\}}{T} \cdot \frac{n_{jk}}{n_{j\cdot}} && (n_j = n_{j\cdot} + \mathbf{1}\{s_T = j\}) \\ &= \frac{n_{\cdot k}}{T} + \frac{\hat{\mathbf{T}}_{s_T, k}}{T} && \text{(sum transitions into } k \text{)} \\ &= \hat{\pi}_k + \frac{\hat{\mathbf{T}}_{s_T, k} - \mathbf{1}\{s_1 = k\}}{T} && (n_{\cdot k} = n_k - \mathbf{1}\{s_1 = k\}) \end{aligned} \quad (\text{S34})$$

The occupancy frequencies therefore satisfy the stationarity equation $\hat{\pi} \hat{\mathbf{T}} = \hat{\pi}$ up to a fixed-point residual bounded by $1/T$. Because the counted chain mixes within a few steps (Online Appendix S4.4), a

residual of this size moves the solution by a comparable amount. For the fitted SPY model, the solved eigenvector $\bar{\pi}$ deviates from the occupancy frequencies by at most 3.7×10^{-4} , the same order as $1/T$, against occupancy values between 0.0058 and 0.017 (Table S1). Thus $\bar{\pi}$ differs from empirical occupancy by order $1/T$ for this rapidly mixing fit.

S4.3 Stationary distribution and moments

The stationary observation law of the no-jump generator follows directly from Eq. (S24). Marginalizing the state at a single time gives the mixture density and CDF:

$$p(g) = \sum_{k=1}^N \bar{\pi}_k f_k(g), \quad F_{\text{mix}}(x) = \sum_{k=1}^N \bar{\pi}_k \Psi_\nu \left(\frac{x - \mu_k}{\sigma_k} \right), \quad (\text{S35})$$

where Ψ_ν is the CDF of the standard Student- t with ν degrees of freedom. For SPY, no emission fallback was needed, and stationary weights differed from occupancies through the endpoint correction in Eq. (S34). Weighting the empirical state means by the occupancy frequencies regroups into the grand mean:

$$\begin{aligned} \sum_{k:n_k>0} \hat{\pi}_k \mu_k &= \sum_{k:n_k>0} \frac{n_k}{T} \cdot \frac{1}{n_k} \sum_{t:s_t=k} G_t && (\text{definitions of } \hat{\pi}_k, \mu_k) \\ &= \frac{1}{T} \sum_{t=1}^T G_t, && (\text{each } t \text{ counted once}) \end{aligned} \quad (\text{S36})$$

and replacing $\hat{\pi}$ by $\bar{\pi}$ changes the value only through the $1/T$ correction of Eq. (S34): the model mean is 0.0636 yr^{-1} against the sample mean of 0.0631 yr^{-1} (Table S1). For other assets, this identity needs a qualification. A state with a single observation takes the full-series mean as its location (Eq. (S55)), which need not preserve Eq. (S36); the other fallback rule changes only the scale (Online Appendix S12). Evaluated at the fitted SPY model, the largest gap between the model CDF and the empirical CDF is $\sup_x |F_{\text{mix}}(x) - \hat{F}_T(x)| = 0.0045$ (Table S1), where $\hat{F}_T$ is the in-sample empirical CDF. The path-level tests compare a simulated path with the data, so the relevant yardstick is the two-sample Kolmogorov–Smirnov (KS) critical value at significance level $\alpha = 0.05$ for two samples of 2,766 observations, $1.358\sqrt{2/T} = 0.0365$. The model distance is about one eighth of this threshold; path sampling and dependence also affect the descriptive pass rates (Table 2).

The second moment makes the role of the emission scale convention explicit. Conditioning on the state and applying the law of total variance gives:

$$\begin{aligned} \text{Var}(G_t) &= \mathbb{E}[\text{Var}(G_t | S_t)] + \text{Var}(\mathbb{E}[G_t | S_t]) && (\text{law of total variance}) \\ &= \frac{\nu}{\nu-2} \sum_k \bar{\pi}_k \sigma_k^2 + \sum_k \bar{\pi}_k (\mu_k - \bar{\mu})^2, && (\text{Student-}t \text{ variance}) \end{aligned} \quad (\text{S37})$$

where $\bar{\mu} = \sum_k \bar{\pi}_k \mu_k$ is the stationary mean. Define the within-state variance $V_w = \sum_k \bar{\pi}_k \sigma_k^2$ and the between-state variance $V_b = \sum_k \bar{\pi}_k (\mu_k - \bar{\mu})^2$. The corresponding empirical decomposition of the sample variance is $V_b + V_w$, up to the $n_k - 1$ versus n_k denominators of the within-state variances and the $\bar{\pi}$ versus $\hat{\pi}$ weights, so the Student- t scale convention adds $2V_w/(\nu - 2)$ relative to the corresponding Gaussian mixture. At the SPY fit (Table S1), $V_w = 0.17 \text{ yr}^{-2}$, only 3.6% of the total variance of 4.60 yr^{-2} : most dispersion lies between states. The inflation is correspondingly small, a model variance of 4.72 against 4.60 yr^{-2} (2.17 against 2.14 yr^{-1} in standard deviation), and it is absent under Gaussian emissions, whose model variance of 4.61 yr^{-2} differs from the sample value only through those denominator and weight corrections.

The fourth moment explains the emission comparison in Table S2. Write $G_t = \mu_k + \sigma_k X$ within state k , where X is a standard Student- t draw, and let $\delta_k = \mu_k - \bar{\mu}$. Expanding the fourth central

moment binomially and dropping the odd-power terms in X , which vanish by the symmetry of ψ_ν , gives:

$$\begin{aligned}
\mathbb{E}[(G_t - \bar{\mu})^4] &= \sum_k \bar{\pi}_k \mathbb{E}[(\delta_k + \sigma_k X)^4] && \text{(condition on the state)} \\
&= \sum_k \bar{\pi}_k \left[\delta_k^4 + 4 \delta_k^3 \sigma_k \mathbb{E}(X) + 6 \delta_k^2 \sigma_k^2 \mathbb{E}(X^2) \right. \\
&\quad \left. + 4 \delta_k \sigma_k^3 \mathbb{E}(X^3) + \sigma_k^4 \mathbb{E}(X^4) \right] && \text{(binomial expansion)} \\
&= \sum_k \bar{\pi}_k \left[\delta_k^4 + 6 \delta_k^2 \sigma_k^2 \mathbb{E}(X^2) \right. \\
&\quad \left. + \sigma_k^4 \mathbb{E}(X^4) \right], && (\mathbb{E}X = \mathbb{E}X^3 = 0) \quad (\text{S38})
\end{aligned}$$

The standard Student- t moments are finite for $\nu > 4$ and satisfy:

$$\mathbb{E}(X^2) = \frac{\nu}{\nu - 2}, \quad \mathbb{E}(X^4) = \frac{3\nu^2}{(\nu - 2)(\nu - 4)}. \quad (\text{S39})$$

At $\nu = 5$ these values are $5/3$ and 25 : the within-state kurtosis is 9 (excess kurtosis 6), against 3 (excess kurtosis 0) for Gaussian emissions. The excess kurtosis of the stationary mixture is $\mathbb{E}[(G_t - \bar{\mu})^4] / \text{Var}(G_t)^2 - 3$; evaluating it at the SPY fit gives 8.34 with Student- t emissions and 5.82 with Gaussian emissions, against an observed value of 7.72 (Table S1). The emission choice enters Eq. (S38) through both moments in Eq. (S39); the larger change by far is $\mathbb{E}(X^4)$ rising from 3 to 25, which acts on the σ_k^4 terms that the wide tail states dominate. The simulated HMM-WJ values (7.5 and 5.5) are lower than these no-jump population values because jumps lower kurtosis and finite heavy-tailed samples underestimate it (Table S2). Asymmetric state locations, scales and occupancies also let the mixture reproduce skewness despite symmetric individual emissions (Table S1).

S4.4 Dependence structure without jumps

The no-jump generator loses return-magnitude dependence too quickly (Table S1). Within state k , the sojourn time is geometric: the chain remains for m steps with probability $\mathbf{T}_{kk}^{m-1}(1 - \mathbf{T}_{kk})$ and therefore stays for $1/(1 - \mathbf{T}_{kk})$ steps on average, between one and two days for every fitted state under the fitted transitions. Short visits alone do not establish rapid mixing; the chain also leaves either tail set within one to two steps on average. The tail sets were $\mathcal{S}_- = \{1, \dots, 5\}$ and $\mathcal{S}_+ = \{96, \dots, 100\}$. Every SPY state was populated, so empty-row fallbacks did not cause these short visits. Let $a_k = \mathbb{E}[|G_t| | S_t = k]$ be the within-state mean absolute return and $\bar{a} = \sum_k \bar{\pi}_k a_k$ its stationary average. Because observations are conditionally independent given the states, the lag- τ product moment reduces to a state-pair sum:

$$\begin{aligned}
\mathbb{E}[|G_t| |G_{t+\tau}|] &= \sum_{j,k} \Pr(S_t = j, S_{t+\tau} = k) a_j a_k && \text{(conditional independence)} \\
&= \sum_{j,k} \bar{\pi}_j (\mathbf{T}^\tau)_{jk} a_j a_k, && \text{(Chapman-Kolmogorov)} \quad (\text{S40})
\end{aligned}$$

so the autocorrelation function (ACF) of $|G_t|$ is:

$$\text{ACF}_{|G|}(\tau) = \frac{\sum_{j,k} \bar{\pi}_j (\mathbf{T}^\tau)_{jk} a_j a_k - \bar{a}^2}{\text{Var}(|G_t|)}. \quad (\text{S41})$$

For an ergodic, diagonalizable transition matrix, $\mathbf{T}^\tau$ approaches the rank-one limit with rows $\bar{\pi}$ at geometric rate $|\theta_2|^\tau$, where θ_2 is the second-largest eigenvalue in modulus; the ACF is then bounded by a constant multiple of $|\theta_2|^\tau$. Direct evaluation of Eq. (S41) gives the fitted-chain decay reported here. For the fitted SPY matrix (Table S1), $|\theta_2| = 0.253$, and $|\theta_2|^\tau$ falls below 0.01 from lag 4 onward. Evaluating Eq. (S40) gives a model ACF of 0.26 at lag 1, close to the observed 0.30 because the counted matrix pins the one-step state-pair law, but 0.021 at lag 3 and effectively zero from lag 5, while the observed ACF remains near 0.26 at lag 5 and 0.14 at lag 25 (Table S1; Fig. 1d). Matching counted one-step transitions fixes $\mathbf{T}$ and therefore its longer-lag dependence; the small $|\theta_2| = 0.253$ motivates the added duration mechanism.

S4.5 Jump-episode arithmetic

Renewal arguments quantify the frequency and duration of forced-tail episodes. On each step with no active episode, an episode with at least one forced step begins with probability $p_e = \epsilon(1 - e^{-\lambda})$, since a trigger whose Poisson draw returns zero is discarded; conditional on starting, the episode length is the zero-truncated Poisson draw with mean $\mathbb{E}[K \mid K \geq 1] = \lambda/(1 - e^{-\lambda})$. At $\lambda = 90$, the correction $e^{-\lambda}$ is below 10^{-39} , so $p_e = \epsilon$ and $\mathbb{E}[K \mid K \geq 1] = \lambda$ to machine precision. The long-run fraction of forced steps, a scalar denoted π_J , follows from the renewal-reward theorem. A renewal cycle consists of the free steps preceding an episode and the episode itself. The number of steps up to and including the trigger is geometric with mean $1/p_e$, but the triggering step is itself the first forced step, so a cycle contains on average $1/p_e - 1 = (1 - p_e)/p_e$ free steps, and the episode contributes $\mathbb{E}[K \mid K \geq 1]$ forced steps in total:

$$\begin{aligned}
 \pi_J &= \frac{\mathbb{E}[K \mid K \geq 1]}{\frac{1 - p_e}{p_e} + \mathbb{E}[K \mid K \geq 1]} && \text{(forced steps over cycle length)} \\
 &= \frac{p_e \mathbb{E}[K \mid K \geq 1]}{1 - p_e + p_e \mathbb{E}[K \mid K \geq 1]} && \text{(multiply through by } p_e) \\
 &= \frac{\epsilon \lambda}{1 - \epsilon + \epsilon e^{-\lambda} + \epsilon \lambda} && (p_e \mathbb{E}[K \mid K \geq 1] = \epsilon \lambda) \\
 &\approx \frac{\epsilon \lambda}{1 + \epsilon \lambda} = 0.0089. && \text{(drop } \epsilon e^{-\lambda}, \text{ then } \epsilon) \tag{S42}
 \end{aligned}$$

Simulation gave 0.0088 across 400 paths (Table S1). The product $\epsilon \lambda$ sets this unconditional fraction, so the fraction alone cannot separate the two parameters; Online Appendix S4.6 explains why conditioning on paths with an episode emphasizes duration while leaving the trigger probability weakly determined.

At the path level, the same arithmetic determines how episodes are distributed across the ensemble. A simulated path contains no episode only if every one of its $T - 1$ transition steps fails to trigger one, so the jump-path probability at $T = 2,766$ is $1 - (1 - p_e)^{T-1} = 24.2\%$; the simulated ensemble gives 24.8% (99 of 400 paths; Table S1), consistent with the $\sim 24\%$ jump-active share in the main comparison. We call these jump paths. Using the long-run episode rate, dividing the $T - 1$ transition steps by the mean cycle length $(1 - p_e)/p_e + \lambda$ gives about 0.274 episodes per path in expectation. The free waiting time is approximately $1/\epsilon = 10^4$ trading days, about 40 trading years, far longer than the 11-year path, so roughly three quarters follow the HMM-NJ law, while about one jump path in eight contains multiple episodes. Ignoring horizon truncation, one episode of mean duration gives a forced fraction near $\lambda/T = 3.3\%$; the simulated mean is 3.6% (Table S1), with multi-episode paths increasing the average. The contrast between forced and free steps explains the added magnitude dependence. Under the forced-step distribution u of Eq. (S26), the conditional standard deviation is 5.38 yr^{-1} against the free-step 2.17 yr^{-1} , a variance ratio of 6.1, and the mean absolute return is $\bar{a}_J = \sum_k u_k a_k = 4.96 \text{ yr}^{-1}$ against $\bar{a} = 1.47 \text{ yr}^{-1}$ (Table S1). The same split describes the state distribution of the augmented chain. On free steps the state is distributed as $\bar{\pi}$, except during the few steps after an episode ends, when the chain relaxes from the last forced tail state back to $\bar{\pi}$ at the rate $|\theta_2|$. The long-run state marginal is therefore approximately $(1 - \pi_J) \bar{\pi} + \pi_J u$. Its forced-state contribution has weight $O(\pi_J) \approx 1\%$; this is not an error bound for the full augmented initial law, which also sets the episode counter to zero. Thus $\bar{\pi}$ supplies only an approximate stationary start.

S4.6 Autocorrelation and kurtosis under jumps

To explain what (ϵ, λ) control in Eq. (3), define the episode-overlap probability: the probability $h(\tau)$ that, given a step is forced, the step τ later belongs to the same episode. A uniformly chosen forced step falls in an episode of length m with probability proportional to $m \Pr(K = m \mid K \geq 1)$, because

an episode of length m contains m forced steps, and its position within that episode is uniform. Combining the two gives:

$$\begin{aligned}
h(\tau) &= \sum_{m \geq 1} \frac{m \Pr(K = m \mid K \geq 1)}{\mathbb{E}[K \mid K \geq 1]} \cdot \frac{(m - \tau)_+}{m} \\
&= \frac{\mathbb{E}[(K - \tau)_+ \mid K \geq 1]}{\mathbb{E}[K \mid K \geq 1]} && \text{(sum over } m) \\
&\approx \left(1 - \frac{\tau}{\lambda}\right)_+, && (K \text{ concentrated near } \lambda) \quad (\text{S43})
\end{aligned}$$

where $(x)_+ = \max(x, 0)$ and the approximation holds because the Poisson length concentrates within a few multiples of $\sqrt{\lambda} \approx 9.5$ around λ . The same-episode probability therefore decays almost linearly from one to zero over the horizon λ .

The ACF follows by conditioning on the forced-step indicator $Z_t = \mathbf{1}\{\text{step } t \text{ is forced}\}$. Forced states are independent draws from u , followed by independent emissions from those states. Dependence between free observations, or between an episode and subsequent free steps, decays at rate $|\theta_2|^\tau$. Neglecting this dependence and post-episode relaxation leaves covariance between the phase means. Write $A_t = |G_t|$ for the absolute return. Under this approximation, the conditional mean is $\mathbb{E}[A_t \mid Z_t] = \bar{a} + Z_t(\bar{a}_J - \bar{a})$, and for rare episodes the joint forced probability is $\Pr(Z_t = 1, Z_{t+\tau} = 1) \approx \pi_J h(\tau)$, so:

$$\begin{aligned}
\text{Cov}(A_t, A_{t+\tau}) &\approx \text{Cov}(\mathbb{E}[A_t \mid Z_t], \mathbb{E}[A_{t+\tau} \mid Z_{t+\tau}]) && \text{(independence given } Z) \\
&= (\bar{a}_J - \bar{a})^2 \text{Cov}(Z_t, Z_{t+\tau}) && \text{(conditional mean in } Z) \\
&\approx (\bar{a}_J - \bar{a})^2 \pi_J h(\tau), && \text{(episodes rare)} \quad (\text{S44})
\end{aligned}$$

so the jump mechanism adds an ACF component of height $\pi_J(\bar{a}_J - \bar{a})^2 / \text{Var}(A_t)$ that decays almost linearly to zero at lag λ , precisely the slow component the counted chain cannot produce. For a jump path carrying a single episode, the probability that a step is forced is λ/T rather than π_J , because the path contains about λ forced steps among its T steps. Replacing π_J by λ/T and using the absolute-return variance of the fitted two-phase mixture, $\text{Var}(A_t) = 3.01$, gives a predicted height of 0.13 at short lags, the plateau entry of Table S1. Among 99 jump-active paths out of 400, the predicted and simulated ACF differed by 0.013 at lag 5 and by less than 0.01 from lag 10 onward. At lag 1, the simulation gave 0.35 against the episode contribution of 0.13, because the short-lived free-phase contribution was omitted from the approximation.

Jump episodes lowered excess kurtosis while strengthening absolute-return autocorrelation (Table S1). Treating a path with one episode as a mixture with forced-step weight λ/T , and using u in place of $\bar{\pi}$ for that component in Eq. (S38), gave population excess kurtosis of 7.20 against 8.34 without jumps. Forced steps increased variance by about 17% by drawing more often from the existing tail states. The fourth central moment did not increase enough to offset the increase in squared variance, so standardized kurtosis fell. A mixture of jump-active and no-jump groups from 4,000 training-length paths, with the jump-active weight varied from zero to one, lowered ACF-MAE together with KS and AD pass rates as the weight increased. Forced steps change how often existing tail emissions are sampled, not their tail exponent, which is set by ν . At the fitted jump-active share, mean path excess kurtosis was 7.5 against the observed 7.72 (Table 2). Conditioning on jump paths also limits parameter identification. Within a single-episode jump path, the ACF component of Eq. (S44) has height proportional to λ/T and decays over roughly λ lags. Across the 25 lags of the objective, its amplitude and variance normalization depend on λ ; the kurtosis shift uses the same forced fraction. The parameter ϵ moves the objective only through the incidence of jump paths, which the conditioning on jump paths removes, and through the small fraction of multi-episode paths. The objective therefore weakly identifies ϵ : the tuned $\epsilon = 10^{-4}$ lies at the lower edge of the explored range for SPY and for all three cross-asset tickers, and the tuned optima vary with the Monte Carlo sample (Online Appendix S7).

S5 Emission distribution and semi-Markov comparison

To compare the emission and duration specifications, we evaluated three variants on SPY (Table S2). The first is a hidden semi-Markov model (HSMM) baseline adapted from Bulla and Bulla [11]. It

partitions the series into eight Laplace-quantile states, the count with the highest in-sample KS pass rate among 3, 4, 5, 6, and 8 states. For each state, we fitted a negative-binomial count distribution by moments of the observed visit lengths when at least five visits had mean length above 1.01 and variance above the mean, using a geometric fallback otherwise. The simulator added one to each nonnegative count to obtain a positive dwell time; fitting used the unshifted visit lengths, so simulation added one step to the fitted count mean. This convention also qualifies the duration comparison. Emissions were Student- t with $\nu = 5$. The other two variants are HMM-WJ with Normal emissions and HMM-WJ with Student- t emissions, both with $N = 100$ states. The HMM-WJ variants had higher training pass rates, but their 100 states versus the HSMM's 8 confound a duration-only comparison; the holdout favored the HSMM on pass rates. Its training ACF-MAE equaled HMM-NJ's, whereas both HMM-WJ variants improved it (Table 2). Holding the rest of HMM-WJ fixed, changing the emission from Normal to Student- t ($\nu = 5$) increased simulated excess kurtosis from 5.5 to 7.5, against an observed value of 7.7 (Online Appendix S4). The emission change improved training marginal fit but barely changed temporal error or holdout pass rates.

Table S2: **Three-way comparison of emission distributions and duration specifications for SPY.** Standard errors in parentheses; bold marks the best value per row, which for excess kurtosis is the value closest to the observed one. The HSMM is the hidden semi-Markov baseline adapted from Bulla and Bulla (eight states, negative-binomial dwell times with a geometric fallback, and Student- t emissions) [11]; HMM-WJ: hidden Markov model with jumps ($N = 100$). All entries are computed from 1,000 simulated paths; pass rates use significance level $\alpha = 0.05$. Kolmogorov–Smirnov (KS), Anderson–Darling (AD), and mean absolute error in the autocorrelation function (ACF-MAE) are defined in Online Appendix S3. Autocorrelation error compares the observed curve with the ensemble-average curve, using lags 1–252 in training and 1–248 in the holdout.

Metric	HSMM (Student- t)	HMM-WJ (Gaussian)	HMM-WJ (Student- t)
States	8	100	100
<i>In-sample (2,766 trading days, 2014–2024)</i>			
KS pass rate (%)	82.0 (1.2)	97.0 (0.5)	98.3 (0.4)
AD pass rate (%)	42.5 (1.6)	90.5 (0.9)	94.8 (0.7)
Excess kurtosis	4.8 (0.08)	5.5 (0.03)	7.5 (0.09)
ACF-MAE	0.059 (<0.001)	0.052 (<0.001)	0.053 (<0.001)
Wasserstein-1	0.176 (0.001)	0.101 (0.002)	0.097 (0.001)
Hellinger	0.113 (<0.001)	0.076 (<0.001)	0.074 (<0.001)
<i>Out-of-sample (249 trading days, 2025)</i>			
KS pass rate (%)	96.2 (0.6)	95.0 (0.7)	95.4 (0.7)
AD pass rate (%)	96.7 (0.6)	95.9 (0.6)	95.3 (0.7)
Excess kurtosis	4.1 (0.13)	4.9 (0.08)	6.2 (0.15)
ACF-MAE	0.042 (<0.001)	0.040 (<0.001)	0.040 (<0.001)
Wasserstein-1	0.287 (0.002)	0.275 (0.005)	0.275 (0.005)
Hellinger	0.239 (0.001)	0.212 (0.001)	0.210 (0.001)

S6 State-resolution sensitivity

To test sensitivity to state resolution, we refitted the hidden Markov models with and without jumps (HMM-WJ and HMM-NJ) to the 2,766-day SPY training history using $N \in \{30, 60, 90, 100, 150, 200\}$ states using 1,000 paths per fit, $\alpha = 0.05$ and the ensemble-ACF convention. Each refit kept five states in each tail set and repeated the (ϵ, λ) search. The no-jump model's Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) pass rates changed by less than one percentage point, and its absolute-return autocorrelation error (ACF-MAE) was unchanged at the reported precision. For HMM-WJ, ACF-MAE fell from 0.057 at $N = 30$ to 0.045 at $N = 200$, while the AD pass rate fell from 97.1% to 82.8%; intermediate values were not monotone. Increasing N narrowed the fixed-size tail sets to more extreme quantile bands and left fewer observations for each state's emission estimates, while retuning also changed the jump parameters. The sweep therefore measured their combined effect, without isolating the contribution of each change. Fallback rules kept sparsely populated states defined (Online Appendix S12). The primary $N = 100$ was a practical compromise; this SPY-only sweep did not establish an optimum for other assets or shorter histories.

S7 Cross-asset generalization

Separate fits to NVDA (semiconductors), JNJ (health care) and JPM (financials) tested whether the SPY findings extended to other assets. Tuning used ($n_{\text{paths}} = 200, \text{seed} = 1234$) and selected $(\epsilon^*, \lambda^*) = (10^{-4}, 70)$ for NVDA and JNJ and $(10^{-4}, 80)$ for JPM. With 1,000 evaluation paths and $\alpha = 0.05$, training KS pass rates were 98.9%, 99.4% and 99.1%, respectively; on the 249-day 2025 holdout they were 97.7%, 74.0% and 79.2%. Transfer was uneven, and Monte Carlo variation in the kurtosis component of the tuning objective makes these selected grid points sample-dependent.

S8 SIM composition derivations and properties verification

The composition identities below use sample moments of the supplied paths. Dropping the market cross-covariance is exact only when its sample value is zero (Online Appendix S1). To derive Eq. (8), first center the full-return draw as in Eq. (6), then set $\varepsilon_i = s_i \tilde{g}_i^c$ for $s_i \in [0, 1]$ and require that the composed series have the same variance as the generator path:

$$\text{Var}(g_i) = \text{Var}(\alpha_i + \beta_i g_m + \varepsilon_i) = \text{Var}(\beta_i g_m + \varepsilon_i) = \sigma_{\text{gen},i}^2, \quad (\text{S45})$$

The constant α_i drops out; expanding the sum gives:

$$\text{Var}(\beta_i g_m + \varepsilon_i) = \beta_i^2 \text{Var}(g_m) + 2\beta_i \text{Cov}(g_m, \varepsilon_i) + \text{Var}(\varepsilon_i). \quad (\text{S46})$$

Substituting $\varepsilon_i = s_i \tilde{g}_i^c$ gives $\text{Var}(\varepsilon_i) = s_i^2 \sigma_{\text{gen},i}^2$ and $\text{Cov}(g_m, \varepsilon_i) = s_i \text{Cov}(g_m, \tilde{g}_i^c)$. Under the assumption $\text{Cov}(\tilde{g}_i^c, g_m) \approx 0$, the cross term vanishes and the variance condition becomes $\beta_i^2 \sigma_m^2 + s_i^2 \sigma_{\text{gen},i}^2 = \sigma_{\text{gen},i}^2$. Solving for s_i^2 gives Eq. (8).

To derive Eq. (11), use the same zero-cross-covariance assumption and write the R^2 of the composed series of Eq. (4) regressed on the market:

$$R^2 = \frac{\beta_i^2 \sigma_m^2}{\beta_i^2 \sigma_m^2 + \sigma_{\varepsilon,i}^2}. \quad (\text{S47})$$

Setting R^2 equal to the calibrated $R_{i,\text{real}}^2$ and solving for the residual variance gives the target $\sigma_{\varepsilon,\text{target}}^2$ of Eq. (11). This branch applies only to assets whose calibrated R^2 is at least $R_{\text{preserve}}^2 = 0.80$. Only QQQ and SPYG crossed this threshold; the other 421 assets used variance preservation. Across 100 draws per tracker, median absolute loading and R^2 errors were 0.005 and 0.001. No training path on the variance-preserving branch clipped: $\rho_i = \beta_i^2 \sigma_m^2 / \sigma_{\text{gen},i}^2$ stayed below $1 - f = 0.90$. A Gaussian check used $\beta \in \{0.8, 1.0, 1.2\}$ and $R^2 \in \{0.80, 0.85, 0.90, 0.95, 0.99\}$, with observed SPY and zero intercept. Reference and composed residuals were independent Gaussian draws with variance $\sigma_{\varepsilon,\text{target}}^2$ from Eq. (11). Supplying this target as σ_{gen}^2 made the scale in Eq. (12) one; only the composed draw was centered. All cells used the intended branch; across 100 replications per cell, median loading and R^2 errors were at most 0.0011 and 0.0017. Independent residuals still caused finite-path differences. This checked the branch formula, not full-return reuse or temporal fit; shared SPY and unequal centering also prevent interpreting its KS pass rates as calibrated tests.

To distinguish intercept retention from mean preservation, let $\bar{g}_m$ be the sample mean of the supplied market path. Centering and scaling give $\bar{\varepsilon}_i = 0$ exactly, and the implementation retains the fitted intercept α_i in every branch. The resulting mean and its change from the calibrated linear mean on the same market path are:

$$\begin{aligned} \bar{g}_i &= \alpha_i + \beta_i^{\text{eff}} \bar{g}_m, \\ \bar{g}_i - (\alpha_i + \beta_i \bar{g}_m) &= (\beta_i^{\text{eff}} - \beta_i) \bar{g}_m. \end{aligned} \quad (\text{S48})$$

Retaining the intercept therefore preserves this linear mean when the loading is unchanged, and a clipped path has a different mean whenever $\bar{g}_m \neq 0$. The residual floor determines the clipped loading without an offsetting intercept adjustment. In the training comparison, the OLS calibration also implies $\alpha_i = \bar{g}_{i,\text{real}} - \beta_i \bar{g}_{m,\text{real}}$, where the bars with subscript real denote observed training means. The difference from the observed asset mean then separates into a change in market mean and a change in loading:

$$\bar{g}_i - \bar{g}_{i,\text{real}} = \beta_i (\bar{g}_m - \bar{g}_{m,\text{real}}) + (\beta_i^{\text{eff}} - \beta_i) \bar{g}_m. \quad (\text{S49})$$

Using the observed training SPY path with $\beta_i^{\text{eff}} = \beta_i$ therefore matches the observed asset mean exactly. The stress transformation $g_m^{(\gamma)}(t) = \bar{g}_m + \gamma[g_m(t) - \bar{g}_m]$, with $\gamma \in \{1, 2, 3\}$, preserved the market mean while multiplying its standard deviation by γ . Holding calibrated marginals fixed, clipping affected 0.0%, 76.4% and 95.2% of evaluated composed paths across the 423 assets, respectively; only clipping changed means in this check. A different supplied market mean can also change asset means without clipping. Small fitted intercept errors therefore reflect the imposed mean constraint (Table S5).

Retaining α_i also does not make the OLS intercept fitted to a finite composed path equal α_i exactly. Because the composed path is $g_i = \alpha_i + \beta_i^{\text{eff}} g_m + \varepsilon_i$, the OLS slope and intercept on a finite path are:

$$\begin{aligned}\hat{\beta}_i &= \frac{\text{Cov}(\alpha_i + \beta_i^{\text{eff}} g_m + \varepsilon_i, g_m)}{\text{Var}(g_m)} && \text{(OLS slope)} \\ &= \beta_i^{\text{eff}} + \frac{\text{Cov}(\varepsilon_i, g_m)}{\text{Var}(g_m)}, && (\text{Cov}(g_m, g_m) = \text{Var}(g_m)) \\ \hat{\alpha}_i &= \bar{g}_i - \hat{\beta}_i \bar{g}_m && \text{(OLS intercept)} \\ &= \alpha_i - (\hat{\beta}_i - \beta_i^{\text{eff}}) \bar{g}_m. && \text{(Eq. (S48))} \quad (\text{S50})\end{aligned}$$

With independent generator and market draws, convergent sample moments, and nonzero limiting market variance, the scaled sample cross-covariance vanishes as T grows, so $\hat{\beta}_i \rightarrow \beta_i^{\text{eff}}$ and $\hat{\alpha}_i \rightarrow \alpha_i$. Here $\beta_i^{\text{eff}} = \beta_i$ unless Eq. (10) clips the market loading. On the variance-preserving branch, the composed variance equals $\sigma_{\text{gen},i}^2$ when the sample cross-covariance is zero: without clipping, $\beta_i^2 \sigma_m^2 + s_i^2 \sigma_{\text{gen},i}^2 = \sigma_{\text{gen},i}^2$ by Eq. (8), and under clipping, Eq. (10) sets β_i^{eff} to give the same variance. On the R^2 -preserving branch, the composed variance is $\beta_i^2 \sigma_m^2 / R_{i,\text{real}}^2$, the value implied by the calibrated $(\beta_i, R_{i,\text{real}}^2)$ rather than by the generator marginal. On the variance-preserving branch, clipped or not, the residual floor guarantees only that $\text{Var}(\varepsilon_i) \geq f \sigma_{\text{gen},i}^2$; it does not guarantee that adding the market term preserves the generator's tail distribution (Online Appendix S8.1).

The zero-sum constraint also fixes the residual contribution to the terminal cumulative log return. With time step Δt , and because the centered residuals sum to zero, summing the composed growth rates gives the exact identity:

$$\Delta t \sum_{t=1}^T g_i(t) = T \Delta t \alpha_i + \beta_i^{\text{eff}} \Delta t \sum_{t=1}^T g_m(t), \quad \sum_{t=1}^T \varepsilon_i(t) = 0. \quad (\text{S51})$$

For a fixed market path and effective loading, the residual contributes no terminal uncertainty. Partial sums before T can still vary. If clipping changes the loading between draws, terminal returns can vary through β_i^{eff} , but the residual sum remains zero. Centering uses the full horizon and is not equivalent to subtracting a fitted population mean: if the same draw is extended to a longer horizon, its first T days receive a different centering constant and scale. These paths are therefore constrained over a specified horizon and do not represent unconstrained cumulative residual returns.

S8.1 Role of the centered full-return draw as the residual

The hybrid composition places $\varepsilon_i = s_i \tilde{g}_i^c$, a centered and rescaled draw of asset i 's full return, in the residual slot of Eq. (4). The distributions differ: the residual of a single-index decomposition is the idiosyncratic component of the return, orthogonal to the market, while $\tilde{g}_i^c$ is distributed like the centered total return. Its variance and tails include observed market co-movement, although the draw itself is independent of the supplied market path. The required residual variance is $\sigma_{\text{gen},i}^2 - \beta_i^2 \sigma_m^2$ on the unclipped variance-preserving branch. Centering gives the residual path an exactly zero sample mean (Eq. (6)). On the unclipped variance-preserving branch, computing σ_m^2 in Eq. (8) from the same market path used in the composition, as in training, gives the residual exactly the remaining variance. The composed variance also contains the sample cross-covariance term, which need not vanish on a finite path (Online Appendix S1). Using the frozen training market variance, as in the six-method holdout evaluation, adds a further variance difference if the simulated market variance differs from that training value. Standalone generator validation does not validate the reused regression-residual shape.

At $\rho_i = 0$, the loading is zero, Eq. (8) gives $s_i = 1$, and the composed path is the centered generator path shifted to the mean α_i . It therefore has the same centered empirical distribution as the generator path, and it equals the uncentered generator path only if α_i equals the draw's sample mean. For $\rho_i > 0$, the independent market contribution changes even the centered distribution. To describe that change on the unclipped variance-preserving branch, we treat s_i and β_i as constants rather than recomputing them from each draw, and we work with population moments conditional on the fitted parameters, which the sample moments of a long path approach. Write the deviation of the composed return from its mean as $X_m + X_i$. The market contribution is $X_m = \beta_i g_m^c$, where g_m^c is the market growth rate minus its mean, and the asset contribution is $X_i = s_i \tilde{g}_i^c$, the scaled asset draw. Their variances are $v_m = \rho_i \sigma_{\text{gen},i}^2$ and $v_i = (1 - \rho_i) \sigma_{\text{gen},i}^2$, and independence factors the fourth-moment cross terms:

$$\begin{aligned}
\mathbb{E}[(X_m + X_i)^4] &= \mathbb{E}(X_m^4) + 4 \mathbb{E}(X_m^3) \mathbb{E}(X_i) \\
&\quad + 6 \mathbb{E}(X_m^2) \mathbb{E}(X_i^2) + 4 \mathbb{E}(X_m) \mathbb{E}(X_i^3) \\
&\quad + \mathbb{E}(X_i^4) \quad (\text{independence}) \\
&= \mathbb{E}(X_m^4) + 6 v_m v_i + \mathbb{E}(X_i^4). \quad (\mathbb{E}X_m = \mathbb{E}X_i = 0) \quad (\text{S52})
\end{aligned}$$

Writing κ_m and κ_{gen} for the population excess kurtoses of the market and generator laws in this fixed-coefficient approximation, the component fourth moments are $\mathbb{E}(X_m^4) = (\kappa_m + 3) v_m^2$ and $\mathbb{E}(X_i^4) = (\kappa_{\text{gen}} + 3) v_i^2$, where rescaling by s_i leaves excess kurtosis unchanged. The excess kurtosis of the composed return follows by dividing Eq. (S52) by the squared total variance:

$$\begin{aligned}
\kappa(X_m + X_i) &= \frac{(\kappa_m + 3) v_m^2 + 6 v_m v_i + (\kappa_{\text{gen}} + 3) v_i^2}{(v_m + v_i)^2} - 3 \\
&= \frac{\kappa_m v_m^2 + \kappa_{\text{gen}} v_i^2 + 3(v_m + v_i)^2}{(v_m + v_i)^2} - 3 \quad (\text{collect terms}) \\
&= \kappa_m \rho_i^2 + \kappa_{\text{gen}} (1 - \rho_i)^2. \quad (v_m + v_i = \sigma_{\text{gen},i}^2) \quad (\text{S53})
\end{aligned}$$

The generator's excess kurtosis survives composition with weight $(1 - \rho_i)^2$ and the market's enters with weight ρ_i^2 ; a check combining 200 independent, standardized SPY-generator path pairs as $\sqrt{\rho_i} x + \sqrt{1 - \rho_i} y$ matched the prediction within 0.03 in mean excess kurtosis at $\rho_i \in \{0.1, 0.3, 0.5\}$. For a small market variance share, most generator excess kurtosis survives: at $\rho_i = 0.10$, it retains weight 0.81. As ρ_i approaches one, the market contribution dominates. The empirical quartiles group assets by loading rather than variance share: median hybrid kurtosis falls from the lowest to the highest β quartile, as does naive kurtosis, and the hybrid KS pass rate falls from 87.6% to 65.9% over the same range (Table S3). The Gaussian SIM, whose residual has no excess kurtosis, stays far below both across the β range (Fig. S1). On the clipped and R^2 -preserving branches, the same formula uses the market's actual share of composed variance in place of ρ_i .

Table S3: **Aggregate metrics by β quartile, across composition methods.** Quartile cutoffs are computed from the calibrated β distribution across the 423-ticker universe. Pass rates pool equal numbers of paths per asset; other entries are medians across paths in the bucket. The GARCH rows use eligible fits among 393 assets, while the other methods cover all 423.

β bucket	Method	$ \hat{\beta} - \beta $	KS pass (%)	W_1	κ	$\text{Var}(g)$
Q1 (low β)	Naive	0.018	24.6	0.403	8.971	18.1
	Gaussian SIM	0.015	0.0	0.620	0.622	14.0
	Hybrid	0.016	87.6	0.177	8.369	14.6
	JumpHMM-on-residuals	0.015	73.2	0.204	7.059	14.3
	Block bootstrap	0.015	71.3	0.208	6.286	13.9
	GARCH(1,1)- t	0.015	57.8	0.253	5.255	13.4
Q2	Naive	0.021	1.9	0.621	7.510	25.1
	Gaussian SIM	0.016	0.2	0.653	1.509	18.0
	Hybrid	0.017	74.9	0.231	6.889	19.0
	JumpHMM-on-residuals	0.017	82.7	0.200	7.799	18.7
	Block bootstrap	0.016	79.8	0.197	7.213	18.0
	GARCH(1,1)- t	0.015	76.4	0.227	6.470	17.8
Q3	Naive	0.023	0.7	0.792	7.390	33.3
	Gaussian SIM	0.017	1.4	0.688	1.947	23.4
	Hybrid	0.018	66.1	0.279	6.904	24.4
	JumpHMM-on-residuals	0.018	78.3	0.242	7.454	24.0
	Block bootstrap	0.017	75.0	0.236	6.888	22.8
	GARCH(1,1)- t	0.016	71.0	0.263	6.265	21.9
Q4 (high β)	Naive	0.029	1.3	0.965	7.233	51.2
	Gaussian SIM	0.022	0.6	0.825	2.054	36.3
	Hybrid	0.022	65.9	0.339	6.739	37.1
	JumpHMM-on-residuals	0.022	69.1	0.313	6.842	37.0
	Block bootstrap	0.021	67.2	0.311	6.334	35.3
	GARCH(1,1)- t	0.021	64.5	0.361	6.064	34.7

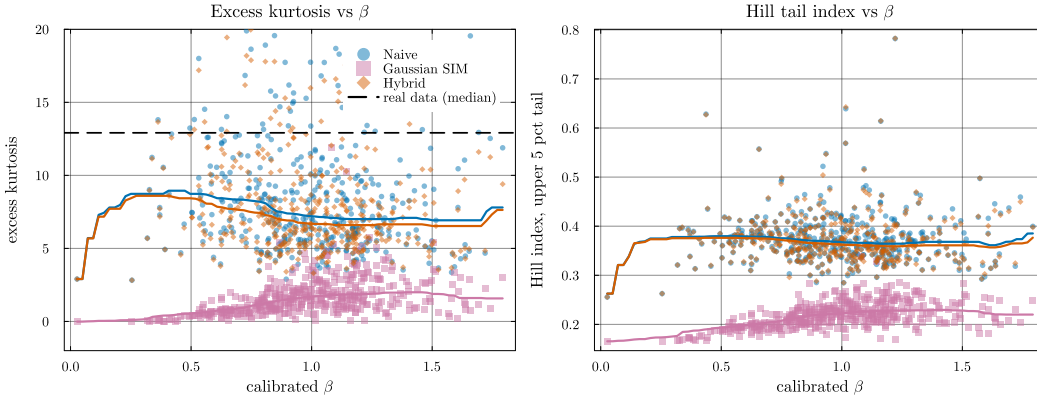


Figure S1: **Heavy-tail preservation: excess kurtosis and Hill tail index vs calibrated β .** Each point is a per-ticker median over 100 replications. *Left:* excess kurtosis, y -axis clipped to $[-2, 20]$ for readability. The dashed line marks the median real-data excess kurtosis across the universe ($\kappa_{\text{real}} \approx 13$); the hybrid and naive composition methods (orange and blue) track each other, while the Gaussian single-index model (SIM) stays near $\kappa \approx 1$. *Right:* Hill tail-index estimator on the upper 5% of $|g|$. The hybrid and naive medians remain near 0.37 throughout the β range; Gaussian SIM sits near 0.22. The shortfall from κ_{real} is present with and without variance correction; this similarity does not isolate the effect of rescaling. Both composed distributions depend on the market and generator variance shares (Eq. (S53)).

S9 Uncertainty in the multi-asset jump comparison

Replication-level contrasts confirmed that jump settings improved training temporal fit but worsened holdout fit (Table S4). Four seeds supplied 1,000 market replications per window with frozen fits. Naive and corrected composition shared draws; settings reused unchanged asset or market components, while enabled and disabled generators used separate random streams. We averaged each metric across tickers within a replication, differenced settings, and divided the standard deviation of the 1,000 differences by $\sqrt{1,000}$; intervals used the mean plus or minus 1.96 standard errors. This retained shared-market dependence but excluded fitting and historical-window uncertainty. All paths entered the primary scores; 247 training-length and 22 holdout-length market paths contained episodes, while the mean episode-containing shares among jump-enabled asset paths were 24.24% and 2.46%. These rare holdout episodes and the transferred SPY calibration limit interpretation; KS non-rejection remains descriptive under temporal dependence.

Table S4: **Monte Carlo uncertainty in the effect of jump settings under corrected composition.** Differences are relative to jumps disabled, with 1,000 market replications per window. ΔACF_{25} is the change in mean absolute error of the absolute-return autocorrelation function through lag 25; negative values indicate improved temporal fit. ΔKS is the change in Kolmogorov–Smirnov non-rejection rate in percentage points. Brackets contain approximate 95% Monte Carlo (MC) intervals conditional on the fitted models and observed histories.

Jump setting	ΔACF_{25} [95% MC interval]	ΔKS [95% MC interval]
<i>Training: 2014–2024, 423 assets, 2,766 days</i>		
Market only	−0.00725 [−0.00812, −0.00638]	−0.30 [−1.08, 0.49]
Market + assets	−0.01988 [−0.02063, −0.01913]	−12.25 [−13.02, −11.49]
<i>Holdout: 2025, 416 assets, 249 days</i>		
Market only	0.00195 [0.00104, 0.00287]	−0.04 [−0.41, 0.34]
Market + assets	0.00502 [0.00412, 0.00593]	−1.49 [−1.87, −1.12]

S10 Residual-centering control

To separate the variance correction from the different residual mean constraints, we paired each native training path with an equivalently centered version (Table S5). The control used frozen models and ordinary least squares (OLS) calibrations, observed training SPY, seed 1234, and 100 draws of length 2,766 per asset, retaining each method’s native scales. With g_i denoting a native composed draw, the control removed only its residual mean:

$$g_i^{\text{ctrl}}(t) = g_i(t) - \frac{1}{T} \sum_{u=1}^T [g_i(u) - \alpha_i - \beta_i^{\text{eff}} g_m(u)]. \quad (\text{S54})$$

The effective loading equaled the fitted loading except when the hybrid rule changed it. Naive and hybrid paths already satisfied the constraint and were reused without modification. No fits, random draws, loadings, or scales changed between a native path and its control. This paired translation left sample variance, recovered loading, R^2 , and excess kurtosis unchanged to numerical tolerance for every evaluated path. The control assessed mean treatment; it did not restore cumulative residual uncertainty or estimate parameter uncertainty. The common set contained 393 assets with admissible GARCH fits, giving 39,300 paired paths per method. The other 30 fits had ARCH and GARCH coefficients summing to at least one. Pass rates pooled equal draw counts per asset; Wasserstein and intercept errors were medians across paths. Equivalent centering favored the residual-fit comparators while preserving the naive-to-hybrid improvement (Table S5). Pass rates remain descriptive under serial dependence and the fixed residual sum.

Table S5: **Paired control for residual centering on common training assets.** Native and centered results use the same 393 assets and 100 paths per asset. Centered paths have zero residual mean over 2,766 observations. Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) columns give non-rejection percentages at $\alpha = 0.05$; higher values indicate closer empirical fit. W_1 is median Wasserstein-1 distance, and $|\hat{\alpha} - \alpha|$ is median absolute ordinary least squares (OLS) intercept error, both in yr^{-1} ; lower values indicate closer agreement. Naive and hybrid already center each residual path. JumpHMM denotes the hidden Markov generator, with jumps disabled; SIM denotes the single-index model, and GARCH denotes generalized autoregressive conditional heteroskedasticity.

Method	KS pass (%)		AD pass (%)		W_1		$ \hat{\alpha} - \alpha $	
	Native	Centered	Native	Centered	Native	Centered	Native	Centered
Naive	7.5	7.5	3.7	3.7	0.695	0.695	0.002	0.002
Gaussian SIM	0.6	0.9	0.5	0.6	0.675	0.673	0.047	0.002
Hybrid	74.4	74.4	65.1	65.1	0.246	0.246	0.002	0.002
JumpHMM-on-residuals	75.8	78.4	70.4	71.4	0.230	0.226	0.048	0.002
Block bootstrap	73.5	76.7	66.7	68.0	0.230	0.227	0.041	0.002
GARCH(1,1)- t	67.4	70.0	61.4	63.0	0.267	0.262	0.047	0.002

S11 Pooled one-day tail thresholds

Pooled one-day tail thresholds used $B = 5,000$ separately constructed 249-day paths per asset and method (Table 5). Linear empirical quantiles pooled all $249B$ daily log returns. Each replication shared a market path across assets and methods; each asset path retained its centering and scaling rules, with hybrid scaling using training market variance. Hidden Markov models started from their fitted stationary laws with jumps disabled; GARCH retained its 100-step warmup. Thresholds were calibrated for 423 training assets (393 GARCH fits) before reading holdout data. The estimand is a uniformly selected day in this finite-horizon construction, not cumulative risk. Pools of 100, 500, 1,000, 2,500 and 5,000 paths tested numerical stability; 1,000 independent paths checked simulated exceedances. Relative threshold changes divided the difference by the absolute 5,000-path threshold. Doubling 2,500 to 5,000 changed mean observed exceedance rates by less than 0.006 percentage points. Median absolute relative changes in 99% thresholds were 0.12–0.30% across methods, with 95th percentiles 0.37–1.03% and a worst case of 3.95%. Independent simulated exceedances were 5.03–5.04% and 1.01–1.02% against 5% and 1% targets. These checks establish simulation stability, not real-market coverage. On the common 386 holdout assets, corrected, residual-fit HMM, naive and Gaussian composition had mean 99% exceedance rates of 1.08%, 1.14%, 0.85% and 1.66%, respectively. Cross-asset standard deviations describe dispersion, not standard errors. Neither eligibility control nor one shared market period establishes equivalence or precise method rankings.

S12 Emission fallback inventory and sensitivity

Emission fallbacks replace within-state moments when a state is sparse or nearly constant. For one asset, let n_k be the number of observations in state k , let $\bar{G}_k$ and s_k be its sample mean and standard deviation when defined, and let $\bar{G}$ and s_G be the corresponding full-series quantities. The implemented emission rule was:

$$(\mu_k, \sigma_k) = \begin{cases} (\bar{G}, s_G), & n_k < 2, \\ (\bar{G}_k, s_G), & n_k \geq 2, s_k < \tau, \\ (\bar{G}_k, s_k), & n_k \geq 2, s_k \geq \tau, \end{cases} \quad \tau = 10^{-12} \text{ yr}^{-1}. \quad (\text{S55})$$

The scale σ_k multiplies a standard Student- t draw; it is not the emission standard deviation. State intervals included their lower boundary and excluded their upper boundary. A transition row with no observed outgoing transition was set to $1/N$ in every column. Such rows are unidentified by observed transitions. Among the 424 full-return models, 39 had at least one fallback emission, affecting 50 states. Of these, 39 states contained 11–119 identical observations each, seven were empty, and four contained one observation. The seven empty states also supplied the seven uniform transition rows. Fallback states carried 0.399–4.300% of stationary probability per affected asset. Sparse-state probability was at most 0.0363% per asset; most fallback mass belonged to populated states with repeated returns. SPY required no fallback, and neither did any of the 423 residual-fit models. Fallback mass is $100 \sum_{k \in \mathcal{F}} \bar{\pi}_k$, where $\mathcal{F}$ is the set of fallback states. The per-asset inventory retained in the replication files uses n_c for observations in a constant state and n_0, n_1 for empty and singleton state counts. Its diagnostic ΔV is the percentage change in stationary mixture variance after replacing only populated constant-state scales by their empirical values; all fits used $N = 100$ and $\nu = 5$.

To isolate the consequence of broadening populated constant states, we compared the fitted generators with an empirical-scale alternative on all 39 affected non-market assets (Table S6). The alternative replaced s_G by s_k only where $n_k \geq 2$ and $s_k < \tau$; locations, partitions, transitions, initial probabilities, and sparse-state fallbacks were unchanged. A zero empirical scale gives a point mass at the state mean. We replayed the original 100 paths of 2,766 observations per asset, paired by state sequence and random draws, with jumps disabled and the observed training SPY path shared by both treatments. We scored the uncomposed generator and the naive and hybrid compositions; each composition used its treatment’s generator variance. Pass fractions remain descriptive for these dependent series with ties. The empirical-scale alternative improved marginal-fit scores on this training subset (Table S6). Hybrid KS and AD pass rates rose by 10.28 and 14.08 percentage points, with Monte Carlo standard errors of 0.49 and 0.60. For the uncomposed generators, the change in stationary mixture variance ranged from -0.651% to -6.520% (Online Appendix S12). The fallback scale therefore affected both the generator’s variance and the composed marginal fit. All main comparisons retain the original

fallback rule. This paired training check did not test changes to sparse-state estimates or validate the alternative on held-out histories, so the alternative remains a training diagnostic.

Table S6: Paired sensitivity to the scale of populated constant states. Each treatment used 100 paired training-length paths for each of the same 39 affected assets. Entries are means over these fixed assets and replications. The empirical-scale treatment changes only populated near-constant states, retaining the sparse-state fallback. Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) pass fractions use $p > 0.05$; their changes are percentage points. W_1 is the Wasserstein-1 distance to observed growth rates. Variance / observed divides each path’s variance by its asset’s observed training variance. ACF-MAE₂₅ is the mean absolute difference between each path’s absolute-return autocorrelation function and the observed function over lags 1–25, calculated before averaging paths. Paired change subtracts the fitted value from the empirical-scale value. Standard errors (SE) use the 100 replication-level mean paired changes over the fixed asset set and describe simulation uncertainty, not uncertainty across historical markets.

Output	Metric	As fitted	Empirical scale	Paired change (SE)
Uncomposed	KS pass (%)	98.64	99.82	+1.18 (0.16)
	AD pass (%)	98.90	99.72	+0.82 (0.14)
	W_1 (yr ⁻¹)	0.1800	0.1696	-0.0104 (0.0004)
	Variance / observed	1.0772	1.0553	-0.0220 (0.0001)
	ACF-MAE ₂₅	0.14207	0.14183	-0.00024 (0.00002)
Naive	KS pass (%)	12.13	14.64	+2.51 (0.22)
	AD pass (%)	6.92	9.44	+2.51 (0.23)
	W_1 (yr ⁻¹)	0.6234	0.5840	-0.0394 (0.0002)
	Variance / observed	1.3650	1.3431	-0.0219 (0.0001)
	ACF-MAE ₂₅	0.11663	0.11576	-0.00086 (0.00002)
Hybrid	KS pass (%)	68.64	78.92	+10.28 (0.49)
	AD pass (%)	56.15	70.23	+14.08 (0.60)
	W_1 (yr ⁻¹)	0.2782	0.2474	-0.0308 (0.0002)
	Variance / observed	1.0775	1.0556	-0.0219 (0.0001)
	ACF-MAE ₂₅	0.10289	0.10145	-0.00144 (0.00002)