
Variance-Corrected Multi-Asset Equity Simulation with Hybrid Hidden Markov Marginals

Abdulrahman Alswaidan

Robert Frederick Smith School of Chemical and Biomolecular Engineering
Cornell University, Ithaca, NY 14850
aa2725@cornell.edu

Jeffrey D. Varner*

Robert Frederick Smith School of Chemical and Biomolecular Engineering
Cornell University, Ithaca, NY 14850
jdv27@cornell.edu

Abstract

Synthetic multi-asset equity data must reproduce each asset’s return distribution and its relationship with the market. Reusing a generator fitted to full asset returns creates a problem: adding its draws to a market factor counts market variance twice. We derived a correction that centers and rescales each draw over a fixed horizon before adding the market factor, allowing reuse without fitting a second generator to regression residuals. We tested the correction on 423 non-market assets in a 424-asset United States equity and exchange-traded-fund universe, using hidden Markov generators with heavy-tailed emissions. The corrected paths retained heavy tails and recovered the calibrated market loadings with low error. On 416 complete asset histories held out from 2025, the correction improved the mean Kolmogorov–Smirnov pass rate over naive composition and brought the median ratio of synthetic to observed variance close to one. Its one-day left-tail 99% Value-at-Risk exceedance rate, using thresholds pooled across separate simulated paths, was 1.12%, compared with 1.16% for the residual-fit hidden Markov comparator and a nominal rate of 1%. We also tested a jump-duration mechanism that extended visits to extreme-return states and improved volatility clustering for the broad-market exchange-traded fund with ticker SPY. The multi-asset correction remained effective with jumps enabled, but transferring the SPY jump settings improved temporal fit in training and worsened it in the 2025 holdout. The method provides a way to reuse fitted asset generators for daily-fit comparisons. Its zero-sum residual constraint removes terminal residual uncertainty, and unmodeled dependence among asset-specific residuals can lead to overstated rebalancing returns. Code, cached inputs, result summaries, and instructions for fitting the per-asset models accompany the paper.

Keywords: hidden Markov model; jump-duration mechanism; single-index model; synthetic financial data; variance correction; Value-at-Risk coverage check; volatility clustering; heavy-tailed marginals.

*Corresponding author.

1 Introduction

Researchers and practitioners use synthetic equity paths to test risk models, evaluate portfolio strategies, and examine market scenarios beyond those observed in a historical sample [1, 2]. A multi-asset simulator must represent both the behavior of each asset and the relationships among assets. Factor models provide a simple way to link many assets through a shared market path [3–5], but using them with existing single-asset generators requires care. The single-index model separates each asset’s return into a market component and an asset-specific residual, with the market loading estimated by regression. A generator fitted to full asset returns already represents the asset’s total variance. Adding its draws to the market component as though they were residuals adds market variance a second time and can also shift the mean. Fitting another generator to each asset’s regression residuals avoids that problem, but requires a second fit across the asset universe. Reusing the existing generator would avoid that additional fit, provided its draws could be transformed to supply only the residual contribution. The relevant question is whether that transformation can control the mean and variance of the composed paths while retaining useful distributional and temporal behavior. Dependence among the remaining residuals is a further requirement that a per-asset adjustment alone cannot resolve.

The return features that a generator must capture are illustrated by daily excess growth rates for the broad-market exchange-traded fund with ticker SPY from 2014–2024 (Fig. 1). Most returns lie close to zero, but extreme returns occur much more often than a Gaussian model predicts (Fig. 1a,b), a widely documented feature of financial returns [6, 7]. Raw growth rates show little correlation across days, while absolute growth rates remain positively correlated over longer periods (Fig. 1c,d). Large and small changes therefore cluster over time, so matching the return distribution alone does not reproduce volatility dynamics. Synthetic financial data often miss these temporal properties even when the return histogram appears realistic [8]. A hidden Markov model (HMM) offers an interpretable way to represent both features: it draws returns from state-dependent distributions and uses transitions between states to represent temporal behavior [9, 10]. Ordinary transitions can leave extreme states too quickly to reproduce persistent volatility, motivating an explicit duration mechanism [11]. Such a mechanism can improve an individual generator, but adding a shared market path changes the distribution and temporal behavior of the composed returns. Preserving total variance therefore does not by itself establish that the single-asset improvements survive composition. Portfolio evaluation also requires dependence between assets, including relationships not explained by the market factor [12, 13].

In this study, we developed a variance correction for combining independently fitted asset generators with a shared market path (Fig. 4; Table 3). The correction centered and rescaled full-return draws before adding the market component, avoiding a separate residual-generator fit. We used heavy-tailed hidden Markov generators and first assessed their distributional and temporal fit on SPY, including a jump-duration variant that extended visits to extreme-return states. We then evaluated composition on 423 non-market assets, initially with jumps disabled to isolate the variance correction, and compared reuse with methods fitted directly to regression residuals. With all 2014–2024 fits held fixed, the correction improved distributional fit over naive composition on 416 complete asset histories from 2025 and brought the median ratio of synthetic to observed variance close to one (Table 4). Per-asset Value-at-Risk coverage checks tested whether that improvement also produced reliable tail thresholds (Table 5). A separate comparison enabled jumps in the market alone or in both the market and asset generators to test whether the SPY temporal benefit survived composition (Table 6). The correction remained effective, but the transferred jump settings improved temporal fit in training and worsened it in the holdout. The experiments established the value and limits of generator reuse while leaving cross-asset residual dependence unresolved.

2 Related Work

Single-asset return models treat changing volatility, market regimes, and extreme moves in different ways. Autoregressive conditional heteroskedasticity (ARCH) and generalized autoregressive conditional heteroskedasticity (GARCH) models allow conditional variance to change over time [14, 15]. Even with Gaussian innovations, the changing variance can produce an unconditional return distribution with excess kurtosis. Heavy-tailed innovations can improve the tail fit when Gaussian GARCH understates the frequency of extreme returns. Stochastic-volatility models make volatility a latent

process [16–18]. Jump-diffusion models add discontinuous price moves [19, 20], but a jump component alone does not explain persistent volatility. Markov-switching ARCH and GARCH models combine discrete regimes with changing conditional variance [21, 22]. Hidden-state models represent returns with a small number of market regimes. In a hidden Markov model (HMM), each latent state has a separate return distribution. Gaussian-emission HMMs can reproduce heavy tails and weak raw-return autocorrelation, but may still miss volatility clustering [23, 10]. Hidden semi-Markov models allow more flexible state durations and can improve volatility persistence [11]. An HMM does not create a jump process by itself. Rare extreme moves must come from the state-dependent return distributions or from a transition rule designed for such events. Deep generative models learn return distributions and temporal features without specifying a small set of market regimes or a parametric return process. Generative adversarial networks (GANs) are one class of deep generative model. Quant GANs have reproduced several financial time-series features, including volatility clustering and leverage effects [24]. Sig-Wasserstein GANs use path signatures to learn features that depend on the order of observations [25]. In contrast, evaluations of GAN paths, including paths from the time-series generative adversarial network (TimeGAN), have found too little autocorrelation in absolute returns [26–28]. The conflicting results show that flexible architectures do not guarantee a match to financial stylized facts. Model design, training, and evaluation all matter [1, 8].

Multi-asset generation also requires a model of cross-asset dependence. Multivariate GARCH models estimate time-varying covariance matrices. The dynamic conditional correlation model reduces the number of parameters by separating individual volatility models from correlation dynamics [29, 30]. Copulas separate each asset’s return distribution from the dependence model. Dynamic copulas allow cross-asset dependence to change over time, while vine copulas provide flexible high-dimensional constructions [31, 32]. Factor models reduce dimension by linking each asset to a small number of shared factors [3–5]. Shared-state HMMs and multivariate GANs can also generate joint market moves [33, 34]. A standard factor model can resample historical residuals or fit a separate residual generator for every asset. This paper addresses a narrower problem. We start with single-asset generators already fitted to full returns and ask whether they can be reused in a factor model. The relevant comparison is with methods fitted directly to regression residuals: those methods remove the market component before fitting, whereas reuse adjusts an existing full-return draw during composition. Neither approach specifies cross-asset residual dependence unless that dependence is modeled separately.

3 Methods

We fitted a marginal generator for each asset and combined the generated paths with a variance-corrected single-index model. The dataset contained 424 United States-listed equities and exchange-traded funds observed from 2014 through 2024. The single-asset analysis focused on the broad-market exchange-traded fund with ticker SPY. It used 2,767 daily volume-weighted average prices for fitting, which yielded 2,766 growth rates, and the next 250 prices from 2025, which yielded 249 holdout growth rates. The multi-asset analysis used daily closing prices. Of the 423 non-market assets in the training universe, 416 had complete 2025 histories and were included in the multi-asset holdout evaluation. We defined the excess growth rate $G_{i,j}$ for ticker i between trading days $j - 1$ and j from prices $P_{i,j-1}$ and $P_{i,j}$.

$$G_{i,j} \equiv \left(\frac{1}{\Delta t} \right) \ln \left(\frac{P_{i,j}}{P_{i,j-1}} \right) - r_f. \quad (1)$$

Here, $\Delta t = 1/252$ is the fraction of a trading year spanned by one trading day, and r_f is a constant continuously compounded risk-free rate. We used $r_f = 0.043$ for the SPY training period and $r_f = 0.0421$ for its 2025 holdout, based on Treasury Separate Trading of Registered Interest and Principal of Securities (STRIPS) bond yields. For the multi-asset closing-price experiments, we set $r_f = 0$ in both windows, so their growth rates were annualized log returns. The excess growth rate has units of year^{-1} and is time-additive under continuous compounding.

3.1 Per-asset hidden Markov marginal generator

For each asset, the hidden Markov model with jumps (HMM-WJ) converted the continuous return series into a sequence of N ordered return regimes. At each time step, the model first selected a regime and then drew a return from that regime’s distribution (Fig. 2). We represented the model as

$\mathcal{M} = (\mathcal{S}, \mathcal{O}, \mathbf{T}, \mathbf{E}, \bar{\pi})$ [9]. The hidden state $S_t \in \mathcal{S} = \{1, \dots, N\}$ identifies the regime at time t , and the observed value is the excess growth rate G_t from Eq. (1). We omit the ticker index i when discussing one asset. The transition matrix $\mathbf{T}$ sets the probabilities of moving between regimes, $\mathbf{E}$ gives the return distribution within each regime, and $\bar{\pi}$ gives the initial regime probabilities. We ordered the regimes from the most negative to the most positive returns. Their boundaries were equally spaced quantiles of a Laplace distribution fitted to the asset’s in-sample returns. Specifically, $Q_k = F_L^{-1}(k/N; \mu_L, b_L)$, where μ_L and b_L are the fitted location and scale. We set $Q_0 = -\infty$ and $Q_N = +\infty$ and assigned return G_t to state k when $Q_{k-1} \leq G_t < Q_k$. The Laplace distribution captured the sharp concentration of small price movements in Fig. 1a [35, 36]. We computed its closed-form quantiles for all 424 tickers [37].

The within-state emission followed a location-scale Student- t distribution:

$$G_t \mid S_t = k \sim \mu_k + \sigma_k \cdot t_\nu, \quad \nu = 5, \quad (2)$$

where t_ν denotes a standard Student- t random variable with ν degrees of freedom. For observations assigned to state k , we used the sample mean for μ_k and the sample standard deviation for σ_k , subject to two fallback rules. A state with fewer than two observations used the mean and standard deviation of that asset’s full training series. A state with at least two observations and sample standard deviation below 10^{-12} yr^{-1} retained its state mean but used the full-series standard deviation as its scale. The same rules applied to residual-fit generators, using their residual training series. These exceptions kept emission parameters defined but could broaden states containing repeated returns (Table S17). A standard t_ν has variance $\nu/(\nu - 2)$, so σ_k is a scale parameter rather than the emission standard deviation. At $\nu = 5$, the emission standard deviation is $\sigma_k \sqrt{5/3}$. We selected $\nu = 5$ from a sensitivity sweep. We used $\nu = \infty$ for the Normal baseline; Table 1 gives the explored range. Holding the rest of the model fixed, the Student- t emission raised simulated kurtosis toward the observed value and raised the Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) pass rates relative to the Normal emission. We also compared HMM-WJ with a hidden semi-Markov model (HSMM) baseline adapted from Bulla and Bulla [11] (Table S4; Online Appendix S6). The emission and HSMM comparisons separated the effects of heavy-tailed emissions and the jump-duration mechanism. We estimated the transition matrix $\mathbf{T}$ by counting observed transitions and normalizing each row with a positive count. A state with no observed outgoing transition used a uniform row, $\mathbf{T}_{kj} = 1/N$ for every destination j . Counting avoided the initialization sensitivity of iterative expectation-maximization [37]. The counted matrix was concentrated near its diagonal, but individual states, including tail states, were short-lived (Fig. S3 in Online Appendix S5). The counted transition probabilities caused the model to leave extreme-return states too quickly to reproduce the observed volatility clustering [11]: a chain fitted by counting reproduces the one-step state-pair frequencies exactly, and its absolute-return autocorrelation therefore decays geometrically at a rate set by the counted matrix. Online Appendix S4 derives the fitted generator’s stationary law and autocorrelation structure and quantifies both this rapid mixing and the correction added by the jump mechanism.

We added jump episodes to extend visits to extreme-return states. When no jump episode was active, a new episode began with probability ϵ . Its duration was $K \sim \text{Poisson}(\lambda)$, where λ is the mean episode length [38]. Because a Poisson draw can be zero, $K = 0$ caused no forced tail step. For $K > 0$, the model temporarily replaced ordinary transitions with draws from two tail sets. The set $\mathcal{S}_- = \{1, \dots, N_{\text{tail}}\}$ contained the most negative states, and $\mathcal{S}_+ = \{N - N_{\text{tail}} + 1, \dots, N\}$ contained the most positive states. At each forced step, the model selected the negative set with probability p_{neg} and the positive set otherwise. It made the tail-set choice independently at each step, so negative extreme returns occurred slightly more often than positive ones. Table 1 lists ϵ , λ , p_{neg} , and N_{tail} . Two closed-form quantities summarize the mechanism’s operating point: forced steps occupy a long-run fraction of approximately $\epsilon\lambda/(1 + \epsilon\lambda)$ of all steps, and a path of T steps contains at least one episode with probability approximately $1 - e^{-\epsilon T}$, so ϵ sets how many paths jump while λ sets how long an episode lasts (Online Appendix S4). We obtained the initial-state distribution $\bar{\pi}$ by solving $\bar{\pi}\mathbf{T} = \bar{\pi}$ with $\sum_k \bar{\pi}_k = 1$ [39, 40]. Because $\mathbf{T}$ was estimated by counting, $\bar{\pi}$ equals the vector of in-sample state frequencies up to end effects, so the model’s stationary growth-rate distribution is the frequency-weighted mixture of the state emission distributions. The solved $\bar{\pi}$ is exact for the ordinary transition matrix but only approximate for the jump-augmented process because it does not include the remaining jump duration. The full simulation procedure appears in Algorithm 1. Each step followed $\mathbf{T}$ or continued a jump episode and then drew a return from the selected state’s emission distribution.

Algorithm 1 Hidden Markov model with jumps (HMM-WJ) single-asset marginal generator.

Require: Fitted parameters $(\mathbf{T}, \mathbf{E}, \bar{\pi}, \epsilon, \lambda, p_{\text{neg}}, N_{\text{tail}})$; horizon T ; tail sets $\mathcal{S}_- = \{1, \dots, N_{\text{tail}}\}$ and $\mathcal{S}_+ = \{N - N_{\text{tail}} + 1, \dots, N\}$.
Ensure: State sequence $\{S_t\}_{t=1}^T$ and growth-rate path $\{G_t\}_{t=1}^T$.
1: Draw $S_1 \sim \bar{\pi}$; draw $G_1 \sim \mu_{S_1} + \sigma_{S_1} t_5$; $k \leftarrow 0$ {stationary start; k : remaining forced-step counter}
2: **for** $t = 2, \dots, T$ **do**
3: **if** $k > 0$ **then**
4: $\mathcal{J} \leftarrow \mathcal{S}_-$ w.p. p_{neg} , else $\mathcal{S}_+$; $S_t \sim \text{Uniform}(\mathcal{J})$; $k \leftarrow k - 1$ {forced tail step; sign drawn per step}
5: **else if** $\text{Uniform}(0, 1) > \epsilon$ **then**
6: $S_t \sim \mathbf{T}_{S_{t-1}, \cdot}$ {standard Markov transition}
7: **else**
8: $K \sim \text{Poisson}(\lambda)$ {trigger jump; K is the episode length}
9: **if** $K = 0$ **then**
10: $S_t \sim \mathbf{T}_{S_{t-1}, \cdot}$ { $K = 0$: no forced steps, standard transition}
11: **else**
12: $\mathcal{J} \leftarrow \mathcal{S}_-$ w.p. p_{neg} , else $\mathcal{S}_+$; $S_t \sim \text{Uniform}(\mathcal{J})$; $k \leftarrow \min(K - 1, T - t)$ {first forced step; K steps total, sign per step}
13: **end if**
14: **end if**
15: Draw $G_t \sim \mu_{S_t} + \sigma_{S_t} t_5$ {Eq. (2)}
16: **end for**

We chose the jump probability ϵ and mean duration λ to match the SPY absolute-return autocorrelation and kurtosis [6, 7, 10]. Jump-diffusion models use Poisson events to add instantaneous price jumps [19, 20]. In HMM-WJ, a jump episode extended a visit to the tail states. We searched a grid of (ϵ, λ) values. At each grid point, we averaged squared errors in the autocorrelation function (ACF) of absolute returns through lag L and weighted squared errors in excess kurtosis over the jump-active paths. We minimized the objective $J(\epsilon, \lambda)$.

$$J(\epsilon, \lambda) = \frac{1}{|\mathcal{R}_J|} \sum_{r \in \mathcal{R}_J} \left[\sum_{\tau=1}^L (\text{ACF}_{\text{obs}}(\tau) - \text{ACF}_r(\tau))^2 + w_\kappa (\kappa_{\text{obs}} - \kappa_r)^2 \right], \quad (3)$$

where $\mathcal{R}_J$ is the set of jump-active simulated paths, $\text{ACF}_{\text{obs}}(\tau)$ and κ_{obs} are the empirical absolute-growth autocorrelation at lag τ and excess kurtosis, and $\text{ACF}_r(\tau)$ and κ_r are the corresponding values for path r . We used κ for kurtosis and K for jump duration. We simulated 200 independent paths of 2,766 trading days at each grid point. A path with no jump reduces to the hidden Markov model with no jumps (HMM-NJ) and contains no information about (ϵ, λ) , so the objective included only paths with at least one jump [38]. Within those paths, λ controls both the height and the horizon of the slow autocorrelation component while the kurtosis penalty limits the total forced-step mass; ϵ acts mainly through the share of paths that contain an episode (Online Appendix S4). The value of w_κ set the relative weight of the kurtosis error. The search ranges, w_κ , L , and the remaining HMM-WJ and SIM hyperparameters are reported in Table 1. We fixed the selected hyperparameters before running the generator comparisons and the holdout evaluation.

To compare the hidden Markov generator with a neural autoregressive model, we included a gated recurrent unit (GRU) benchmark (Table 2). Its two recurrent layers used 64 hidden units each and a 50-return input window. Separate output heads predicted the mean and log variance of the next standardized return. We fitted the network on training SPY only, selected weights by training loss, and sampled recursively from the predicted Gaussian distributions. Online Appendix S3.1 specifies the optimizer, stopping rule, initialization, and recorded computational environment.

3.2 Variance-corrected multi-asset composition

The single-asset model generated each ticker separately and did not specify cross-asset dependence. For the multi-asset model, we added a shared market path as a common factor. We used the single-index model (SIM) of Sharpe [3].

$$g_i(t) = \alpha_i + \beta_i g_m(t) + \varepsilon_i(t), \quad t = 1, \dots, T. \quad (4)$$

Here α_i is the intercept for asset i , g_m is the market growth-rate path, β_i is the asset's market loading, and ε_i is its asset-specific residual path. We use ε_i for the residual path and ϵ for the jump probability in the single-asset model. We estimated the intercept and market loading (α_i, β_i) from real data by ordinary least squares (OLS). The choice of ε_i determined the composition method. A standard SIM draws independent Gaussian residuals with the variance estimated by OLS. These Gaussian residuals preserve the fitted market relationship but do not retain the heavy tails and volatility regimes produced by the single-asset generator. We called the Gaussian-residual method *Gaussian SIM*.

Naive full-path composition. In the naive construction, a full synthetic return path $\tilde{g}_i$ from the single-asset generator served as the residual.

$$g_i = \alpha_i + \beta_i g_m + \tilde{g}_i. \quad (5)$$

The fitted intercept and market term already set the conditional mean of asset i , while the full-return draw generally has $\mathbb{E}[\tilde{g}_i] \neq 0$. Equation (5) therefore has conditional mean $\alpha_i + \mathbb{E}[\tilde{g}_i] + \beta_i g_m$, not $\alpha_i + \beta_i g_m$. We centered every full-return path before composition to remove the duplicate mean. Centering subtracted the realized path mean.

$$\bar{\tilde{g}}_i \equiv \frac{1}{T} \sum_{t=1}^T \tilde{g}_i(t), \quad \tilde{g}_i^c(t) \equiv \tilde{g}_i(t) - \bar{\tilde{g}}_i. \quad (6)$$

Therefore, $T^{-1} \sum_t \tilde{g}_i^c(t) = 0$ exactly. Subtracting a constant leaves both the sample variance and the sample covariance with g_m unchanged. We used the centered construction $g_i = \alpha_i + \beta_i g_m + \tilde{g}_i^c$ as the *naive* benchmark. This choice imposes a zero residual sum over the requested horizon, which is stronger than a zero population mean. Scaling preserves that constraint in every hybrid branch. For a fixed market path and effective loading, the terminal cumulative log return has no asset-specific residual uncertainty, although daily and intermediate returns still vary. A clipped loading can vary between draws and produce terminal variation through the market term. Because centering and scaling use statistics of the entire draw, the construction depends on the chosen horizon. We therefore evaluated it as a constrained finite-horizon construction for daily distributional fit and factor recovery; it does not preserve cumulative residual uncertainty (Online Appendix S9).

Centering corrected the mean but not the variance. The path variance $\sigma_{\text{gen},i}^2 = \text{Var}(\tilde{g}_i) = \text{Var}(\tilde{g}_i^c)$ is the *generator variance*. It already represents the asset's total variance. Adding the market term therefore adds variance a second time. We sampled the residual and market paths independently. Their covariance is zero in population and close to zero on a long realized path. We approximated the naive composed variance accordingly.

$$\text{Var}(g_i) \approx \beta_i^2 \sigma_m^2 + \sigma_{\text{gen},i}^2, \quad \text{Cov}(\tilde{g}_i^c, g_m) \approx 0, \quad (7)$$

where $\sigma_m^2 = \text{Var}(g_m)$ is the variance of the market path. The excess is $\beta_i^2 \sigma_m^2$, so the error is largest for assets with large market loadings.

Variance correction. We set $\sigma_{\text{gen},i}^2$ as the target total variance for asset i . The market term contributed $\beta_i^2 \sigma_m^2$, so the residual term could contribute only the remaining variance. We defined s_i as the nonnegative asset-specific residual scale, set $\varepsilon_i = s_i \tilde{g}_i^c$, and required $\text{Var}(\beta_i g_m + s_i \tilde{g}_i^c) = \sigma_{\text{gen},i}^2$. Under the zero-covariance assumption, solving for s_i gives the correction.

$$s_i^2 = 1 - \frac{\beta_i^2 \sigma_m^2}{\sigma_{\text{gen},i}^2} \quad (8)$$

The *market loading ratio* ρ_i is the market variance contribution divided by the target variance.

$$\rho_i \equiv \frac{\beta_i^2 \sigma_m^2}{\sigma_{\text{gen},i}^2}, \quad (9)$$

Under the zero-covariance assumption, ρ_i is the fraction of the target variance contributed by the market, and $s_i^2 = 1 - \rho_i$. At $\rho_i = 1$, the unconstrained rule leaves no asset-specific variance; for $\rho_i > 1$, it has no real-valued solution. Values of ρ_i at or above one can arise when β_i is large, the generator variance is low, or the synthetic market is more volatile than the calibration market. We required the asset-specific draw to contribute at least a fraction f of the target variance. We set $\rho_i^{\max} = 1 - f$ and reduced the effective loading β_i^{eff} when $\rho_i > \rho_i^{\max}$. We applied the piecewise correction in Eq. (10).

$$\beta_i^{\text{eff}} = \begin{cases} \beta_i & \text{if } \rho_i \leq \rho_i^{\max} \\ \text{sign}(\beta_i) \sqrt{(1-f) \frac{\sigma_{\text{gen},i}^2}{\sigma_m^2}} & \text{if } \rho_i > \rho_i^{\max} \end{cases} \quad s_i^2 = \begin{cases} 1 - \rho_i & \text{if } \rho_i \leq \rho_i^{\max} \\ f & \text{if } \rho_i > \rho_i^{\max} \end{cases} \quad (10)$$

The correction retained the sign of the calibrated loading β_i . We used $f = 0.10$, so the asset-specific draw contributed at least 10% of the target variance for non-tracker assets (Table 1). We retained the fitted intercept α_i when clipping changed the loading. Because the scaled residual had zero sample mean, the composed mean was $\bar{g}_i = \alpha_i + \beta_i^{\text{eff}} \bar{g}_m$, where $\bar{g}_m$ is the supplied market path's mean. Clipping therefore changed the mean by $(\beta_i^{\text{eff}} - \beta_i) \bar{g}_m$ relative to the calibrated linear mean on that same market path. The clipped branch retained the intercept, generator-variance budget, and residual floor; it did not retain the original mean unless $\bar{g}_m = 0$. Online Appendix S9.1 examines the substitution of a full-return draw for the residual: it derives what the construction preserves exactly and how the composed shape dilutes as ρ_i grows.

High- R^2 index trackers. The non-tracker branch targeted total generator variance. For an index-tracking fund, we instead targeted its fitted relationship with the market. The coefficient of determination R^2 measures the fraction of the asset's variance explained by the market. For example, SPY regressed on itself has $\beta = 1$, $R^2 = 1$, and no residual variance. QQQ and SPYG also had high R^2 against SPY. The non-tracker branch can change the fitted R^2 even when it preserves total variance. We therefore used a separate tracker branch when $R_{i,\text{real}}^2$ was at least R_{preserve}^2 . We set $R_{\text{preserve}}^2 = 0.80$, which separated the index trackers from individual stocks in our universe (Fig. S5). For the tracker branch, we computed the residual variance required to recover the calibrated R^2 under the zero-covariance assumption.

$$\sigma_{\varepsilon,\text{target}}^2 = \beta_i^2 \sigma_m^2 \cdot \frac{1 - R_{i,\text{real}}^2}{R_{i,\text{real}}^2} \quad (11)$$

We rescaled the generator draw to the target residual variance.

$$\varepsilon_i = \left(\sqrt{\frac{\sigma_{\varepsilon,\text{target}}^2}{\sigma_{\text{gen},i}^2}} \right) \tilde{g}_i^c. \quad (12)$$

When $R_{i,\text{real}}^2 = 1$, the target residual variance is zero. SPY regressed on itself therefore has no residual term. A scale factor greater than one increases the variance of the generator draw and can weaken the original marginal fit.

Complete composition rule. The tracker branch targeted the calibrated R^2 . The non-tracker branch targeted the generator variance and reduced β_i only when the market term would leave less than the required asset-specific variance. After selecting a branch, we added the scaled asset draw to the market term. The full procedure appears in Algorithm 2. If used, a residual-copula rank reorder was applied jointly after scaling and before composition. The reorder preserved the empirical variance of each residual path. Centering kept the path mean controlled by the intercept and market term. Under the zero-covariance assumption, OLS estimates from longer composed paths converge to the effective market loading and its intercept. The variance and loading properties are asymptotic. They do not specify exact finite-sample values or the complete return distribution. Online Appendix S9 gives the algebra. The construction links assets through same-day market returns. A simulated market episode can therefore affect several assets together, but the rule does not separately fit lead-lag effects or a joint volatility process.

Algorithm 2 Hybrid single-index model (SIM) composition with variance correction.

Require: Nonconstant $g_m, \tilde{g}_i \in \mathbb{R}^T, i = 1, \dots, N$; each $\tilde{g}_i$ is independent of g_m .

Require: Parameters $(\alpha_i, \beta_i, R_{i,\text{real}}^2)$; floor $f \in (0, 1)$; threshold $R_{\text{preserve}}^2 \in (0, 1]$.

Ensure: Composed paths $g_i \in \mathbb{R}^T$ and branch flags b_i .

```

1:  $\sigma_m^2 \leftarrow \text{Var}(g_m)$ .
2: for each asset  $i = 1, \dots, N$  do
3:    $\sigma_{\text{gen},i}^2 \leftarrow \text{Var}(\tilde{g}_i)$ ;  $\tilde{g}_i^c \leftarrow \tilde{g}_i - \bar{\tilde{g}}_i$ .
4:   if  $R_{i,\text{real}}^2 \geq R_{\text{preserve}}^2$  then
5:      $v_i \leftarrow \beta_i^2 \sigma_m^2 (1 - R_{i,\text{real}}^2) / R_{i,\text{real}}^2$ .
6:      $s_i \leftarrow \sqrt{v_i / \sigma_{\text{gen},i}^2}$ ;  $\beta_i^{\text{eff}} \leftarrow \beta_i$ ;  $b_i \leftarrow \text{R2-PRESERVE}$ .
7:   else
8:      $\rho_i \leftarrow \beta_i^2 \sigma_m^2 / \sigma_{\text{gen},i}^2$ 
9:     if  $\rho_i \leq 1 - f$  then
10:       $s_i \leftarrow \sqrt{1 - \rho_i}$ ;  $\beta_i^{\text{eff}} \leftarrow \beta_i$ ;  $b_i \leftarrow \text{VARIANCE}$ .
11:    else
12:       $s_i \leftarrow \sqrt{f}$ ;  $\beta_i^{\text{eff}} \leftarrow \text{sign}(\beta_i) \sqrt{(1 - f) \sigma_{\text{gen},i}^2 / \sigma_m^2}$ .
13:       $b_i \leftarrow \text{CLIPPED}$ .
14:    end if
15:  end if
16:   $\varepsilon_i \leftarrow s_i \tilde{g}_i^c$ .
17: end for
18: Optional: jointly rank-reorder  $\{\varepsilon_i\}_{i=1}^N$ .
19: for each asset  $i = 1, \dots, N$  do
20:    $g_i \leftarrow \alpha_i + \beta_i^{\text{eff}} g_m + \varepsilon_i$  {Eq. (4)}
21: end for

```

Evaluation protocol. We evaluated the method on 424 United States equities and exchange-traded funds from Polygon.io. Each ticker had 2,767 daily closing prices from January 2014 through December 2024, which yielded 2,766 growth rates. This complete-case selection conditioned the analysis on assets that survived and retained data coverage throughout the training window. We used SPY as the market and composed the other 423 assets. For each asset, we fitted the state and emission model used in the SPY analysis (Table 1; $r_f = 0$). In the primary six-method comparison, we set the jump probability to zero to measure composition without per-ticker jump calibration. We regressed each real asset on SPY to estimate $\alpha_i, \beta_i, R_{i,\text{real}}^2$, and residual variance. Across the sample, β_i ranged from 0.03 to 1.79, and $R_{i,\text{real}}^2$ ranged from 0.001 to 0.933 (Figs. S4 and S5). We compared six ways to construct the asset-specific term (Table 3). The naive method used the centered full-return draw without variance correction. The Gaussian SIM method used independent Gaussian residuals with variance estimated by OLS. The corrected method, labeled *hybrid* in the tables and figures, used Algorithm 2. The JumpHMM-on-residuals method fitted a new JumpHMM to the OLS residual series after converting the residuals to a synthetic price path by cumulative compounding. The block-bootstrap method sampled the OLS residual series with the Politis–Romano stationary bootstrap [41] and a mean block length of $\sqrt{T} \approx 50$. The GARCH(1,1)- t method fitted a conditional-variance model to each residual series [15]. We required optimizer convergence, a finite likelihood, finite coefficients, a positive variance intercept, nonnegative ARCH and GARCH coefficients whose sum was below one, and Student- t degrees of freedom above two. Accepted fits also required finite positive unconditional variance and a finite, nonconstant trial path. All 423 optimizations converged; 30 fits failed the stationarity condition, leaving 393 eligible training assets. The cached models included per-ticker acceptance diagnostics, which were checked again before evaluation. For each ticker, the naive and corrected methods received the same JumpHMM draw, which isolated the effect of the variance correction. The other four methods generated their own residual draws. JumpHMM names identify the generator implementation; its jump mechanism was disabled in both full-return and residual fits for this six-method comparison. We did not use the optional cross-sectional rank reorder because the experiment tested each ticker’s marginal construction separately. To isolate the effect of the different mean constraints, we also compared each method’s native path with the same path after subtracting its residual mean over the full training horizon (Table S14). We held the fitted models, random draws, market path, effective loadings, and residual scales fixed. Naive and hybrid paths already satisfied this constraint. The control used 100 replications per asset and the same 393

assets with available, simulatable cached GARCH models for all six methods. Online Appendix S11 gives the control definition and separates centering effects from model fitting.

We evaluated each composed series on factor recovery, distributional fit, and variance preservation. For factor recovery, a new OLS regression produced the absolute errors $|\hat{\beta} - \beta|$ and $|\hat{R}^2 - R_{\text{real}}^2|$; lower values indicate closer recovery. For distributional fit, we used Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) pass rates, Wasserstein-1 distance, excess kurtosis, and the Hill upper-tail index. Higher KS and AD pass rates and lower Wasserstein distance indicate a closer match; kurtosis and the Hill index describe tail behavior. For variance preservation, we used the composed-to-generator variance ratio. A ratio of one indicates equal variances. Online Appendix S3 gives the metric definitions. We ran 100 replications per ticker with seed 1234, producing 42,300 series for each method except GARCH, which produced 39,300 series across its 393 eligible assets. Pass rates used the significance level $\alpha = 0.05$. We archived all 250,800 training-path scores with the input, fitted-model, source-code, and configuration fingerprints. The aggregate, branch, and loading-quartile tables were generated from this same validated run, with matching method-level summaries distributed alongside the path scores. For the six-method holdout evaluation, we froze all marginal fits, residual models, and SIM parameters estimated from 2014–2024 (Tables 4 and 5). We evaluated the methods against the 249 growth rates observed in 2025. Of the 423 non-market training assets, 416 had complete holdout histories; GARCH results covered 386 because its thirty non-stationary training fits remained excluded (Table 4). For each replication, we generated a 249-day SPY path from the training-period SPY marginal and used the same simulated market path in all asset compositions. In this evaluation, the correction used the observed training-period market variance in place of the simulated path variance σ_m^2 in Eqs. (8)–(12); the generator variance was still computed from each asset draw. The residual scale therefore budgeted for the training market variance, and variation in the simulated market variance could move the composed variance away from the generator target even when the sample cross-covariance was zero. Observed 2025 SPY and asset returns were used only for scoring. We repeated the KS, AD, Wasserstein-1, variance, and kurtosis evaluations with 100 paths per ticker. Because goodness-of-fit tests have less power on 249 observations than on 2,766, we also compared each synthetic path with a randomly selected contiguous 249-day block from the training history. We first averaged replication-level results within ticker and then summarized across tickers so each asset received equal weight. The 249-day training blocks provided a comparison at the same sample length as the holdout period.

To isolate the generators’ one-day tail thresholds from estimation noise in a single short path, we used a separate simulation ensemble for the Value-at-Risk (VaR) evaluation (Table 5). For each asset and method, we pooled the daily log returns from 5,000 separately constructed 249-day paths, giving 1,245,000 observations for each lower-tail quantile. Centering, scaling, market variance, and initialization followed the same conventions as the holdout scorecard. We fixed one threshold per asset, method, and coverage level before counting exceedances on the observed 2025 returns. The ensemble size and convergence checkpoints were fixed before holdout scoring; 1,000 additional independent paths checked simulation tail probabilities. Each threshold therefore described a uniformly selected day of the retained 249-day construction. Pooling did not remove its horizon dependence or zero-sum residual constraint. We reported mean exceedance rates and cross-ticker standard deviations descriptively. These summaries did not treat simulated days, dependent holdout observations, or assets sharing a market as independent replications for a coverage significance test. No 2025 data were used for fitting or threshold calibration.

Jump-enabled multi-asset comparison. To test whether the temporal benefit of the single-asset jump mechanism survived composition, we compared three settings: jumps disabled, jumps enabled only in the SPY market generator, and jumps enabled in both SPY and every asset generator (Table 6). We froze the existing closing-price state models and SIM calibrations. Enabled models received the SPY settings of Table 1, $(\epsilon, \lambda) = (10^{-4}, 90)$, $p_{\text{neg}} = 0.52$, and $N_{\text{tail}} = 5$, without per-asset tuning. The SPY calibration used volume-weighted average prices, so its transfer also changed the price convention. We simulated the market in both the 2,766-day training comparison and the 249-day holdout comparison; the preceding six-method training comparison instead used observed SPY. In both windows of the jump comparison, the correction used each simulated market path’s variance and each asset draw’s variance. Thus, the jump comparison also differed from the six-method holdout protocol, which kept the market variance fixed at its training value. Within each experiment, the variance convention was the same across all compared jump settings. This comparison assessed whether the SPY settings improved the composed paths without recalibrating the individual asset

models. For each jump setting, naive and corrected composition received the same asset and market draws (Table 6). One market path was shared across all assets in each replication. We generated 250 paths for each of four seeds (1234, 2345, 3456, and 4567), giving 1,000 replications per asset, setting, and method. We measured absolute-return ACF-MAE over lags 1–25, with lags 1–60 as a secondary check, and repeated the marginal and variance diagnostics. These common lag windows used the mean of each path’s absolute ACF errors. The single-asset comparison instead measured the error after averaging the path ACFs, using 252 lags in training and 248 in the holdout (Eqs. (S19) and (S20)). The resulting temporal scores have different estimands and cannot be compared directly across the two experiments. We included all paths in the primary summaries and estimated Monte Carlo uncertainty from replication-level cross-ticker averages, keeping assets together under their shared market path. The intervals describe simulation uncertainty conditional on the fitted models and observed histories, not uncertainty across market regimes.

4 Results

4.1 Single-asset generator validation

We first evaluated whether the asset generator captured the return distribution and volatility clustering that motivated its use in composition (Figs. 1 and 2; Table S1). The observed SPY series had heavy tails and persistent absolute-return autocorrelation in both the training and holdout windows. Individual raw-return correlations were small, although the Ljung–Box test detected joint serial dependence (Table S1). Calibration against the 2014–2024 history selected jump probability and mean duration $(\epsilon, \lambda) = (10^{-4}, 90)$, with similar objective values at nearby grid points (Eq. (3); Table 1; Algorithm 1). Ordinary states lasted only 1–2 steps, and the counted transition matrix implied absolute-return autocorrelation that decayed to near zero within a week (Fig. S3). The selected episodes extended visits to extreme states, providing a mechanism for more persistent volatility. To assess whether the generator comparison depended on the state partition, we varied the number of states (Table S7). The primary SPY analysis used $N = 100$ states, while sweeps from $N = 30$ to 200 changed HMM-NJ pass rates by less than one percentage point (Table S7). The HMM-WJ model showed a tradeoff as the partition changed: narrower states improved autocorrelation accuracy but lowered the AD pass rate. States with too few observations use the documented global-moment fallback instead of local emission estimates (Table S17). The selected $N = 100$ lay within the range that supported well-populated states for the 2,766-day history. That choice did not establish an appropriate resolution for shorter histories, which would provide fewer observations per state. The sensitivity checks therefore supported the fitted generator at the observed sample length without establishing one state count for every asset history.

We compared the calibrated HMM-WJ with seven alternative generators using 1,000 paths of 2,766 trading days (Table 2; Fig. 3). The HMM-NJ and HMM-WJ models had KS pass rates of 99.3% and 98.3%, respectively, compared with 98.4% for the fitted Laplace baseline. Both HMM variants had lower Wasserstein-1 distances than Laplace, whereas Laplace had the lowest Hellinger distance among the fitted generators (Table 2). The ranking therefore depended on the metric. Bootstrap resampling had a 100% KS pass rate but did not reproduce volatility clustering, while Gaussian sampling passed neither distribution test. The GARCH(1,1) model had the lowest mean absolute error between the observed and ensemble-average absolute-return autocorrelation functions (ACF-MAE), 0.031, but rarely passed the distribution tests. The gated recurrent unit (GRU) [42] showed a similar tradeoff. The HSMM-style baseline adapted from Bulla and Bulla [11] reached an 82% KS pass rate but underestimated kurtosis by more than one third. Within the HMM, Student- t emissions produced kurtosis of 7.5, close to the observed 7.7, whereas Normal emissions underestimated it by about 29% (Table S4). Both HMM variants also reproduced the observed skewness of -0.75 through unequal occupancy of negative and positive states (Table S1). The temporal comparison showed the cost of retaining that marginal fit. Jump episodes improved temporal fit, with a small reduction in distributional pass rates (Table 2; Fig. 3b). The HMM-WJ model reduced ACF-MAE from 0.059 for HMM-NJ to 0.053. About 24% of paths contained an episode (Fig. S2); paths without an episode were equivalent to HMM-NJ. The episode share, the fraction of forced steps, and the jump-path autocorrelation agreed with the calculations in Online Appendix S4 (Tables S2 and S3). To examine the tradeoff, we resampled the fitted ensemble with the fraction of jump-active paths ranging from zero to one. Increasing that fraction lowered autocorrelation error but also lowered KS and AD pass rates. Kurtosis declined through the observed value, while the Hill upper-tail index remained stable.

The fitted ensemble retained approximately one quarter jump-active paths, balancing kurtosis and autocorrelation error. To test whether the distributional fit extended beyond calibration, we compared frozen-model paths with the 249 held-out SPY returns from 2025. The HMM-NJ and HMM-WJ models retained KS pass rates of 96.6% and 95.4%, with kurtosis close to the observed value (Table 2; Fig. S2). The fitted Laplace baseline had a KS pass rate of 96.7% and a lower Wasserstein-1 distance than either HMM variant, but its excess kurtosis of 2.8 remained below the observed 6.9 (Table 2). Separate calibrations for NVDA, JNJ, and JPM also showed strong training fit but more variable holdout performance (Table S10). These findings supported the HMM as a source of heavy-tailed asset paths, while the benefit of the jump mechanism depended on the metric and evaluation period. We used the no-jump variant for the primary composition comparison and evaluated the transfer of jump settings separately in the multi-asset jump comparison.

4.2 Variance-corrected multi-asset composition

We compared six composition methods across a training universe of 423 non-market assets, with 393 eligible for GARCH, to test whether the correction preserved generator variance and calibrated market loading (Table 3; Fig. 4). We paired each composed path with its uncomposed generator draw to measure the variance ratio directly. Across the 421 ordinary assets, the median of the per-ticker median ratios was 1.3171 for naive composition and 1.0001 for hybrid composition (Fig. 4b). The corresponding hybrid ticker medians ranged from 0.9933 to 1.0072. Hybrid also retained higher marginal-test pass fractions across the calibrated β range (Fig. 4a). The two tracker assets used a different variance target and were identified separately. Finite-path covariance still caused variation around the ordinary hybrid target: the median absolute relative variance error was 1.12%, and its 95th percentile was 3.41% (Fig. 4b). These path-level errors qualified the small average cross-covariance reported in the earlier diagnostic (Fig. S1): cancellation across replications did not imply exact variance preservation on each path. The correction improved distributional fit while recovering the market loading with accuracy similar to the other methods (Table 3). All six methods had median absolute β errors between 0.017 and 0.022 (Table 3). Centering also kept the median absolute intercept error at 0.002 yr^{-1} for the naive and corrected methods; residual-fit methods retained finite-path variation in their residual means. With observed training SPY and no loading adjustment, centered paths matched the observed asset mean exactly. Their small intercept errors therefore reflected the imposed mean constraint and finite-path loading error, rather than independent evidence of mean recovery.

To test whether fallback emissions influenced the composition comparison, we inspected the fitted states and ran a paired sensitivity check (Tables S17 and S18). Fallbacks affected 50 states in 39 full-return models, including 39 populated states containing repeated returns; no residual-fit model required a fallback. Keeping the empirical spread in those populated states raised hybrid KS pass rates from 68.6% to 78.9% and AD pass rates from 56.2% to 70.2% on the same 39 affected assets (Table S18). The alternative retained partitions, transition matrices, state paths, and state means. Treating repeated returns as noise on the scale of the entire asset therefore affected the reported training fit. The main comparisons retain the original fallback rule; the control identifies sensitivity to that rule without establishing the alternative’s holdout behavior.

The methods differed more in distributional fit than in factor recovery (Table 3; Fig. S6). Gaussian SIM had the lowest median R^2 error, but almost never passed the distribution tests and had excess kurtosis an order of magnitude below the observed value. The corrected method passed 73.6% of KS comparisons and retained heavy tails, with median excess kurtosis of 7.2 and a Hill index of 0.37 (Fig. S6). Its median R^2 error fell between those of the naive and Gaussian methods because the main correction targeted generator variance rather than observed R^2 . Preserving variance therefore improved the marginal fit without making every fitted property an exact target. Fitting directly to regression residuals provided a competitive alternative because those residuals already excluded the market component (Table 3). The three residual-fit methods had KS pass rates ranging from 67.4% for GARCH(1,1)- t to 75.8% for JumpHMM-on-residuals (Table 3). The corrected rate was about two percentage points below JumpHMM-on-residuals and slightly above block bootstrap. JumpHMM-on-residuals and block bootstrap had slightly lower Wasserstein distances, while JumpHMM-on-residuals matched the corrected method’s kurtosis and Hill index almost exactly. The block-bootstrap and GARCH residual fits produced lighter tails. These comparisons used each method’s native mean treatment, so their cross-method differences also included the effect of the zero-sum constraint. Applying equivalent residual centering to all six methods changed the training ranking on the common

393-asset set (Table S14). Hybrid retained a 74.4% KS pass rate, while JumpHMM-on-residuals rose from 75.8% to 78.4% and block bootstrap rose from 73.5% to 76.7%. Both residual-fit methods also had higher AD pass rates and lower Wasserstein distances than hybrid after centering. Gaussian SIM and GARCH remained below hybrid on both pass rates. After centering, all methods had median intercept errors of 0.002 yr^{-1} at the reported precision, while leaving each path’s variance, recovered loading, R^2 , and excess kurtosis unchanged to numerical tolerance. Hybrid’s improvement over naive composition persisted because both already used identical centering. Reuse therefore improved on naive composition without a second generator fit, but did not match the strongest residual-fit comparators under the common mean constraint. Held-out histories were needed to assess whether the improvement over naive composition persisted beyond the fitting period.

4.3 Holdout performance and VaR coverage

To test out-of-sample generalization without refitting or look-ahead bias, we froze the fitted models and SIM parameters before evaluating them against 416 complete asset histories from 2025 (Table 4). The corrected method reached an 87.0% mean cross-ticker KS pass rate, against 83.5% for centered naive composition, and its median composed-to-observed variance ratio was 0.97, whereas naive composition remained inflated at 1.29. JumpHMM-on-residuals reached an 86.2% KS pass rate and a slightly lower median W_1 than the corrected method. Matched-length training blocks produced lower pass rates for every method. The higher 2025 pass rates did not arise solely from comparing samples of 249 rather than 2,766 observations. The average pass rates concealed substantial differences among tickers (Fig. 5). Most ticker-level rates were near the upper end of the range, but every method retained a lower tail of weak fits. For the corrected method, many tickers improved relative to their matched-length training blocks, while a subset deteriorated out of sample. The held-out marginal improvement was broad but did not ensure reliable extreme-loss thresholds. To test whether marginal fit translated into reliable tail thresholds, we estimated per-ticker one-day left-tail Value-at-Risk (VaR) thresholds from 5,000 separate 249-day paths and counted exceedances on the observed 2025 histories (Table 5). At $\alpha = 0.95$, the corrected and JumpHMM-on-residuals methods produced mean exceedance rates of 5.48% and 5.62%, respectively, against the 5% nominal rate. At $\alpha = 0.99$, their rates were 1.12% and 1.16%, against the 1% nominal rate. Naive composition was below nominal at 0.88%, while Gaussian SIM had the largest rate at 1.72%. Doubling the threshold pool from 2,500 to 5,000 paths changed every method’s mean exceedance rate by less than 0.006 percentage points at either coverage level (Table S15). The corrected method and naive composition lay similarly close to the 1% target on opposite sides. Their small difference did not establish a ranking: the holdout contained only about 2–3 expected 99% exceedances per asset, and all assets shared one market period. The corrected method’s mean rates remained above nominal at both coverage levels. Cross-asset dispersion described the heterogeneity of realized coverage; it did not establish statistical miscalibration or validate coverage in other periods.

4.4 Jump-enabled multi-asset composition

To test whether jump episodes improved the composed paths, we compared jumps disabled, market-only jumps, and market-plus-asset jumps under naive and corrected composition (Table 6). With corrected composition, market-only jumps reduced the training absolute-return ACF-MAE over lags 1–25 from 0.13569 to 0.12844, a 5.3% reduction. The KS pass rate changed from 73.94% to 73.64%, with a Monte Carlo interval for the difference that included zero (Table S12). Enabling jumps in both the market and asset generators reduced the ACF-MAE further, to 0.11581, a 14.6% reduction from the no-jump setting, but lowered the KS pass rate to 61.68%. Across all settings and both windows, the mean ratio of corrected to generator variance differed from one by less than 0.05%. The correction remained effective, while asset episodes reduced training autocorrelation error at the cost of marginal fit. The training-period temporal improvement did not carry into the 2025 holdout (Table 6). With corrected composition, market-only jumps raised the 25-lag ACF-MAE from 0.07330 to 0.07525, a 2.7% increase, while market-plus-asset jumps raised it to 0.07832, a 6.9% increase (Table 6). The corresponding KS pass rates were 85.92%, 85.88%, and 84.43%. The Monte Carlo intervals excluded zero for both increases in ACF error, and the 60-lag results agreed (Table S12). The jump-active market paths represented only 2.2% of the simulated one-year ensemble (Table S13), so the holdout comparison tested the fitted mixture of ordinary and jump-active paths. The correction worked with jumps enabled, but the transferred SPY settings did not improve temporal fit in 2025.

The short holdout and low episode frequency limited what the comparison could establish about behavior in other market periods.

4.5 Sensitivity analyses

We examined the tracker and clipping rules under conditions where they could affect the result (Figs. S4 and S5; Table S5). In the observed universe, 421 assets used the variance-preserving branch and two, QQQ and SPYG, used the R^2 -preserving branch; none required clipping (Figs. S5 and S4; Table S5). Both trackers had 100% KS pass rates, while the highest- R^2 individual stock, BLK, fell about 0.16 below the tracker threshold of 0.80. The empirical evaluation of this branch was therefore limited to two assets.

We used a Gaussian synthetic-tracker grid to check branch selection and parameter recovery under controlled inputs (Table S6). The grid covered $(\beta_{\text{true}}, R_{\text{true}}^2) \in \{0.8, 1.0, 1.2\} \times \{0.80, 0.85, 0.90, 0.95, 0.99\}$, with 100 replications per cell. Both the reference and composed series reused the observed SPY path. A fresh Gaussian residual with the target residual variance was supplied directly to the composer, so its residual scale was one. Median loading and R^2 estimates were close to their targets, and every cell had a nominal KS pass rate of 100%. Those pass rates were descriptive: the test’s reference calibration was not established for the shared market path and whole-path centering used in this comparison. The grid checked a restricted Gaussian construction; it did not exercise full-return HMM fitting, non-unit residual scaling, or new market paths.

Greater market exposure made the composed distribution more dependent on the market path (Fig. 4a; Table S8). Grouping assets by β quartile showed that corrected KS pass rates fell from 87.6% in the lowest quartile to 65.9% in the highest (Table S8). To test the loading adjustment directly, we multiplied deviations of the market growth-rate path from its mean by $\gamma \in \{1, 2, 3\}$ while holding the calibrated marginals fixed (Table S9). This preserved the market mean and multiplied its standard deviation by γ . At $\gamma = 1$, every asset had $\rho_i < 1 - f = 0.90$, so clipping was unnecessary. At $\gamma = 2$ and 3, clipping applied to 76.4% and 95.2% of assets. The adjustment therefore activated when the market contribution would otherwise consume too much of the target variance. The clipped paths retained their fitted intercepts, so their means shifted by $(\beta_i^{\text{eff}} - \beta_i)\bar{g}_m$ despite the unchanged market mean. The clipping frequencies described activation of the variance constraint, without establishing preservation of the original asset means. At observed market variance, varying the residual floor f did not change branch assignments, and varying the tracker threshold changed only the two tracker assignments (Table S5).

5 Discussion

The variance correction allowed fitted full-return generators to be reused in a single-index model without adding market variance twice (Fig. 4; Table 3). Its practical value was avoiding a separate generator fit for each asset’s regression residuals while improving on naive composition. The corrected method passed 73.6% of the full-length training KS comparisons and retained heavy tails (Table 3). On the 2025 holdout, it raised the mean cross-ticker KS pass rate from 83.5% under centered naive composition to 87.0% and held the median ratio of synthetic to observed variance at 0.97 (Table 4). JumpHMM-on-residuals had a slightly higher pass rate in training and a slightly lower rate in the holdout. The comparison supported reuse as a practical option when full-return generators are already available; fitting directly to residuals remained a competitive alternative. Under equivalent centering on the common training assets, JumpHMM-on-residuals and block bootstrap both outperformed hybrid on distribution-test pass rates and Wasserstein distance (Table S14). The original comparison therefore partly reflected different mean constraints. Neither method was best for every asset, and the average improvement concealed a subset of corrected paths whose fit deteriorated relative to matched-length training blocks. The validation established closer marginal fit, but it did not establish reliable tail coverage (Table 4; Table 5). The corrected method and JumpHMM-on-residuals had pooled-threshold one-day left-tail 99% VaR exceedance rates of 1.12% and 1.16%, respectively, against the nominal 1% rate (Table 5). The larger simulation ensemble reduced threshold-estimation error while retaining each 249-day path’s construction. The remaining differences were descriptive: the 249-day holdout contained too few expected extreme events per asset for a precise ranking or a general calibration claim. Distributional pass rates also require care because the two-sample KS and AD tests assume independent observations, whereas several evaluated generators produced serial

dependence. We therefore interpreted pass rates alongside distributional distances, tail summaries, and autocorrelation errors. Matched-length training blocks reduced the difference in test power between the training and holdout comparisons, but the observed 2025 history still represented only one market period. The evidence supported improved variance and distributional fit across the evaluated universe, with substantial uncertainty about performance in other periods and for individual assets.

The jump comparison showed that improving the single-asset generator did not automatically improve the composed paths (Table 2; Table 6). On SPY, HMM-WJ reduced absolute-return autocorrelation error relative to HMM-NJ while retaining high distributional pass rates. Other generators achieved lower autocorrelation error or higher pass rates, so the single-asset result supported a tradeoff between temporal and marginal fit (Table 2). With multi-asset composition, market-only jumps improved training temporal fit with little change in the KS pass rate, whereas adding asset-level episodes produced a larger temporal improvement at a substantial marginal-fit cost. Both settings increased autocorrelation error in 2025, although the variance correction remained effective (Table 6). These tests transferred one SPY calibration from volume-weighted average prices to closing-price models. Separate calibrations for NVDA, JNJ, and JPM had strong in-sample fit, but three assets did not establish a general calibration rule (Table S10). The asset episodes also came from full-return models and were not identified separately as idiosyncratic events. Per-asset tuning or distinct shared and asset-specific episode models could change the tradeoff, but neither was tested here.

The correction’s effect on the return distribution depended on the asset’s market exposure (Fig. 4; Table S8). Corrected KS pass rates declined from 87.6% in the lowest β quartile to 65.9% in the highest because the market path accounted for more of the composed variance (Table S8). Preserving total variance therefore did not preserve the complete shape of the original return distribution. The loading adjustment was unnecessary at observed market variance but activated for most assets when market volatility was doubled or tripled (Table S9). That stress transformation preserved the market mean. Clipping retained the fitted intercept while reducing the magnitude of the loading, so it changed the asset mean by $(\beta_i^{\text{eff}} - \beta_i)\bar{g}_m$. The clipped branch therefore traded retention of the calibrated loading and mean for the variance budget and residual floor. Only two tracker assets used the separate R^2 -preserving branch (Table S5). The Gaussian grid supplemented that limited empirical evidence with a branch check at unit residual scale (Table S6); it did not establish performance of the full fitted pipeline across the grid. Its nominal KS pass rates also lacked calibration for the shared-market comparison. These properties depended on generating asset and market draws independently. If their covariance were nonzero, the variance calculation would need an additional cross-term. The correction thus addressed a specific composition problem, with explicit assumptions about the supplied paths and adjustments when the market term consumed too much of the target variance. Marginal-fit conclusions also depended on how populated constant states were represented (Table S18). The paired control improved training fit when those states retained their empirical spread. The main results retain the original global-scale fallback, and the alternative requires holdout evaluation before its performance can be generalized. Dependence among asset-specific residuals remained outside the composition rule (Algorithm 2; Online Appendix S2). A shared market path linked same-day asset returns and could produce simultaneous large moves, but independent residual draws omitted the sector and style dependence present in real assets. Omitting positive residual covariance can overstate the diversification return from periodic rebalancing [43, 13, 44]; Online Appendix S2 derives the contribution for this construction. The limitation also applies to the residual-fit baselines when their residuals are generated independently. Shifting paths leaves cross-asset covariance unchanged, and rescaling independent residuals cannot create the missing dependence. A synchronized multivariate block bootstrap, residual factor model, or copula could address that omission, while separate univariate models would improve only within-asset behavior. The present evaluation measured per-asset fit and VaR coverage, so it did not validate portfolio-level risk or rebalancing performance. Those uses require a joint residual model and direct evaluation of the resulting dependence. There is also a separate temporal limitation: per-path centering forces each residual sum to zero at the chosen terminal horizon (Online Appendix S9). Conditional on the market path and effective loading, terminal returns therefore contain no residual uncertainty. Cross-sectional rank reordering preserves that sum and cannot restore cumulative residual variation. The reported daily-fit and one-day tail diagnostics do not validate cumulative-return risk. Such applications require a construction that retains cumulative residual uncertainty as well as validation of cross-asset dependence.

6 Conclusion

We developed a variance-corrected single-index method that reuses full-return generators without counting market variance twice (Fig. 4; Table 3). Centering and rescaling allowed the generated asset paths to be combined with a shared market path without fitting a second generator to each asset’s regression residuals. Across 423 non-market assets, the method recovered calibrated market loadings with low error and retained heavy-tailed return distributions. On 416 complete asset histories from 2025, it improved the mean KS pass rate over centered naive composition and brought the median ratio of synthetic to observed variance close to one (Table 4). Residual-fit methods remained competitive. With pooled thresholds, the corrected method and JumpHMM-on-residuals had 99% VaR exceedance rates of 1.12% and 1.16%, respectively, compared with the nominal 1% rate (Table 5). The short holdout did not establish calibration or a precise tail-performance ranking. The results supported reuse of existing generators as a practical alternative to fitting separate residual models, with validation still needed for each intended application. The jump experiments established that the correction also worked when the generators included extended episodes in extreme-return states (Table 6). The SPY jump settings improved multi-asset temporal fit in training but worsened it in the 2025 holdout, showing that the single-asset benefit did not transfer automatically. Correcting variance also left dependence among asset-specific residuals unresolved. Independent residual draws omit relationships that matter for portfolio risk and can overstate the return from rebalancing when positive residual covariance is missing. The composition rule therefore provides one component of a multi-asset simulator: it controls how generator variance is combined with the market factor, while portfolio-level applications require a joint residual model and validation of both cross-asset dependence and temporal behavior. Per-path centering also removes terminal residual uncertainty over the chosen horizon. Clipping retains the fitted intercept but changes the composed mean when the market path has a nonzero mean. The present evidence therefore supports the constrained construction for daily-fit comparisons, while cumulative-risk applications require a method that retains cumulative residual variation.

Acknowledgments

The authors thank the eCornell artificial intelligence (AI) in Finance program participants for discussions that motivated this work, and Polygon.io for access to the 2014 to 2024 United States equity and exchange-traded-fund daily price histories used in the experiments. Computations were run on a single laptop; no shared-resource allocation was required.

Author contributions. A.A. designed the hybrid hidden Markov marginal generator, performed the single-asset experiments and validation analyses, and contributed to the manuscript. J.D.V. designed the variance-corrected single-index composition, performed the multi-asset experiments and downstream Value-at-Risk validation, released the code, and contributed to the manuscript.

Competing interests. The authors declare no competing interests.

Code and data availability. The experiment scripts, evaluation code (six-method comparison and Value-at-Risk coverage check), cached inputs and result summaries, and instructions for regenerating the fitted per-asset models are provided in the paper repository (<https://github.com/varnerlab/HMM-w-jumps-paper>); the underlying model-fitting library is released separately as `JumpHMM.jl` (<https://github.com/varnerlab/JumpHMM.jl>), pinned as a dependency of the experiment code.

Generative artificial intelligence use. During the preparation of this work, the authors used OpenAI Codex to assist with language editing, consistency checks, LaTeX formatting, and the implementation and checking of experiment code. The authors reviewed and edited the assisted work and take full responsibility for the content of the publication.

References

- [1] Samuel A. Assefa, Danial Dervovic, Mahmoud Mahfouz, Robert E. Tillman, Prashant Reddy, and Manuela Veloso. Generating synthetic data in finance: Opportunities, challenges and pitfalls. In *Proceedings of the First ACM International Conference on AI in Finance*, pages 1–8, 2020. doi: 10.1145/3383455.3422554.
- [2] James Jordon, Lukasz Szpruch, Florimond Houssiau, Mirko Bottarelli, Giovanni Cherubin, Carsten Maple, Samuel N. Cohen, and Adrian Weller. Synthetic data: What, why and how? *arXiv preprint arXiv:2205.03257*, 2022.
- [3] William F. Sharpe. A simplified model for portfolio analysis. *Management Science*, 9(2): 277–293, 1963. doi: 10.1287/mnsc.9.2.277.
- [4] Stephen A. Ross. The arbitrage theory of capital asset pricing. *Journal of Economic Theory*, 13(3):341–360, 1976. doi: 10.1016/0022-0531(76)90046-6.
- [5] Eugene F. Fama and Kenneth R. French. Common risk factors in the returns on stocks and bonds. *Journal of Financial Economics*, 33(1):3–56, 1993. doi: 10.1016/0304-405X(93)90023-5.
- [6] Benoit Mandelbrot. The variation of certain speculative prices. *The Journal of Business*, 36(4): 394–419, 1963.
- [7] R. Cont. Empirical properties of asset returns: Stylized facts and statistical issues. *Quantitative Finance*, 1(2):223–236, 2001. doi: 10.1080/713665670.
- [8] Michael Stenger, André Bauer, Thomas Prantl, Robert Leppich, Nathaniel Hudson, Kyle Chard, Ian Foster, and Samuel Kounev. Thinking in categories: A survey on assessing the quality for time series synthesis. *Journal of Data and Information Quality*, 16(2):1–32, 2024. doi: 10.1145/3666006.
- [9] L. Rabiner and B. Juang. An introduction to hidden Markov models. *IEEE ASSP Magazine*, 3(1):4–16, 1986. doi: 10.1109/MASSP.1986.1165342.
- [10] Tobias Rydén, Timo Teräsvirta, and Stefan Åsbrink. Stylized facts of daily return series and the hidden Markov model. *Journal of Applied Econometrics*, 13(3):217–244, 1998. doi: 10.1002/(SICI)1099-1255(199805/06)13:3<217::AID-JAE476>3.0.CO;2-V.
- [11] Jan Bulla and Ingo Bulla. Stylized facts of financial time series and hidden semi-Markov models. *Computational Statistics & Data Analysis*, 51(4):2192–2209, 2006. doi: 10.1016/j.csda.2006.07.021.
- [12] Paul Embrechts, Alexander J. McNeil, and Daniel Straumann. Correlation and dependence in risk management: Properties and pitfalls. In *Risk Management: Value at Risk and Beyond*, pages 176–223. Cambridge University Press, 2002. doi: 10.1017/CBO9780511615337.008.
- [13] Paul Bouchev, Vassilii Nemtchinov, and Ting-Kam Leonard Wong. Volatility harvesting in theory and practice. *Journal of Wealth Management*, 18(3):89–100, 2015. doi: 10.3905/jwm.2015.18.3.089.
- [14] Robert F. Engle. Autoregressive conditional heteroscedasticity with estimates of the variance of United Kingdom inflation. *Econometrica*, 50(4):987–1007, 1982.
- [15] Tim Bollerslev. Generalized autoregressive conditional heteroskedasticity. *Journal of Econometrics*, 31(3):307–327, 1986. doi: 10.1016/0304-4076(86)90063-1.
- [16] Elias M. Stein and Jeremy C. Stein. Stock price distributions with stochastic volatility: An analytic approach. *The Review of Financial Studies*, 4(4):727–752, 1991.
- [17] Steven L. Heston. A closed-form solution for options with stochastic volatility with applications to bond and currency options. *The Review of Financial Studies*, 6(2):327–343, 1993. doi: 10.1093/rfs/6.2.327.
- [18] Sangjoon Kim, Neil Shephard, and Siddhartha Chib. Stochastic volatility: Likelihood inference and comparison with ARCH models. *The Review of Economic Studies*, 65(3):361–393, 1998.

- [19] Robert C. Merton. Option pricing when underlying stock returns are discontinuous. *Journal of Financial Economics*, 3(1-2):125–144, 1976. doi: 10.1016/0304-405X(76)90022-2.
- [20] S. G. Kou. A jump-diffusion model for option pricing. *Management Science*, 48(8):1086–1101, 2002. doi: 10.1287/mnsc.48.8.1086.166.
- [21] James D. Hamilton and Raul Susmel. Autoregressive conditional heteroskedasticity and changes in regime. *Journal of Econometrics*, 64(1–2):307–333, 1994. doi: 10.1016/0304-4076(94)90067-1.
- [22] Franc Klaassen. Improving GARCH volatility forecasts with regime-switching GARCH. *Empirical Economics*, 27(2):363–394, 2002. doi: 10.1007/s001810100100.
- [23] James D. Hamilton. A new approach to the economic analysis of nonstationary time series and the business cycle. *Econometrica*, 57(2):357–384, 1989. doi: 10.2307/1912559.
- [24] Magnus Wiese, Robert Knobloch, Ralf Korn, and Peter Kretschmer. Quant GANs: Deep generation of financial time series. *Quantitative Finance*, 20(9):1419–1440, 2020. doi: 10.1080/14697688.2020.1730426.
- [25] Hao Ni, Lukasz Szpruch, Marc Sabate-Vidales, Baoren Xiao, Magnus Wiese, and Shujian Liao. Sig-wasserstein GANs for time series generation. In *Proceedings of the Second ACM International Conference on AI in Finance*, pages 1–8. ACM, 2021. doi: 10.1145/3490354.3494393.
- [26] Shuntaro Takahashi, Yu Chen, and Kumiko Tanaka-Ishii. Modeling financial time-series with generative adversarial networks. *Physica A: Statistical Mechanics and Its Applications*, 527: 121261, 2019. doi: 10.1016/j.physa.2019.121261.
- [27] Jinsung Yoon, Daniel Jarrett, and Mihaela van der Schaar. Time-series generative adversarial networks. In *Advances in Neural Information Processing Systems*, volume 32, pages 5509–5519, 2019.
- [28] Sohyeon Kwon and Yongjae Lee. Can GANs learn the stylized facts of financial time series? In *Proceedings of the 5th ACM International Conference on AI in Finance*, pages 126–133, 2024. doi: 10.1145/3677052.3698661.
- [29] Robert Engle. Dynamic conditional correlation: A simple class of multivariate generalized autoregressive conditional heteroskedasticity models. *Journal of Business & Economic Statistics*, 20(3):339–350, 2002. doi: 10.1198/073500102288618487.
- [30] Luc Bauwens, Sébastien Laurent, and Jeroen V. K. Rombouts. Multivariate GARCH models: A survey. *Journal of Applied Econometrics*, 21(1):79–109, 2006. doi: 10.1002/jae.842.
- [31] Andrew J. Patton. Modelling asymmetric exchange rate dependence. *International Economic Review*, 47(2):527–556, 2006. doi: 10.1111/j.1468-2354.2006.00387.x.
- [32] Kjersti Aas, Claudia Czado, Arnoldo Frigessi, and Henrik Bakken. Pair-copula constructions of multiple dependence. *Insurance: Mathematics and Economics*, 44(2):182–198, 2009.
- [33] José G. Dias, Jeroen K. Vermunt, and Sofia Ramos. Mixture hidden Markov models in finance research. In *Advances in Data Analysis, Data Handling and Business Intelligence*, pages 451–459. Springer, 2010. doi: 10.1007/978-3-642-01044-6_41.
- [34] Matteo Rizzato, Julien Wallart, Christophe Geissler, Nicolas Morizet, and Noureddine Boumlaik. Generative adversarial networks applied to synthetic financial scenarios generation. *Physica A: Statistical Mechanics and its Applications*, 623:128899, 2023. doi: 10.1016/j.physa.2023.128899.
- [35] Samuel Kotz, Tomasz J. Kozubowski, and Krzysztof Podgórski. *The Laplace Distribution and Generalizations: A Revisit with Applications to Communications, Economics, Engineering, and Finance*. Birkhauser, 2001. ISBN 9780817641665.
- [36] David Toth and Bruce Jones. Against the norm: Modeling daily stock returns with the Laplace distribution. *arXiv preprint arXiv:1906.10325*, 2019.

- [37] Jeff A. Bilmes. A gentle tutorial of the EM algorithm and its application to parameter estimation for Gaussian mixture and hidden Markov models. Technical Report TR-97-021, International Computer Science Institute, 1998.
- [38] Paul Glasserman. *Monte Carlo Methods in Financial Engineering*. Springer, 2003. doi: 10.1007/978-0-387-21617-1.
- [39] James D. Hamilton. Regime switching models. *The New Palgrave Dictionary of Economics*, pages 11421–11426, 2018. doi: 10.1057/978-1-349-95189-5_2459.
- [40] Charles M. Grinstead and J. Laurie Snell. *Introduction to Probability*. American Mathematical Society, 1997.
- [41] Dimitris N. Politis and Joseph P. Romano. The stationary bootstrap. *Journal of the American Statistical Association*, 89(428):1303–1313, 1994. doi: 10.1080/01621459.1994.10476870.
- [42] Kyunghyun Cho, Bart van Merriënboer, Caglar Gulcehre, Dzmitry Bahdanau, Fethi Bougares, Holger Schwenk, and Yoshua Bengio. Learning phrase representations using RNN encoder-decoder for statistical machine translation. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1724–1734. Association for Computational Linguistics, 2014. doi: 10.3115/v1/D14-1179.
- [43] David G. Booth and Eugene F. Fama. Diversification returns and asset contributions. *Financial Analysts Journal*, 48(3):26–32, 1992. doi: 10.2469/faj.v48.n3.26.
- [44] Harry M. Markowitz. Investment for the long run: New evidence for an old rule. *Journal of Finance*, 31(5):1273–1286, 1976. doi: 10.1111/j.1540-6261.1976.tb03213.x.
- [45] A. N. Kolmogorov. Sulla determinazione empirica di una legge di distribuzione. *Giornale dell’Istituto Italiano degli Attuari*, 4:83–91, 1933.
- [46] N. Smirnov. Table for estimating the goodness of fit of empirical distributions. *The Annals of Mathematical Statistics*, 19(2):279–281, 1948.
- [47] Theodore W. Anderson and Donald A. Darling. Asymptotic theory of certain “goodness of fit” criteria based on stochastic processes. *The Annals of Mathematical Statistics*, 23(2):193–212, 1952.

Tables

Table 1: **Hidden Markov model with jumps (HMM-WJ) and single-index model (SIM) composition hyperparameters.** Values used for the main SPY analysis, explored ranges, and locations of sensitivity checks. For the primary six-method SIM comparison, we set $\epsilon = 0$ instead of the SPY value. The separate jump-enabled comparison transferred the listed SPY settings to enabled models. The cross-asset validation used per-ticker (ϵ^*, λ^*) values for NVDA, JNJ, and JPM (Table S10).

Symbol	Description	SPY value	Explored range
<i>State partition and emission</i>			
N	Laplace-quantile states	100	$\{30, \dots, 200\}$, Online Appendix S7
ν	Student- t emission degrees of freedom	5	$\{3, \dots, 30, \infty\}$
<i>Jump-duration override</i>			
ϵ	jump probability per step	10^{-4}	$[10^{-4}, 2.5 \times 10^{-2}]$, Eq. (3)
λ	mean jump-episode duration (steps)	90	$[10, 160]$, Eq. (3)
p_{neg}	probability a jump targets S_-	0.52	fixed
N_{tail}	quantile states per tail set	5	fixed (at $N = 100$)
w_κ	kurtosis-penalty weight, Eq. (3)	0.20	fixed
L	autocorrelation lag window, Eq. (3)	25 days	fixed
<i>SIM composition</i>			
f	idiosyncratic variance floor	0.10	$\{0.05, \dots, 0.30\}$
R_{preserve}^2	branch-selection threshold	0.80	$\{0.70, \dots, 0.90\}$

Table 2: **In-sample and out-of-sample model comparison for SPY.** Results summarize 1,000 simulated paths. Values in parentheses are Monte Carlo standard errors conditional on the fitted model and observed history, and bold entries are best among the fitted generative models within each panel; the empirical bootstrap is excluded from this highlighting. Metric definitions and standard-error calculations are given in Online Appendix S3.

Model	KS (%)	AD (%)	κ	ACF-MAE	Coverage (%)	W_1	Hellinger
<i>In sample: 2014–2024 (2,766 days; observed $\kappa = 7.715$)</i>							
Bootstrap	100.0 (<0.1)	99.7 (0.2)	7.6 (0.08)	0.060 (<0.001)	100.0 (<0.1)	0.062 (0.001)	0.042 (<0.001)
Gaussian	0.0 (<0.1)	0.0 (<0.1)	−0.0 (<0.01)	0.060 (<0.001)	13.1 (0.1)	0.399 (0.001)	0.148 (<0.001)
Laplace	98.4 (0.4)	96.8 (0.6)	3.0 (0.02)	0.060 (<0.001)	78.8 (1.0)	0.119 (0.001)	0.069 (<0.001)
GARCH(1,1)	5.5 (0.7)	1.9 (0.4)	8.2 (0.37)	0.031 (0.001)	29.3 (1.4)	0.304 (0.006)	0.100 (0.001)
GRU	0.6 (0.2)	0.2 (0.1)	5.7 (0.16)	0.036 (<0.001)	17.2 (0.5)	0.421 (0.003)	0.134 (<0.001)
HSMM	82.0 (1.2)	42.5 (1.6)	4.8 (0.08)	0.059 (<0.001)	68.7 (1.1)	0.176 (0.001)	0.113 (<0.001)
HMM-NJ	99.3 (0.3)	98.2 (0.4)	8.1 (0.14)	0.059 (<0.001)	100.0 (<0.1)	0.081 (0.001)	0.072 (<0.001)
HMM-WJ	98.3 (0.4)	94.8 (0.7)	7.5 (0.09)	0.053 (<0.001)	100.0 (<0.1)	0.097 (0.001)	0.074 (<0.001)
<i>Out of sample: 2025 (249 days; observed $\kappa = 6.867$)</i>							
Bootstrap	97.4 (0.5)	98.5 (0.4)	6.0 (0.18)	0.043 (<0.001)	100.0 (<0.1)	0.232 (0.002)	0.205 (0.001)
Gaussian	62.2 (1.5)	46.3 (1.6)	−0.0 (<0.01)	0.043 (<0.001)	36.4 (1.9)	0.452 (0.002)	0.235 (0.001)
Laplace	96.7 (0.6)	98.1 (0.4)	2.8 (0.05)	0.043 (<0.001)	99.0 (0.4)	0.242 (0.002)	0.207 (0.001)
GARCH(1,1)	80.3 (1.3)	72.0 (1.4)	1.6 (0.07)	0.026 (<0.001)	96.0 (1.3)	0.507 (0.018)	0.232 (0.001)
GRU	71.8 (1.4)	44.8 (1.6)	2.9 (0.10)	0.033 (<0.001)	77.8 (2.9)	0.488 (0.005)	0.240 (0.001)
HSMM	96.2 (0.6)	96.7 (0.6)	4.1 (0.13)	0.042 (<0.001)	100.0 (0.2)	0.287 (0.002)	0.239 (0.001)
HMM-NJ	96.6 (0.6)	96.1 (0.6)	6.2 (0.15)	0.041 (<0.001)	100.0 (<0.1)	0.259 (0.003)	0.207 (0.001)
HMM-WJ	95.4 (0.7)	95.3 (0.7)	6.2 (0.15)	0.040 (<0.001)	100.0 (<0.1)	0.275 (0.005)	0.210 (0.001)

Model abbreviations are generalized autoregressive conditional heteroskedasticity (GARCH), gated recurrent unit (GRU), hidden semi-Markov model (HSMM), hidden Markov model with no jumps (HMM-NJ), and hidden Markov model with jumps (HMM-WJ). Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) report pass rates at $\alpha = 0.05$; coverage is the fraction of the 99 observed quantiles at levels 0.01, $\dots$, 0.99 inside their pointwise synthetic 90% envelopes. κ is simulated excess kurtosis. Mean absolute error in the autocorrelation function (ACF-MAE) compares the observed ACF of $|G_t|$ with the mean ACF over paths, using lags 1–252 in training and 1–248 in the holdout. Larger values are preferred for KS, AD, and coverage; smaller values are preferred for ACF-MAE, W_1 , and Hellinger distance; κ is compared with the observed value.

Table 3: **Aggregate training scorecard with 100 replications per ticker.** Errors, distances, and tail metrics are medians per method. Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) pass fractions are pooled across replications. $|\hat{\alpha} - \alpha|$, $|\hat{\beta} - \beta|$, and $|\hat{R}^2 - R_{\text{real}}^2|$: absolute deviation between ordinary least-squares (OLS) recovery and calibration (intercept error has units of yr^{-1}). KS pass and AD pass: fraction of replications whose two-sample test against the real marginal exceeds $p = 0.05$. W_1 : Wasserstein-1 distance to the real marginal. κ : sample excess kurtosis. Hill: tail-index estimate on the upper 5% of $|g|$. SIM denotes the single-index model, and GARCH denotes generalized autoregressive conditional heteroskedasticity. The GARCH method covered 393 non-market tickers; the other five methods covered 423.

Method	$ \hat{\alpha} - \alpha $	$ \hat{\beta} - \beta $	$ \hat{R}^2 - R_{\text{real}}^2 $	KS pass (%)	AD pass (%)	W_1	κ	Hill
Naive	0.002	0.022	0.087	7.1	3.5	0.700	7.767	0.369
Gaussian SIM	0.048	0.017	0.008	0.6	0.5	0.682	1.427	0.217
Hybrid	0.002	0.018	0.021	73.6	64.6	0.249	7.165	0.365
JumpHMM-on-residuals	0.049	0.018	0.015	75.8	70.7	0.232	7.262	0.365
Block bootstrap	0.042	0.017	0.020	73.3	66.8	0.232	6.675	0.330
GARCH(1,1)- t	0.047	0.017	0.036	67.4	61.4	0.267	6.069	0.317

Table 4: **Frozen-parameter multi-asset evaluation on the 2025 holdout.** Results cover 416 non-market tickers and 100 replications per ticker; generalized autoregressive conditional heteroskedasticity (GARCH) covers 386 tickers. Pass rates are first averaged within ticker and then across tickers. The *matched in-sample (IS)* columns compare each synthetic path with a randomly selected contiguous 249-day block from the 2014–2024 training history, matching the holdout sample length. W_1 and the variance ratio are medians across ticker-level medians; the variance ratio is synthetic variance divided by observed 2025 variance. The hybrid correction used the training-period market variance and each simulated asset draw’s variance.

Method	KS pass (%)		AD pass (%)		W_1 (2025)	variance ratio
	matched IS	2025	matched IS	2025		
Naive	69.4	83.5	54.8	71.6	0.877	1.29
Gaussian SIM	57.4	73.9	44.9	64.6	0.866	0.97
Hybrid	78.8	87.0	66.2	79.7	0.716	0.97
JumpHMM-on-residuals	77.9	86.2	65.6	80.1	0.708	0.98
Block bootstrap	76.3	84.0	64.0	76.5	0.715	0.90
GARCH(1,1)- t	74.5	82.6	62.6	75.0	0.733	0.91

Table 5: **Out-of-sample per-ticker one-day left-tail Value-at-Risk coverage across the six composition methods.** For each asset and coverage level α , one VaR threshold was estimated from 1,245,000 daily log returns pooled across 5,000 separate 249-day paths with frozen parameters. Exceedances were counted on the observed 2025 history. The hybrid correction retained the training-period market variance convention of Table 4. *rate*: mean per-asset exceedance rate (nominal: $1 - \alpha$). Standard deviation (SD) describes cross-asset dispersion in percentage points; it is not a standard error. Coverage summaries are descriptive.

Method	Assets	$\alpha = 0.95$		$\alpha = 0.99$	
		rate (%)	SD (pp)	rate (%)	SD (pp)
Naive	416	4.04	2.08	0.88	0.70
Gaussian SIM	416	4.65	2.22	1.72	1.08
Hybrid	416	5.48	2.45	1.12	0.81
JumpHMM-on-residuals	416	5.62	2.55	1.16	0.81
Block bootstrap	416	5.50	2.52	1.28	0.87
GARCH(1,1)- t	386	5.07	2.45	1.20	0.89

Table 6: **Jump settings under naive and corrected multi-asset composition.** Each setting used 1,000 replications per asset across four seeds, with identical asset and market draws for the two composition methods. SPY was simulated in both windows, and the correction used each simulated market path’s variance and each asset draw’s variance. Entries are equal-weight cross-ticker means of per-path metrics. Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) report non-rejection rates at $\alpha = 0.05$. ACF_{25} and ACF_{60} are absolute-return autocorrelation errors through lags 25 and 60, calculated within each path before averaging over replications and assets; lower values indicate better temporal fit. $V_{\text{gen}} = \text{Var}(g_i)/\sigma_{\text{gen},i}^2$ compares composed variance with the active generator’s variance, rather than observed variance.

Jump setting	Method	KS (%)	AD (%)	ACF_{25}	ACF_{60}	V_{gen}
<i>Training: 2014–2024, 423 assets, 2,766 days</i>						
Off	Naive	6.93	3.38	0.13585	0.09492	1.33273
Off	Corrected	73.94	68.54	0.13569	0.09485	1.00011
Market only	Naive	6.28	3.18	0.13197	0.09208	1.34938
Market only	Corrected	73.64	67.81	0.12844	0.08969	1.00032
Market + assets	Naive	5.25	2.56	0.11727	0.08264	1.33445
Market + assets	Corrected	61.68	53.33	0.11581	0.08154	1.00018
<i>Holdout: 2025, 416 assets, 249 days</i>						
Off	Naive	82.38	70.14	0.07322	0.06683	1.36081
Off	Corrected	85.92	78.76	0.07330	0.06687	1.00041
Market only	Naive	81.76	69.60	0.07347	0.06698	1.36638
Market only	Corrected	85.88	78.72	0.07525	0.06796	1.00045
Market + assets	Naive	80.27	68.19	0.07672	0.06885	1.36032
Market + assets	Corrected	84.43	77.21	0.07832	0.06973	1.00039

Figures

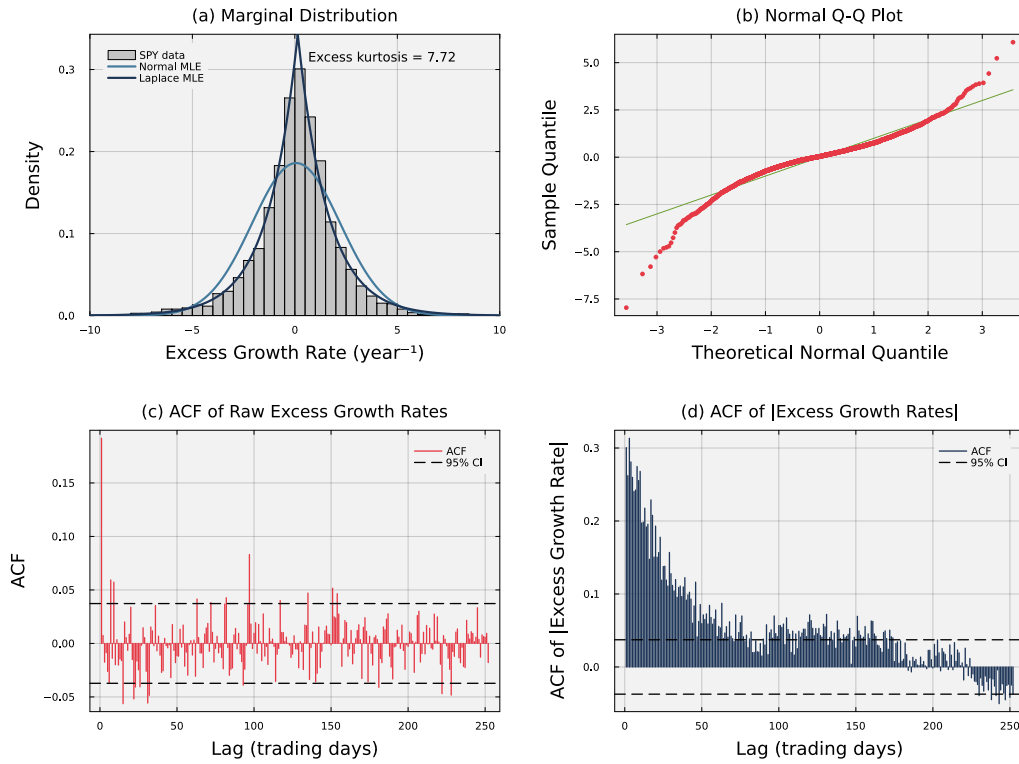


Figure 1: **Empirical stylized facts of SPY daily excess growth rates (2014–2024).** Panel (a) shows the heavy-tailed return density; the Laplace maximum-likelihood fit tracks the empirical peak and tails while the Gaussian fit does not. Panel (b) shows departure from the diagonal in a normal quantile-quantile plot at both extremes. Panel (c) shows the autocorrelation function of raw excess growth rates. Individual correlations are small, although the Ljung–Box test detects joint serial dependence. Panel (d) shows the autocorrelation function of absolute excess growth rates, which decays slowly across the reported lags.

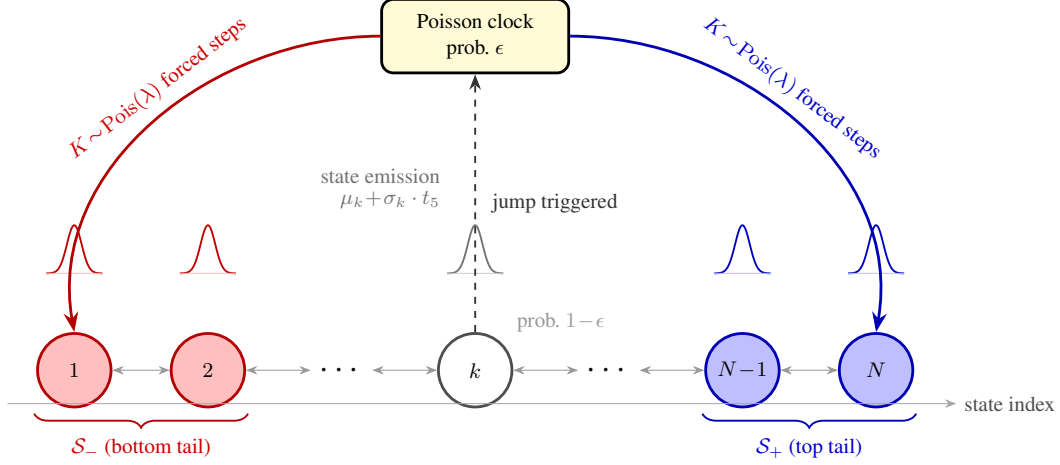


Figure 2: **Architecture of the hidden Markov model with jumps (HMM-WJ).** When no jump episode is active, the chain transitions according to the empirical transition matrix $\mathbf{T}$ with probability $1 - \epsilon$ (thin bidirectional arrows) or enters a Poisson jump episode with probability ϵ (dashed upward arrow to the Poisson clock). During an episode, each of the $K \sim \text{Poisson}(\lambda)$ forced steps independently draws the bottom tail set $\mathcal{S}_-$ (red, lowest-valued states) with probability p_{neg} or the top tail set $\mathcal{S}_+$ (blue, highest-valued states) otherwise. Ordinary transitions then resume. Small bell curves above each state show the state-conditional location-scale Student- t ($\nu = 5$) emission distribution. Tail sets are defined as the N_{tail} lowest- and highest-quantile states under the Laplace quantile partition.

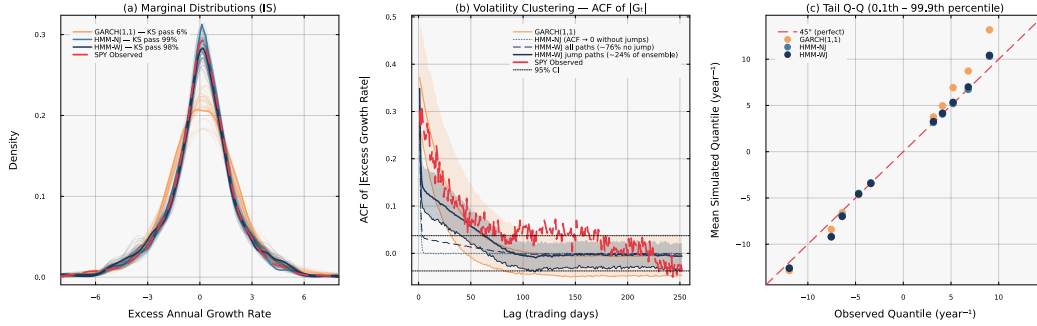


Figure 3: **Head-to-head in-sample model comparison for SPY** ($N = 100, 1,000$ simulated paths). *Panel (a):* marginal density of excess growth rates with in-sample Kolmogorov–Smirnov (KS) pass rates annotated per generator. *Panel (b):* mean autocorrelation function (ACF) of $|G_t|$ at lags 1–252. For the hidden Markov model with jumps (HMM-WJ), the solid curve and its 10th–90th percentile band use jump-active paths; the dashed curve averages all paths. The generalized autoregressive conditional heteroskedasticity (GARCH) band also gives path percentiles. Horizontal dotted lines are the white-noise references $\pm 1.96/\sqrt{2,766}$. *Panel (c):* tail quantile-quantile plot at the 0.1st–99.9th percentile region per generator.

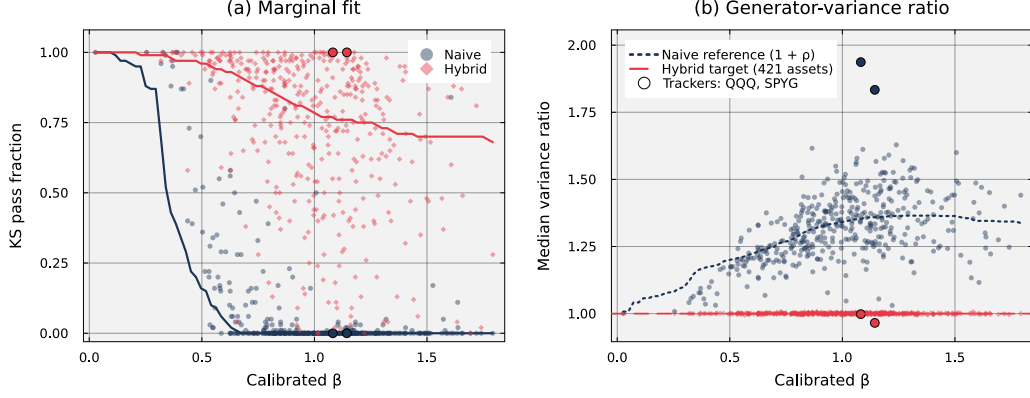


Figure 4: Marginal fit and generator-variance preservation under paired composition. We used 100 paired paths of 2,766 observations for each of 423 non-market assets, with the observed 2014–2024 SPY market path and jumps disabled. Blue circles denote naive composition; red diamonds denote hybrid composition. Outlined circles mark the tracker assets QQQ and SPYG in the corresponding method color. *Panel (a)*: each point is the fraction of paths passing the Kolmogorov–Smirnov (KS) test against the observed asset returns at $\alpha = 0.05$. *Panel (b)*: each point is the median of the 100 ratios $\text{Var}(g_i)/\sigma_{\text{gen},i}^2$, with the denominator measured from the same uncomposed generator draw. The dashed line marks the hybrid target of one for the 421 ordinary assets. Trackers instead target $\beta_i^2 \sigma_m^2 / R_{\text{real},i}^2$ and need not lie on that line. The dotted curve summarizes the per-ticker medians of the naive reference $1 + \rho_i$, where $\rho_i = \beta_i^2 \sigma_m^2 / \sigma_{\text{gen},i}^2$ is computed per draw. This reference omits the finite-path covariance term. Solid curves in panel (a) and the dotted curve in panel (b) are Gaussian-kernel weighted medians over ordinary assets, with bandwidth 0.15 in calibrated β . For ordinary hybrid paths, the median and 95th percentile of $|\text{Var}(g_i)/\sigma_{\text{gen},i}^2 - 1|$ were 1.12% and 3.41%; ticker medians therefore conceal individual-path variation. The annualized variance of the observed market path was $\Delta t \sigma_m^2 = 0.030 \text{ yr}^{-1}$.

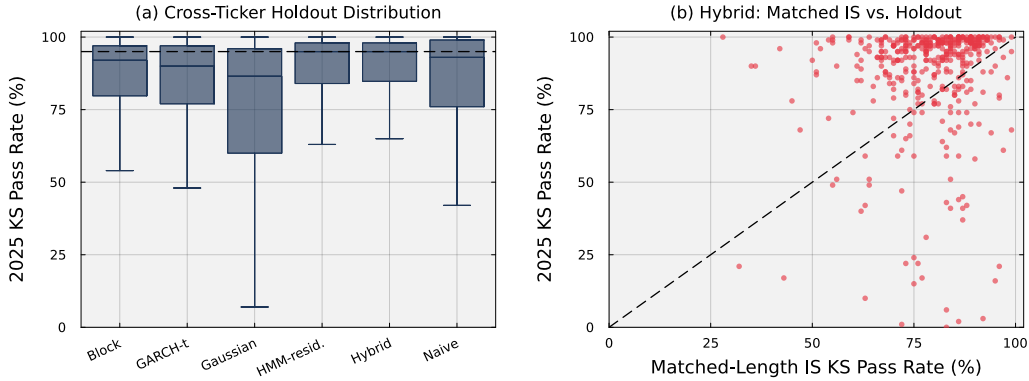


Figure 5: Cross-ticker distribution of frozen-parameter out-of-sample marginal fit. Panel (a) shows the distribution of per-ticker 2025 Kolmogorov–Smirnov (KS) pass rates across 100 replications; the dashed line marks 95%. Panel (b) compares each ticker’s hybrid KS pass rate against a matched-length training block with its pass rate against the 2025 holdout. The diagonal denotes equal performance.

Online Appendix

S1 Empirical cross-term diagnostic

The variance correction of Eq. (8) assumes $\text{Cov}(\tilde{g}_i^c, g_m) \approx 0$, allowing the variance derivation to omit the cross-term. This assumption does not follow automatically from the fitting procedure because each JumpHMM uses the asset’s full growth-rate history, including its market-correlated component. A remaining market loading in the generator draw would invalidate the closed-form scale. We tested the assumption by sampling $R = 100$ generator growth-rate paths $\tilde{g}_i^{(r)}$ per ticker from each generator and computing the normalized cross-covariance against the real return path for a broad-market exchange-traded fund (ticker SPY):

$$\text{cov}_i^{\text{norm}} = \frac{1}{R} \sum_{r=1}^R \frac{\text{Cov}((\tilde{g}_i^{(r)})^c, g_m)}{\sigma_{\text{gen},i} \sigma_m}. \quad (\text{S1})$$

Centering does not change covariance, so these values are numerically identical to those obtained from the raw draws. We plotted the per-ticker values as histograms (Fig. S1). Across the 423 tickers, the full-return JumpHMM generator (used by the hybrid and naive composition methods), the residual-fit JumpHMM generator (used by the JumpHMM-on-residuals composition method), and the Gaussian baseline had universe-mean normalized cross-covariances of 1.53×10^{-4} , 6.58×10^{-5} , and 2.26×10^{-4} , respectively. Their per-ticker values ranged from -0.0061 to 0.0061 . These values quantify the cross-term omitted in Eq. (8).

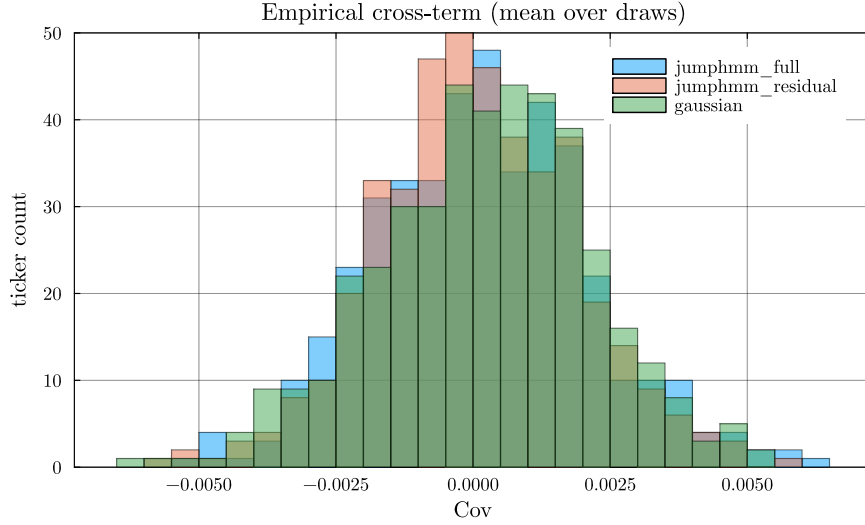


Figure S1: **Empirical normalized cross-covariance** $\text{Cov}(\tilde{g}_i^c, g_m)/(\sigma_{\text{gen},i} \sigma_m)$ **across the 423-ticker universe.** Histograms were stacked per generator, with each per-ticker value averaged over $R = 100$ generator growth-rate paths. Universe means were 1.53×10^{-4} , 6.58×10^{-5} , and 2.26×10^{-4} for the full-return JumpHMM, residual-fit JumpHMM, and Gaussian generators.

S2 Rebalancing under independent residuals

To determine what a portfolio-level use of these paths inherits from the independent-residual construction, this appendix derives the diversification return of a rebalanced portfolio under Eq. (4). The variance correction in Eq. (8) sets each synthetic asset’s second moment to its generator target. When that target matches the empirical second moment, the second-order formula for the diversification return is matched at the asset level as well. What the construction does not match is the cross-asset residual covariance, and the derivation below isolates where that omission enters.

The synthetic paths reproduce per-asset marginals and single-factor cross-sectional dependence. Each residual generator retains its own temporal structure, but the residual paths are generated

independently across assets at each date. The construction therefore omits cross-asset residual covariance. Consider a daily-rebalanced portfolio of N assets with constant target weights $w_i \geq 0$, $\sum_i w_i = 1$, reset to those weights at the start of each trading day. Throughout this derivation $g_i(t)$ is the annualized log-growth rate of Eq. (1), so the per-period log return on asset i is $g_i(t) \Delta t$ with $\Delta t = 1/252$ yr. The wealth process is:

$$W_t = W_{t-1} \sum_i w_i \exp(g_i(t) \Delta t), \quad (\text{S2})$$

so the per-step log return on the portfolio is $\log(W_t/W_{t-1}) = \log \sum_i w_i \exp(g_i(t) \Delta t)$. We suppress the time argument, writing g_i for $g_i(t)$. A second-order Taylor expansion of the exponential about zero is $\exp(g_i \Delta t) = 1 + g_i \Delta t + \frac{1}{2}(g_i \Delta t)^2 + O((g_i \Delta t)^3)$. Substituting it into each summand of $\sum_i w_i \exp(g_i \Delta t)$ gives:

$$\begin{aligned} \sum_i w_i \exp(g_i \Delta t) &= \sum_i w_i [1 + g_i \Delta t + \frac{1}{2}(g_i \Delta t)^2 + O((g_i \Delta t)^3)] \quad (\text{Taylor}) \\ &= \sum_i w_i + \Delta t \sum_i w_i g_i + \frac{1}{2}(\Delta t)^2 \sum_i w_i g_i^2 + O((g_i \Delta t)^3) \quad (\text{distribute}) \\ &= 1 + \Delta t \sum_i w_i g_i + \frac{1}{2}(\Delta t)^2 \sum_i w_i g_i^2 + O((g_i \Delta t)^3). \quad (\sum_i w_i = 1) \end{aligned} \quad (\text{S3})$$

A second-order Taylor expansion of $\log(1+x)$ about $x=0$ gives $\log(1+x) = x - \frac{1}{2}x^2 + O(x^3)$. Identifying $1+x$ with the right-hand side of Eq. (S3), the order- Δt correction is $x := \Delta t \sum_i w_i g_i + \frac{1}{2}(\Delta t)^2 \sum_i w_i g_i^2$, and squaring keeps only the leading $(\Delta t)^2$ term: $x^2 = (\Delta t)^2 (\sum_i w_i g_i)^2 + O((\Delta t)^3)$ because the cross term has an extra Δt factor. Substitution gives:

$$\begin{aligned} \log \frac{W_t}{W_{t-1}} &= \log(1 + x + O((g_i \Delta t)^3)) \\ &= x - \frac{1}{2}x^2 + O(x^3) \\ &= \Delta t \sum_i w_i g_i + \frac{1}{2}(\Delta t)^2 \sum_i w_i g_i^2 \\ &\quad - \frac{1}{2}(\Delta t)^2 \left(\sum_i w_i g_i \right)^2 + O((g_i \Delta t)^3) \\ &= \Delta t \sum_i w_i g_i + \frac{1}{2}(\Delta t)^2 \left[\sum_i w_i g_i^2 - \left(\sum_i w_i g_i \right)^2 \right] + O((g_i \Delta t)^3). \end{aligned} \quad (\text{S4})$$

Dividing through by Δt extracts the portfolio's annualized one-step log-growth rate $g_p(t) := \Delta t^{-1} \log(W_t/W_{t-1})$, the portfolio counterpart of the per-asset $g_i(t)$ (still suppressing the time argument):

$$g_p = \sum_i w_i g_i + \frac{1}{2} \Delta t \left(\sum_i w_i g_i^2 - \left(\sum_i w_i g_i \right)^2 \right) + O((\Delta t)^2). \quad (\text{S5})$$

To obtain expected annualized portfolio growth, we restored the time argument and took unconditional expectations of Eq. (S5) under stationarity. Define the per-asset annualized mean and variance:

$$\mu_i := \mathbb{E}(g_i(t)), \quad \sigma_i^2 := \text{Var}(g_i(t)), \quad (\text{S6})$$

the per-rate covariance $\Sigma_{ij} := \text{Cov}(g_i(t), g_j(t))$, and the per-rate portfolio variance $\sigma_p^2 := \text{Var}(\sum_i w_i g_i(t)) = w^\top \Sigma w$. The $O(\Delta t)$ correction in Eq. (S5) contains two squared quantities, $\sum_i w_i g_i(t)^2$ and $(\sum_i w_i g_i(t))^2$. Both expand by the second-moment identity, which holds for any random variable X with finite second moment:

$$\mathbb{E}(X^2) = \mathbb{E}(X)^2 + \text{Var}(X). \quad (\text{S7})$$

Applying this identity to $X = g_i(t)$ and summing against w_i gives:

$$\begin{aligned}\mathbb{E}\left(\sum_i w_i g_i(t)^2\right) &= \sum_i w_i \mathbb{E}(g_i(t)^2) && \text{(linearity)} \\ &= \sum_i w_i [\mu_i^2 + \sigma_i^2] && \text{(by Eq. (S7))} \\ &= \sum_i w_i \mu_i^2 + \sum_i w_i \sigma_i^2. && \text{(S8)}\end{aligned}$$

Applying the identity to $X = \sum_i w_i g_i(t)$, whose mean is $\sum_i w_i \mu_i$ and whose variance is σ_p^2 , gives:

$$\begin{aligned}\mathbb{E}\left(\left(\sum_i w_i g_i(t)\right)^2\right) &= \mathbb{E}\left(\sum_i w_i g_i(t)\right)^2 + \text{Var}\left(\sum_i w_i g_i(t)\right) && \text{(by Eq. (S7))} \\ &= \left(\sum_i w_i \mu_i\right)^2 + \sigma_p^2. && \text{(S9)}\end{aligned}$$

We substituted Eqs. (S8)–(S9) into the expectation of Eq. (S5) and grouped the variance and mean contributions as follows:

$$\begin{aligned}\mathbb{E}(g_p) &= \sum_i w_i \mu_i + \underbrace{\frac{1}{2} \Delta t \left(\sum_i w_i \sigma_i^2 - \sigma_p^2 \right)}_D \\ &\quad + \frac{1}{2} \Delta t \left[\sum_i w_i \mu_i^2 - \left(\sum_i w_i \mu_i \right)^2 \right] + O((\Delta t)^2),\end{aligned}\tag{S10}$$

the Booth-Fama identity for the daily-rebalanced portfolio in annualized growth-rate units [43, 44]. The middle term, D , is the diversification return: the $O(\Delta t)$ correction equal to half the difference between the weighted-average per-asset variance $\sum_i w_i \sigma_i^2$ and the portfolio variance σ_p^2 . The per-rate moments μ_i and σ_i^2 have units yr^{-1} and yr^{-2} respectively; the products $\Delta t \sigma_i^2$ and $\Delta t \sigma_p^2$ in Eq. (S10) are the annualized variances (yr^{-1}). The third term in Eq. (S10) is the cross-sectional dispersion of the per-asset annualized means, of order $\Delta t \mu^2$, against the variance term D of order $\Delta t \sigma^2$; because μ^2 lies more than two orders of magnitude below σ^2 for daily growth rates (Table S1), we drop it. The realized annualized compound growth rate $\bar{g}_p = (T \Delta t)^{-1} \log(W_T/W_0) = T^{-1} \sum_t g_p(t)$ converges to $\mathbb{E}(g_p)$ by the ergodic theorem under any stationary residual process, so the long-run limit is fixed by the one-time-slice unconditional joint distribution of $(g_i(t))_i$ and does not, in itself, depend on the serial structure of the residual draw.

To rewrite D in a form that makes its non-negativity manifest, expand $\sigma_p^2 = \sum_i w_i^2 \sigma_i^2 + 2 \sum_{i < j} w_i w_j \Sigma_{ij}$ and use the identity $\sum_i w_i (1 - w_i) \sigma_i^2 = \sum_{i < j} w_i w_j (\sigma_i^2 + \sigma_j^2)$ that holds for any weights summing to one:

$$D = \frac{1}{2} \Delta t \left(\sum_i w_i \sigma_i^2 - \sigma_p^2 \right) = \frac{1}{2} \Delta t \sum_{i < j} w_i w_j \text{Var}(g_i - g_j) \geq 0, \tag{S11}$$

so D equals one-half the annualized weighted-average pairwise growth-rate-difference variance and is therefore non-negative, with equality only when every pair (i, j) comoves perfectly ($\text{Var}(g_i - g_j) = 0$) or all weight concentrates on a single asset. The rebalancing rule itself produces this effect: weights drift between rebalances, the rebalancer sells whatever has outperformed (its weight rose above target) and buys whatever has underperformed (its weight fell below target), and the trade systematically converts period-by-period cross-sectional dispersion into compounded growth. Markowitz [44] described this as the variance bonus of the long-run mean-variance allocation; Booth and Fama [43] called it the diversification return.

To separate market and residual contributions to the diversification return, we substituted the single-index decomposition $g_i(t) = \alpha_i + \beta_i g_m(t) + \varepsilon_i(t)$, with market variance $\sigma_m^2 := \text{Var}(g_m(t))$, per-asset residual variance $\sigma_{\varepsilon,i}^2 := \text{Var}(\varepsilon_i(t))$, and $\text{Cov}(g_m, \varepsilon_i) = 0$ (verified in Sec. S1), into Eq. (S11) gives:

$$\text{Var}(g_i - g_j) = (\beta_i - \beta_j)^2 \sigma_m^2 + \text{Var}(\varepsilon_i - \varepsilon_j), \tag{S12}$$

Because g_m and the residuals are uncorrelated, this relation splits the diversification return into market-beta-dispersion and idiosyncratic components:

$$D = \underbrace{\frac{1}{2} \Delta t \sigma_m^2 \sum_{i < j} w_i w_j (\beta_i - \beta_j)^2}_{D_{\text{mkt}}} + \underbrace{\frac{1}{2} \Delta t \sum_{i < j} w_i w_j \text{Var}(\varepsilon_i - \varepsilon_j)}_{D_\varepsilon}, \quad (\text{S13})$$

where the market-beta-dispersion component D_{mkt} equals $\frac{1}{2} \Delta t \sigma_m^2 [\sum_i w_i \beta_i^2 - (\sum_i w_i \beta_i)^2]$, the weighted cross-sectional β dispersion scaled by the annualized market variance $\Delta t \sigma_m^2$. Across the 423-ticker universe the calibrated β distribution spans $[0.03, 1.79]$ (Fig. S4). The weighted variance of β is bounded by one quarter of its squared range, so $D_{\text{mkt}} \leq \frac{1}{8} \Delta t \sigma_m^2 (1.79 - 0.03)^2$; at the SPY annualized variance $\Delta t \sigma_m^2 = 0.030 \text{ yr}^{-1}$ of the closing-price series used for the multi-asset universe (Fig. 4), D_{mkt} is at most 0.012 yr^{-1} , or 1.2 percentage points per year over this universe. For the idiosyncratic component D_ε , residuals were approximately orthogonal across assets at the same time slice. Therefore, $\text{Var}(\varepsilon_i - \varepsilon_j) \approx \sigma_{\varepsilon,i}^2 + \sigma_{\varepsilon,j}^2$, and D_ε scales with the weighted-average annualized idiosyncratic variance $\Delta t \sigma_{\varepsilon,i}^2$ per name.

The second-order value of D depends on same-time unconditional moments, not on serial dependence. Equation (8) sets $\sigma_{\text{gen},i}^2 = \beta_i^2 \sigma_m^2 + \sigma_{\varepsilon,i}^2$ to its empirical target. Any residual generator with the same unconditional second moments therefore gives the same D . This includes a stationary first-order autoregressive [AR(1)] residual generator $\varepsilon_i(t) = \phi \varepsilon_i(t-1) + \eta_i(t)$ with independent and identically distributed innovations η_i tuned so that $\text{Var}(\varepsilon_i) = \sigma_{\eta,i}^2 / (1 - \phi^2) = \sigma_{\varepsilon,i}^2$. The parameter ϕ leaves the marginal distribution at a single time slice unchanged. It therefore does not change $\mathbb{E}(g_p)$ in Eqs. (S10) and (S13), but it changes sampling variance. For a stationary AR(1) residual with variance σ_ε^2 , the variance of its sample mean is approximately $T^{-1} \sigma_\varepsilon^2 (1 + \phi) / (1 - \phi)$. Under ergodicity, serial dependence changes per-path sampling noise, not the stationary mean. Serial dependence in the residual draw is therefore not a lever on the diversification return at the level of the second-order formula.

The direct structural difference is contemporaneous. The derivation assumes residuals are orthogonal across assets at each time slice, as they are in the independent per-asset generator. Real residuals share sector and style factors, which reduce $\text{Var}(\varepsilon_i - \varepsilon_j)$ below the independent-generator value $\sigma_{\varepsilon,i}^2 + \sigma_{\varepsilon,j}^2$. Matching each marginal variance does not restore this covariance. The synthetic D_ε will therefore exceed its real-market counterpart when the omitted covariance is positive. Quantifying that contribution requires a joint-residual experiment with the marginals and the allocation rule held fixed, which we did not run. Realized diversification returns on real equity portfolios are also attenuated relative to the second-order formula at all rebalancing horizons [13], so the synthetic excess is an upper bound on what an independent-residual generator would contribute in a live comparison.

S3 Validation metric definitions

To distinguish marginal agreement from temporal agreement, we used separate distributional, tail, and autocorrelation summaries (Tables 2 and 6). For one observed series $x = (x_1, \dots, x_n)$ and R synthetic paths $y^{(r)}$ of the same length, each distributional comparison used one complete synthetic path and the fixed observed history. The two-sample Kolmogorov–Smirnov (KS) statistic is the largest absolute difference between their empirical cumulative distribution functions, $D = \sup_z |F_x(z) - F_{y^{(r)}}(z)|$ [45, 46]. The Anderson–Darling (AD) comparison gives greater weight to differences near the tails [47]. We used the approximate two-sample KS test and the modified, tie-aware two-sample AD calculation in `HypothesisTests.jl`, with asymptotic p -values. A path passed when $p > 0.05$, and the pass percentage was 100 times the fraction of passing paths. Dependence within returns, shared observed data, and parameter fitting prevent these percentages from being interpreted as calibrated significance levels or evidence of model equivalence. They describe agreement with the supplied history.

To quantify marginal discrepancies without a pass threshold, we computed Wasserstein-1 and histogram Hellinger scores for each path (Table 2). Let $x_{(j)}$ and $y_{(j)}^{(r)}$ denote the j th order statistics in increasing order. For equal sample lengths, the Wasserstein-1 distance is:

$$W_1(x, y^{(r)}) = \frac{1}{n} \sum_{j=1}^n |x_{(j)} - y_{(j)}^{(r)}|. \quad (\text{S14})$$

It has the growth-rate units yr^{-1} . For each Hellinger comparison, we formed 50 equally spaced bins between the minimum and maximum of the pooled pair of samples. Let p_b and q_b be the observed and simulated bin counts divided by their original sample lengths. The implemented histogram score is:

$$H(x, y^{(r)}) = \left[\frac{1}{2} \sum_{b=1}^{50} (\sqrt{p_b} - \sqrt{q_b})^2 \right]^{1/2}. \quad (\text{S15})$$

The stored implementation used lower-inclusive, upper-exclusive bins, including the final bin, so observations equal to the pooled maximum were excluded. The resulting bin weights can sum to less than one. The reported score retains that endpoint convention and depends on the pair-specific bin edges; it is a histogram approximation. Smaller Wasserstein and Hellinger scores indicate closer marginal agreement.

To describe tail shape, we computed excess kurtosis for each synthetic path and compared its mean with the observed value (Table 2). With $m_p(x) = n^{-1} \sum_{t=1}^n (x_t - \bar{x})^p$, the estimator was $\kappa(x) = m_4(x)/m_2(x)^2 - 3$, without a finite-sample bias correction. The composition scorecard also used the Hill index of absolute returns (Table 3). Let $X_{(1)} \geq \dots \geq X_{(n)}$ be decreasingly ordered absolute returns and $k = \max\{2, \lfloor 0.05n \rfloor\}$. The implemented upper-tail estimator is:

$$\hat{\xi} = \frac{1}{k-1} \sum_{j=1}^{k-1} \log \left(\frac{X_{(j)}}{X_{(k)}} \right). \quad (\text{S16})$$

The threshold $X_{(k)}$ must be positive. Larger values indicate a heavier estimated absolute-return tail. These shape summaries do not measure tail-threshold coverage.

To assess whether the simulated distributions bracketed the observed one, we measured agreement at 99 quantile levels (Table 2). For $u_j = j/100$, $j = 1, \dots, 99$, let $Q_x(u_j)$ be the observed sample quantile and $Q_r(u_j)$ the corresponding quantile of path r . Let L_j and U_j be the 5th and 95th percentiles of $\{Q_r(u_j) : r = 1, \dots, R\}$. All quantiles used the default linear interpolation between order statistics (type 7). The reported quantile-envelope coverage is:

$$C = \frac{100}{99} \sum_{j=1}^{99} \mathbf{1}\{L_j \leq Q_x(u_j) \leq U_j\}. \quad (\text{S17})$$

Larger values mean that more observed quantiles fall inside the pointwise simulation envelopes. This statistic assesses marginal quantile agreement; it does not estimate daily Value-at-Risk exceedance coverage or simultaneous confidence coverage.

To quantify persistence in return magnitude, we used the sample autocorrelation function (ACF) of absolute returns. Each series was centered by its own full-series absolute-return mean, $\bar{a}_x = n^{-1} \sum_t |x_t|$. At lag ℓ , the calculation was:

$$a_\ell(x) = \frac{\sum_{t=1}^{n-\ell} (|x_t| - \bar{a}_x)(|x_{t+\ell}| - \bar{a}_x)}{\sum_{t=1}^n (|x_t| - \bar{a}_x)^2}. \quad (\text{S18})$$

The denominator used all n observations, with no lag-dependent rescaling. Lag zero was excluded from the error scores. The single-asset comparison measured the error of the ensemble-average ACF (Table 2). For a lag limit L , that mean absolute error is:

$$E_L^{\text{ensemble}} = \frac{1}{L} \sum_{\ell=1}^L \left| a_\ell(x) - \frac{1}{R} \sum_{r=1}^R a_\ell(y^{(r)}) \right|. \quad (\text{S19})$$

We used $R = 1,000$ and $L = \min(252, n-1)$: lags 1–252 for the 2,766-observation training series and 1–248 for the 249-observation holdout. The state-resolution and emission comparisons used the same ensemble convention.

The multi-asset jump comparison instead measured error within each path before averaging (Table 6). For one asset, its mean path error is:

$$E_L^{\text{path}} = \frac{1}{R} \sum_{r=1}^R \left[\frac{1}{L} \sum_{\ell=1}^L |a_\ell(x) - a_\ell(y^{(r)})| \right]. \quad (\text{S20})$$

We used $L = 25$ and 60 in both windows and averaged these scores over assets. The fallback control also used the path convention with $L = 25$ (Table S18). At a common lag limit and on the same paths, the triangle inequality gives $E_L^{\text{ensemble}} \leq E_L^{\text{path}}$: averaging the curves can cancel errors of opposite sign. The two scores therefore answer different questions about temporal agreement. Their magnitudes cannot be compared directly across the single-asset and composition experiments, which also differ in lag limits, histories, and assets.

To describe simulation uncertainty in the single-asset comparison, we used the sampling unit appropriate to each statistic (Table 2). For a pass fraction $\hat{p}$, the reported binomial standard error was $100\sqrt{\hat{p}(1-\hat{p})/R}$ percentage points. This estimate is zero when every path passes or fails; it does not establish that the underlying pass probability is exactly zero or one. For kurtosis, Wasserstein distance, and Hellinger score, the standard error was the sample standard deviation of the R path scores divided by $\sqrt{R}$. For ensemble ACF error and quantile-envelope coverage, we used 500 bootstrap resamples of the R path indices, each of size R with replacement. Each resample retained entire paths and recomputed the statistic across all lags or quantile levels. The standard error was the sample standard deviation of those 500 recomputed values, without a further division by $\sqrt{500}$. All these errors condition on one observed history and a fixed fitted model; they omit uncertainty in fitting, model selection, and market regimes. The multi-asset jump contrasts instead used the 1,000 replication-level means over the asset set, preserving the shared market draw when calculating paired standard errors (Table S12).

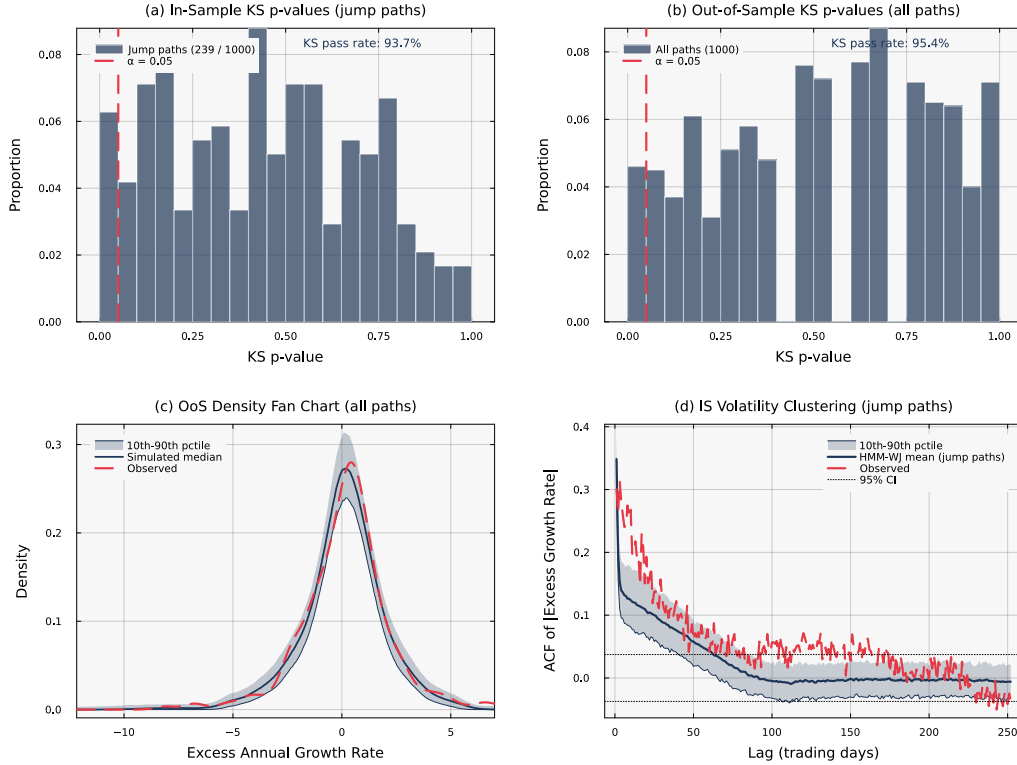


Figure S2: **Statistical validation of the hidden Markov model with jumps (HMM-WJ)** ($N = 100$, $\alpha = 0.05$). Panels (a) and (d) condition on the $\sim 24\%$ of in-sample paths containing jump events. (a) In-sample KS p -values for 239 jump paths (pass rate 93.7%). (b) Out-of-sample KS p -values for all 1,000 paths (pass rate 95.4%). (c) Out-of-sample density fan chart; the observed density falls within the simulation envelope. (d) Observed and mean simulated in-sample autocorrelation function (ACF) of $|G_t|$ for jump paths.

S3.1 Gated recurrent unit benchmark

To provide an autoregressive neural benchmark, we used a gated recurrent unit (GRU) network to predict the distribution of the next SPY growth rate from the preceding 50 values (Table 2). We standardized the training series using its mean and population standard deviation, both fixed for evaluation. The network had two GRU layers with 64 hidden units per layer, dropout probability 0.1 between layers during training, and separate linear heads for a conditional mean and log variance. The last hidden output of each input window supplied both heads, giving 37,954 trainable parameters. For a standardized target z_t and head outputs m_t and v_t , the training loss was the Gaussian negative log-likelihood with its constant term omitted:

$$\mathcal{L} = \frac{1}{2B} \sum_{t \in \mathcal{B}} [v_t + (z_t - m_t)^2 \exp(-v_t)], \quad (\text{S21})$$

where $\mathcal{B}$ is a training batch containing $B = 256$ windows. The 2,766 training observations supplied 2,716 overlapping input-target pairs. Each epoch shuffled these pairs and used ten complete batches; the final incomplete batch was dropped. Adam used an initial learning rate of 10^{-3} , default moment decay rates (0.9, 0.999), and no weight decay. We clipped the gradient norm at one and halved the learning rate after the scheduler’s 15-epoch plateau tolerance, with a floor of 10^{-5} . Training ran for at most 200 epochs. We retained weights whenever mean training loss improved by more than 10^{-4} and stopped after 40 epochs without such improvement. The recorded fit completed 200 epochs and retained epoch 199. Model selection used training loss, with no separate validation split; the holdout supplied only the evaluation horizon.

To generate paths, we disabled dropout and selected an initial window uniformly from the 2,716 training input windows. At each step, we passed the current 50 values through the network with a fresh zero hidden state, sampled a Gaussian value with mean m_t and standard deviation $\max\{\exp(v_t/2), 10^{-6}\}$, and replaced the oldest window value with that draw. Every generated value was retained, with no burn-in, and the fixed training normalization was inverted afterward. The same fitted network generated 1,000 training-length and then 1,000 holdout-length paths, in that order, using seed 1234 for NumPy and PyTorch. The recorded rerun used Python 3.14.2, PyTorch 2.10.0, NumPy 2.4.3, and SciPy 1.17.1 on a central processing unit (CPU). The repository includes pinned dependencies, trained weights, an epoch log, and input and output fingerprints. Parallel generation assigned each worker the random-number state for its position in the original serial rollout; a direct check confirmed identical paths. The rerun reproduced both archived path files exactly. The benchmark is one fitted network: its reported simulation errors do not measure variation across training seeds or neural architectures.

Table S1: **Descriptive statistics and stylized-facts tests for SPY daily excess growth rates.** In-sample (IS): 2014–2024 ($T = 2,766$); out-of-sample (OoS): 2025 ($T = 249$). Gaussian and Laplace columns show maximum likelihood estimation (MLE) fits to the in-sample data. We used the Jarque–Bera (JB) normality test and the Ljung–Box (LB) autocorrelation test at lag 20. * denotes rejection at $\alpha = 0.05$.

Statistic	IS Observed	OoS Observed	Gaussian	Laplace
Mean (annualized, %)	6.31	11.60	6.31	14.19
Standard deviation of G_t (% yr ^{−1})	214.50	220.62	214.46	205.93
Skewness	−0.753	−1.093	0	0
Excess Kurtosis	7.715	6.867	0	3
JB normality test	reject* ($p < 0.001$)	reject* ($p < 0.001$)	not used	not used
LB test on G_t (lag 20)	reject* ($p < 0.001$)	reject* ($p = 0.019$)	not used	not used
LB test on $ G_t $ (lag 20)	reject* ($p < 0.001$)	reject* ($p < 0.001$)	not used	not used

S4 Derivation of the single-asset generator

This appendix derives the probability law of the fitted single-asset generator and connects each fitted component to the empirical feature it controls. The hidden Markov model with jumps (HMM-WJ), its no-jump restriction (HMM-NJ), and their symbols follow the main-text definitions in Eq. (2) and Algorithm 1. Unless noted otherwise, numerical values evaluate the closed-form expressions at the

fitted SPY model of Table 1: $N = 100$ states, Student- t degrees of freedom $\nu = 5$, jump probability $\epsilon = 10^{-4}$, mean episode duration $\lambda = 90$ steps, tail-selection probability $p_{\text{neg}} = 0.52$, tail-set size $N_{\text{tail}} = 5$, and the in-sample series of $T = 2,766$ daily excess growth rates. Table S2 collects these values beside their sample or simulated counterparts.

Table S2: Closed-form quantities of the fitted SPY generator against sample and simulated values. Each closed-form entry evaluates the expression named in the text at the fitted SPY model of Table 1. Sample values are computed from the in-sample SPY series; simulated values use 400 in-sample-length paths for the jump-episode quantities and 1,000 paths for skewness. For comparison with the sup-distance entry, the two-sample Kolmogorov–Smirnov critical value at $\alpha = 0.05$ for two samples of $T = 2,766$ observations is $1.358\sqrt{2/T} = 0.0365$. Observed autocorrelations are those of the in-sample series shown in Fig. 1d.

Quantity	Closed form at the fit	Sample or simulation
<i>Stationary law and moments</i>		
State occupancy count, smallest and largest (of $T = 2,766$)	–	16, 47
Occupancy frequency $\hat{\pi}_k$, smallest and largest	–	0.0058, 0.017
$\max_k \hat{\pi}_k - \hat{\pi}_k $	3.7×10^{-4}	–
Mean (yr^{-1})	0.0636	0.0631
$\sup_x F_{\text{mix}}(x) - \hat{F}_T(x) $	0.0045	–
Within-state variance V_w (yr^{-2}), share of sample variance	0.17, 3.6%	–
Variance (yr^{-2}), Student- t emissions	4.72	4.60
Variance (yr^{-2}), Gaussian emissions	4.61	4.60
Standard deviation (yr^{-1}), Student- t emissions	2.17	2.14
Excess kurtosis, Student- t emissions	8.34	7.72
Excess kurtosis, Gaussian emissions	5.82	7.72
Skewness, HMM-NJ (1,000 simulated paths)	–	–0.76
Skewness, HMM-WJ (1,000 simulated paths)	–	–0.73
<i>Dependence without jumps</i>		
$ \theta_2 $, smallest lag with $ \theta_2 ^\tau < 0.01$	0.253, lag 4	–
ACF of $ G_t $ at lag 1, no jumps	0.26	0.30 (observed)
ACF of $ G_t $ at lag 3, no jumps	0.021	0.31 (observed)
ACF of $ G_t $ at lag 5, no jumps	0.001	0.26 (observed)
ACF of $ G_t $ at lag 25, no jumps	< 0.001	0.14 (observed)
<i>Jump-episode arithmetic</i>		
Forced-step fraction π_J	0.0089	0.0088 (400 paths)
Jump-path probability	24.2%	24.8% (99 of 400)
Forced fraction within a jump path	3.3% (λ/T)	3.6%
Forced-step standard deviation (yr^{-1})	5.38	–
Mean absolute return, forced $\bar{a}_J$ and free $\bar{a}$ (yr^{-1})	4.96, 1.47	–
$\text{Var}(A_t)$, single-episode conditioning	3.01	–
Predicted jump-path ACF plateau	0.13	–
Excess kurtosis, single-episode jump path	7.20	–
Variance inflation from forced steps, single-episode jump path	17%	–

S4.1 Generative law

The no-jump model generates a hidden state path $S_0, \dots, S_T$ on $\{1, \dots, N\}$ and observations $G_1, \dots, G_T$ with the joint density:

$$p(s_0, \dots, s_T, g_1, \dots, g_T) = \bar{\pi}_{s_0} \prod_{t=1}^T \mathbf{T}_{s_{t-1}, s_t} f_{s_t}(g_t), \quad (\text{S22})$$

where $\bar{\pi}_{s_0}$ is the initial probability of state s_0 , $\mathbf{T}_{s_{t-1}, s_t}$ is the probability of moving from state s_{t-1} to state s_t , and f_k is the emission density of state k . Under Eq. (2), f_k is the location-scale Student- t density:

$$f_k(g) = \frac{1}{\sigma_k} \psi_\nu\left(\frac{g - \mu_k}{\sigma_k}\right), \quad \psi_\nu(x) = \frac{\Gamma(\frac{\nu+1}{2})}{\sqrt{\nu\pi} \Gamma(\frac{\nu}{2})} \left(1 + \frac{x^2}{\nu}\right)^{-\frac{\nu+1}{2}}, \quad (\text{S23})$$

where ψ_ν is the density of a standard Student- t random variable with ν degrees of freedom, Γ is the gamma function, and (μ_k, σ_k) are the location and scale of state k . The factorization in Eq. (S22) states the structural property that drives everything that follows: given the state path, the observations are independent. Every form of serial dependence the generator can produce must therefore be carried by the state path [9].

The jump-augmented model enlarges the hidden state. Let $J_t \in \{0, 1, 2, \dots\}$ count the forced steps remaining after time t , and let u be the forced-step state distribution, which mixes uniform draws over the two tail sets:

$$u_k = \begin{cases} p_{\text{neg}}/N_{\text{tail}} & k \in \mathcal{S}_-, \\ (1 - p_{\text{neg}})/N_{\text{tail}} & k \in \mathcal{S}_+, \\ 0 & \text{otherwise.} \end{cases} \quad (\text{S24})$$

Writing $p_K(m) = e^{-\lambda} \lambda^m / m!$ for the Poisson probability of episode length m and $\mathbf{1}\{\cdot\}$ for the indicator function, the pair (S_t, J_t) evolves by the transition kernel:

$$\begin{aligned} \Pr(S_t = k, J_t = j \mid S_{t-1} = s, J_{t-1} = i) \\ = \begin{cases} u_k \mathbf{1}\{j = i - 1\} & i \geq 1, \\ (1 - \epsilon + \epsilon e^{-\lambda}) \mathbf{T}_{s,k} \mathbf{1}\{j = 0\} + \epsilon p_K(j + 1) u_k & i = 0, \end{cases} \end{aligned} \quad (\text{S25})$$

and the emission draw depends only on the first coordinate, $G_t \sim f_{S_t}$. The two cases read as follows. While an episode is active ($i \geq 1$), the next state is an independent draw from u and the counter decrements; the tail set and the state within it are re-drawn at every forced step. While no episode is active ($i = 0$), the chain either takes an ordinary transition (no trigger, or a trigger whose Poisson draw returns zero) or starts an episode of length $j + 1 \geq 1$ whose first forced step occurs immediately. The pair (S_t, J_t) is therefore itself a Markov chain, and the HMM-WJ generator is a hidden Markov model on the enlarged state space $\{1, \dots, N\} \times \{0, 1, 2, \dots\}$. Algorithm 1 implements Eq. (S25) with the episode counter truncated at the simulation horizon; it emits the stationary initial draw as the first observation and applies the kernel from the second step onward, which changes the law of a path only through the absent possibility of a trigger at the first step. When an episode ends, ordinary transitions resume from the last forced tail state, so the chain re-enters the body of the state space through the tail rows of $\mathbf{T}$.

S4.2 Estimators and the one-step empirical law

The fitting procedure consists of four closed-form estimators, and each one matches a specific empirical object exactly. The Laplace partition comes first. For observations $G_1, \dots, G_T$, the Laplace log-likelihood with location μ_L and scale b_L is:

$$\ell(\mu_L, b_L) = -T \ln(2b_L) - \frac{1}{b_L} \sum_{t=1}^T |G_t - \mu_L|. \quad (\text{S26})$$

For any fixed $b_L > 0$, maximizing ℓ over μ_L minimizes $\sum_t |G_t - \mu_L|$, so $\hat{\mu}_L$ is the sample median. Setting the b_L derivative to zero at $\hat{\mu}_L$ gives:

$$\begin{aligned} \frac{\partial \ell}{\partial b_L} &= -\frac{T}{b_L} + \frac{1}{b_L^2} \sum_{t=1}^T |G_t - \hat{\mu}_L| = 0 & (\text{first-order condition}) \\ \hat{b}_L &= \frac{1}{T} \sum_{t=1}^T |G_t - \hat{\mu}_L|, & (\text{solve for } b_L) \end{aligned} \quad (\text{S27})$$

the mean absolute deviation about the median. The state boundaries then invert the fitted Laplace cumulative distribution function (CDF) [35]. The Laplace CDF is piecewise exponential:

$$F_L(x) = \begin{cases} \frac{1}{2} \exp((x - \hat{\mu}_L)/\hat{b}_L) & x \leq \hat{\mu}_L, \\ 1 - \frac{1}{2} \exp(-(x - \hat{\mu}_L)/\hat{b}_L) & x > \hat{\mu}_L, \end{cases} \quad (\text{S28})$$

and setting $F_L(Q_k) = k/N$ and solving each branch for Q_k gives the closed-form boundaries:

$$\begin{aligned} \frac{k}{N} &= \frac{1}{2} e^{(Q_k - \hat{\mu}_L)/\hat{b}_L} \implies Q_k = \hat{\mu}_L + \hat{b}_L \ln \frac{2k}{N}, & (\text{lower branch}) \\ \frac{k}{N} &= 1 - \frac{1}{2} e^{-(Q_k - \hat{\mu}_L)/\hat{b}_L} \implies Q_k = \hat{\mu}_L - \hat{b}_L \ln \left(2 - \frac{2k}{N}\right). & (\text{upper branch}) \end{aligned} \quad (\text{S29})$$

The bins are equiprobable under the fitted Laplace, not under the empirical distribution, so the in-sample state counts are not uniform: across the 100 states, they range from 16 to 47 of the 2,766 observations (Table S2). Every within-state mean μ_k and standard deviation σ_k was therefore computed from at least 16 observations, and no state required a fallback to the global moments.

The transition matrix is the maximum likelihood estimator (MLE) of a first-order Markov chain. Conditional on the assigned state sequence $s_1, \dots, s_T$, let n_{jk} count the transitions from state j to state k and let $n_{j\cdot} = \sum_k n_{jk}$ be the row total. The likelihood of the transition parameters factorizes over rows into multinomials, and maximizing the log-likelihood subject to each row summing to one, with multiplier c_j for row j , uses the Lagrangian:

$$\mathcal{L} = \sum_{j,k} n_{jk} \ln \mathbf{T}_{jk} + \sum_j c_j \left(1 - \sum_k \mathbf{T}_{jk}\right), \quad (\text{S30})$$

whose stationarity conditions solve in three steps:

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \mathbf{T}_{jk}} &= \frac{n_{jk}}{\mathbf{T}_{jk}} - c_j = 0 & (\text{first-order condition}) \\ \mathbf{T}_{jk} &= \frac{n_{jk}}{c_j} & (\text{solve for } \mathbf{T}_{jk}) \\ c_j &= \sum_k n_{jk} = n_{j\cdot}. & (\text{row constraint } \sum_k \mathbf{T}_{jk} = 1) \\ \hat{\mathbf{T}}_{jk} &= \frac{n_{jk}}{n_{j\cdot}}. & (\text{counted estimator}) \end{aligned} \quad (\text{S31})$$

For a row with $n_{j\cdot} > 0$, the interior condition applies to cells with positive counts; for a cell with $n_{jk} = 0$, the log-likelihood is non-increasing in $\mathbf{T}_{jk}$, so its maximizer is the boundary value $\hat{\mathbf{T}}_{jk} = 0$, which the same formula returns. When $n_{j\cdot} = 0$, the observations do not identify that row. The implementation sets every entry to $1/N$; this is a fallback choice, not an estimate of an observed transition frequency. Multiplying $\hat{\mathbf{T}}_{jk}$ by the row frequency $n_{j\cdot}/(T-1)$ recovers $n_{jk}/(T-1)$, the empirical frequency of the state pair (j, k) . The counted estimator therefore reproduces the in-sample joint law of (S_{t-1}, S_t) exactly; everything it asserts about longer horizons is the Chapman–Kolmogorov extension $\mathbf{T}^T$ of that one-step law [37, 40]. The emission estimator completes the pair: within each state with at least two observations and sample standard deviation at least 10^{-12} yr^{-1} , μ_k and σ_k are the sample mean and standard deviation of the assigned observations. Otherwise, the implementation uses the fallback rules in Eq. (S53). In either case, σ_k enters Eq. (S23) as the scale, so the emission standard deviation is $\sigma_k \sqrt{\nu/(\nu-2)}$. The aggregate consequence of this scale convention is quantified in Eq. (S35).

The initial distribution ties the pieces together. Let n_k count the occupancy of state k over the T observations, and let $\hat{\pi}_k = n_k/T$ be the occupancy frequency. The row total satisfies $n_{j\cdot} = n_j - \mathbf{1}\{s_T = j\}$, and the column total satisfies $n_{\cdot k} = n_k - \mathbf{1}\{s_1 = k\}$, because only the last observation opens no transition and only the first closes none. Substituting both identities gives:

$$\begin{aligned} (\hat{\pi} \hat{\mathbf{T}})_k &= \sum_j \frac{n_j}{T} \cdot \frac{n_{jk}}{n_{j\cdot}} & (\text{definitions}) \\ &= \sum_j \frac{n_{j\cdot}}{T} \cdot \frac{n_{jk}}{n_{j\cdot}} + \sum_j \frac{\mathbf{1}\{s_T = j\}}{T} \cdot \frac{n_{jk}}{n_{j\cdot}} & (n_{j\cdot} = n_j + \mathbf{1}\{s_T = j\}) \\ &= \frac{n_{\cdot k}}{T} + \frac{\hat{\mathbf{T}}_{s_T, k}}{T} & (\text{sum transitions into } k) \\ &= \hat{\pi}_k + \frac{\hat{\mathbf{T}}_{s_T, k} - \mathbf{1}\{s_1 = k\}}{T}. & (n_{\cdot k} = n_k - \mathbf{1}\{s_1 = k\}) \end{aligned} \quad (\text{S32})$$

The occupancy frequencies therefore satisfy the stationarity equation $\hat{\pi}\hat{\mathbf{T}} = \hat{\pi}$ up to a fixed-point residual bounded by $1/T$. For the fitted SPY model, the solved eigenvector $\bar{\pi}$ deviates from the occupancy frequencies by at most 3.7×10^{-4} , the same order as $1/T$, against occupancy values between 0.0058 and 0.017 (Table S2). The initial distribution is consequently not an abstract spectral object: $\bar{\pi}$ is, up to a correction of the order of $1/T$, the vector of in-sample state frequencies.

S4.3 Stationary distribution and moments

The stationary observation law of the no-jump generator follows directly from Eq. (S22). Marginalizing the state at a single time gives the mixture density and CDF:

$$p(g) = \sum_{k=1}^N \bar{\pi}_k f_k(g), \quad F_{\text{mix}}(x) = \sum_{k=1}^N \bar{\pi}_k \Psi_{\nu} \left(\frac{x - \mu_k}{\sigma_k} \right), \quad (\text{S33})$$

where Ψ_{ν} is the CDF of the standard Student- t with ν degrees of freedom. Every ingredient of Eq. (S33) is a summary of the fitted SPY model. Its component locations and scales are within-state sample moments because no fallback was needed; its stationary weights differ from occupancy frequencies through the end effects described above. For other assets, fallback locations or scales need not be within-state estimates (Table S17). Mean matching therefore requires a qualification: weighting empirical state means by the occupancy frequencies telescopes into the grand mean, whereas replacing a populated state's mean with a global fallback need not preserve that identity. With empirical state means, the calculation is:

$$\begin{aligned} \sum_{k:n_k>0} \hat{\pi}_k \mu_k &= \sum_{k:n_k>0} \frac{n_k}{T} \cdot \frac{1}{n_k} \sum_{t:s_t=k} G_t && (\text{definitions of } \hat{\pi}_k, \mu_k) \\ &= \frac{1}{T} \sum_{t=1}^T G_t, && (\text{each } t \text{ counted once}) \end{aligned} \quad (\text{S34})$$

and replacing $\hat{\pi}$ by $\bar{\pi}$ changes the value only through the $1/T$ correction of Eq. (S32): the model mean is 0.0636 yr^{-1} against the sample mean of 0.0631 yr^{-1} (Table S2). The distributional match is equally direct. Evaluated at the fitted SPY model, the largest gap between the model CDF and the empirical CDF is $\sup_x |F_{\text{mix}}(x) - \hat{F}_T(x)| = 0.0045$ (Table S2), where $\hat{F}_T$ is the in-sample empirical CDF. The two-sample Kolmogorov–Smirnov (KS) critical value at significance level $\alpha = 0.05$ for two samples of 2,766 observations is $1.358\sqrt{2/T} = 0.0365$, so the model-versus-data distance consumes about one eighth of the rejection threshold. Rejections of simulated paths are therefore driven by path-level sampling variation rather than by a misplaced marginal, which is consistent with the in-sample pass rates in Table S4.

The second moment makes the role of the emission scale convention explicit. Conditioning on the state and applying the law of total variance gives:

$$\begin{aligned} \text{Var}(G_t) &= \mathbb{E}[\text{Var}(G_t | S_t)] + \text{Var}(\mathbb{E}[G_t | S_t]) && (\text{law of total variance}) \\ &= \frac{\nu}{\nu-2} \sum_k \bar{\pi}_k \sigma_k^2 + \sum_k \bar{\pi}_k (\mu_k - \bar{\mu})^2, && (\text{Student-}t \text{ variance}) \end{aligned} \quad (\text{S35})$$

where $\bar{\mu} = \sum_k \bar{\pi}_k \mu_k$ is the stationary mean. Define the within-state variance $V_w = \sum_k \bar{\pi}_k \sigma_k^2$ and the between-state variance $V_b = \sum_k \bar{\pi}_k (\mu_k - \bar{\mu})^2$. The corresponding empirical decomposition of the sample variance is $V_b + V_w$, up to degrees-of-freedom corrections, so the model variance exceeds the sample variance by $2V_w/(\nu-2)$. At the SPY fit (Table S2), $V_w = 0.17 \text{ yr}^{-2}$, only 3.6% of the total variance of 4.60 yr^{-2} : the quantile partition concentrates almost all dispersion between states rather than within them. The inflation is correspondingly small, a model variance of 4.72 against 4.60 yr^{-2} (2.17 against 2.14 yr^{-1} in standard deviation), and vanishes under Gaussian emissions (4.61 yr^{-2}).

The fourth moment explains the emission comparison in Table S4. Write $G_t = \mu_k + \sigma_k X$ within state k , where X is a standard Student- t draw, and let $\delta_k = \mu_k - \bar{\mu}$. Expanding the fourth central moment and dropping the odd-power terms, which vanish by the symmetry of ψ_ν , gives:

$$\begin{aligned}\mathbb{E}[(G_t - \bar{\mu})^4] &= \sum_k \bar{\pi}_k \mathbb{E}[(\delta_k + \sigma_k X)^4] && \text{(condition on the state)} \\ &= \sum_k \bar{\pi}_k [\delta_k^4 + 6 \delta_k^2 \sigma_k^2 \mathbb{E}(X^2) \\ &\quad + \sigma_k^4 \mathbb{E}(X^4)],\end{aligned}\tag{S36}$$

with the standard Student- t moments, finite for $\nu > 4$:

$$\mathbb{E}(X^2) = \frac{\nu}{\nu - 2}, \quad \mathbb{E}(X^4) = \frac{3\nu^2}{(\nu - 2)(\nu - 4)}.\tag{S37}$$

At $\nu = 5$ these values are $5/3$ and 25 : the within-state kurtosis is 9, against 3 for Gaussian emissions. The excess kurtosis of the stationary mixture is $\mathbb{E}[(G_t - \bar{\mu})^4] / \text{Var}(G_t)^2 - 3$; evaluating it at the SPY fit gives 8.34 with Student- t emissions and 5.82 with Gaussian emissions, against an observed value of 7.72 (Table S2). The emission choice enters Eq. (S36) through both moments in Eq. (S37); the larger change by far is $\mathbb{E}(X^4)$ rising from 3 to 25, which acts on the σ_k^4 terms that the wide tail states dominate. The per-path simulated values reported in Table S4 (7.5 and 5.5) sit below these population values because the sample kurtosis of a heavy-tailed series of 2,766 observations is biased downward, but the population gap of 2.5 between the emission choices matches the simulated gap of 2.0 in both direction and size. The mixture also carries the asymmetry of the fitted state occupancies without an explicit skewness parameter: simulating 1,000 in-sample-length paths gives a mean sample skewness of -0.76 for HMM-NJ and -0.73 for HMM-WJ, against the observed -0.75 (Tables S2 and S1). Because the states partition the Laplace quantiles of an asymmetric series, the occupancy-weighted mixture inherits that asymmetry through the μ_k and σ_k estimates.

S4.4 Dependence structure without jumps

The results stated so far concern single time slices; the dependence structure is where the no-jump generator falls short of the data, and the failure is structural rather than a matter of estimation. Within state k , the sojourn time is geometric: the chain remains for m steps with probability $\mathbf{T}_{kk}^{m-1}(1 - \mathbf{T}_{kk})$ and therefore stays for $1/(1 - \mathbf{T}_{kk})$ steps on average, between one and two days for every fitted state (Fig. S3c). The autocorrelation of absolute returns inherits this short memory. Let $a_k = \mathbb{E}[|G_t| \mid S_t = k]$ be the within-state mean absolute return and $\bar{a} = \sum_k \bar{\pi}_k a_k$ its stationary average. Because observations are conditionally independent given the states, the lag- τ product moment reduces to a state-pair sum:

$$\begin{aligned}\mathbb{E}[|G_t| |G_{t+\tau}|] &= \sum_{j,k} \Pr(S_t = j, S_{t+\tau} = k) a_j a_k && \text{(conditional independence)} \\ &= \sum_{j,k} \bar{\pi}_j (\mathbf{T}^\tau)_{jk} a_j a_k, && \text{(Chapman–Kolmogorov)}\end{aligned}\tag{S38}$$

so the autocorrelation function (ACF) of $|G_t|$ is:

$$\text{ACF}_{|G|}(\tau) = \frac{\sum_{j,k} \bar{\pi}_j (\mathbf{T}^\tau)_{jk} a_j a_k - \bar{a}^2}{\text{Var}(|G_t|)}.\tag{S39}$$

As τ grows, $\mathbf{T}^\tau$ converges to its rank-one limit, every row equal to $\bar{\pi}$, at the geometric rate $|\theta_2|^\tau$, where θ_2 is the second-largest eigenvalue of $\mathbf{T}$ in modulus; the ACF is therefore bounded by a constant multiple of $|\theta_2|^\tau$. For the fitted SPY matrix (Table S2), $|\theta_2| = 0.253$, and $|\theta_2|^\tau$ falls below 0.01 from lag 4 onward. Evaluating Eq. (S38) gives a model ACF of 0.26 at lag 1, close to the observed 0.30 because the counted matrix pins the one-step state-pair law, but 0.021 at lag 3 and effectively zero from lag 5, while the observed ACF remains near 0.26 at lag 5 and 0.14 at lag 25 (Table S2; Fig. 1d). No first-order chain fitted by transition counting can do otherwise: matching the one-step law fixes $\mathbf{T}$, and the spectral gap of that matrix then forces geometric mixing within a week. This is the quantitative content of the main-text statement that the counted transition probabilities leave extreme-return states too quickly to reproduce volatility clustering, and it is the failure the jump mechanism corrects.

S4.5 Jump-episode arithmetic

The jump mechanism overlays the fast-mixing chain with rare, long episodes, and its operating characteristics follow from renewal arguments. On each step with no active episode, an episode with at least one forced step begins with probability $p_e = \epsilon(1 - e^{-\lambda})$, since a trigger whose Poisson draw returns zero is discarded; conditional on starting, the episode length is the zero-truncated Poisson draw with mean $\mathbb{E}[K \mid K \geq 1] = \lambda/(1 - e^{-\lambda})$. At $\lambda = 90$, the correction $e^{-\lambda}$ is below 10^{-39} , so $p_e = \epsilon$ and $\mathbb{E}[K \mid K \geq 1] = \lambda$ to machine precision. The long-run fraction of forced steps, denoted π_J , follows from the renewal-reward theorem. A renewal cycle consists of the free steps preceding an episode and the episode itself: the number of free trials up to and including the trigger is geometric with mean $1/p_e$, the triggering trial is itself the first forced step, and the episode contributes $\mathbb{E}[K \mid K \geq 1]$ forced steps in total:

$$\begin{aligned}
 \pi_J &= \frac{\mathbb{E}[K \mid K \geq 1]}{\frac{1 - p_e}{p_e} + \mathbb{E}[K \mid K \geq 1]} && \text{(forced steps over cycle length)} \\
 &= \frac{p_e \mathbb{E}[K \mid K \geq 1]}{1 - p_e + p_e \mathbb{E}[K \mid K \geq 1]} && \text{(multiply through by } p_e) \\
 &= \frac{\epsilon \lambda}{1 - \epsilon + \epsilon e^{-\lambda} + \epsilon \lambda} && (p_e \mathbb{E}[K \mid K \geq 1] = \epsilon \lambda) \\
 &\approx \frac{\epsilon \lambda}{1 + \epsilon \lambda} = 0.0089. && \text{(drop } \epsilon e^{-\lambda}, \text{ then } \epsilon) \tag{S40}
 \end{aligned}$$

Fewer than one step in a hundred is forced at the fitted values; the measured fraction across 400 simulated in-sample-length paths is 0.0088 (Table S2). The product $\epsilon \lambda$ is the quantity that sets this fraction, a point that matters for identification in Section S4.6.

At the path level, the same arithmetic determines how episodes are distributed across the ensemble. A simulated path contains no episode only if every one of its $T - 1$ transition steps fails to trigger one, so the jump-path probability at $T = 2,766$ is $1 - (1 - p_e)^{T-1} = 24.2\%$; the simulated ensemble gives 24.8% (99 of 400 paths; Table S2), matching the $\sim 24\%$ jump-path fraction conditioned on in Fig. S2. Episodes begin at the long-run rate of one per expected renewal cycle, so a path carries about 0.274 episodes in expectation. The expected gap between episodes is $1/\epsilon = 10^4$ trading days, about 40 trading years, so the ensemble is a two-population mixture: roughly three quarters of the paths never trigger an episode and follow the HMM-NJ law exactly, while the remaining quarter carry a single episode (about one jump path in eight carries a second). Within a jump path, the forced fraction is $\lambda/T = 3.3\%$ for a single episode; the simulated mean is 3.6% (Table S2), slightly higher through the multi-episode paths. Forced steps differ sharply from free ones. Under the forced-step distribution u of Eq. (S24), the conditional standard deviation is 5.38 yr^{-1} against the free-step 2.17 yr^{-1} , a variance ratio of 6.1, and the mean absolute return is $\bar{a}_J = \sum_k u_k a_k = 4.96 \text{ yr}^{-1}$ against $\bar{a} = 1.47 \text{ yr}^{-1}$ (Table S2). The stationary state marginal of the augmented chain is the mixture $(1 - \pi_J)$ times the free-phase distribution plus π_J times u ; the free phase relaxes from the post-episode tail state back to $\bar{\pi}$ at the rate $|\theta_2|$ within a few steps. Using $\bar{\pi}$ as the initial law therefore misallocates $O(\pi_J) \approx 1\%$ of probability mass, which quantifies the main-text remark that $\bar{\pi}$ is exact for the ordinary transition matrix but approximate for the jump-augmented process.

S4.6 Autocorrelation and kurtosis under jumps

The tuning objective of Eq. (3) scores the absolute-return ACF and the excess kurtosis, and both statistics admit closed-form approximations that show what (ϵ, λ) control. The ACF contribution rests on one more renewal quantity: the probability $h(\tau)$ that, given a step is forced, the step τ later belongs to the same episode. A uniformly chosen forced step lands in an episode with the length-biased

law, an episode of length m covering m forced steps, and its position within that episode is uniform. Combining the two gives:

$$\begin{aligned}
h(\tau) &= \sum_{m \geq 1} \frac{m \Pr(K = m \mid K \geq 1)}{\mathbb{E}[K \mid K \geq 1]} \cdot \frac{(m - \tau)_+}{m} \\
&= \frac{\mathbb{E}[(K - \tau)_+ \mid K \geq 1]}{\mathbb{E}[K \mid K \geq 1]} && \text{(sum over } m) \\
&\approx \left(1 - \frac{\tau}{\lambda}\right)_+, && (K \text{ concentrated near } \lambda) \quad (\text{S41})
\end{aligned}$$

where $(x)_+ = \max(x, 0)$ and the approximation holds because the Poisson length concentrates within a few multiples of $\sqrt{\lambda} \approx 9.5$ around λ . The same-episode probability therefore decays almost linearly from one to zero over the horizon λ . The ACF follows by conditioning on the forced-step indicator $Z_t = \mathbf{1}\{\text{step } t \text{ is forced}\}$. Given the indicator path, every forced step's state is an independent draw from u , so two forced observations are conditionally independent; the dependence linking a forced observation to a later free one runs only through the episode's final state and, like the free-phase covariance itself, decays at the $|\theta_2|^\tau$ rate of Section S4.4. For lags beyond that scale, only the conditional means covary. Write $A_t = |G_t|$ for the absolute return. The conditional mean is $\mathbb{E}[A_t \mid Z_t] = \bar{a} + Z_t(\bar{a}_J - \bar{a})$, and for rare episodes the joint forced probability is $\Pr(Z_t = 1, Z_{t+\tau} = 1) \approx \pi_J h(\tau)$, so:

$$\begin{aligned}
\text{Cov}(A_t, A_{t+\tau}) &\approx \text{Cov}(\mathbb{E}[A_t \mid Z_t], \mathbb{E}[A_{t+\tau} \mid Z_{t+\tau}]) && \text{(independence given } Z) \\
&= (\bar{a}_J - \bar{a})^2 \text{Cov}(Z_t, Z_{t+\tau}) && \text{(conditional mean in } Z) \\
&\approx (\bar{a}_J - \bar{a})^2 \pi_J h(\tau), && \text{(episodes rare)} \quad (\text{S42})
\end{aligned}$$

so the jump mechanism adds an ACF component of height $\pi_J(\bar{a}_J - \bar{a})^2 / \text{Var}(A_t)$ that decays almost linearly to zero at lag λ , precisely the slow component the counted chain cannot produce. For a jump path carrying a single episode, the relevant forced fraction is λ/T rather than π_J , and evaluating the resulting expression at the fitted values, with $\text{Var}(A_t) = 3.01$ under the same conditioning, gives a predicted plateau of 0.13 (Table S2). Table S3 compares this prediction with the mean simulated jump-path ACF: the two differ by 0.013 at lag 5 and by less than 0.01 from lag 10 onward. At lags 1 to 3 the simulated values exceed the episode component (0.35 against 0.13 at lag 1; Table S3) because the free-phase geometric component of Section S4.4 adds on top before it dies out.

The kurtosis contribution pulls in the opposite direction. Treating a jump path as a two-regime mixture with weights $(1 - \lambda/T, \lambda/T)$ and evaluating the fourth-moment expression of Eq. (S36) with the forced-step distribution u in place of $\bar{\pi}$ for the episode regime gives a population excess kurtosis of 7.20 for a single-episode jump path, against 8.34 with no jumps (Table S2). Forced steps inflate the variance, by about 17% at the fitted values, faster than they inflate the fourth moment, because u draws uniformly within each tail set rather than extending the extreme tail. Adding jump content therefore lowers kurtosis toward and past the observed value while it raises the slow ACF

Table S3: Episode-overlap prediction of the jump-path absolute-return autocorrelation function (ACF) against simulation. The prediction evaluates Eq. (S42) at the fitted SPY values with the single-episode forced fraction λ/T in place of π_J and the same-episode probability $h(\tau)$ of Eq. (S41). The simulated column is the mean ACF of $|G_t|$ over the 99 jump-active paths among 400 simulated in-sample-length paths. The free-phase component of Eq. (S38) is excluded from the prediction; it has decayed below 0.01 from lag 5 onward.

Lag τ	$h(\tau)$	Predicted ACF	Simulated ACF
1	0.989	0.130	0.348
2	0.978	0.129	0.199
3	0.967	0.127	0.153
5	0.944	0.124	0.137
10	0.889	0.117	0.123
15	0.833	0.110	0.115
20	0.778	0.102	0.105
25	0.722	0.095	0.099

component; the jump-share sweep reported in the main text traces the same tradeoff empirically, with the Hill tail index flat across the sweep because the tail exponent is set by ν , not by the jump content. The objective of Eq. (3) balances these two effects.

The same expressions show how the two jump parameters are identified, and where they are not. Within a single-episode jump path, the ACF component of Eq. (S42) has height proportional to λ/T and horizon λ , and the kurtosis shift depends on the same forced fraction: every statistic entering Eq. (3) for such a path is controlled by λ . The parameter ϵ moves the objective only through the incidence of jump paths, which the jump-active conditioning removes, and through the small fraction of multi-episode paths. This weak dependence is consistent with the tuned $\epsilon = 10^{-4}$ lying at the lower edge of the explored range for SPY and for all three cross-asset tickers, and with the Monte Carlo sensitivity of the tuned optima noted in Section S8. The objects entering every expression in this appendix, the fitted boundaries, transition matrix, and residence times, are plotted in Fig. S3.

S5 Transition matrix internals and partition diagnostics

To determine why the ordinary state process required a duration override, we inspected the fitted hidden Markov model with jumps (HMM-WJ) components for SPY at $N = 100$ (Fig. S3). The fitted Laplace CDF and the empirical CDF are shown with the 99 state boundaries Q_k . The transition matrix $\mathbf{T}$ has a near-diagonal band, with most off-diagonal mass within ± 5 states of the diagonal. Under the ordinary Markov transitions, every state has an expected residence time of only 1–2 steps. The fitted jump duration is $\lambda = 90$ steps, about two orders of magnitude longer. Every state had at least one in-sample observation. This residence-time gap, rather than missing states, motivated the duration override.

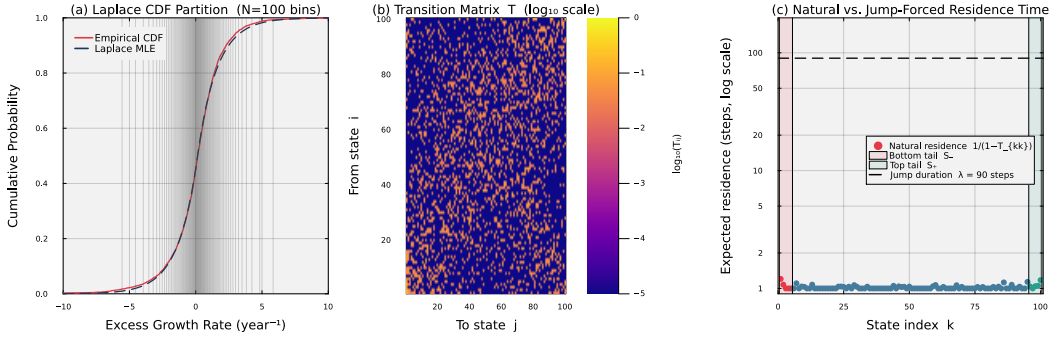


Figure S3: **Fitted hidden Markov model with jumps (HMM-WJ) internals for SPY with $N = 100$ states.** Panel (a) overlays the fitted Laplace cumulative distribution function (CDF) on the empirical CDF; the 99 vertical lines mark the equal-probability quantile boundaries Q_k that define the hidden states. Panel (b) displays the estimated transition matrix $\mathbf{T}$ in $\log_{10}$ color scale; the dominant near-diagonal band reflects short-range regime persistence. Panel (c) plots the expected natural residence time $1/(1 - T_{kk})$ for each state on a $\log_{10}$ scale, with the bottom tail set $\mathcal{S}_-$ (states 1–5, red) and the top tail set $\mathcal{S}_+$ (states 96–100, teal) highlighted. The dashed horizontal line marks the fitted mean jump duration $\lambda = 90$ steps, quantifying the two-order-of-magnitude gap between natural residence times and the jump-duration override.

S6 Emission distribution and semi-Markov comparison

To compare the emission and duration specifications, we evaluated three variants on SPY (Table S4): a hidden semi-Markov model (HSMM) baseline adapted from Bulla and Bulla [11] ($K = 8$ states, negative-binomial dwell times with a geometric fallback, and Student- t emissions), HMM-WJ with the original Gaussian emissions ($N = 100$), and HMM-WJ with Student- t emissions ($N = 100$). Both HMM-WJ variants had higher in-sample KS and AD pass rates than the HSMM-style baseline. The HMM-WJ variants use 100 states and the HSMM uses 8, so this comparison does not assign the pass-rate difference solely to the duration model. Holding the rest of HMM-WJ fixed, changing the emission from Normal to Student- t ($\nu = 5$) increased simulated excess kurtosis from 5.5 to 7.5, against an observed value of 7.7 (Table S1). The Student- t emission also increased the KS and AD

pass rates, while ACF-MAE and the distributional distances changed modestly. The emission choice therefore explained the kurtosis gain in this controlled HMM-WJ comparison, while it changed temporal fit little.

Table S4: **Three-way comparison of emission distributions and duration specifications for SPY.** Standard errors in parentheses; bold marks the best value per row. The HSMM is a hidden semi-Markov-style model adapted from Bulla and Bulla ($K = 8$ states, negative-binomial dwell times with a geometric fallback, and Student- t emissions) [11]; HMM-WJ: hidden Markov model with jumps ($N = 100$). All entries are computed from 1,000 simulated paths at significance level $\alpha = 0.05$. Kolmogorov–Smirnov (KS), Anderson–Darling (AD), and mean absolute error in the autocorrelation function (ACF-MAE) are defined in Online Appendix S3. Autocorrelation error compares the observed curve with the ensemble-average curve, using lags 1–252 in training and 1–248 in the holdout.

Metric	HSMM (Student- t)	HMM-WJ (Gaussian)	HMM-WJ (Student- t)
States	$K = 8$	$N = 100$	$N = 100$
<i>In-sample (2,766 trading days, 2014–2024)</i>			
KS pass rate (%)	82.0 (1.2)	97.0 (0.5)	98.3 (0.4)
AD pass rate (%)	42.5 (1.6)	90.5 (0.9)	94.8 (0.7)
Excess kurtosis	4.8 (0.08)	5.5 (0.03)	7.5 (0.09)
ACF-MAE	0.059 (<0.001)	0.052 (<0.001)	0.053 (<0.001)
Wasserstein-1	0.176 (0.001)	0.101 (0.002)	0.097 (0.001)
Hellinger	0.113 (<0.001)	0.076 (<0.001)	0.074 (<0.001)
<i>Out-of-sample (249 trading days, 2025)</i>			
KS pass rate (%)	96.2 (0.6)	95.0 (0.7)	95.4 (0.7)
AD pass rate (%)	96.7 (0.6)	95.9 (0.6)	95.3 (0.7)
Excess kurtosis	4.1 (0.13)	4.9 (0.08)	6.2 (0.15)
ACF-MAE	0.042 (<0.001)	0.040 (<0.001)	0.040 (<0.001)
Wasserstein-1	0.287 (0.002)	0.275 (0.005)	0.275 (0.005)
Hellinger	0.239 (0.001)	0.212 (0.001)	0.210 (0.001)

Table S5: **Hybrid composition method broken out by branch.** N_{tickers} : number of tickers assigned to each branch by the $R^2_{\text{preserve}} = 0.80$ threshold. The clipped variance-preserving branch does not trigger anywhere in the universe ($\rho_i < 0.90$ for all tickers) and is omitted. The two trackers in the R^2 -preserving branch (QQQ and SPYG) had median absolute errors of 0.005 for β and 0.001 for R^2 , with a KS pass rate of 100%.

Branch	N_{tickers}	$ \hat{\beta} - \beta $	$ \hat{R}^2 - R^2_{\text{real}} $	KS pass (%)	W_1	κ
hybrid	421	0.018	0.021	73.5	0.250	7.142
r2-preserve	2	0.005	0.001	100.0	0.099	11.525

The synthetic grid checked the tracker branch with supplied Gaussian residuals (Table S6). For each target loading and R^2 , the reference return series combined the observed 2,766-day SPY path with an independent Gaussian residual of variance $\sigma_{\varepsilon, \text{target}}^2$ from Eq. (11) and intercept zero. A second Gaussian residual draw was passed directly to Algorithm 2, with $\sigma_{\text{gen}}^2 = \sigma_{\varepsilon, \text{target}}^2$, so the scale in Eq. (12) was one. Only the composed residual was centered over the full path; the reference residual retained its random sample mean. Consequently, the two finite-path constructions were not identical, and realized loading and R^2 estimates could differ from their targets. No full-return hidden Markov model was fitted, and no new market path was simulated. This grid therefore checked branch selection and Gaussian parameter recovery without evaluating full-return reuse or temporal fit. The nominal Kolmogorov–Smirnov pass rates were descriptive because the test’s reference calibration was not established for this shared-market, centered-path comparison.

Table S6: **Restricted Gaussian check of the R^2 -preserving branch.** Both series used the observed SPY path and independent Gaussian residual draws; the composer used unit residual scale and centered its draw. No full-return model was fitted. Entries are medians over 100 replications per cell with cross-replication standard deviations in parentheses. Loading and R^2 were recovered by ordinary least squares. The nominal Kolmogorov–Smirnov (KS) pass rate is the percentage of comparisons with $p > 0.05$; its reference calibration was not established for this design. Every cell used the R^2 -preserving branch.

β_{true}	R^2_{true}	$\hat{\beta}$	$\hat{R}^2$	Nominal KS pass (%)
0.8	0.80	0.8006 (0.0072)	0.7998 (0.0044)	100.0
0.8	0.85	0.8006 (0.0059)	0.8497 (0.0041)	100.0
0.8	0.90	0.8004 (0.0048)	0.8999 (0.0028)	100.0
0.8	0.95	0.7995 (0.0033)	0.9500 (0.0013)	100.0
0.8	0.99	0.7999 (0.0016)	0.9901 (0.0003)	100.0
1.0	0.80	1.0003 (0.0089)	0.8017 (0.0052)	100.0
1.0	0.85	0.9994 (0.0084)	0.8497 (0.0039)	100.0
1.0	0.90	0.9999 (0.0065)	0.8999 (0.0026)	100.0
1.0	0.95	1.0005 (0.0036)	0.9502 (0.0013)	100.0
1.0	0.99	1.0000 (0.0018)	0.9900 (0.0003)	100.0
1.2	0.80	1.2007 (0.0126)	0.8001 (0.0048)	100.0
1.2	0.85	1.2011 (0.0105)	0.8503 (0.0043)	100.0
1.2	0.90	1.1996 (0.0081)	0.8994 (0.0027)	100.0
1.2	0.95	1.1995 (0.0052)	0.9498 (0.0014)	100.0
1.2	0.99	1.1998 (0.0025)	0.9900 (0.0003)	100.0

S7 State-resolution sensitivity

To test whether the results depended on state resolution, we swept the partition over $N \in \{30, 60, 90, 100, 150, 200\}$ and re-evaluated the in-sample Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) pass rates and the mean absolute error in the absolute-return autocorrelation function (ACF-MAE) for the hidden Markov model with no jumps (HMM-NJ) and the hidden Markov model with jumps (HMM-WJ), holding the tail-set size N_{tail} fixed (Table S7). HMM-NJ was insensitive to the partition: its pass rates moved by less than one percentage point and its ACF-MAE was unchanged at the reported precision, as expected for a model with no duration override whose behavior could depend on the width of a tail state. HMM-WJ traded the two metrics against each other. Because N_{tail} is fixed, a finer partition makes the tail set a narrower quantile band, so each forced step lands further out, and ACF-MAE improved from 0.057 at $N = 30$ to 0.045 at $N = 200$. The same narrowing left fewer observations behind each tail state’s emission parameters, and the AD pass rate, which weights tail discrepancies heavily, moved the other way, from 97.1% at $N = 30$ to 82.8% at $N = 200$. The intermediate values were not monotone, which is consistent with re-running the (ϵ, λ) grid search on a finite path ensemble at each N . Finer partitions can produce states with too few observations to estimate their emissions locally. The implemented fallback rules keep those emissions defined (Table S17); missing state-level information does not make the fitted parameters undefined. We adopted $N = 100$ for all subsequent experiments as a midpoint that held the KS pass rate above 98% and the AD pass rate within a few percentage points of its best value while capturing part of the ACF-MAE improvement.

Table S7: **Sensitivity of in-sample fit to the number of states N .** All entries are computed from 1,000 simulated in-sample-length paths for SPY at significance level $\alpha = 0.05$, with the tail-set size N_{tail} and the remaining hyperparameters of Table 1 held fixed and the (ϵ, λ) grid search re-run at each N for the hidden Markov model with jumps (HMM-WJ). Standard errors in parentheses: binomial for pass rates, bootstrap ($B = 500$) for the mean absolute error of the ensemble-average absolute-return autocorrelation function (ACF-MAE), using lags 1–252. HMM-NJ denotes the hidden Markov model with no jumps. Values at $N = 100$ reproduce the corresponding entries of Table 2.

Model	N	KS pass (%)	AD pass (%)	ACF-MAE
HMM-NJ	30	99.3 (0.3)	97.8 (0.5)	0.059 (<0.001)
HMM-NJ	60	99.5 (0.2)	98.5 (0.4)	0.059 (<0.001)
HMM-NJ	90	99.3 (0.3)	98.6 (0.4)	0.059 (<0.001)
HMM-NJ	100	99.3 (0.3)	98.2 (0.4)	0.059 (<0.001)
HMM-NJ	150	99.1 (0.3)	98.7 (0.4)	0.059 (<0.001)
HMM-NJ	200	99.2 (0.3)	98.3 (0.4)	0.059 (<0.001)
HMM-WJ	30	98.4 (0.4)	97.1 (0.5)	0.057 (<0.001)
HMM-WJ	60	96.7 (0.6)	91.4 (0.9)	0.053 (<0.001)
HMM-WJ	90	98.3 (0.4)	95.2 (0.7)	0.055 (<0.001)
HMM-WJ	100	98.3 (0.4)	94.8 (0.7)	0.053 (<0.001)
HMM-WJ	150	97.7 (0.5)	91.7 (0.9)	0.052 (<0.001)
HMM-WJ	200	96.0 (0.6)	82.8 (1.2)	0.045 (0.001)

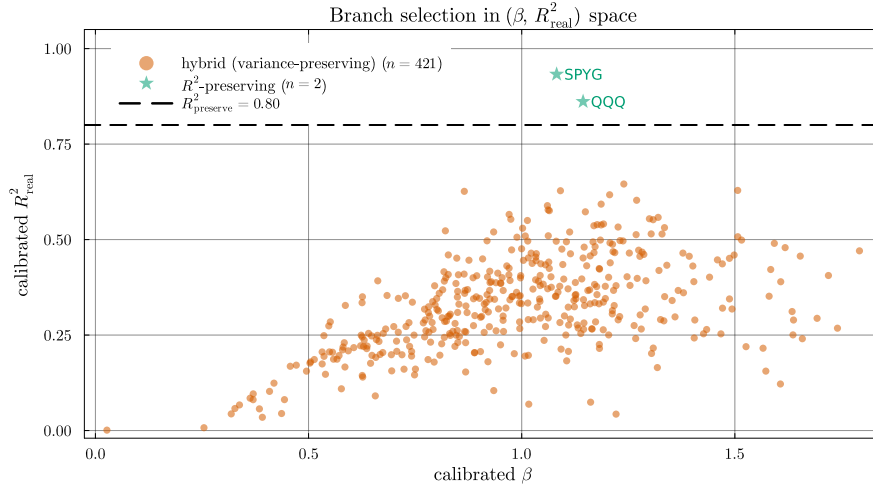


Figure S4: **Branch assignment in calibrated $(\beta, R^2_{\text{real}})$ space.** The $R^2_{\text{preserve}} = 0.80$ threshold (dashed line) separates tracker assets from single stocks. In this universe, only QQQ and SPYG exceed the threshold, and both are assigned to the R^2 -preserving branch. The remaining 421 tickers populate the variance-preserving branch; the clipped variance-preserving branch is unused because the market loading ratio $\rho_i = \beta_i^2 \sigma_m^2 / \sigma_{\text{gen},i}^2$ stays below 0.90 for every ticker.

Table S8: **Aggregate metrics by β quartile, across composition methods.** Quartile cutoffs are computed from the calibrated β distribution across the 423-ticker universe. The hybrid KS pass rate declines from 87.6% in Q1 to 65.9% in Q4 as the market loading ratio ρ_i grows; the naive KS pass rate falls from 24.6% to 1.3% over the same range.

β bucket	Method	$ \hat{\beta} - \beta $	KS pass (%)	W_1	κ	$\text{Var}(g)$
Q1 (low β)	Naive	0.018	24.6	0.403	8.971	18.1
	Gaussian SIM	0.015	0.0	0.620	0.622	14.0
	Hybrid	0.016	87.6	0.177	8.369	14.6
	JumpHMM-on-residuals	0.015	73.2	0.204	7.059	14.3
	Block bootstrap	0.015	71.3	0.208	6.286	13.9
	GARCH(1,1)- t	0.015	57.8	0.253	5.255	13.4
Q2	Naive	0.021	1.9	0.621	7.510	25.1
	Gaussian SIM	0.016	0.2	0.653	1.509	18.0
	Hybrid	0.017	74.9	0.231	6.889	19.0
	JumpHMM-on-residuals	0.017	82.7	0.200	7.799	18.7
	Block bootstrap	0.016	79.8	0.197	7.213	18.0
	GARCH(1,1)- t	0.015	76.4	0.227	6.470	17.8
Q3	Naive	0.023	0.7	0.792	7.390	33.3
	Gaussian SIM	0.017	1.4	0.688	1.947	23.4
	Hybrid	0.018	66.1	0.279	6.904	24.4
	JumpHMM-on-residuals	0.018	78.3	0.242	7.454	24.0
	Block bootstrap	0.017	75.0	0.236	6.888	22.8
	GARCH(1,1)- t	0.016	71.0	0.263	6.265	21.9
Q4 (high β)	Naive	0.029	1.3	0.965	7.233	51.2
	Gaussian SIM	0.022	0.6	0.825	2.054	36.3
	Hybrid	0.022	65.9	0.339	6.739	37.1
	JumpHMM-on-residuals	0.022	69.1	0.313	6.842	37.0
	Block bootstrap	0.021	67.2	0.311	6.334	35.3
	GARCH(1,1)- t	0.021	64.5	0.361	6.064	34.7

Table S9: **Clipping-branch stress test under market-volatility scaling.** We used $g_m^{(\gamma)}(t) = \bar{g}_m + \gamma[g_m(t) - \bar{g}_m]$, with $\gamma \in \{1, 2, 3\}$ and the calibrated marginals held fixed, and re-evaluated the full hybrid composition on the 423-ticker universe. The transformation preserved the market mean and multiplied its standard deviation by γ . The fitted intercepts were retained, so clipping could change asset means according to Eq. (S46).

γ	Clipped (%)
1	0.0
2	76.4
3	95.2

S8 Cross-asset generalization

To test whether the single-asset procedure generalized beyond SPY, we repeated the fitting and evaluation on three stocks: NVDA (semiconductors, high volatility), JNJ (health care, low volatility), and JPM (financials, moderate volatility). Per-ticker tune outputs at ($n_{\text{paths}} = 200$, seed = 1234) were reproducible with these settings (Table S10). The objective combines ACF and kurtosis errors with fixed weights. Because kurtosis varies across finite samples of heavy-tailed paths, the selected grid point can change with the Monte Carlo sample. The reported (ϵ^*, λ^*) values are reproducible with the stated path count and seed, but they are not unique per-ticker optima. At the selected parameter values, in-sample HMM-WJ KS pass rates were 98.9% for NVDA, 99.4% for JNJ, and 99.1% for JPM. Out-of-sample KS pass rates on the 249-day 2025 hold-out were 97.7%, 74.0%, and 79.2%, respectively. Thus the strong in-sample fit transferred unevenly across assets, especially on the short holdout.

Table S10: **Cross-asset generalization of the hidden Markov model with jumps (HMM-WJ) across three single-stock tickers spanning sector and volatility regimes.** Per-ticker tune outputs (ϵ^*, λ^*) at $n_{\text{paths}} = 200$ and seed = 1234, and the corresponding HMM-WJ Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) pass rates on 1,000 simulated paths at $\alpha = 0.05$ against each ticker’s in-sample (IS; 2014–2024) and out-of-sample (OoS; 2025) growth-rate history. Values in parentheses are binomial standard errors (SEs) for pass rates. The (ϵ^*, λ^*) values are reported as the parameter values used for the IS / OoS metrics rather than as canonical per-ticker optima.

Ticker	ϵ^*	λ^*	IS KS (%)	IS AD (%)	OoS KS (%)	OoS AD (%)
NVDA (semiconductors)	10^{-4}	70	98.9 (0.3)	96.7 (0.6)	97.7 (0.5)	96.1 (0.6)
JNJ (health care)	10^{-4}	70	99.4 (0.2)	96.3 (0.6)	74.0 (1.4)	61.3 (1.5)
JPM (financials)	10^{-4}	80	99.1 (0.3)	95.7 (0.6)	79.2 (1.3)	77.7 (1.3)

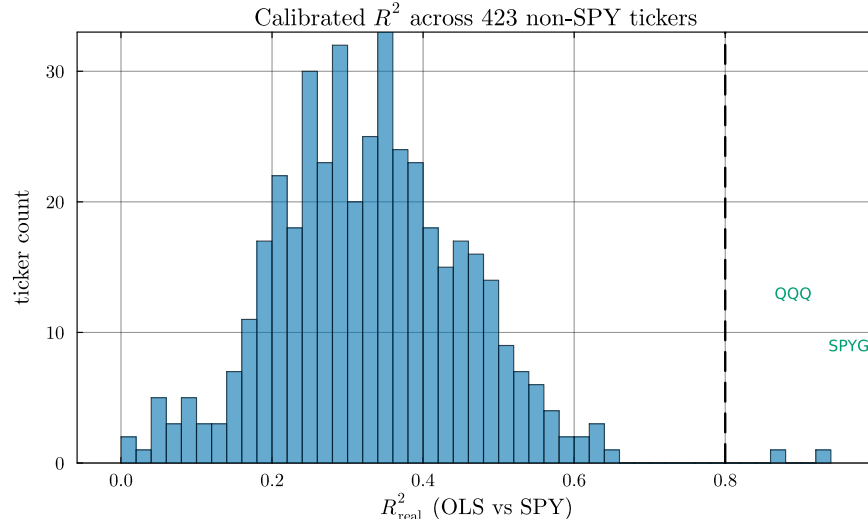


Figure S5: **Calibrated R^2 distribution across the 423 non-SPY tickers.** Histogram of ordinary least-squares (OLS) R^2 against SPY over the 2014–2024 window. The two tickers crossing the $R^2_{\text{preserve}} = 0.80$ threshold (dashed line) are index exchange-traded funds (QQQ, SPYG); the highest- R^2 individual stock (BLK, 0.645) falls ~ 0.16 below the threshold. The R^2 -preserving branch therefore contains only QQQ and SPYG in this universe.

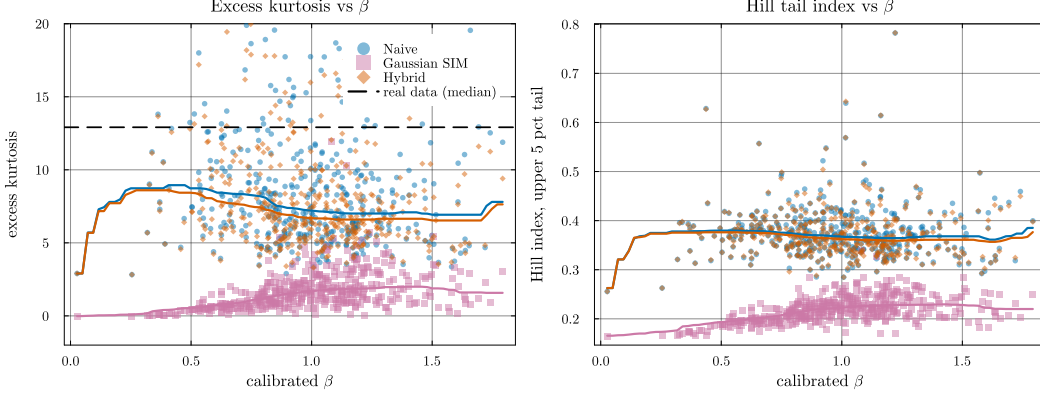


Figure S6: **Heavy-tail preservation: excess kurtosis and Hill tail index vs calibrated β .** Each point is a per-ticker median over 100 replications. *Left:* excess kurtosis, y -axis clipped to $[-2, 20]$ for readability. The dashed line marks the median real-data excess kurtosis across the universe ($\kappa_{\text{real}} \approx 13$); the hybrid and naive composition methods (orange and blue) track the generator’s kurtosis, while the Gaussian single-index model (SIM) collapses to $\kappa \approx 1$. *Right:* Hill tail-index estimator on the upper 5% of $|g|$. The hybrid and naive medians remain near 0.37 throughout the β range; Gaussian SIM drops to ~ 0.22 . The hybrid’s median being below κ_{real} reflects the JumpHMM marginal’s own kurtosis rather than a composition-rule distortion: hybrid tracks naive (both retain the generator’s tails) while Gaussian SIM does not.

S9 SIM composition derivations and properties verification

To verify the two closed-form targets used by the variance-corrected single-index composition, we derived the variance scale of Eq. (8), the residual-variance target of Eq. (11), and the resulting large- T OLS coefficients and composed variance. To derive Eq. (8), first center the full-return draw as in Eq. (6), then set $\varepsilon_i = s_i \tilde{g}_i^c$ for $s_i \in [0, 1]$ and require that the composed series have the same variance as the generator path:

$$\text{Var}(g_i) = \text{Var}(\alpha_i + \beta_i g_m + \varepsilon_i) = \text{Var}(\beta_i g_m + \varepsilon_i) = \sigma_{\text{gen},i}^2, \quad (\text{S43})$$

where α_i drops out because it is constant. Expanding the sum gives:

$$\text{Var}(\beta_i g_m + \varepsilon_i) = \beta_i^2 \text{Var}(g_m) + 2\beta_i \text{Cov}(g_m, \varepsilon_i) + \text{Var}(\varepsilon_i). \quad (\text{S44})$$

Substituting $\varepsilon_i = s_i \tilde{g}_i^c$ gives $\text{Var}(\varepsilon_i) = s_i^2 \sigma_{\text{gen},i}^2$ and $\text{Cov}(g_m, \varepsilon_i) = s_i \text{Cov}(g_m, \tilde{g}_i^c)$. Under the assumption $\text{Cov}(\tilde{g}_i^c, g_m) \approx 0$, the cross term vanishes and the variance condition becomes $\beta_i^2 \sigma_m^2 + s_i^2 \sigma_{\text{gen},i}^2 = \sigma_{\text{gen},i}^2$. Solving for s_i^2 gives Eq. (8).

To derive Eq. (11), use the same zero-cross-covariance assumption and write the population R^2 identity for Eq. (4):

$$R^2 = \frac{\beta_i^2 \sigma_m^2}{\beta_i^2 \sigma_m^2 + \sigma_{\varepsilon,i}^2}. \quad (\text{S45})$$

Solving this identity for the residual variance gives Eq. (11). To distinguish intercept retention from mean preservation, let $\bar{g}_m$ be the sample mean of the supplied market path. Centering and scaling give $\bar{\varepsilon}_i = 0$ exactly, and the implementation retains the fitted intercept α_i in every branch. The resulting mean and its change from the calibrated linear mean on the same market path are:

$$\begin{aligned} \bar{g}_i &= \alpha_i + \beta_i^{\text{eff}} \bar{g}_m, \\ \bar{g}_i - (\alpha_i + \beta_i \bar{g}_m) &= (\beta_i^{\text{eff}} - \beta_i) \bar{g}_m. \end{aligned} \quad (\text{S46})$$

Thus, retaining the intercept preserves this linear mean when the loading is unchanged. A clipped path has a different mean whenever $\bar{g}_m \neq 0$. The sign of the shift depends on the loading and market mean; it is not always a downward shift. The variance budget and residual floor determine the clipped loading, with no intercept adjustment to offset this mean change. Retaining α_i also does not imply exact recovery of its OLS estimate from a finite composed path. The finite-sample OLS intercept was:

$$\hat{\alpha}_i = \bar{g}_i - \hat{\beta}_i \bar{g}_m = \alpha_i - (\hat{\beta}_i - \beta_i^{\text{eff}}) \bar{g}_m. \quad (\text{S47})$$

Under the zero-cross-covariance assumption, in the large- T limit OLS therefore gives $\hat{\alpha}_i \rightarrow \alpha_i$ and $\hat{\beta}_i \rightarrow \beta_i^{\text{eff}}$. Here $\beta_i^{\text{eff}} = \beta_i$ unless Eq. (10) clips the market loading. On the variance-preserving branch, the composed variance is $\sigma_{\text{gen},i}^2$. Without clipping, $\text{Var}(g_i) = \beta_i^2 \sigma_m^2 + s_i^2 \sigma_{\text{gen},i}^2 = \sigma_{\text{gen},i}^2$. Under clipping, Eq. (10) sets β_i^{eff} to give the same variance. On the R^2 -preserving branch, the composed variance is $\beta_i^2 \sigma_m^2 / R_{i,\text{real}}^2$, the value implied by the calibrated $(\beta_i, R_{i,\text{real}}^2)$ rather than by the generator marginal. On the ordinary-stock branch, the floor guarantees only that $\text{Var}(\varepsilon_i) \geq f \sigma_{\text{gen},i}^2$; it does not guarantee that adding the market term preserves the generator's tail distribution. The KS pass rate fell from 87.6% in the lowest-beta quartile to 65.9% in the highest-beta quartile (Table S8).

The zero-sum constraint also fixes the residual contribution to the terminal cumulative log return. With time step Δt , summing the composed growth rates gives the exact identity:

$$\Delta t \sum_{t=1}^T g_i(t) = T \Delta t \alpha_i + \beta_i^{\text{eff}} \Delta t \sum_{t=1}^T g_m(t), \quad \sum_{t=1}^T \varepsilon_i(t) = 0. \quad (\text{S48})$$

For a fixed market path and effective loading, the residual contributes no terminal uncertainty. Partial sums before T can still vary. If clipping changes the loading between draws, terminal returns can vary through β_i^{eff} , but the residual sum remains zero. Centering uses the full horizon and is not equivalent to subtracting a fitted population mean. Changing the requested horizon can change both the center and the scale applied to an otherwise identical prefix. These paths are therefore constrained over a specified horizon and do not represent unconstrained cumulative residual returns. In the training comparison, the OLS calibration further implies $\alpha_i = \bar{g}_{i,\text{real}} - \beta_i \bar{g}_{m,\text{real}}$, where the bars with subscript real denote observed training means. The difference from the observed asset mean separates into a change in market mean and a change in loading:

$$\bar{g}_i - \bar{g}_{i,\text{real}} = \beta_i (\bar{g}_m - \bar{g}_{m,\text{real}}) + (\beta_i^{\text{eff}} - \beta_i) \bar{g}_m. \quad (\text{S49})$$

Using observed training SPY and $\beta_i^{\text{eff}} = \beta_i$ therefore matches the observed asset mean exactly. The stress transformation preserved the market mean, so only the clipping term could change that mean target. For a supplied market path with a different mean, the original asset mean need not be retained even without clipping. Intercept recovery must be interpreted with these constraints in mind.

S9.1 Role of the centered full-return draw as the residual

The hybrid composition places $\varepsilon_i = s_i \tilde{g}_i^c$, a centered and rescaled draw of asset i 's full return, in the residual slot of Eq. (4). On its face this is a category mismatch: the residual of a single-index decomposition is the idiosyncratic component of the return, orthogonal to the market, while $\tilde{g}_i^c$ is distributed like the centered total return, market-driven component included. This appendix states what the substitution preserves exactly, what it preserves approximately, and how the approximation degrades as the market loading grows.

The residual slot must supply three things: a zero mean, so that the intercept and market term alone set the conditional mean; the variance $\sigma_{\text{gen},i}^2 - \beta_i^2 \sigma_m^2$ not already contributed by the market term; and the asset-specific distributional shape, the heavy tails and volatility clustering that motivated the single-asset generator. Centering gives the residual path an exactly zero sample mean (Eq. (6)). On the unclipped non-tracker branch, using the market path variance in Eq. (8) gives the residual exactly the remaining variance. The composed variance also contains the sample cross-covariance term, which need not vanish on a finite path. Under the independence and large- T assumptions of Section S9, the recovered loadings and intercept converge to their targets. Using the frozen training market variance, as in the six-method holdout evaluation, adds a further variance difference if the simulated market variance differs from that training value. The full-return draw supplies the residual's shape, but its validation as a standalone asset generator does not establish that it reproduces the asset's regression-residual distribution.

At $\rho_i = 0$, Eq. (8) gives $s_i = 1$ and the market term contributes no variance. The composed path then has the same centered empirical distribution as the generator path, while its mean is set by the intercept and market term. Equality with the original uncentered generator distribution would additionally require those means to agree. For $\rho_i > 0$, the independent market contribution changes even the centered distribution. To describe that change, take the unclipped non-tracker branch with population variances and fixed scales. In population, conditional on the fitted parameters, write the deviation of the composed return from its mean as $X_m + X_i$, where $X_m = \beta_i g_m^c$ is the market

contribution, g_m^c is the market path centered at its mean, and $X_i = s_i \tilde{g}_i^c$ is the scaled asset draw; their variances are $v_m = \rho_i \sigma_{\text{gen},i}^2$ and $v_i = (1 - \rho_i) \sigma_{\text{gen},i}^2$. Independence factors every cross term in the fourth moment:

$$\begin{aligned} \mathbb{E}[(X_m + X_i)^4] &= \mathbb{E}(X_m^4) + 4 \mathbb{E}(X_m^3) \mathbb{E}(X_i) \\ &\quad + 6 \mathbb{E}(X_m^2) \mathbb{E}(X_i^2) + 4 \mathbb{E}(X_m) \mathbb{E}(X_i^3) \\ &\quad + \mathbb{E}(X_i^4) \quad (\text{independence}) \\ &= \mathbb{E}(X_m^4) + 6 v_m v_i + \mathbb{E}(X_i^4). \quad (\mathbb{E}X_m = \mathbb{E}X_i = 0) \end{aligned} \quad (\text{S50})$$

Writing κ_m and κ_{gen} for the excess kurtosis of the market path and of the generator draw, the component fourth moments are $\mathbb{E}(X_m^4) = (\kappa_m + 3) v_m^2$ and $\mathbb{E}(X_i^4) = (\kappa_{\text{gen}} + 3) v_i^2$, where rescaling by s_i leaves excess kurtosis unchanged. The excess kurtosis of the composed return follows by dividing Eq. (S50) by the squared total variance:

$$\begin{aligned} \kappa(X_m + X_i) &= \frac{(\kappa_m + 3) v_m^2 + 6 v_m v_i + (\kappa_{\text{gen}} + 3) v_i^2}{(v_m + v_i)^2} - 3 \\ &= \frac{\kappa_m v_m^2 + \kappa_{\text{gen}} v_i^2 + 3(v_m + v_i)^2}{(v_m + v_i)^2} - 3 \quad (\text{collect terms}) \\ &= \kappa_m \rho_i^2 + \kappa_{\text{gen}} (1 - \rho_i)^2. \quad (v_m + v_i = \sigma_{\text{gen},i}^2) \end{aligned} \quad (\text{S51})$$

The generator’s excess kurtosis survives composition with weight $(1 - \rho_i)^2$ and the market path’s enters with weight ρ_i^2 ; a simulation check with independent generator draws matched Eq. (S51) to within 0.03 in mean excess kurtosis at $\rho_i \in \{0.1, 0.3, 0.5\}$ (Table S11). For a low-loading asset the composed tails are essentially the generator’s: at $\rho_i = 0.10$ the generator’s kurtosis retains weight 0.81. As ρ_i grows the composed shape moves away from the asset’s own marginal, which is the pattern in the documented diagnostics: the hybrid tracks the generator’s kurtosis across the β range while the Gaussian SIM does not (Fig. S6), and the hybrid KS pass rate declines from the lowest to the highest β quartile (Table S8).

The residual-fit methods offer a direct alternative by fitting each asset’s OLS residual series (Table 3). Those fitted series are orthogonal to the observed market by construction, but a new simulated residual path need not have exactly zero sample covariance with its market path. Fitting JumpHMM to residuals requires converting each residual series to a synthetic price path by cumulative compounding and a second fit per asset. The corrected full-return construction instead reuses the generator’s centered shape and supplies the residual variance budget without that second fit. Its path mean equals $\alpha_i + \beta_i^{\text{eff}} \bar{g}_m$ exactly; matching the observed training mean additionally requires the conditions in Eq. (S49). Variance and factor recovery depend on the stated variance convention and cross-covariance assumptions. At zero market loading it preserves the generator path’s centered empirical distribution. For positive market loading, Eq. (S51) describes how the independent market contribution changes population excess kurtosis on the unclipped non-tracker branch. The clipped and R^2 -preserving branches use the different variance allocations in Algorithm 2.

Table S11: **Simulation check of the kurtosis composition rule.** For each variance share ρ_i , 200 pairs of independent in-sample-length generator paths were standardized and combined as $\sqrt{\rho_i} x + \sqrt{1 - \rho_i} y$. The predicted column evaluates Eq. (S51) with each pair’s sample excess kurtosis; the simulated column is the sample excess kurtosis of the combined series. Both are averaged over the 200 pairs.

ρ_i	Predicted κ	Simulated κ
0.1	6.09	6.11
0.3	4.31	4.34
0.5	3.71	3.74

S10 Uncertainty in the multi-asset jump comparison

The jump comparison used four seeds and 1,000 market replications per window, with all fits frozen (Table 6). Within each setting, naive and corrected composition shared the same asset and

market draws. The no-jump and market-only settings reused the no-jump asset draws; the market-only and market-plus-asset settings reused the jump-enabled market draws. Enabled and disabled models used separate random-number streams, so matching replication identifiers did not imply identical innovations. Primary summaries included every path; jump-active subsets only described the mechanism. For each metric, we averaged across tickers within each replication and formed the difference between settings (Table S12). The Monte Carlo standard error was the sample standard deviation of the 1,000 differences divided by $\sqrt{1,000}$, and intervals used the mean difference plus or minus 1.96 standard errors (Table S12). Keeping the cross-section together retained dependence from the shared market draw. The intervals did not treat assets as independent market histories or include uncertainty from fitting or historical-window selection. Kolmogorov–Smirnov (KS) non-rejection remained descriptive because returns were temporally dependent. The temporal contrast between training and holdout remained clear in the replication-level uncertainty estimates (Table S12). The episode frequencies matched the rare-event setting (Table S13): 247 of 1,000 training-length SPY paths and 22 of 1,000 holdout-length paths contained an episode. The corresponding shares across enabled asset generators were 24.24% and 2.46%. Market-only jumps reduced average 25-lag autocorrelation error for 99.5% of training assets but only 2.6% of holdout assets. Enabling jumps in both components reduced that error for 96.9% and 0.5%, respectively. These fractions described ticker-level mean changes, not significance tests. The temporal contrast therefore extended across most assets, within the limits of the short holdout and transferred SPY calibration.

Table S12: Monte Carlo uncertainty in the effect of jump settings under corrected composition. Differences are relative to jumps disabled, with 1,000 market replications per window. ΔACF_{25} is the change in mean absolute error of the absolute-return autocorrelation function through lag 25; negative values indicate improved temporal fit. ΔKS is the change in Kolmogorov–Smirnov non-rejection rate in percentage points. Brackets contain approximate 95% Monte Carlo (MC) intervals conditional on the fitted models and observed histories.

Jump setting	ΔACF_{25} [95% MC interval]	ΔKS [95% MC interval]
<i>Training: 2014–2024, 423 assets, 2,766 days</i>		
Market only	−0.00725 [−0.00812, −0.00638]	−0.30 [−1.08, 0.49]
Market + assets	−0.01988 [−0.02063, −0.01913]	−12.25 [−13.02, −11.49]
<i>Holdout: 2025, 416 assets, 249 days</i>		
Market only	0.00195 [0.00104, 0.00287]	−0.04 [−0.41, 0.34]
Market + assets	0.00502 [0.00412, 0.00593]	−1.49 [−1.87, −1.12]

Table S13: Episode incidence and breadth of the temporal change in the multi-asset jump comparison. SPY paths with an episode are counted over the 1,000 jump-enabled market replications per window. Asset paths with an episode is the mean jump-active share across the enabled asset generators. The last two columns give the share of assets whose mean absolute-return autocorrelation error through lag 25 fell under corrected composition when jumps were enabled in the market only, or in the market and the assets, relative to jumps disabled.

Window	SPY paths with an episode	Asset paths with an episode (%)	Assets with lower ACF_{25} error, market only (%)	..., market + assets (%)
Training	247 of 1,000	24.24	99.5	96.9
Holdout	22 of 1,000	2.46	2.6	0.5

S11 Residual-centering control

To separate the variance correction from the different residual mean constraints, we paired each native training path with an equivalently centered version (Table S14). The experiment reused the frozen full-return and residual models, ordinary least squares (OLS) calibrations, observed training SPY, seed 1234, and 100 draws per asset of length 2,766. The Gaussian single-index model (SIM), JumpHMM-on-residuals, stationary block bootstrap, and generalized autoregressive conditional heteroskedasticity (GARCH) model retained their native variance scales. With g_i denoting a native composed draw, the control removed only its residual mean:

$$g_i^{\text{ctrl}}(t) = g_i(t) - \frac{1}{T} \sum_{u=1}^T [g_i(u) - \alpha_i - \beta_i^{\text{eff}} g_m(u)] . \quad (\text{S52})$$

The effective loading equaled the fitted loading except when the hybrid rule changed it. Naive and hybrid paths already satisfied the constraint and were reused without modification. No fits, random draws, loadings, or scales changed between a native path and its control. This paired translation left sample variance, recovered loading, R^2 , and excess kurtosis unchanged to numerical tolerance for every evaluated path. The control assessed mean treatment; it did not restore cumulative residual uncertainty or estimate parameter uncertainty.

For a comparison on the same assets, the six-method summaries used the 393 assets whose GARCH fits passed the acceptance checks (Table S14). Refitting all 423 residual series with explicit convergence and admissibility checks reproduced the accepted models' coefficients exactly. All optimizations converged; the same 30 fits were excluded because their ARCH and GARCH coefficients summed to at least one. Acceptance records, coefficient fingerprints, and exclusion reasons accompany the fitted-model cache. The control therefore retained the same models and eligible asset set. There were 39,300 paired paths per method on the common set. The accompanying results also retain each method's full available population: 423 assets for the other five methods and 393 for GARCH. All available-path summaries reproduced the corresponding native values in Table 3 at its reported precision for the metrics included here. Pass rates pooled the same number of draws per asset; Wasserstein distances and intercept errors were medians across paths. Pass rates remained descriptive under serial dependence and the fixed-sum constraint. Equivalent centering favored the residual-fit comparators while preserving the improvement from naive to hybrid composition, so the control narrowed the interpretation of the cross-method comparison without changing the variance correction.

Table S14: **Paired control for residual centering on common training assets.** Native and centered results use the same 393 assets and 100 paths per asset. Centered paths have zero residual mean over 2,766 observations. Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) columns give non-rejection percentages at $\alpha = 0.05$; higher values indicate closer empirical fit. W_1 is median Wasserstein-1 distance, and $|\hat{\alpha} - \alpha|$ is median absolute ordinary least squares (OLS) intercept error, both in yr^{-1} ; lower values indicate closer agreement. Naive and hybrid already center each residual path. JumpHMM denotes the hidden Markov generator, with jumps disabled; SIM denotes the single-index model, and GARCH denotes generalized autoregressive conditional heteroskedasticity.

Method	KS pass (%)		AD pass (%)		W_1		$ \hat{\alpha} - \alpha $	
	Native	Centered	Native	Centered	Native	Centered	Native	Centered
Naive	7.5	7.5	3.7	3.7	0.695	0.695	0.002	0.002
Gaussian SIM	0.6	0.9	0.5	0.6	0.675	0.673	0.047	0.002
Hybrid	74.4	74.4	65.1	65.1	0.246	0.246	0.002	0.002
JumpHMM-on-residuals	75.8	78.4	70.4	71.4	0.230	0.226	0.048	0.002
Block bootstrap	73.5	76.7	66.7	68.0	0.230	0.227	0.041	0.002
GARCH(1,1)- t	67.4	70.0	61.4	63.0	0.267	0.262	0.047	0.002

S12 Pooled one-day tail thresholds

To estimate each generator’s one-day tail without relying on the few extreme observations in a single 249-day path, we pooled returns only after constructing separate paths (Table S15). For every frozen training asset and composition method, we generated $B = 5,000$ paths of length 249 and calculated linearly interpolated empirical quantiles from all $249B$ daily log returns. A market path was shared across assets and methods within each replication. Each asset draw retained its own centering and variance correction, with the observed training market variance used in the hybrid rule. The hidden Markov models started from their fitted stationary state distributions, jumps remained disabled, and the generalized autoregressive conditional heteroskedasticity (GARCH) simulator retained its 100-step warmup. We calibrated thresholds for all 423 training assets, including 393 with accepted GARCH fits, before reading the holdout histories. The resulting quantile estimated the return distribution of a uniformly selected day within this finite-horizon construction. It did not estimate a horizon-independent path law or restore cumulative residual uncertainty.

To distinguish numerical stability from holdout performance, we fixed pool sizes of 100, 500, 1,000, 2,500, and 5,000 paths before scoring the observed returns (Table S15). An independent ensemble of 1,000 paths per asset and method checked the simulated probability of falling below each threshold. Disjoint random streams separated calibration and validation, while preserving the shared market within each ensemble. Doubling the pool from 2,500 to 5,000 changed the median asset’s 99% threshold by 0.12–0.30%, depending on method. The corresponding 95th percentiles of absolute relative change were 0.37–1.03%. Individual thresholds were less stable than aggregate rates: the largest 99% change was 3.95%, for a GARCH asset. Every method’s mean observed exceedance rate changed by less than 0.006 percentage points at both coverage levels. Mean exceedance rates on independent simulated paths were 5.03–5.04% and 1.01–1.02%, close to the respective 5% and 1% targets. These checks assessed Monte Carlo stability under the fitted generators; they did not establish coverage on real returns. The reported cross-asset standard deviations were not standard errors, and no coverage significance test treated shared market histories or dependent days as independent observations.

Table S15: **Threshold convergence and independent simulation checks.** Relative changes compare pooled thresholds from 2,500 and 5,000 separate 249-day paths, divided by the absolute 5,000-path threshold. Median and P95 denote the cross-asset median and 95th percentile. Simulation rates are mean per-asset exceedance percentages on 1,000 independent paths, using the 5,000-path threshold. Summaries cover the 416 holdout-eligible assets, or 386 for generalized autoregressive conditional heteroskedasticity (GARCH). SIM denotes the single-index model; JumpHMM denotes the hidden Markov generator with jumps disabled.

Method	Relative threshold change (%)		Simulation rate (%)	
	95%: median / P95	99%: median / P95	95%	99%
Naive	0.10 / 0.31	0.28 / 0.90	5.03	1.01
Gaussian SIM	0.08 / 0.24	0.12 / 0.37	5.04	1.02
Hybrid	0.12 / 0.39	0.28 / 0.93	5.03	1.01
JumpHMM-on-residuals	0.11 / 0.31	0.26 / 0.80	5.03	1.01
Block bootstrap	0.14 / 0.45	0.22 / 0.72	5.03	1.01
GARCH(1,1)- t	0.14 / 0.65	0.30 / 1.03	5.03	1.01

To check whether differences in asset eligibility affected the comparison, we restricted all six methods to the same 386 assets with accepted GARCH fits and complete holdout histories (Table S16). The corrected method’s 99% exceedance rate was 1.08%, compared with 1.14% for JumpHMM-on-residuals and 0.85% for naive composition. Gaussian single-index composition remained farther above the nominal rate at 1.66%. The common-asset comparison therefore retained the finding that the corrected and residual-fit hidden Markov methods were close to nominal on average. Neither the common-asset nor the full-asset summary established equivalence, precise method rankings, or calibration beyond the single observed market period.

Table S16: **Pooled-threshold coverage on the common holdout assets.** All methods use the same 386 assets. Each threshold pools 5,000 separate 249-day paths, as in Table 5. Rate denotes the mean per-asset exceedance percentage on observed 2025 returns. Standard deviation (SD) describes cross-asset dispersion in percentage points. SIM denotes the single-index model; JumpHMM denotes the hidden Markov generator with jumps disabled; GARCH denotes generalized autoregressive conditional heteroskedasticity.

Method	$\alpha = 0.95$		$\alpha = 0.99$	
	rate (%)	SD (pp)	rate (%)	SD (pp)
Naive	3.95	2.06	0.85	0.69
Gaussian SIM	4.54	2.19	1.66	1.06
Hybrid	5.37	2.43	1.08	0.79
JumpHMM-on-residuals	5.50	2.51	1.14	0.80
Block bootstrap	5.38	2.48	1.25	0.86
GARCH(1,1)- t	5.07	2.45	1.20	0.89

S13 Emission fallback inventory and sensitivity

To identify where the fitted emissions differed from within-state estimates, we reconstructed all state assignments, emission parameters, and counted transition rows from the training inputs (Table S17). For one asset, let n_k be the number of observations in state k , let $\bar{G}_k$ and s_k be its sample mean and standard deviation when defined, and let $\bar{G}$ and s_G be the corresponding full-series quantities. The implemented emission rule was:

$$(\mu_k, \sigma_k) = \begin{cases} (\bar{G}, s_G), & n_k < 2, \\ (\bar{G}_k, s_G), & n_k \geq 2, s_k < \tau, \\ (\bar{G}_k, s_k), & n_k \geq 2, s_k \geq \tau, \end{cases} \quad \tau = 10^{-12} \text{ yr}^{-1}. \quad (\text{S53})$$

The scale σ_k multiplies a standard Student- t draw; it is not the emission standard deviation. State intervals included their lower boundary and excluded their upper boundary. A transition row with no observed outgoing transition was set to $1/N$ in every column. Such a row was unconstrained by the observed transition counts. Reconstruction matched every saved emission parameter and transition probability exactly, including the corresponding fits to regression residuals. Among the 424 full-return models, 39 had at least one fallback emission, affecting 50 states. Of these, 39 states contained 11–119 identical observations each, seven were empty, and four contained one observation. The seven empty states also supplied the seven uniform transition rows. Fallback states carried 0.399–4.300% of stationary probability per affected asset. Sparse-state probability was at most 0.0363% per asset; most fallback mass belonged to populated states with repeated returns. SPY required no fallback, and neither did any of the 423 residual-fit models.

Table S17: **Fallback emissions in the full-return training fits.** Each listed asset had one populated constant-return state containing n_c observations. The columns n_0 and n_1 count empty and singleton states; the other 385 full-return models required no fallback. Fallback mass is $100 \sum_{k \in \mathcal{F}} \bar{\pi}_k$, where $\mathcal{F}$ contains all fallback states for that ticker. For populated constant states, the fitted location remained the state mean while the scale used the asset’s full training standard deviation. Empty and singleton states used both full-series moments. ΔV is the percentage change in stationary mixture variance when only the populated constant-state scales are replaced by their empirical values, with all other parameters fixed. These are changes to the uncomposed generator, not variance errors from composition. All fits used $N = 100$ and $\nu = 5$.

Ticker	n_c	n_0	n_1	Fallback mass (%)	ΔV (%)
ADM	20	0	0	0.723	-1.130
AEE	24	0	0	0.870	-1.361
AES	49	0	1	1.807	-2.792
BMV	19	0	0	0.687	-1.090
CAG	34	0	0	1.231	-1.830
CNP	35	1	0	1.267	-1.906
CSCO	30	0	0	1.087	-1.710
EXC	32	0	0	1.159	-1.728
F	65	1	0	2.349	-3.665
FE	23	0	0	0.828	-1.255
FITB	18	0	0	0.651	-1.025
GLW	28	0	0	1.013	-1.606
HBAN	55	0	1	2.025	-3.120
HRL	34	0	0	1.231	-1.943
HST	43	1	0	1.553	-2.428
IPG	33	0	0	1.194	-1.894
JCI	11	0	0	0.399	-0.651
JNPR	34	0	0	1.230	-1.938
K	15	0	0	0.542	-0.854
KEY	45	0	0	1.627	-2.488
KIM	40	0	1	1.483	-2.219
KMI	36	0	0	1.300	-2.015
KO	28	0	0	1.014	-1.609
MO	30	0	0	1.084	-1.727
NI	36	0	0	1.305	-1.525
NWS	119	1	0	4.300	-6.520
NWSA	59	0	1	2.170	-3.359
O	26	0	0	0.940	-1.391
PPL	44	0	0	1.591	-2.484
RF	49	1	0	1.774	-2.784
ROL	38	0	0	1.371	-2.172
SLV	56	1	0	1.988	-3.148
T	36	0	0	1.302	-2.018
UDR	24	0	0	0.869	-1.374
USB	28	0	0	1.013	-1.602
VZ	28	0	0	1.012	-1.631
WU	56	1	0	2.026	-3.209
WY	28	0	0	1.012	-1.537
XEL	27	0	0	0.976	-1.541

To isolate the consequence of broadening populated constant states, we compared the fitted generators with an empirical-scale alternative on all 39 affected non-market assets (Table S18). The alternative replaced s_G by s_k only where $n_k \geq 2$ and $s_k < \tau$; locations, partitions, transitions, initial probabilities, and sparse-state fallbacks were unchanged. A zero empirical scale gives a point mass at the state mean. The alternative was a diagnostic of how repeated returns were represented, not a fitted or selected replacement model. We replayed the original 100 paths of 2,766 observations per asset, paired by state sequence and random draws, with jumps disabled and the observed training SPY path shared by both treatments. Returns from unmodified states were identical between treatments. We scored the uncomposed generator and the naive and hybrid compositions; each composition used its treatment’s generator variance. All nine original path metrics for the 7,800 fitted naive and hybrid

paths matched the canonical cache exactly. Comparisons with the historical returns used the original scoring functions, so pass fractions remain descriptive summaries rather than calibrated significance claims for dependent series containing ties.

The empirical-scale alternative improved marginal-fit scores on this training subset (Table S18). For hybrid composition, Kolmogorov–Smirnov (KS) pass rates increased from 68.64% to 78.92%, and Anderson–Darling (AD) pass rates increased from 56.15% to 70.23%. The paired changes were 10.28 and 14.08 percentage points, with Monte Carlo standard errors of 0.49 and 0.60 points. Mean Wasserstein distance fell from 0.2782 to 0.2474 yr^{-1} . For the uncomposed generators, the change in stationary mixture variance ranged from -0.651% to -6.520% (Table S17). The fallback scale therefore affected both the generator’s variance and the composed marginal fit. All main comparisons retain the original fallback rule. This paired training check did not test changes to sparse-state estimates or validate the alternative on held-out histories, and it did not establish a preferred production policy.

Table S18: Paired sensitivity to the scale of populated constant states. Each treatment used 100 paired training-length paths for each of the same 39 affected assets. Entries are means over these fixed assets and replications. The empirical-scale treatment changes only populated near-constant states, retaining the sparse-state fallback. Kolmogorov–Smirnov (KS) and Anderson–Darling (AD) pass fractions use $p > 0.05$; their changes are percentage points. W_1 is the Wasserstein-1 distance to observed growth rates. Variance / observed divides each path’s variance by its asset’s observed training variance. ACF-MAE₂₅ is the mean absolute difference between each path’s absolute-return autocorrelation function and the observed function over lags 1–25, calculated before averaging paths. Paired change subtracts the fitted value from the empirical-scale value. Standard errors (SE) use the 100 replication-level mean paired changes over the fixed asset set and describe simulation uncertainty, not uncertainty across historical markets.

Output	Metric	As fitted	Empirical scale	Paired change (SE)
Uncomposed	KS pass (%)	98.64	99.82	+1.18 (0.16)
	AD pass (%)	98.90	99.72	+0.82 (0.14)
	W_1 (yr^{-1})	0.1800	0.1696	-0.0104 (0.0004)
	Variance / observed	1.0772	1.0553	-0.0220 (0.0001)
	ACF-MAE ₂₅	0.14207	0.14183	-0.00024 (0.00002)
Naive	KS pass (%)	12.13	14.64	+2.51 (0.22)
	AD pass (%)	6.92	9.44	+2.51 (0.23)
	W_1 (yr^{-1})	0.6234	0.5840	-0.0394 (0.0002)
	Variance / observed	1.3650	1.3431	-0.0219 (0.0001)
	ACF-MAE ₂₅	0.11663	0.11576	-0.00086 (0.00002)
Hybrid	KS pass (%)	68.64	78.92	+10.28 (0.49)
	AD pass (%)	56.15	70.23	+14.08 (0.60)
	W_1 (yr^{-1})	0.2782	0.2474	-0.0308 (0.0002)
	Variance / observed	1.0775	1.0556	-0.0219 (0.0001)
	ACF-MAE ₂₅	0.10289	0.10145	-0.00144 (0.00002)