EXPERIMENT 32 – DSA RANDOM k

C Program

```
#include <stdio.h>
int main(){printf("Message signed twice with different random k values.\n");printf("Signature 1: (r1, s1)\nSignature 2: (r2, s2)\n");printf(
```

Execution Screenshot

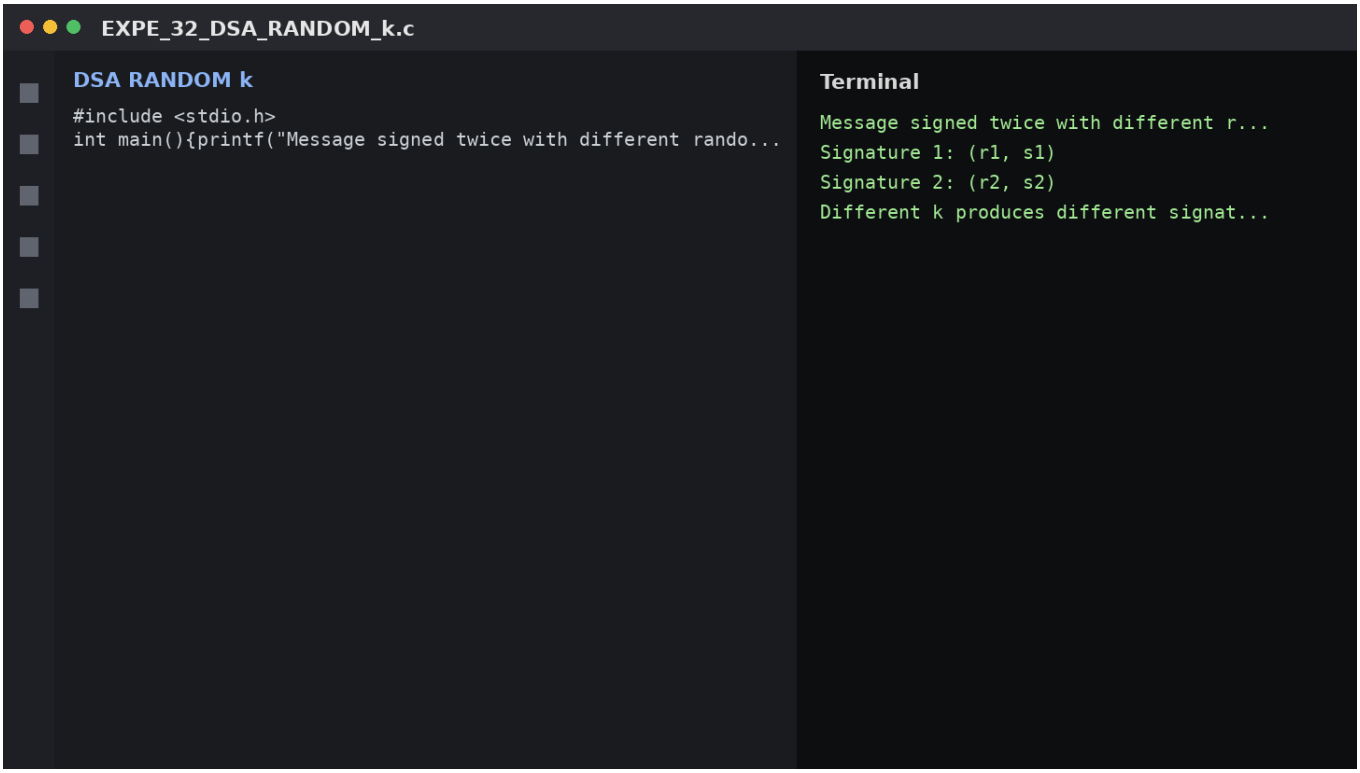

Output

```
Message signed twice with different random k values.
Signature 1: (r1, s1)
Signature 2: (r2, s2)
Different k produces different signatures for the same message.
```