EXPERIMENT 17 – DES DECRYPTION KEY SCHEDULE

C Program

```
#include <stdio.h>
int main(){int i;printf("DES decryption subkeys in reverse order:\n");for(i=16;i>=1;i--)printf("K%d ",i);printf("\n");return 0;}
```

Execution Screenshot

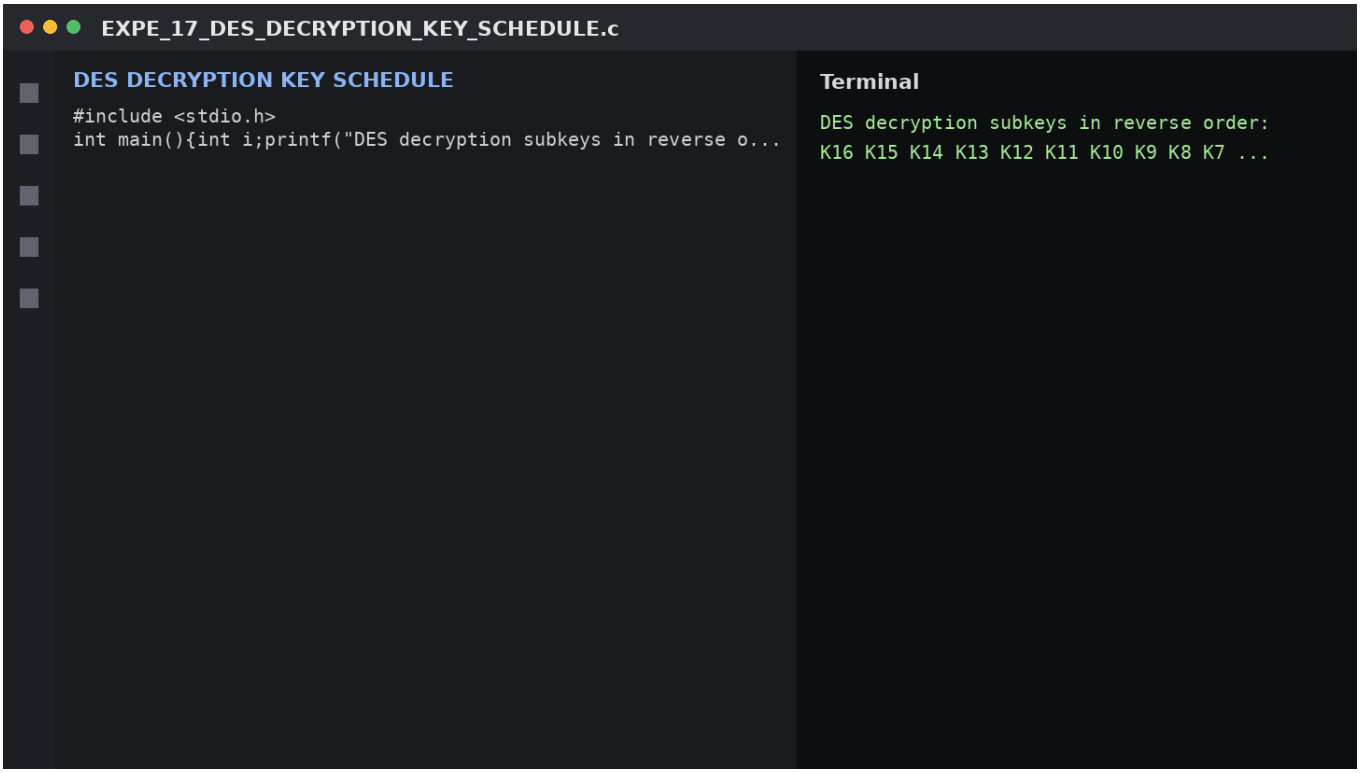

Output

```
DES decryption subkeys in reverse order:
K16 K15 K14 K13 K12 K11 K10 K9 K8 K7 K6 K5 K4 K3 K2 K1
```