EXPERIMENT 30 – CBC MAC FORGERY

C Program

```
#include <stdio.h>
int main(){printf("T = MAC(K, X)\n");printf("Forged message: X || (X XOR T)\n");printf("CBC-MAC of forged two-block message equals T.\n");re
```

Execution Screenshot

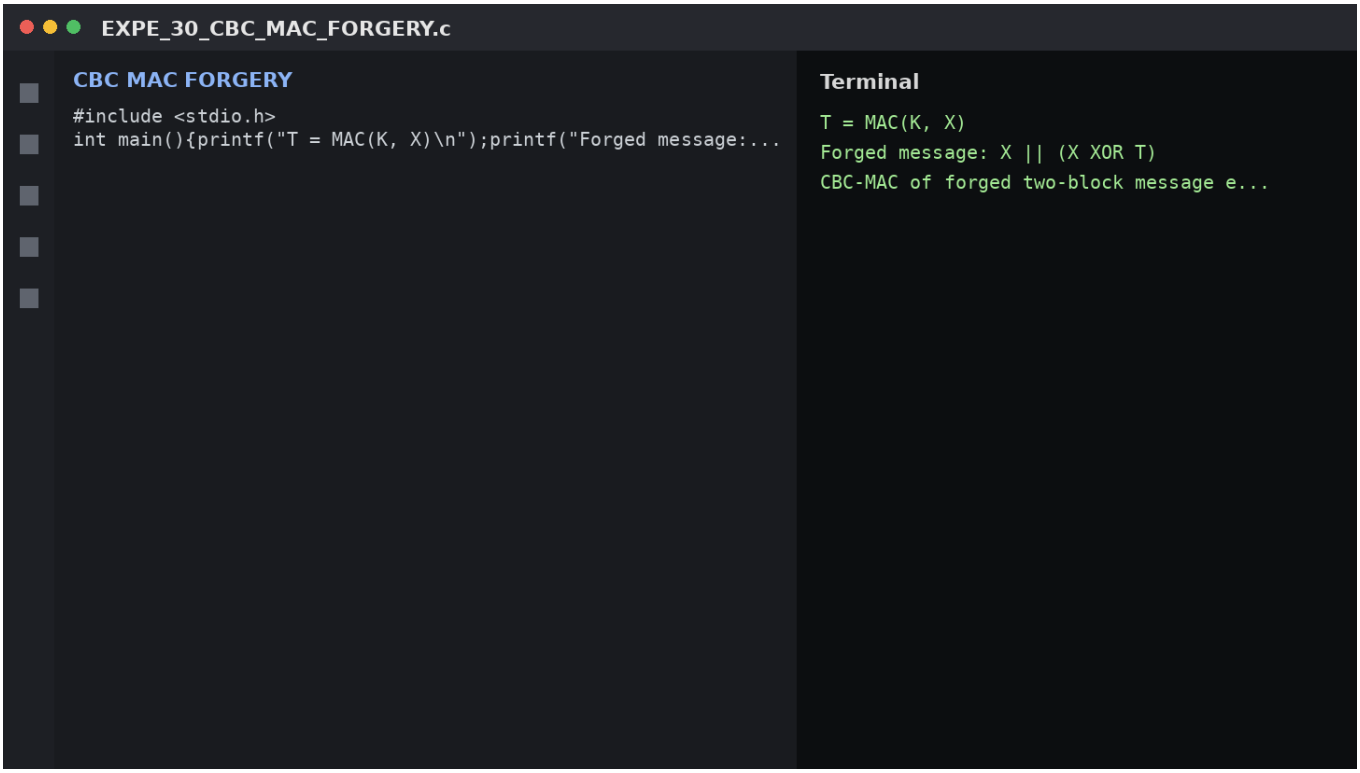

Output

```
T = MAC(K, X)
Forged message: X || (X XOR T)
CBC-MAC of forged two-block message equals T.
```