Query 1: Retrieve all students

```
CREATE DATABASE IF NOT EXISTS school_db;

USE school_db;


DROP TABLE IF EXISTS Student;

CREATE TABLE Student (
   Student_ID INT PRIMARY KEY,
   Name VARCHAR(50),
   Dept_ID INT,
   Marks INT
);

INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES
(101, 'Navya', 18, 85),
(102, 'Manya', 20, 96),
(103, 'Varshii', 15, 65),
(104, 'Neha', 20, 80),
(105, 'Tanisha', 18, 75);

SELECT * FROM Student;
```

OUTPUT

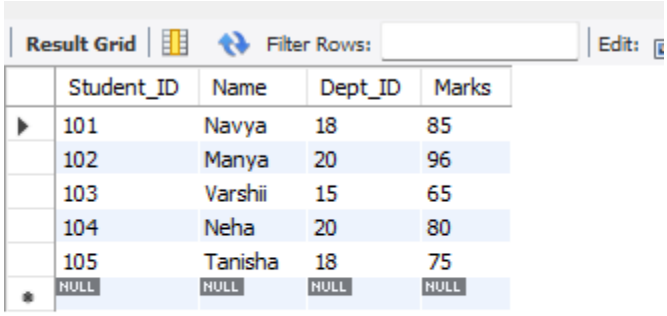

Student_ID	Name	Dept_ID	Marks
101	Navya	18	85
102	Manya	20	96
103	Varshii	15	65
104	Neha	20	80
105	Tanisha	18	75
NULL	NULL	NULL	NULL

Query 2: Retrieve selected columns

```
CREATE DATABASE IF NOT EXISTS school_db;

USE school_db;


DROP TABLE IF EXISTS Student;

CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
    Dept_ID INT,
    Marks INT
);

INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES
(101, 'Navya', 18, 85),
(102, 'Manya', 20, 96),
(103, 'Varshii', 15, 65),
(104, 'Neha', 20, 80),
(105, 'Tanisha', 18, 75);

SELECT Name, Marks
FROM Student;
```

OUTPUT

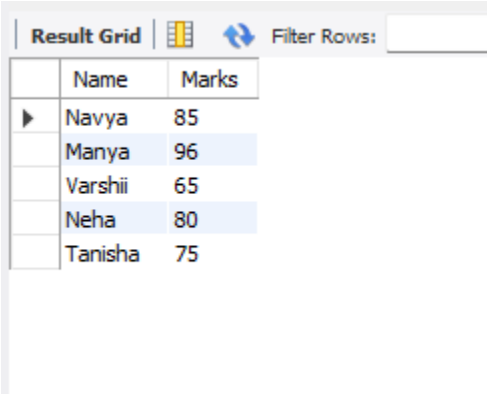

Name	Marks
Navya	85
Manya	96
Varshii	65
Neha	80
Tanisha	75

Query 3: Find students scoring more than 80

```
CREATE DATABASE IF NOT EXISTS school_db;

USE school_db;


DROP TABLE IF EXISTS Student;

CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
    Dept_ID INT,
    Marks INT
);

INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES
(101, 'Navya', 18, 85),
(102, 'Manya', 20, 96),
(103, 'Varshii', 15, 65),
(104, 'Neha', 20, 80),
(105, 'Tanisha', 18, 75);

SELECT Student_ID, Name, Dept_ID, Marks
FROM Student
WHERE Marks > 80;
```

OUTPUT

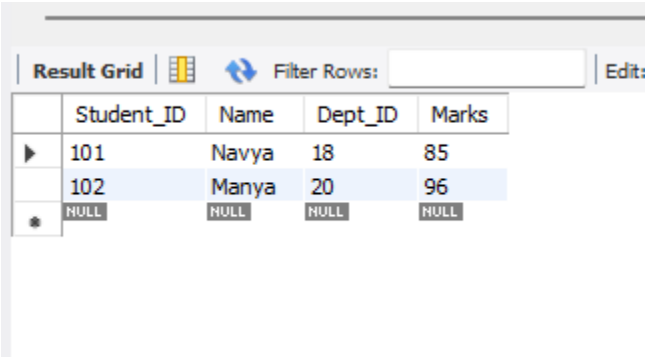

Student_ID	Name	Dept_ID	Marks
101	Navya	18	85
102	Manya	20	96
NULL	NULL	NULL	NULL

Query 4: Find CSE students

```
CREATE DATABASE IF NOT EXISTS school_db;

USE school_db;


DROP TABLE IF EXISTS Student;


CREATE TABLE Student (
   Student_ID INT PRIMARY KEY,
   Name VARCHAR(50),
   Dept_ID INT,
   Marks INT
);

INSERT INTO Student (Student_ID, Name, Dept_ID, Marks) VALUES
(101, 'Navya', 18, 85),
(102, 'Manya', 20, 96),
(103, 'Varshii', 15, 65),
(104, 'Neha', 20, 80),
(105, 'Tanisha', 18, 75);

SELECT Name, Marks
FROM Student
WHERE Dept_ID = 20;
```

OUTPUT

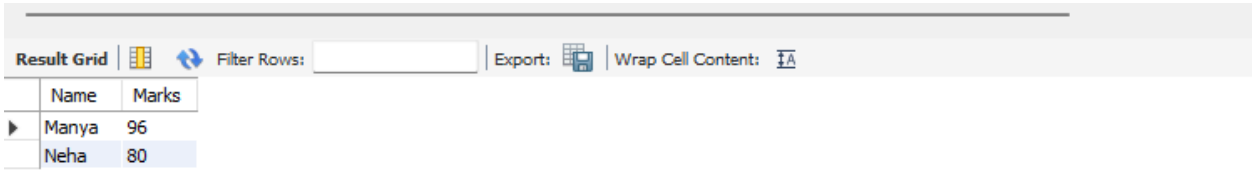

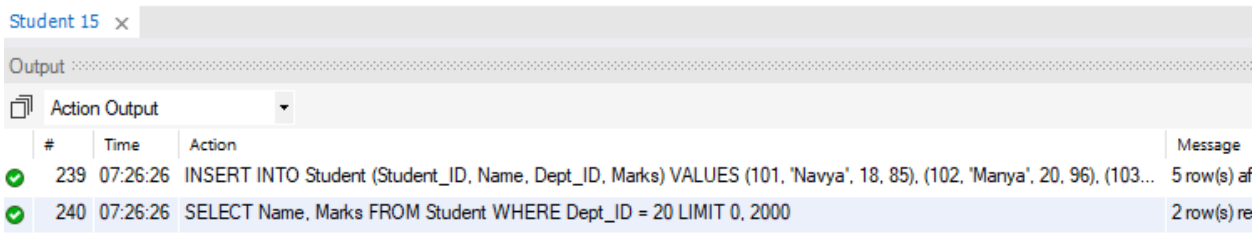

Query 5: Find students from Delhi who scored above 80

```
CREATE DATABASE IF NOT EXISTS school_db;

USE school_db;


DROP TABLE IF EXISTS Student;

CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
    Dept_ID INT,
    Marks INT,
    City VARCHAR(50)
);

INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
(101, 'Navya', 18, 85, 'Delhi'),
(102, 'Manya', 20, 96, 'Delhi'),
(103, 'Varshii', 15, 65, 'Mumbai'),
(104, 'Neha', 20, 80, 'Bangalore'),
(105, 'Tanisha', 18, 75, 'Chennai');

SELECT Name, Marks
FROM Student
WHERE City = 'Delhi'
AND Marks > 80;
```

OUTPUT

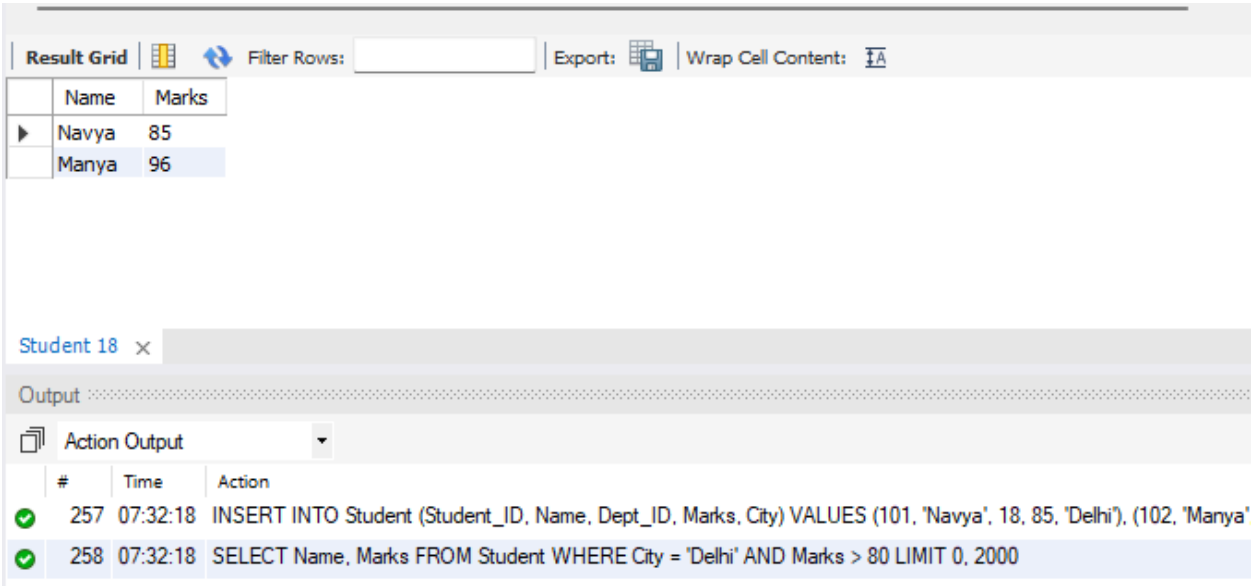

Query 6: Find the highest marks

```
CREATE DATABASE IF NOT EXISTS school_db;

USE school_db;


DROP TABLE IF EXISTS Student;

CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
    Dept_ID INT,
    Marks INT,
    City VARCHAR(50)
);

INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
(101, 'Navya', 18, 85, 'Delhi'),
(102, 'Manya', 20, 96, 'Delhi'),
(103, 'Varshii', 15, 65, 'Mumbai'),
(104, 'Neha', 20, 80, 'Bangalore'),
(105, 'Tanisha', 18, 75, 'Chennai');

SELECT MAX(Marks) AS Highest_Marks
FROM Student;
```

OUTPUT

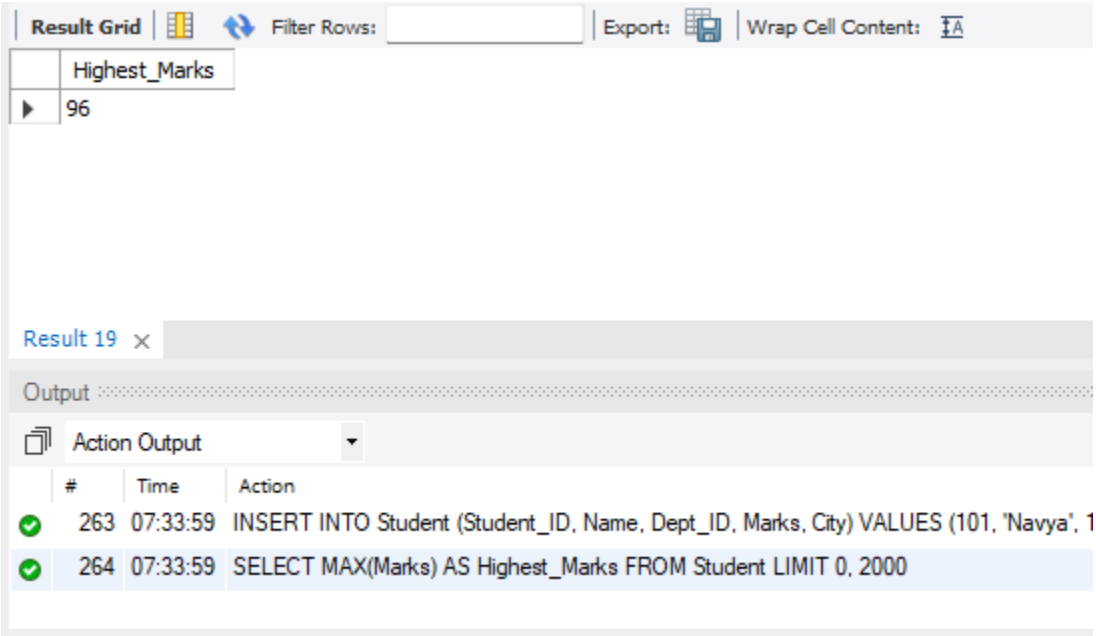

Query 7: Find the average marks

```
CREATE DATABASE IF NOT EXISTS school_db;

USE school_db;

DROP TABLE IF EXISTS Student;

CREATE TABLE Student (
    Student_ID INT PRIMARY KEY,
    Name VARCHAR(50),
    Dept_ID INT,
    Marks INT,
    City VARCHAR(50)
);

INSERT INTO Student (Student_ID, Name, Dept_ID, Marks, City) VALUES
(101, 'Navya', 18, 85, 'Delhi'),
(102, 'Manya', 20, 96, 'Delhi'),
(103, 'Varshii', 15, 65, 'Mumbai'),
(104, 'Neha', 20, 80, 'Bangalore'),
(105, 'Tanisha', 18, 75, 'Chennai');

SELECT AVG(Marks) AS Average_Marks
FROM Student;
```

OUTPUT

