SQL OPERATORS:

Arithmetic Operators:

Addition:

```
4  CREATE TABLE STUDENT
5  (
6      ID INT,
7      NAME VARCHAR(30),
8      MARKS INT,
9      AGE INT
10 );
11 INSERT INTO STUDENT VALUES
12 (1, 'Manya', 90, 19),
13 (2, 'Navya', 85, 19),
14 (3, 'Neha', 70, 20),
15 (4, 'Spoorthi', 65, 21),
16 (5, 'Varshitha', 95, 20),
17 (6, 'Tanisha', 85, 20);
18 SELECT * FROM STUDENT;
19 SELECT NAME, MARKS, MARKS + 5 AS ADDITION
20 FROM STUDENT;
```

OUTPUT:

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

NAME	MARKS	ADDITION
Manya	90	95
Navya	85	90
Neha	70	75
Spoorthi	65	70
Varshitha	95	100

Subtraction:

```
1  CREATE DATABASE IF NOT EXISTS LAB5;
2  USE LAB5;
3  DROP TABLE IF EXISTS STUDENT;
4  CREATE TABLE STUDENT
5  (
6      ID INT,
7      NAME VARCHAR(30),
8      MARKS INT,
9      AGE INT
10 );
```

```sql
INSERT INTO STUDENT VALUES
(1, 'Manya', 90, 19),
(2, 'Navya', 85, 19),
(3, 'Neha', 70, 20),
(4, 'Spoorthi', 65, 21),
(5, 'Varshitha', 95, 20),
(6, 'Tanisha', 85, 20);
SELECT NAME, MARKS, MARKS - 5 AS SUBTRACTION
FROM STUDENT;
```

OUTPUT:

Result Grid | Filter Rows: | Export: | Wrap Cell Content:


NAME	MARKS	SUBTRACTION
Manya	90	85
Navya	85	80
Neha	70	65
Spoorthi	65	60
Varshitha	95	90
Tanisha	85	80

Multiplication:

```sql
CREATE DATABASE IF NOT EXISTS LAB5;
USE LAB5;
DROP TABLE IF EXISTS STUDENT;
CREATE TABLE STUDENT
(
    ID INT,
    NAME VARCHAR(30),
    MARKS INT,
    AGE INT
);
```

```sql
INSERT INTO STUDENT VALUES
(1, 'Manya', 90, 19),
(2, 'Navya', 85, 19),
(3, 'Neha', 70, 20),
(4, 'Spoorthi', 65, 21),
(5, 'Varshitha', 95, 20),
(6, 'Tanisha', 85, 20);
SELECT NAME, MARKS, MARKS * 2 AS MULTIPLICATION
FROM STUDENT;
```

OUTPUT:

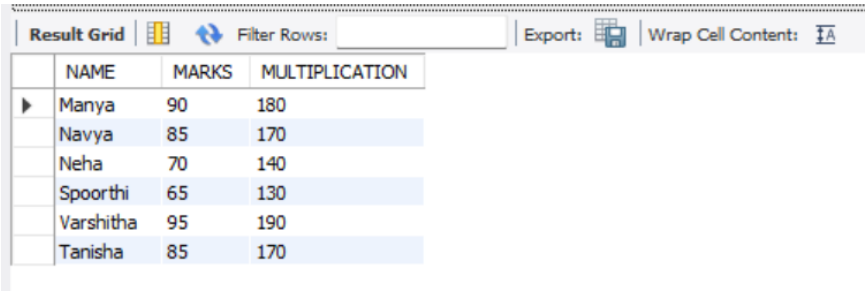

Result Grid | Filter Rows: | Export: | Wrap Cell Content:


NAME	MARKS	MULTIPLICATION
Manya	90	180
Navya	85	170
Neha	70	140
Spoorthi	65	130
Varshitha	95	190
Tanisha	85	170

Division:

```
1  CREATE DATABASE IF NOT EXISTS LAB5;
2  USE LAB5;
3  DROP TABLE IF EXISTS STUDENT;
4  CREATE TABLE STUDENT
5  (
6      ID INT,
7      NAME VARCHAR(30),
8      MARKS INT,
9      AGE INT
10 );
```

```
11 INSERT INTO STUDENT VALUES
12 (1, 'Manya', 90, 19),
13 (2, 'Navya', 85, 19),
14 (3, 'Neha', 70, 20),
15 (4, 'Spoorthi', 65, 21),
16 (5, 'Varshitha', 95, 20),
17 (6, 'Tanisha', 85, 20);
18 SELECT NAME, MARKS, MARKS / 2 AS DIVISION
19 FROM STUDENT;
```


OUTPUT:

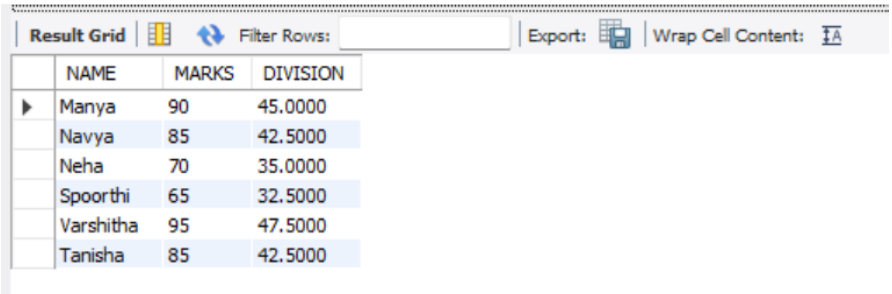

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

NAME	MARKS	DIVISION
Manya	90	45.0000
Navya	85	42.5000
Neha	70	35.0000
Spoorthi	65	32.5000
Varshitha	95	47.5000
Tanisha	85	42.5000


Reminder:

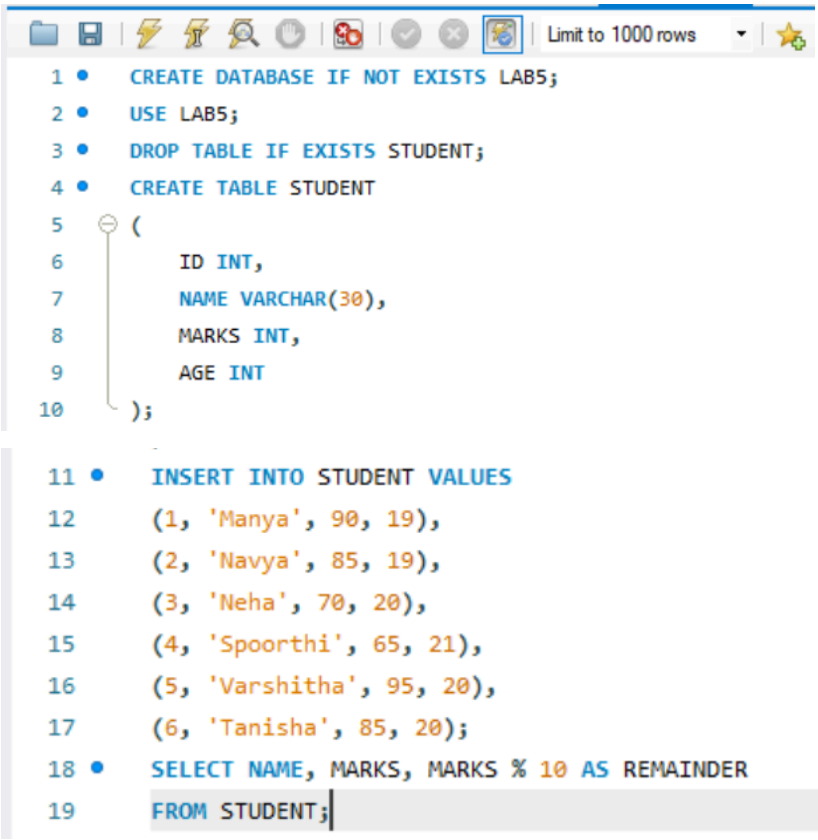

```sql
CREATE DATABASE IF NOT EXISTS LAB5;
USE LAB5;
DROP TABLE IF EXISTS STUDENT;
CREATE TABLE STUDENT
(
    ID INT,
    NAME VARCHAR(30),
    MARKS INT,
    AGE INT
);

INSERT INTO STUDENT VALUES
(1, 'Manya', 90, 19),
(2, 'Navya', 85, 19),
(3, 'Neha', 70, 20),
(4, 'Spoorthi', 65, 21),
(5, 'Varshitha', 95, 20),
(6, 'Tanisha', 85, 20);
SELECT NAME, MARKS, MARKS % 10 AS REMAINDER
FROM STUDENT;
```

OUTPUT:

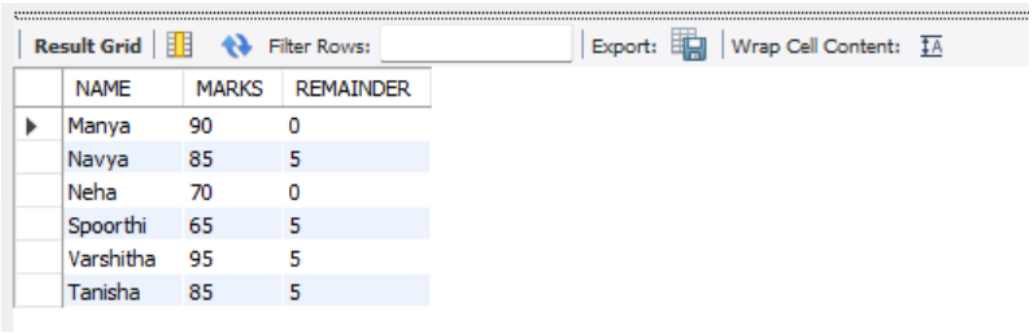

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

NAME	MARKS	REMAINDER
Manya	90	0
Navya	85	5
Neha	70	0
Spoorthi	65	5
Varshitha	95	5
Tanisha	85	5

COMPARISON OPERATORS:

```
CREATE DATABASE IF NOT EXISTS Comparison;
USE Comparison;
DROP TABLE IF EXISTS STUDENT;
CREATE TABLE STUDENT
(
    ID INT,
    NAME VARCHAR(30),
    MARKS INT,
    AGE INT
);
INSERT INTO STUDENT VALUES
(1, 'Manya', 90, 19),
(2, 'Navya', 85, 19),
(3, 'Neha', 70, 20),
(4, 'Spoorthi', 65, 21),
(5, 'Varshitha', 95, 20),
(6, 'Tanisha', 85, 20);
```

```
SELECT * FROM STUDENT;
SELECT * FROM STUDENT
WHERE MARKS = 90;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

ID	NAME	MARKS	AGE
1	Manya	90	19


```
CREATE DATABASE IF NOT EXISTS Comparison;
USE Comparison;
DROP TABLE IF EXISTS STUDENT;
CREATE TABLE STUDENT
(
    ID INT,
    NAME VARCHAR(30),
    MARKS INT,
    AGE INT
);
INSERT INTO STUDENT VALUES
(1, 'Manya', 90, 19),
(2, 'Navya', 85, 19),
(3, 'Neha', 70, 20),
(4, 'Spoorthi', 65, 21),
(5, 'Varshitha', 95, 20),
(6, 'Tanisha', 85, 20);
```

```sql
SELECT * FROM STUDENT
WHERE MARKS <> 90;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

ID	NAME	MARKS	AGE
2	Navya	85	19
3	Neha	70	20
4	Spoorthi	65	21
5	Varshitha	95	20
6	Tanisha	85	20

```sql
CREATE DATABASE IF NOT EXISTS Comparison;
USE Comparison;
DROP TABLE IF EXISTS STUDENT;
CREATE TABLE STUDENT
(
    ID INT,
    NAME VARCHAR(30),
    MARKS INT,
    AGE INT
);
INSERT INTO STUDENT VALUES
(1, 'Manya', 90, 19),
(2, 'Navya', 85, 19),
(3, 'Neha', 70, 20),
(4, 'Spoorthi', 65, 21),
(5, 'Varshitha', 95, 20),
(6, 'Tanisha', 85, 20);
SELECT * FROM STUDENT
WHERE MARKS > 80;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

ID	NAME	MARKS	AGE
1	Manya	90	19
2	Navya	85	19
5	Varshitha	95	20
6	Tanisha	85	20

```sql
USE Comparison;
DROP TABLE IF EXISTS STUDENT;
CREATE TABLE STUDENT
(
    ID INT,
    NAME VARCHAR(30),
    MARKS INT,
    AGE INT
);
INSERT INTO STUDENT VALUES
(1, 'Manya', 90, 19),
(2, 'Navya', 85, 19),
(3, 'Neha', 70, 20),
(4, 'Spoorthi', 65, 21),
(5, 'Varshitha', 95, 20),
(6, 'Tanisha', 85, 20);
SELECT * FROM STUDENT
WHERE MARKS < 80;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

ID	NAME	MARKS	AGE
3	Neha	70	20
4	Spoorthi	65	21

```sql
USE Comparison;
DROP TABLE IF EXISTS STUDENT;
CREATE TABLE STUDENT
(
    ID INT,
    NAME VARCHAR(30),
    MARKS INT,
    AGE INT
);
INSERT INTO STUDENT VALUES
(1, 'Manya', 90, 19),
(2, 'Navya', 85, 19),
(3, 'Neha', 70, 20),
(4, 'Spoorthi', 65, 21),
(5, 'Varshitha', 95, 20),
(6, 'Tanisha', 85, 20);
SELECT * FROM STUDENT
WHERE MARKS >= 85;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

ID	NAME	MARKS	AGE
1	Manya	90	19
2	Navya	85	19
5	Varshitha	95	20
6	Tanisha	85	20

Limit to 1000

```
1  USE Comparison;
2  DROP TABLE IF EXISTS STUDENT;
3  CREATE TABLE STUDENT
4  (
5      ID INT,
6      NAME VARCHAR(30),
7      MARKS INT,
8      AGE INT
9  );
10 INSERT INTO STUDENT VALUES
11 (1, 'Manya', 90, 19),
12 (2, 'Navya', 85, 19),
13 (3, 'Neha', 70, 20),
14 (4, 'Spoorthi', 65, 21),
15 (5, 'Varshitha', 95, 20),
16 (6, 'Tanisha', 85, 20);
17 SELECT * FROM STUDENT
18 WHERE MARKS <= 70;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

ID	NAME	MARKS	AGE
3	Neha	70	20
4	Spoorthi	65	21

Logic Operators:

```sql
USE Comparison;
DROP TABLE IF EXISTS STUDENT;
CREATE TABLE STUDENT
(
    ID INT,
    NAME VARCHAR(30),
    MARKS INT,
    AGE INT
);
INSERT INTO STUDENT VALUES
(1, 'Manya', 90, 19),
(2, 'Navya', 85, 19),
(3, 'Neha', 70, 20),
(4, 'Spoorthi', 65, 21),
(5, 'Varshitha', 95, 20),
(6, 'Tanisha', 85, 20);
SELECT * FROM STUDENT
WHERE MARKS > 80 AND AGE = 19;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

ID	NAME	MARKS	AGE
1	Manya	90	19
2	Navya	85	19

```sql
USE Comparison;
DROP TABLE IF EXISTS STUDENT;
CREATE TABLE STUDENT
(
    ID INT,
    NAME VARCHAR(30),
    MARKS INT,
    AGE INT
);
INSERT INTO STUDENT VALUES
(1, 'Manya', 90, 19),
(2, 'Navya', 85, 19),
(3, 'Neha', 70, 20),
(4, 'Spoorthi', 65, 21),
(5, 'Varshitha', 95, 20),
(6, 'Tanisha', 85, 20);
SELECT * FROM STUDENT
WHERE MARKS > 90 OR AGE = 19;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

ID	NAME	MARKS	AGE
1	Manya	90	19
2	Navya	85	19
5	Varshitha	95	20

Limit to 1000 rows

```sql
USE Comparison;
DROP TABLE IF EXISTS STUDENT;
CREATE TABLE STUDENT
(
    ID INT,
    NAME VARCHAR(30),
    MARKS INT,
    AGE INT
);
INSERT INTO STUDENT VALUES
(1, 'Manya', 90, 19),
(2, 'Navya', 85, 19),
(3, 'Neha', 70, 20),
(4, 'Spoorthi', 65, 21),
(5, 'Varshitha', 95, 20),
(6, 'Tanisha', 85, 20);
SELECT * FROM STUDENT
WHERE NOT MARKS = 90;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

ID	NAME	MARKS	AGE
2	Navya	85	19
3	Neha	70	20
4	Spoorthi	65	21
5	Varshitha	95	20
6	Tanisha	85	20

Github link:
https://github.com/manyappoojarybca25-byte/Dbms.git