
STRING FUNCTION

UPPER()

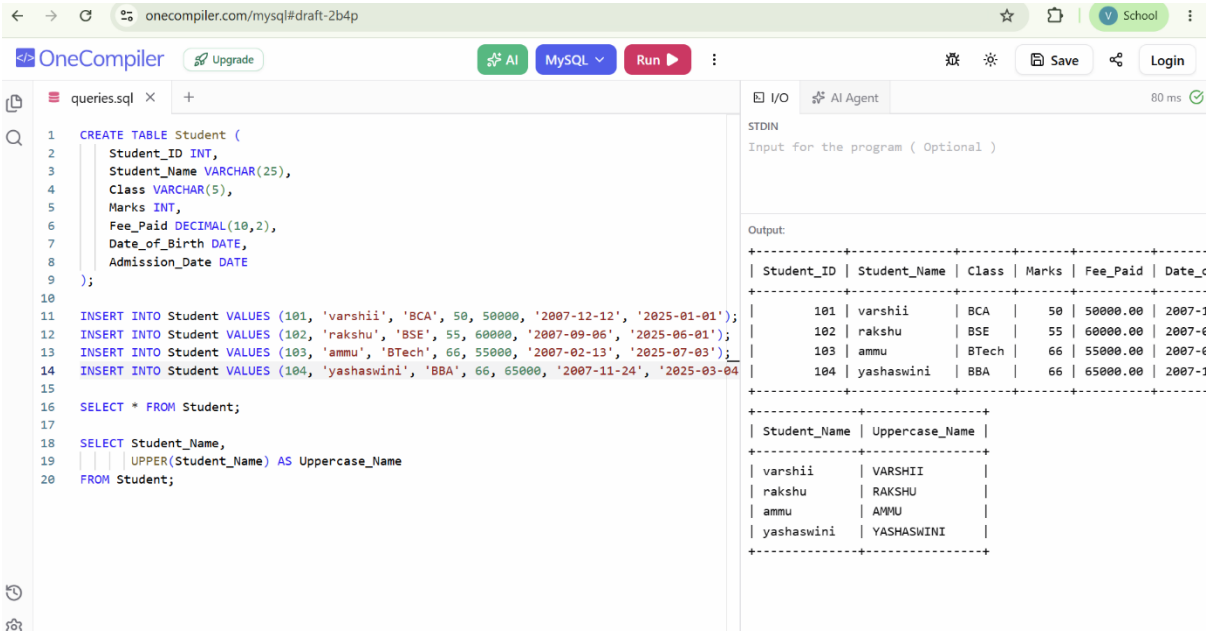

```
CREATE TABLE Student (
    Student_ID INT,
    Student_Name VARCHAR(25),
    Class VARCHAR(5),
    Marks INT,
    Fee_Paid DECIMAL(10,2),
    Date_of_Birth DATE,
    Admission_Date DATE
);


INSERT INTO Student VALUES (101, 'varshii', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'rakshu', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'ammu', 'BTech', 66, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yashaswini', 'BBA', 66, 65000, '2007-11-24', '2025-03-04

SELECT * FROM Student;

SELECT Student_Name,
       UPPER(Student_Name) AS Uppercase_Name
FROM Student;
```

```
+------------+--------------+-------+-------+----------+-------
| Student_ID | Student_Name | Class | Marks | Fee_Paid | Date_c
+------------+--------------+-------+-------+----------+-------
|        101 | varshii      | BCA   |    50 | 50000.00 | 2007-1
|        102 | rakshu       | BSE   |    55 | 60000.00 | 2007-0
|        103 | ammu         | BTech |    66 | 55000.00 | 2007-0
|        104 | yashaswini   | BBA   |    66 | 65000.00 | 2007-1
+------------+--------------+-------+-------+----------+-------
+--------------+----------------+
| Student_Name | Uppercase_Name |
+--------------+----------------+
| varshii      | VARSHII        |
| rakshu       | RAKSHU         |
| ammu         | AMMU           |
| yashaswini   | YASHASWINI     |
+--------------+----------------+
```

LOWER()

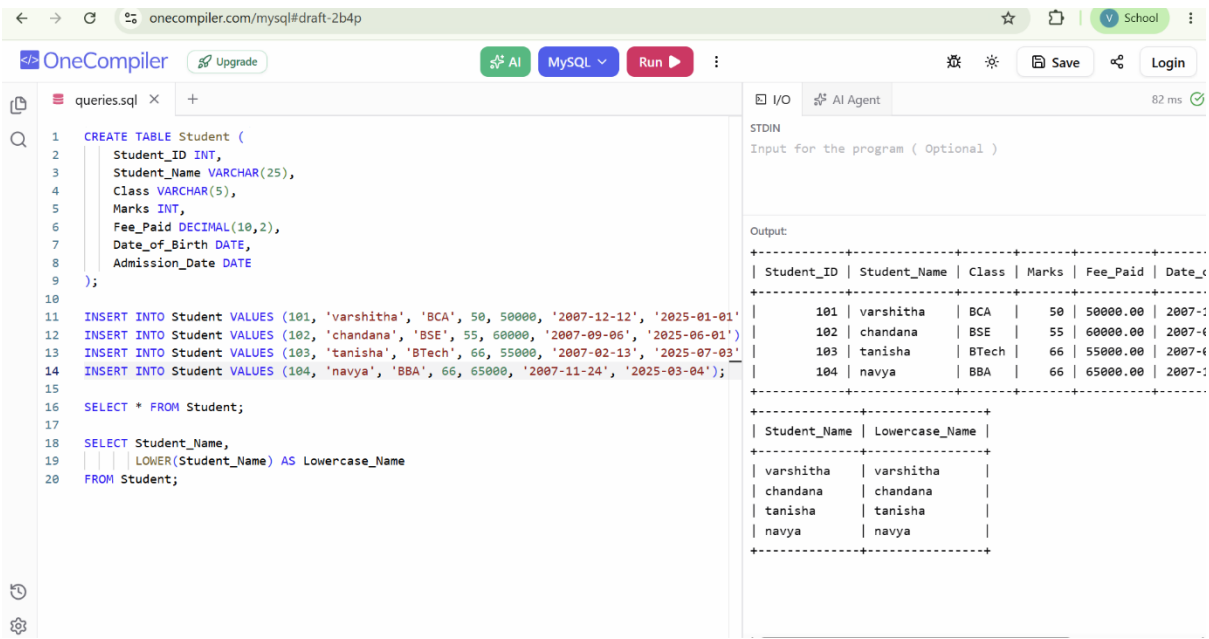

```
CREATE TABLE Student (
    Student_ID INT,
    Student_Name VARCHAR(25),
    Class VARCHAR(5),
    Marks INT,
    Fee_Paid DECIMAL(10,2),
    Date_of_Birth DATE,
    Admission_Date DATE
);


INSERT INTO Student VALUES (101, 'varshitha', 'BCA', 50, 50000, '2007-12-12', '2025-01-01'
INSERT INTO Student VALUES (102, 'chandana', 'BSE', 55, 60000, '2007-09-06', '2025-06-01')
INSERT INTO Student VALUES (103, 'tanisha', 'BTech', 66, 55000, '2007-02-13', '2025-07-03'
INSERT INTO Student VALUES (104, 'navya', 'BBA', 66, 65000, '2007-11-24', '2025-03-04');

SELECT * FROM Student;


SELECT Student_Name,
       LOWER(Student_Name) AS Lowercase_Name
FROM Student;
```

```
+------------+--------------+-------+-------+----------+-------
| Student_ID | Student_Name | Class | Marks | Fee_Paid | Date_c
+------------+--------------+-------+-------+----------+-------
|        101 | varshitha    | BCA   |    50 | 50000.00 | 2007-1
|        102 | chandana     | BSE   |    55 | 60000.00 | 2007-0
|        103 | tanisha      | BTech |    66 | 55000.00 | 2007-0
|        104 | navya        | BBA   |    66 | 65000.00 | 2007-1
+------------+--------------+-------+-------+----------+-------
+--------------+----------------+
| Student_Name | Lowercase_Name |
+--------------+----------------+
| varshitha    | varshitha      |
| chandana     | chandana       |
| tanisha      | tanisha        |
| navya        | navya          |
+--------------+----------------+
```


LENGTH()

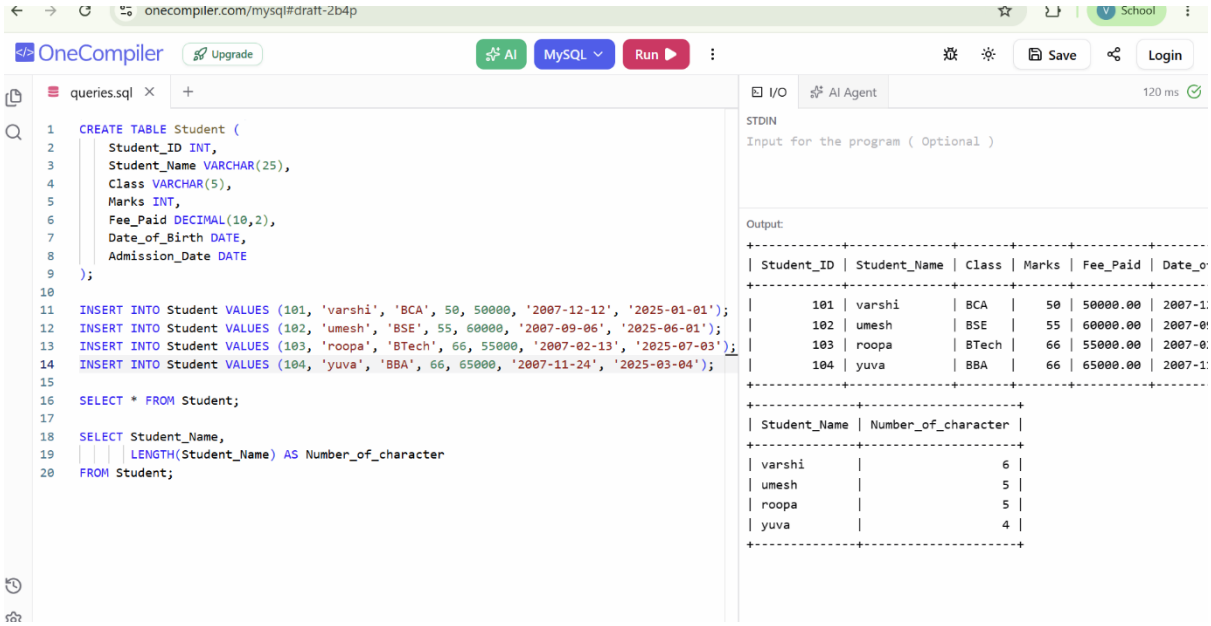


CONCAT()

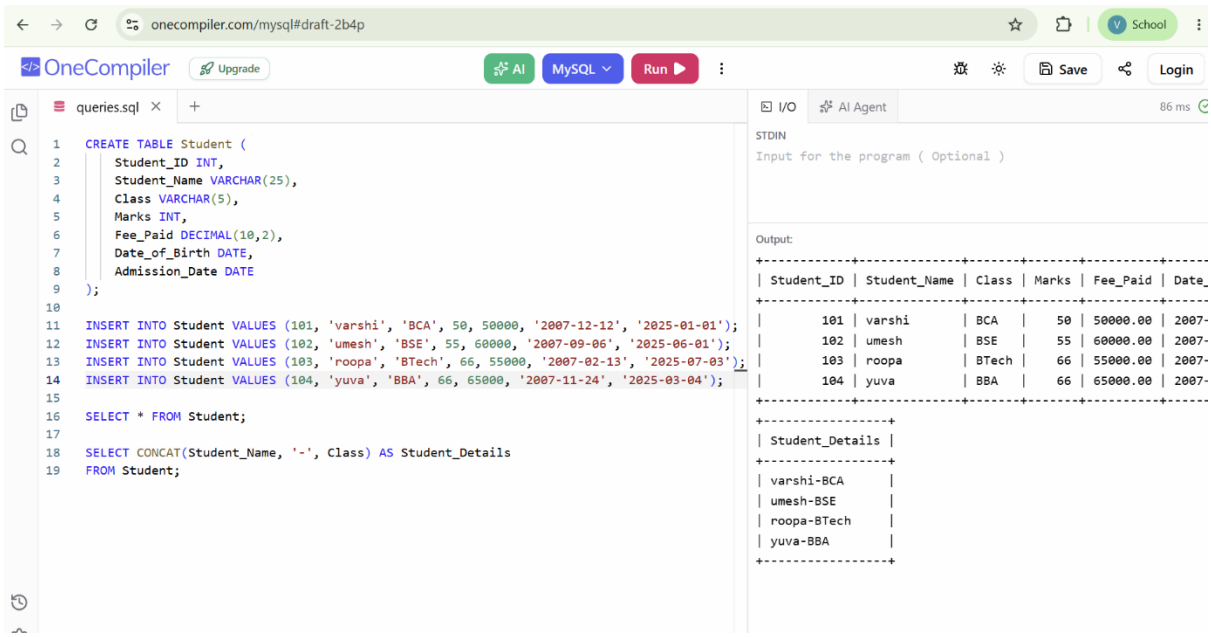

SUBSTRING()

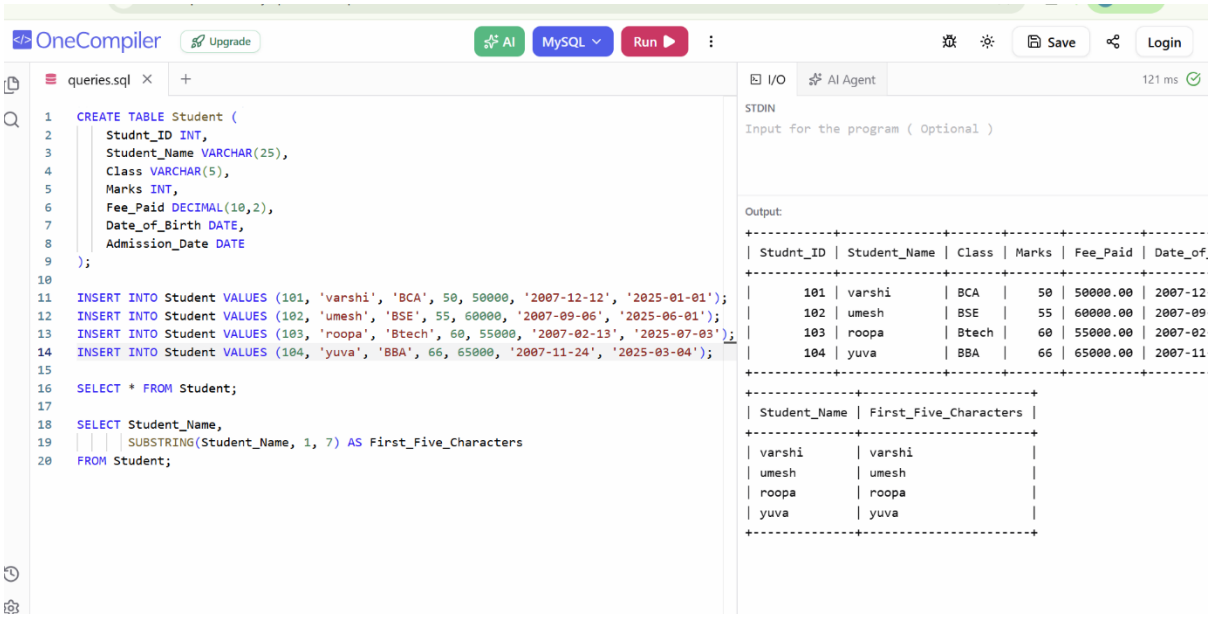
OneCompiler
Upgrade
AI
MySQL
Run
Save
Login
queries.sql
I/O
AI Agent
121 ms
STDIN
Input for the program (Optional)
Output:
CREATE TABLE Student (
Studnt_ID INT,
Student_Name VARCHAR(25),
Class VARCHAR(5),
Marks INT,
Fee_Paid DECIMAL(10,2),
Date_of_Birth DATE,
Admission_Date DATE
);
INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BBA', 66, 65000, '2007-11-24', '2025-03-04');
SELECT * FROM Student;
SELECT Student_Name,
SUBSTRING(Student_Name, 1, 7) AS First_Five_Characters
FROM Student;
| Studnt_ID | Student_Name | Class | Marks | Fee_Paid | Date_of
| 101 | varshi | BCA | 50 | 50000.00 | 2007-12
| 102 | umesh | BSE | 55 | 60000.00 | 2007-09
| 103 | roopa | Btech | 60 | 55000.00 | 2007-02
| 104 | yuva | BBA | 66 | 65000.00 | 2007-11
Student_Name	First_Five_Characters
varshi	varshi
umesh	umesh
roopa	roopa
yuva	yuva

ROUND()

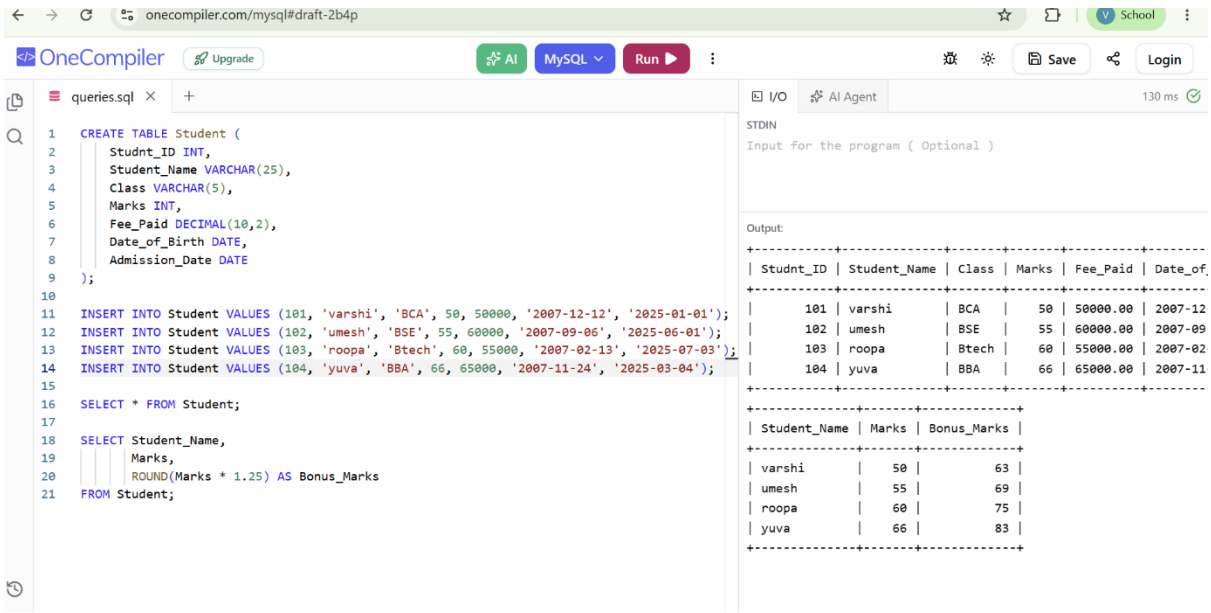
onecompiler.com/mysql#draft-2b4p
School
OneCompiler
Upgrade
AI
MySQL
Run
Save
Login
queries.sql
I/O
AI Agent
130 ms
STDIN
Input for the program (Optional)
Output:
CREATE TABLE Student (
Studnt_ID INT,
Student_Name VARCHAR(25),
Class VARCHAR(5),
Marks INT,
Fee_Paid DECIMAL(10,2),
Date_of_Birth DATE,
Admission_Date DATE
);
INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BBA', 66, 65000, '2007-11-24', '2025-03-04');
SELECT * FROM Student;
SELECT Student_Name,
Marks,
ROUND(Marks * 1.25) AS Bonus_Marks
FROM Student;
| Studnt_ID | Student_Name | Class | Marks | Fee_Paid | Date_of
| 101 | varshi | BCA | 50 | 50000.00 | 2007-12
| 102 | umesh | BSE | 55 | 60000.00 | 2007-09
| 103 | roopa | Btech | 60 | 55000.00 | 2007-02
| 104 | yuva | BBA | 66 | 65000.00 | 2007-11
Student_Name	Marks	Bonus_Marks
varshi	50	63
umesh	55	69
roopa	60	75
yuva	66	83

CEIL()



```
CREATE TABLE Student (
    Studnt_ID INT,
    Student_Name VARCHAR(25),
    Class VARCHAR(5),
    Marks INT,
    Fee_Paid DECIMAL(10,2),
    Date_of_Birth DATE,
    Admission_Date DATE
);

INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BBA', 66, 65000, '2007-11-24', '2025-03-04');


SELECT * FROM Student;

SELECT Student_Name,
       Marks / 10 AS Marks_Value,
       CEIL(Marks / 10) AS Rounded_Up
FROM Student;
```

```
+-----------+--------------+-------+-------+----------+--------
| Studnt_ID | Student_Name | Class | Marks | Fee_Paid | Date_of
+-----------+--------------+-------+-------+----------+--------
|       101 | varshi       | BCA   |    50 | 50000.00 | 2007-12
|       102 | umesh        | BSE   |    55 | 60000.00 | 2007-09
|       103 | roopa        | Btech |    60 | 55000.00 | 2007-02
|       104 | yuva         | BBA   |    66 | 65000.00 | 2007-11
+-----------+--------------+-------+-------+----------+--------

+--------------+-------------+------------+
| Student_Name | Marks_Value | Rounded_Up |
+--------------+-------------+------------+
| varshi       |      5.0000 |          5 |
| umesh        |      5.5000 |          6 |
| roopa        |      6.0000 |          6 |
| yuva         |      6.6000 |          7 |
+--------------+-------------+------------+
```

FLOOR()

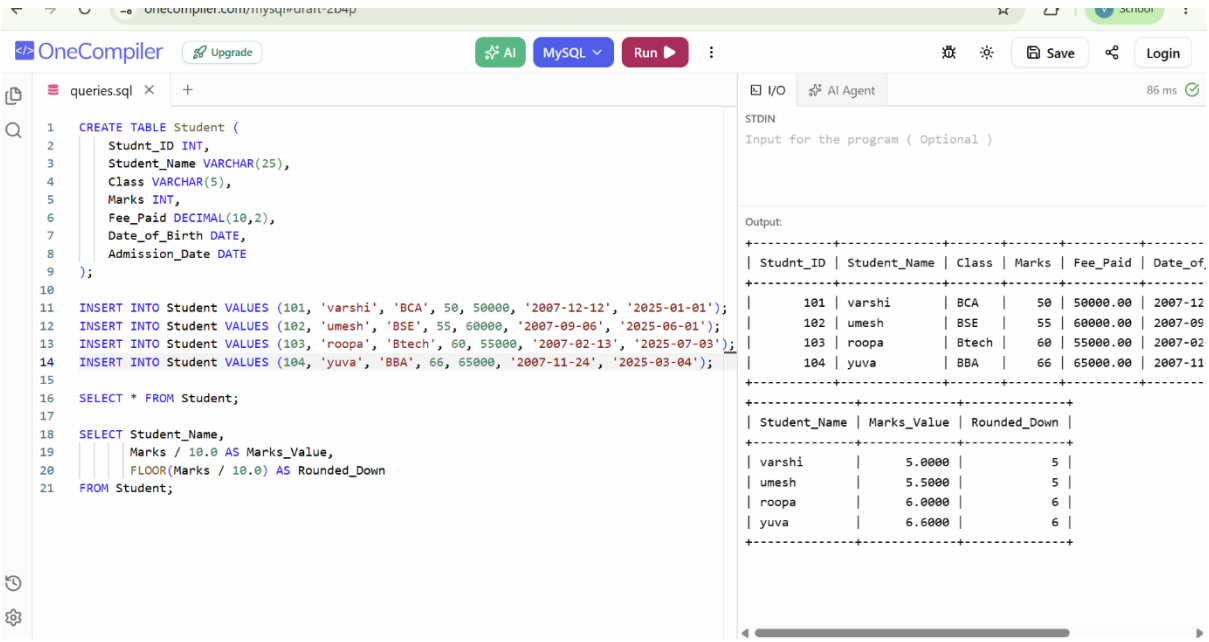

```
CREATE TABLE Student (
    Studnt_ID INT,
    Student_Name VARCHAR(25),
    Class VARCHAR(5),
    Marks INT,
    Fee_Paid DECIMAL(10,2),
    Date_of_Birth DATE,
    Admission_Date DATE
);

INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BBA', 66, 65000, '2007-11-24', '2025-03-04');


SELECT * FROM Student;

SELECT Student_Name,
       Marks / 10.0 AS Marks_Value,
       FLOOR(Marks / 10.0) AS Rounded_Down
FROM Student;
```


```
+-----------+--------------+-------+-------+----------+--------
| Studnt_ID | Student_Name | Class | Marks | Fee_Paid | Date_of
+-----------+--------------+-------+-------+----------+--------
|       101 | varshi       | BCA   |    50 | 50000.00 | 2007-12
|       102 | umesh        | BSE   |    55 | 60000.00 | 2007-09
|       103 | roopa        | Btech |    60 | 55000.00 | 2007-02
|       104 | yuva         | BBA   |    66 | 65000.00 | 2007-11
+-----------+--------------+-------+-------+----------+--------

+--------------+-------------+--------------+
| Student_Name | Marks_Value | Rounded_Down |
+--------------+-------------+--------------+
| varshi       |      5.0000 |            5 |
| umesh        |      5.5000 |            5 |
| roopa        |      6.0000 |            6 |
| yuva         |      6.6000 |            6 |
+--------------+-------------+--------------+
```


MOD()

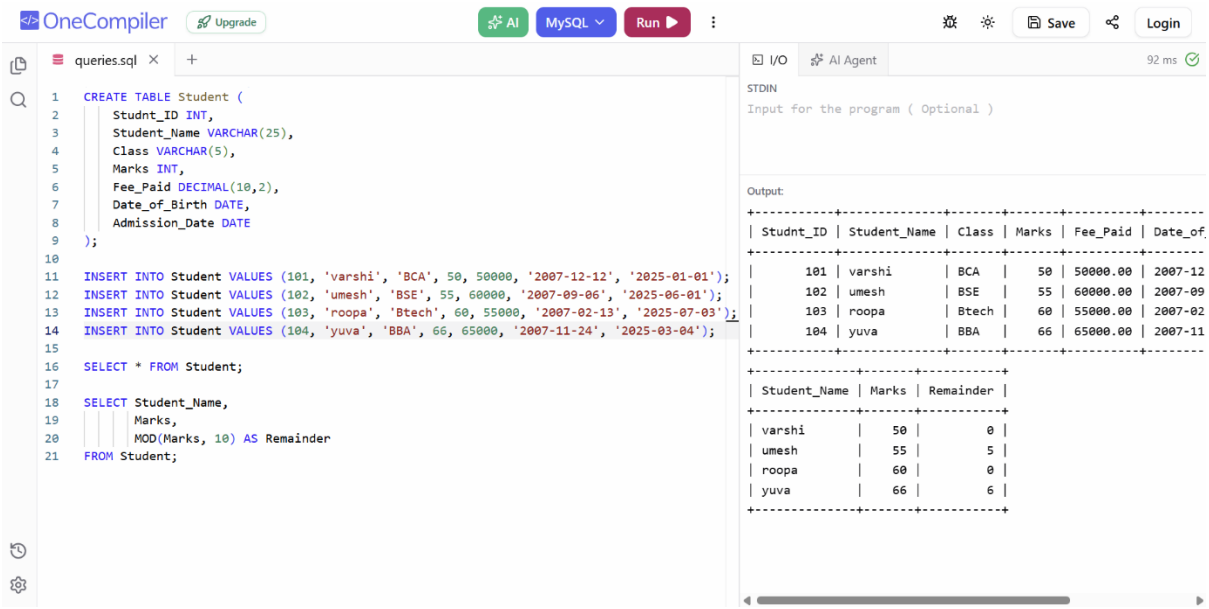
OneCompiler
Upgrade
AI
MySQL
Run
Save
Login
queries.sql
I/O
AI Agent
92 ms
STDIN
Input for the program (Optional)
Output:
CREATE TABLE Student (
Studnt_ID INT,
Student_Name VARCHAR(25),
Class VARCHAR(5),
Marks INT,
Fee_Paid DECIMAL(10,2),
Date_of_Birth DATE,
Admission_Date DATE
);
INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BBA', 66, 65000, '2007-11-24', '2025-03-04');
SELECT * FROM Student;
SELECT Student_Name,
Marks,
MOD(Marks, 10) AS Remainder
FROM Student;
| Studnt_ID | Student_Name | Class | Marks | Fee_Paid | Date_of
| 101 | varshi | BCA | 50 | 50000.00 | 2007-12
| 102 | umesh | BSE | 55 | 60000.00 | 2007-09
| 103 | roopa | Btech | 60 | 55000.00 | 2007-02
| 104 | yuva | BBA | 66 | 65000.00 | 2007-11
Student_Name	Marks	Remainder
varshi	50	0
umesh	55	5
roopa	60	0
yuva	66	6


ABS()

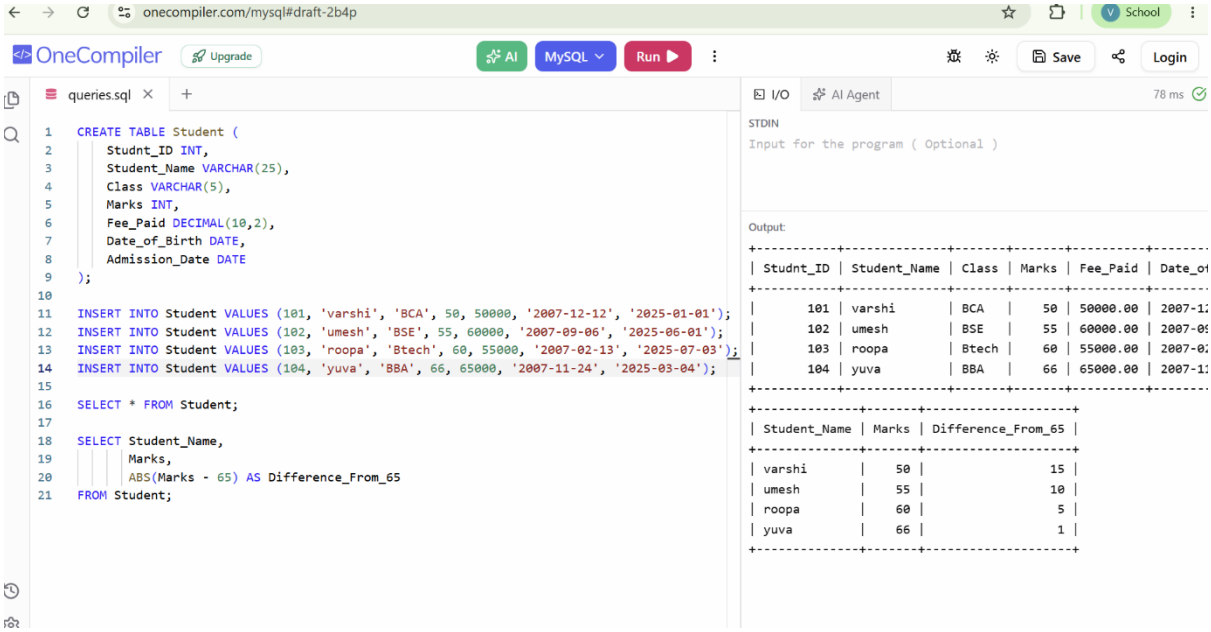
onecompiler.com/mysql#draft-2b4p
OneCompiler
Upgrade
AI
MySQL
Run
Save
Login
queries.sql
I/O
AI Agent
78 ms
STDIN
Input for the program (Optional)
Output:
CREATE TABLE Student (
Studnt_ID INT,
Student_Name VARCHAR(25),
Class VARCHAR(5),
Marks INT,
Fee_Paid DECIMAL(10,2),
Date_of_Birth DATE,
Admission_Date DATE
);
INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BBA', 66, 65000, '2007-11-24', '2025-03-04');
SELECT * FROM Student;
SELECT Student_Name,
Marks,
ABS(Marks - 65) AS Difference_From_65
FROM Student;
| Studnt_ID | Student_Name | Class | Marks | Fee_Paid | Date_of
| 101 | varshi | BCA | 50 | 50000.00 | 2007-12
| 102 | umesh | BSE | 55 | 60000.00 | 2007-09
| 103 | roopa | Btech | 60 | 55000.00 | 2007-02
| 104 | yuva | BBA | 66 | 65000.00 | 2007-11
Student_Name	Marks	Difference_From_65
varshi	50	15
umesh	55	10
roopa	60	5
yuva	66	1

GROUP BY

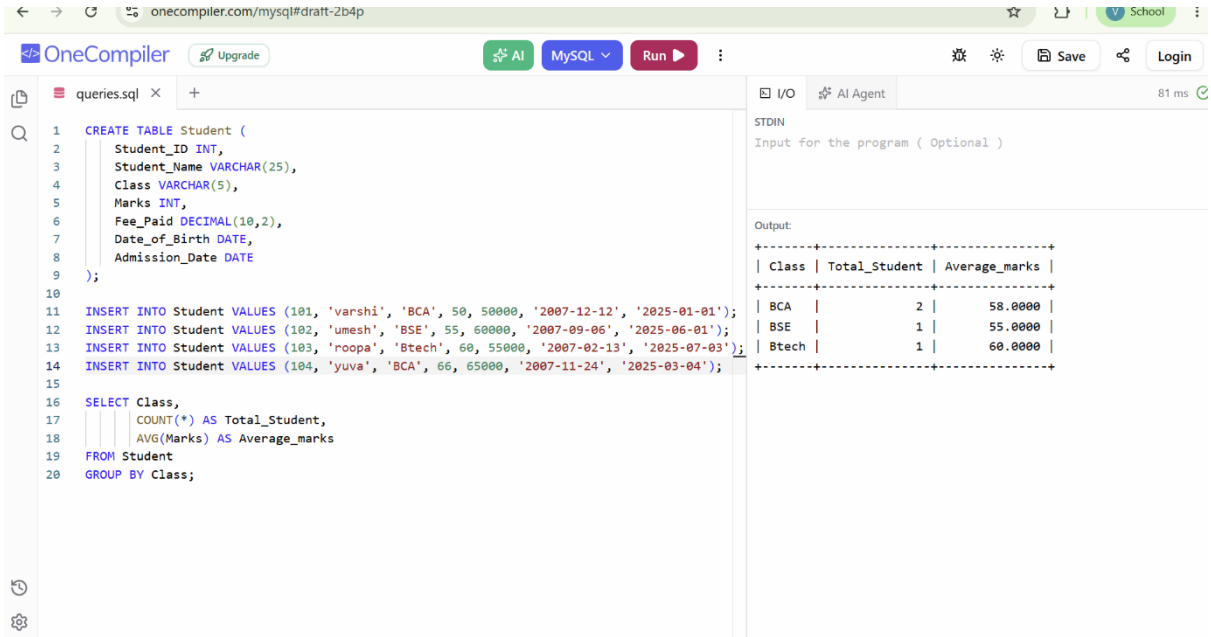
onecompiler.com/mysql#draft-2b4p
OneCompiler
Upgrade
AI
MySQL
Run
Save
Login
queries.sql
I/O
AI Agent
81 ms
STDIN
Input for the program (Optional)
Output:
CREATE TABLE Student (
Student_ID INT,
Student_Name VARCHAR(25),
Class VARCHAR(5),
Marks INT,
Fee_Paid DECIMAL(10,2),
Date_of_Birth DATE,
Admission_Date DATE
);
INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BCA', 66, 65000, '2007-11-24', '2025-03-04');
SELECT Class,
COUNT(*) AS Total_Student,
AVG(Marks) AS Average_marks
FROM Student
GROUP BY Class;
Class	Total_Student	Average_marks
BCA	2	58.0000
BSE	1	55.0000
Btech	1	60.0000

CLAUSE:

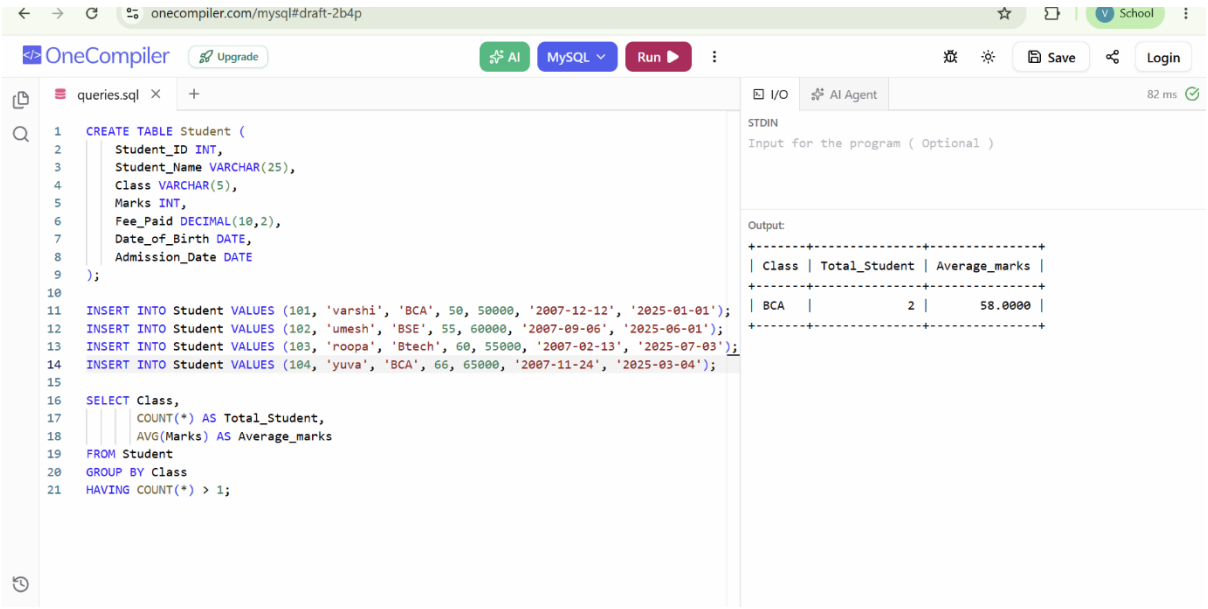



```
CREATE TABLE Student (
    Student_ID INT,
    Student_Name VARCHAR(25),
    Class VARCHAR(5),
    Marks INT,
    Fee_Paid DECIMAL(10,2),
    Date_of_Birth DATE,
    Admission_Date DATE
);

INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BCA', 66, 65000, '2007-11-24', '2025-03-04');

SELECT Class,
       COUNT(*) AS Total_Student,
       AVG(Marks) AS Average_marks
FROM Student
GROUP BY Class
HAVING COUNT(*) > 1;
```

ORDER BY:

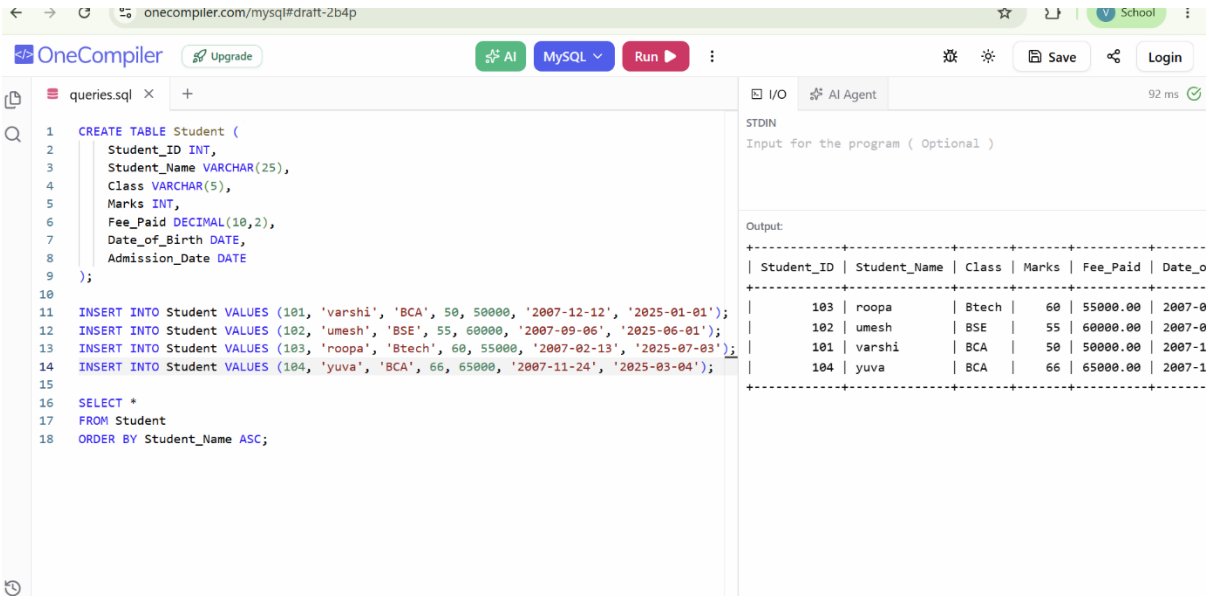



```
CREATE TABLE Student (
    Student_ID INT,
    Student_Name VARCHAR(25),
    Class VARCHAR(5),
    Marks INT,
    Fee_Paid DECIMAL(10,2),
    Date_of_Birth DATE,
    Admission_Date DATE
);

INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BCA', 66, 65000, '2007-11-24', '2025-03-04');

SELECT *
FROM Student
ORDER BY Student_Name ASC;
```

EXTRACTING THE YEAR

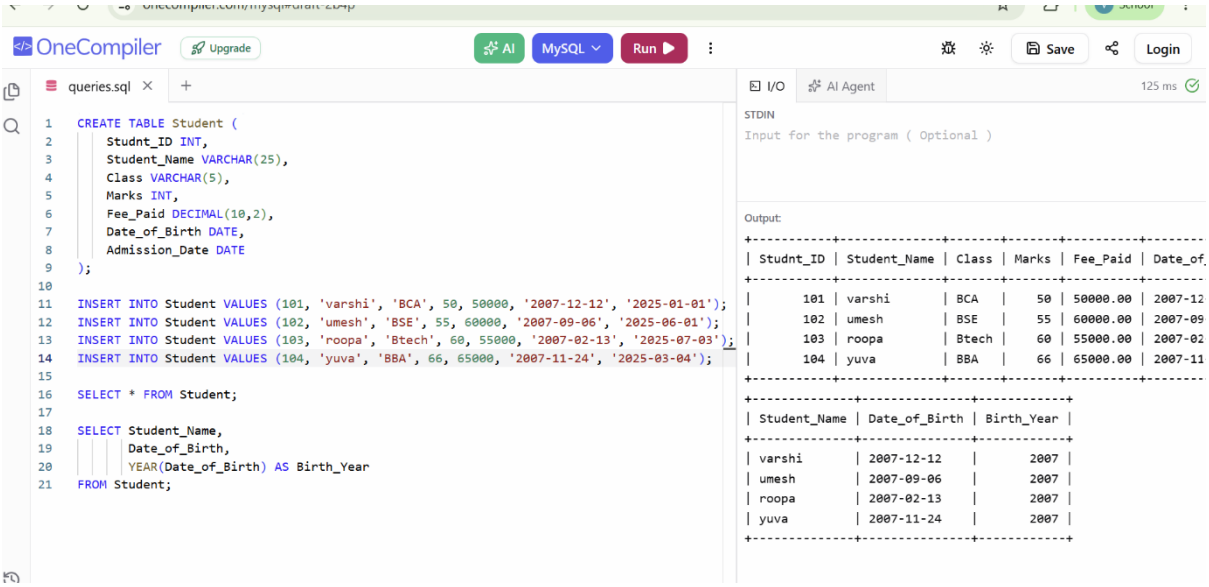

```
CREATE TABLE Student (
    Studnt_ID INT,
    Student_Name VARCHAR(25),
    Class VARCHAR(5),
    Marks INT,
    Fee_Paid DECIMAL(10,2),
    Date_of_Birth DATE,
    Admission_Date DATE
);

INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BBA', 66, 65000, '2007-11-24', '2025-03-04');


SELECT * FROM Student;

SELECT Student_Name,
       Date_of_Birth,
       YEAR(Date_of_Birth) AS Birth_Year
FROM Student;
```

```
+-----------+--------------+-------+-------+----------+--------
| Studnt_ID | Student_Name | Class | Marks | Fee_Paid | Date_of
+-----------+--------------+-------+-------+----------+--------
|       101 | varshi       | BCA   |    50 | 50000.00 | 2007-12
|       102 | umesh        | BSE   |    55 | 60000.00 | 2007-09
|       103 | roopa        | Btech |    60 | 55000.00 | 2007-02
|       104 | yuva         | BBA   |    66 | 65000.00 | 2007-11
+-----------+--------------+-------+-------+----------+--------

+--------------+---------------+------------+
| Student_Name | Date_of_Birth | Birth_Year |
+--------------+---------------+------------+
| varshi       | 2007-12-12    |       2007 |
| umesh        | 2007-09-06    |       2007 |
| roopa        | 2007-02-13    |       2007 |
| yuva         | 2007-11-24    |       2007 |
+--------------+---------------+------------+
```

EXTRACTING THE MONTH

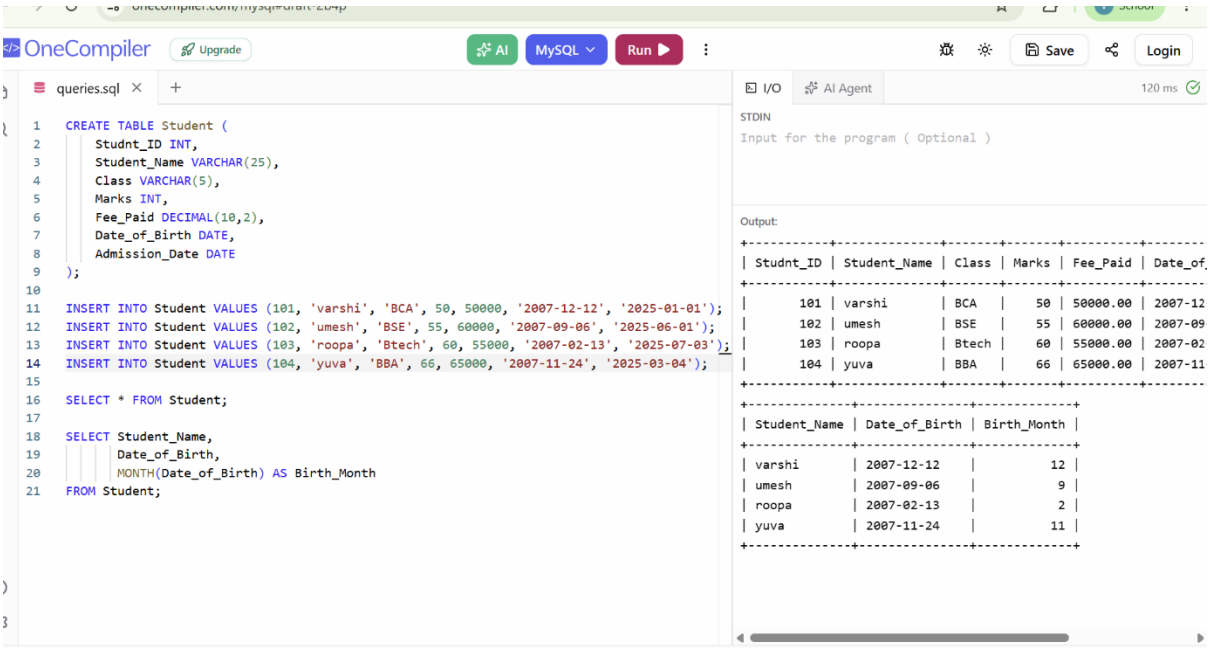

```
CREATE TABLE Student (
    Studnt_ID INT,
    Student_Name VARCHAR(25),
    Class VARCHAR(5),
    Marks INT,
    Fee_Paid DECIMAL(10,2),
    Date_of_Birth DATE,
    Admission_Date DATE
);

INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BBA', 66, 65000, '2007-11-24', '2025-03-04');


SELECT * FROM Student;

SELECT Student_Name,
       Date_of_Birth,
       MONTH(Date_of_Birth) AS Birth_Month
FROM Student;
```

```
+-----------+--------------+-------+-------+----------+--------
| Studnt_ID | Student_Name | Class | Marks | Fee_Paid | Date_of
+-----------+--------------+-------+-------+----------+--------
|       101 | varshi       | BCA   |    50 | 50000.00 | 2007-12
|       102 | umesh        | BSE   |    55 | 60000.00 | 2007-09
|       103 | roopa        | Btech |    60 | 55000.00 | 2007-02
|       104 | yuva         | BBA   |    66 | 65000.00 | 2007-11
+-----------+--------------+-------+-------+----------+--------

+--------------+---------------+-------------+
| Student_Name | Date_of_Birth | Birth_Month |
+--------------+---------------+-------------+
| varshi       | 2007-12-12    |          12 |
| umesh        | 2007-09-06    |           9 |
| roopa        | 2007-02-13    |           2 |
| yuva         | 2007-11-24    |          11 |
+--------------+---------------+-------------+
```

ESTRACTING THE DAY

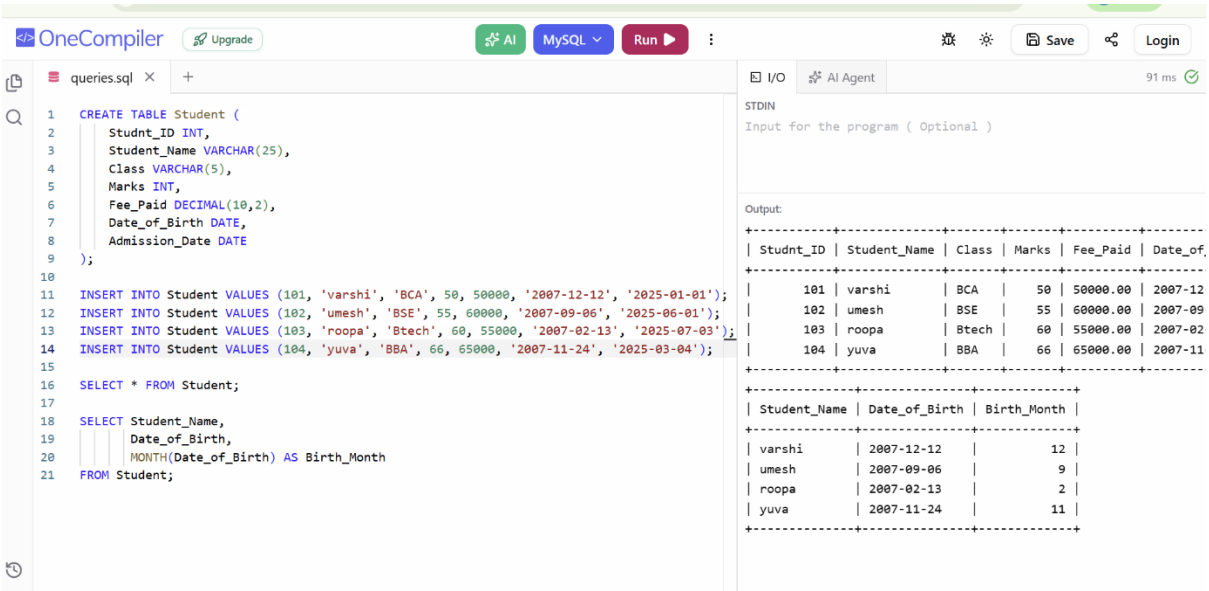

```
CREATE TABLE Student (
    Studnt_ID INT,
    Student_Name VARCHAR(25),
    Class VARCHAR(5),
    Marks INT,
    Fee_Paid DECIMAL(10,2),
    Date_of_Birth DATE,
    Admission_Date DATE
);

INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BBA', 66, 65000, '2007-11-24', '2025-03-04');

SELECT * FROM Student;

SELECT Student_Name,
       Date_of_Birth,
       MONTH(Date_of_Birth) AS Birth_Month
FROM Student;
```

```
+-----------+--------------+-------+-------+----------+--------
| Studnt_ID | Student_Name | Class | Marks | Fee_Paid | Date_of
+-----------+--------------+-------+-------+----------+--------
|       101 | varshi       | BCA   |    50 | 50000.00 | 2007-12
|       102 | umesh        | BSE   |    55 | 60000.00 | 2007-09
|       103 | roopa        | Btech |    60 | 55000.00 | 2007-02
|       104 | yuva         | BBA   |    66 | 65000.00 | 2007-11
+-----------+--------------+-------+-------+----------+--------

+--------------+---------------+-------------+
| Student_Name | Date_of_Birth | Birth_Month |
+--------------+---------------+-------------+
| varshi       | 2007-12-12    |          12 |
| umesh        | 2007-09-06    |           9 |
| roopa        | 2007-02-13    |           2 |
| yuva         | 2007-11-24    |          11 |
+--------------+---------------+-------------+
```

CAKCULATING CURRENT AGE



```
CREATE TABLE Student (
    Student_ID INT,
    Student_Name VARCHAR(25),
    Class VARCHAR(5),
    Marks INT,
    Fee_Paid DECIMAL(10,2),
    Date_of_Birth DATE,
    Admission_Date DATE
);

INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BBA', 66, 65000, '2007-11-24', '2025-03-04');


SELECT * FROM Student;

SELECT Student_Name,
       Date_of_Birth,
       TIMESTAMPDIFF(YEAR, Date_of_Birth, CURDATE()) AS Age
FROM Student;
```

```
+------------+--------------+-------+-------+----------+-------
| Student_ID | Student_Name | Class | Marks | Fee_Paid | Date_o
+------------+--------------+-------+-------+----------+-------
|        101 | varshi       | BCA   |    50 | 50000.00 | 2007-1
|        102 | umesh        | BSE   |    55 | 60000.00 | 2007-0
|        103 | roopa        | Btech |    60 | 55000.00 | 2007-0
|        104 | yuva         | BBA   |    66 | 65000.00 | 2007-1
+------------+--------------+-------+-------+----------+-------

+--------------+---------------+------+
| Student_Name | Date_of_Birth | Age  |
+--------------+---------------+------+
| varshi       | 2007-12-12    |   18 |
| umesh        | 2007-09-06    |   18 |
| roopa        | 2007-02-13    |   19 |
| yuva         | 2007-11-24    |   18 |
+--------------+---------------+------+
```

COUNT()

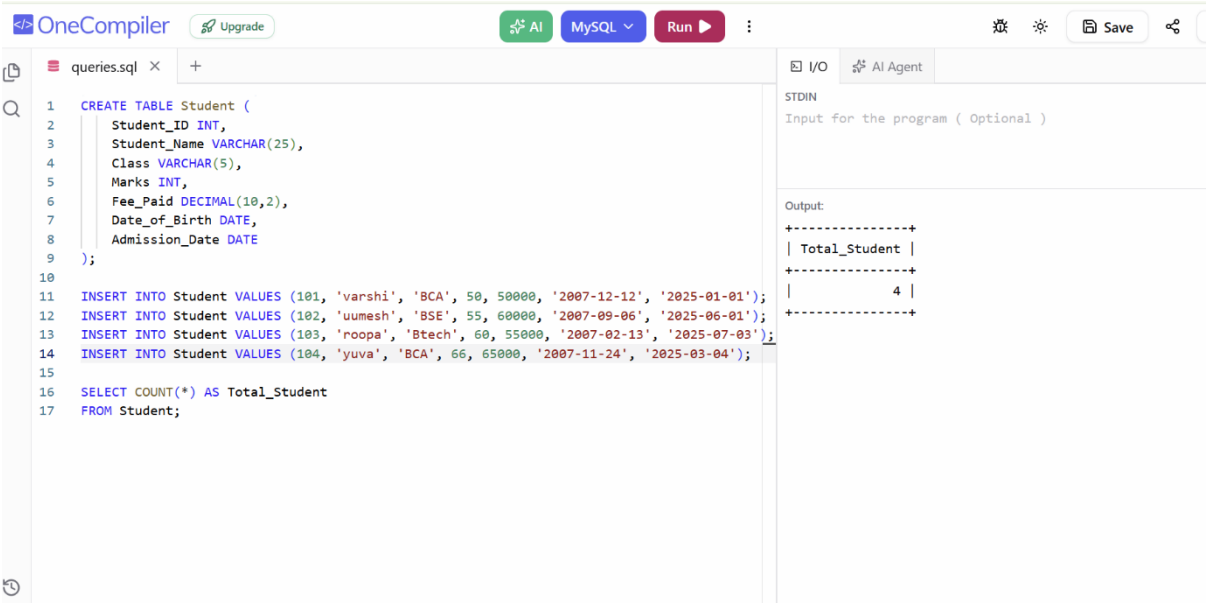



```
CREATE TABLE Student (
    Student_ID INT,
    Student_Name VARCHAR(25),
    Class VARCHAR(5),
    Marks INT,
    Fee_Paid DECIMAL(10,2),
    Date_of_Birth DATE,
    Admission_Date DATE
);

INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'uumesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BCA', 66, 65000, '2007-11-24', '2025-03-04');

SELECT COUNT(*) AS Total_Student
FROM Student;
```

SUM()

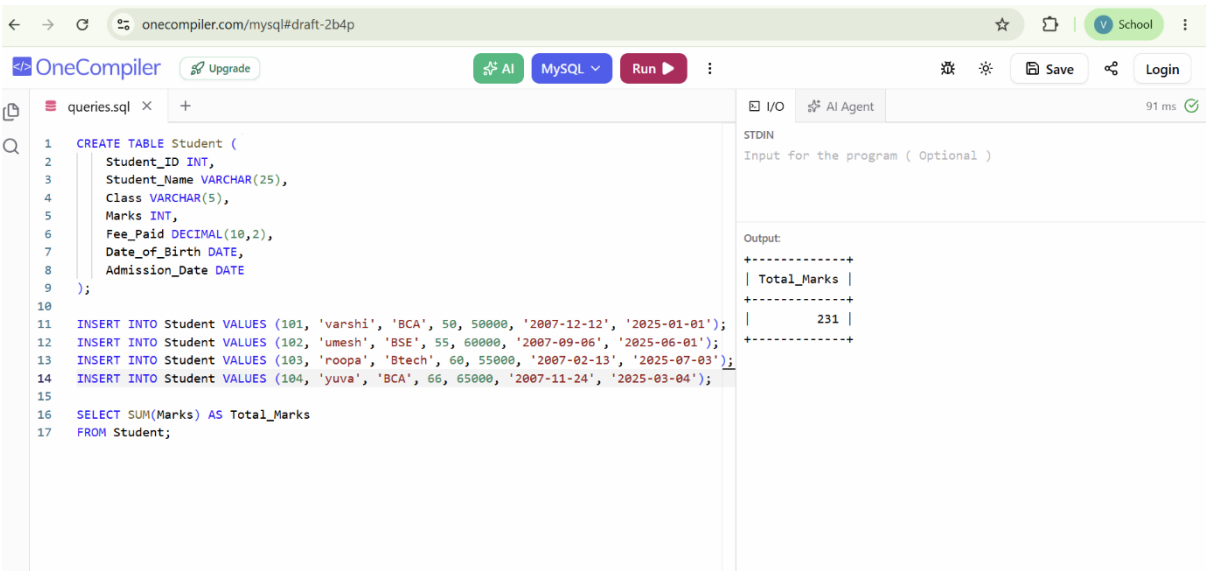



```
CREATE TABLE Student (
    Student_ID INT,
    Student_Name VARCHAR(25),
    Class VARCHAR(5),
    Marks INT,
    Fee_Paid DECIMAL(10,2),
    Date_of_Birth DATE,
    Admission_Date DATE
);


INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BCA', 66, 65000, '2007-11-24', '2025-03-04');

SELECT SUM(Marks) AS Total_Marks
FROM Student;
```


AVR()

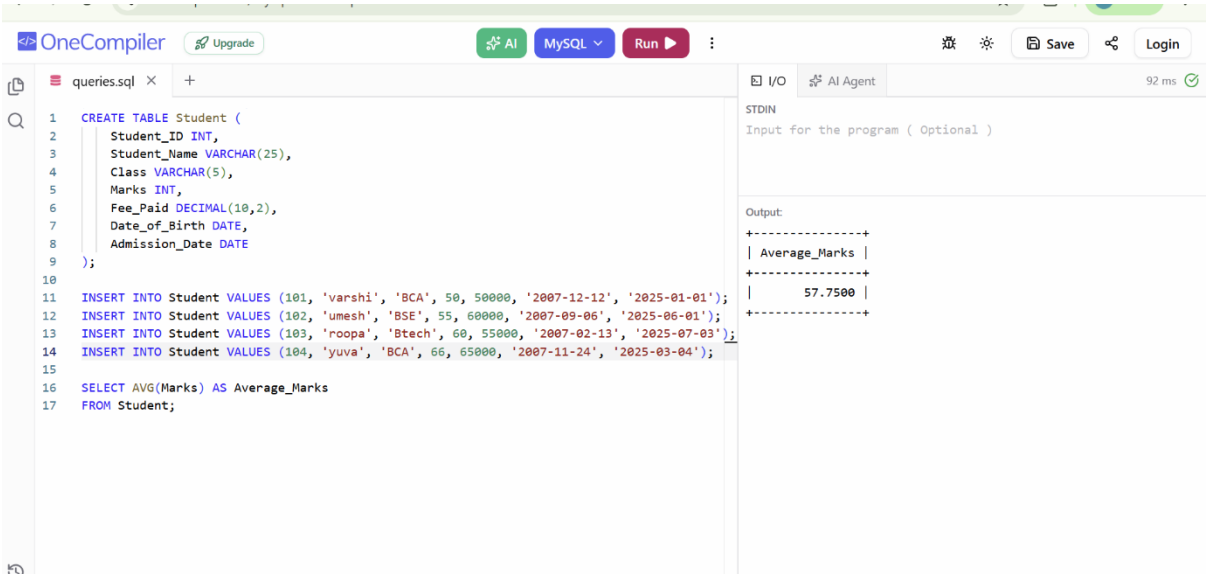
OneCompiler
Upgrade
AI
MySQL
Run
Save
Login
queries.sql
I/O
AI Agent
92 ms
STDIN
Input for the program (Optional)
Output:
+---------------+
| Average_Marks |
+---------------+
| 57.7500 |
+---------------+
CREATE TABLE Student (
Student_ID INT,
Student_Name VARCHAR(25),
Class VARCHAR(5),
Marks INT,
Fee_Paid DECIMAL(10,2),
Date_of_Birth DATE,
Admission_Date DATE
);
INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BCA', 66, 65000, '2007-11-24', '2025-03-04');
SELECT AVG(Marks) AS Average_Marks
FROM Student;

MAX()

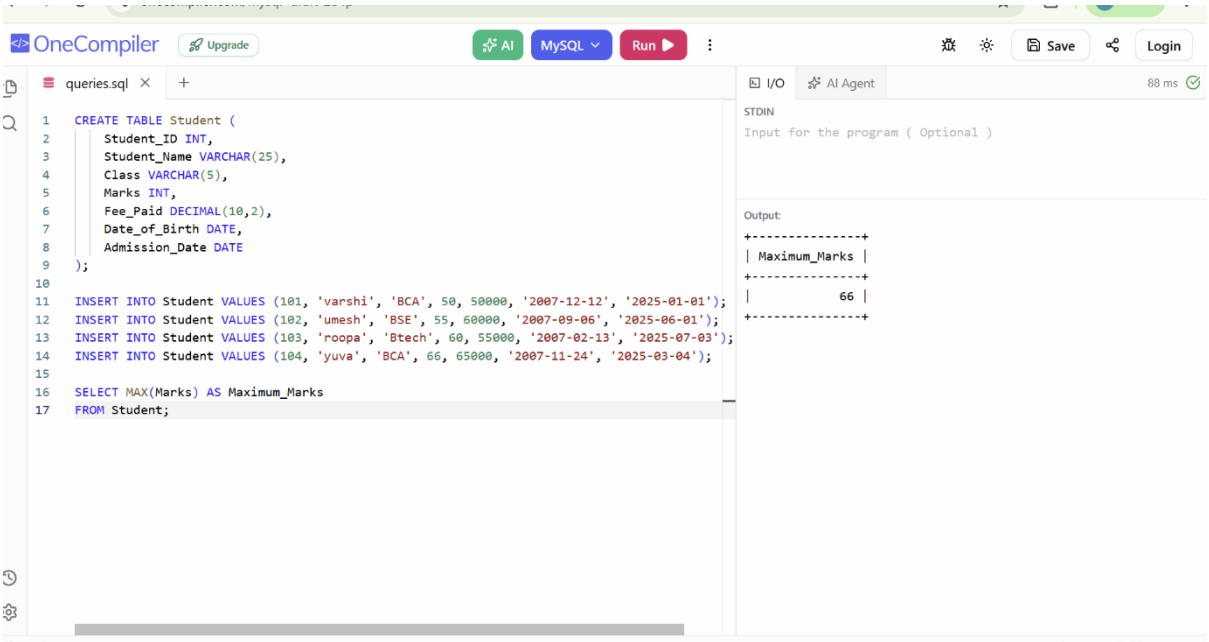
OneCompiler
Upgrade
AI
MySQL
Run
Save
Login
queries.sql
I/O
AI Agent
88 ms
STDIN
Input for the program (Optional)
Output:
+---------------+
| Maximum_Marks |
+---------------+
| 66 |
+---------------+
CREATE TABLE Student (
Student_ID INT,
Student_Name VARCHAR(25),
Class VARCHAR(5),
Marks INT,
Fee_Paid DECIMAL(10,2),
Date_of_Birth DATE,
Admission_Date DATE
);
INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BCA', 66, 65000, '2007-11-24', '2025-03-04');
SELECT MAX(Marks) AS Maximum_Marks
FROM Student;

MIN()

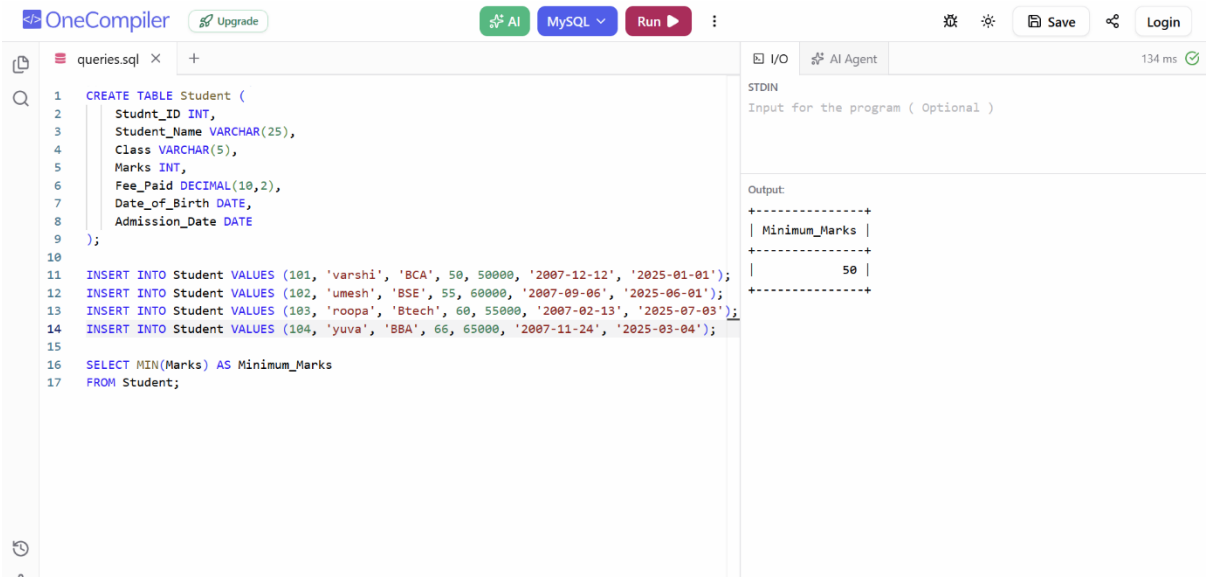
OneCompiler
Upgrade
AI
MySQL
Run
Save
Login
queries.sql
I/O
AI Agent
134 ms
STDIN
Input for the program (Optional)
Output:
CREATE TABLE Student (
Studnt_ID INT,
Student_Name VARCHAR(25),
Class VARCHAR(5),
Marks INT,
Fee_Paid DECIMAL(10,2),
Date_of_Birth DATE,
Admission_Date DATE
);
INSERT INTO Student VALUES (101, 'varshi', 'BCA', 50, 50000, '2007-12-12', '2025-01-01');
INSERT INTO Student VALUES (102, 'umesh', 'BSE', 55, 60000, '2007-09-06', '2025-06-01');
INSERT INTO Student VALUES (103, 'roopa', 'Btech', 60, 55000, '2007-02-13', '2025-07-03');
INSERT INTO Student VALUES (104, 'yuva', 'BBA', 66, 65000, '2007-11-24', '2025-03-04');
SELECT MIN(Marks) AS Minimum_Marks
FROM Student;
+---------------+
| Minimum_Marks |
+---------------+
| 50 |
+---------------+