

Practical-9

localhost:8080/inventory/101

Pretty print ☒

```
{
  "bookId": 101,
  "totalStock": 5,
  "availableStock": 5
}
```

POST

▼

http://localhost:8080/orders

☰ Docs ●

Params

Authorization

Headers 8

Body ●

Scripts

Settings

☐ none

☐ form-data

☐ x-www-form-urlencoded

☒ raw

☐ binary

☐ G

```
1  {
2    "userId": 501,
3    "bookId": 101
4  }
```

Body

Cookies

Headers 5

Test Results



↺

{ } JSON ▼

▶ Preview

 Visualize ▼

```
1  {
2    "id": 1,
3    "userId": 501,
4    "bookId": 101,
5    "status": "BORROWED"
6  }
```

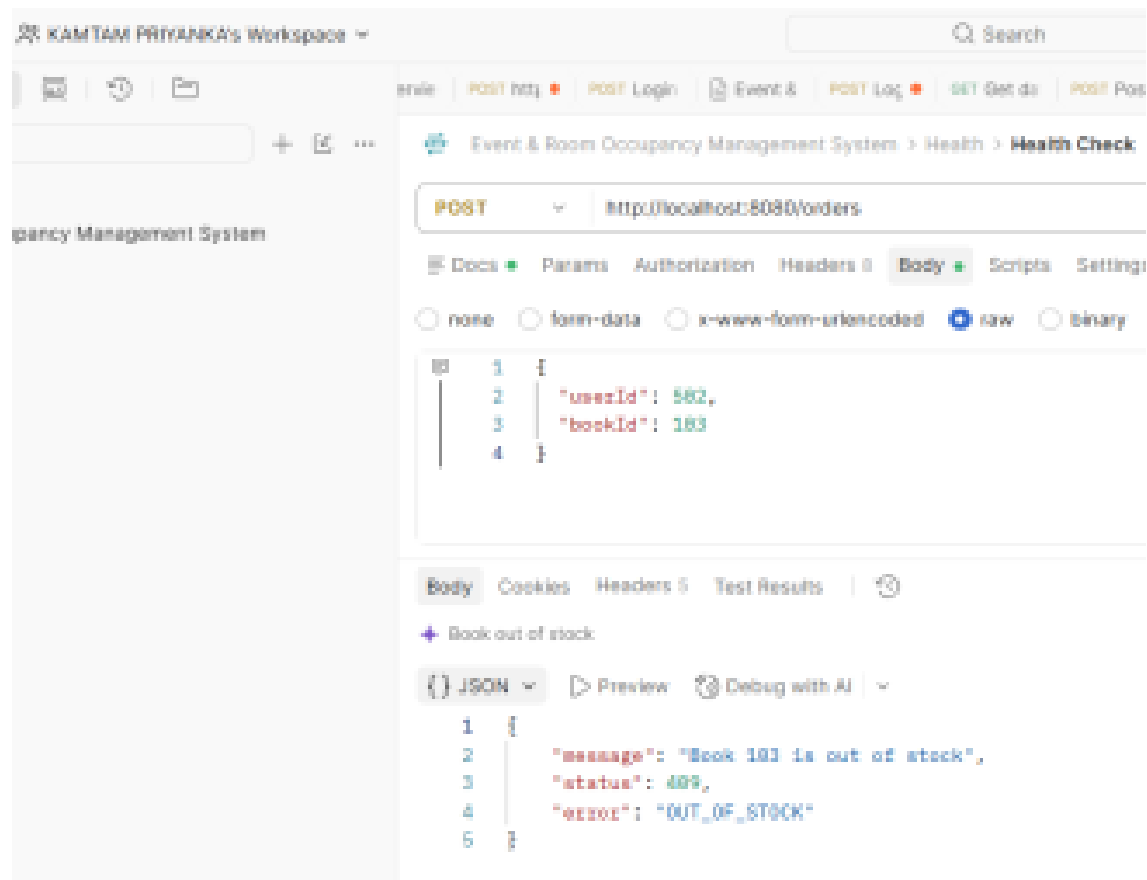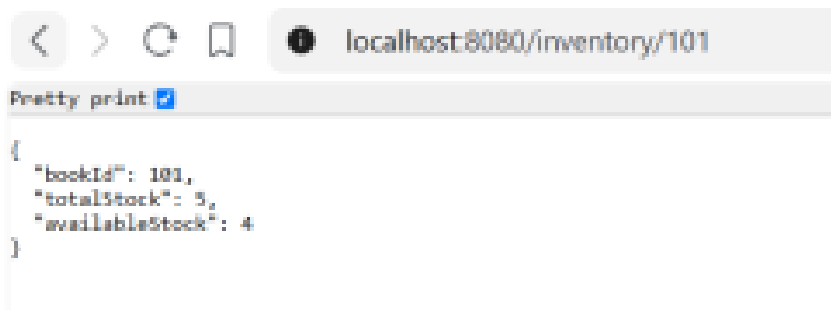

KAMTAM PRIYANKA's Workspace

Search

Event & Room Occupancy Management System > Health > Health

POST http://localhost:8000/gateway/orders

Docs Params Authorization Headers 8 Body Scripts

none form-data x-www-form-urlencoded raw b

```

1 {
2   "userId": 581,
3   "bookId": 101
4 }

```

Body Cookies Headers 4 Test Results

{ } JSON Preview Visualize

```

1 {
2   "id": 2,
3   "userId": 581,
4   "bookId": 101,
5   "status": "BORROWED"
6 }

```

```

postgres=# CREATE DATABASE bookflow;
CREATE DATABASE
postgres=# \c bookflow
You are now connected to database "bookflow" as user "postgres".
bookflow=# \dt
Did not find any tables.

```

```

bookflow=# \dt
          List of tables
 Schema |   Name   | Type  | Owner
-----+-----+-----+-----
 public | inventory | table | postgres
 public | orders   | table | postgres
(2 rows)

```

```

bookflow=# INSERT INTO inventory
bookflow=# (book_id, total_stock, available_stock)
bookflow=# VALUES
bookflow=# (101, 5, 5),
bookflow=# (102, 3, 3),
bookflow=# (103, 2, 0);
INSERT 0 3

```

```

bookflow=# SELECT * FROM inventory;

```

book_id	available_stock	total_stock
101	5	5
102	3	3
103	0	2

```

(3 rows)

```

```

2026-10-01T12:02:30.250+05:30 INFO 23396 --- [demo] [nio-8080-exec-1] o.s.web.servlet.DispatcherServlet : Completed initialization in 1 ms

```

```

Hibernate:
    select
        i1_0.book_id,
        i1_0.available_stock,
        i1_0.total_stock
    from
        inventory i1_0
    where
        i1_0.book_id=?

```

```

Hibernate:
    select
        i1_0.book_id,
        i1_0.available_stock,
        i1_0.total_stock
    from
        inventory i1_0
    where
        i1_0.book_id=?

```

```
bookflow=# SELECT * FROM inventory;
 book_id | available_stock | total_stock 
-----+-----+-----
      101 |                5 |           5
      102 |                3 |           3
      103 |                0 |           2
(3 rows)
```

```
bookflow=# SELECT * FROM inventory;
 book_id | available_stock | total_stock 
-----+-----+-----
      102 |                3 |           3
      103 |                0 |           2
      101 |                4 |           5
(3 rows)
```

```
bookflow=# SELECT * FROM orders;
 id | book_id | status  | user_id 
-----+-----+-----+-----
   1 |     101 | BORROWED |     501
(1 row)
```

```
INFO:      127.0.0.1:64794 - "POST /gateway/orders HTTP/1.1" 200
OK
```

```
bookflow=# SELECT * FROM inventory;
```

book_id	available_stock	total_stock
102	3	3
103	0	2
101	3	5

(3 rows)

```
bookflow=# SELECT * FROM orders;
```

id	book_id	status	user_id
1	101	BORROWED	501
2	101	BORROWED	501

(2 rows)