


# FLOAT

Here are all the support classes:

- 
- `.float-start`
  - `.float-end`
  - `.float-none`
  - `.float-sm-start`
  - `.float-sm-end`
  - `.float-sm-none`
  - `.float-md-start`
  - `.float-md-end`
  - `.float-md-none`
  - `.float-lg-start`
  - `.float-lg-end`
  - `.float-lg-none`
  - `.float-xl-start`
  - `.float-xl-end`
  - `.float-xl-none`
  - `.float-xxl-start`
  - `.float-xxl-end`
  - `.float-xxl-none`

```
</head>  
<body>  
  <div class="float-start">SARANAM AYYAPPA</div>  
  <br />  
  <div class="float-end">SARANAM AYYAPPA</div>  
  <br />  
  <div class="float-none">SARANAM AYYAPPA</div>  
</body>
```

SARANAM AYYAPPA

SARANAM AYYAPPA

SARANAM AYYAPPA

# INTERACTIONS

## INTERACTION CONTAINS 2

1)TEXT SELECTION


2)POINTER EVENT

```
<body>  
  <div class="user-select-all">SARANAM AYYAPPA</div>  
  <br />  
  <div class="user-select-auto">SARANAM AYYAPPA</div>  
  <br />  
  <div class="user-select-none">SARANAM AYYAPPA</div>  
</body>
```

All → can select all

Auto → can select only particular word

None → we cant select it

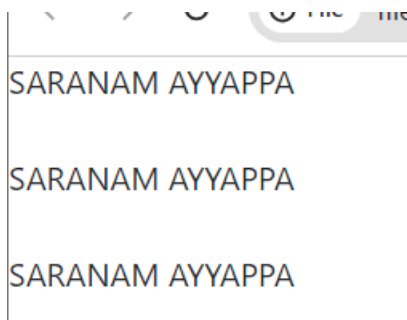

SARANAM AYYAPPA

SARANAM AYYAPPA


SARANAM AYYAPPA

Pointer ->

```
<body>  
  <a href="https://openai.com/index/chatgpt/" class="pe-auto">chatgpt</a>  
  <a href="https://openai.com/index/chatgpt/" class="pe-none">chatgpt</a>  
</body>
```

Auto → will redirect to next page

None → will not redirect to next page

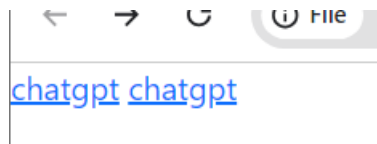

# OVERFLOW

## Overflow #

Adjust the `overflow` property on the fly with four default values and classes. These classes are not responsive by default.

The image shows four examples of the `overflow` property in action, each in a light gray box. The text in each box is truncated to fit the width of the box. The first box shows `overflow-auto` with a vertical scrollbar. The second box shows `overflow-hidden` with no scrollbar. The third box shows `overflow-visible` with no scrollbar. The fourth box shows `overflow-scroll` with a horizontal scrollbar. Below these examples is a code block containing the HTML for each example. Red arrows point from the code snippets to the corresponding visual examples above them.

Examples of overflow behavior:

- `overflow-auto`: This is an example of using `.overflow-auto` on an element with set width and height.
- `overflow-hidden`: This is an example of using `.overflow-hidden` on an element.
- `overflow-visible`: This is an example of using `.overflow-visible` on an element with set width and height.
- `overflow-scroll`: This is an example of using `.overflow-scroll` on an element with set width and height.

Code snippets:

```
<div class="overflow-auto">...</div>  
<div class="overflow-hidden">...</div>  
<div class="overflow-visible">...</div>  
<div class="overflow-scroll">...</div>
```