

VISVESVARAYA TECHNOLOGICAL UNIVERSITY

Jnana Sangama, Belagavi – 590014, Karnataka



DBMS MINI PROJECT REPORT

On

“COURIER MANAGEMENT”

Submitted in the partial fulfillment of the requirement for the 3rd Semester

Bachelor of Engineering In COMPUTER SCIENCE AND ENGINEERING

Submitted by

UMME SAIRA Z	1SP22CS110
USHA M M	1SP22SC112
VARSHITH M	1SP22CS116
VARUN KUMAR V	1SP22CS119

Under the guidance of

Mrs. SUSHMA

Asst. Professor, Dept. of CSE
SEACET, Bangalore.



2023 – 2024

Department Of Computer Science and Engineering

**SEA COLLEGE OF ENGINEERING AND TECHNOLOGY
BANGALORE – 560036**

SEA COLLEGE OF ENGINEERING AND TECHNOLOGY

(Affiliated to VTU, Belgaum)

K R Puram, Bangalore - 560036



DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

CERTIFICATE

This is to certify that the Mini Project work entitled "**COURIER MANAGEMENT**" is a Bonafede work carried out by

Umme Saira Z(1SP22CS110)

USHA M M(1SP22CS112)

VARSHITH M(1SP22CS116)

VARUN KUMAR V(1SP22CS119)

In partial fulfillment for the award of Degree of bachelor's in computer science and engineering of Visvesvaraya Technological University, Belagavi during the year 2023-2024. It is certified that all the corrections/suggestions indicated for internal assessment have been incorporated in the Report. The report has been approved as it satisfies the academic requirements in respect of Mini-Project work prescribed.

Signature of the Guide
Mrs.Sushma BA

Signature of the HOD

ACKNOWLEDGEMENT

We are extremely thankful to **Mr.Venkatanarayana**, Principal, SEACET., Bengaluru, for providing us the academic ambience and everlasting motivation to carry out this work and shaping our careers.

We express our sincere gratitude to **Dr.Krishna Kumar**, HOD, Dept. of Computer Science and Engineering, SEACET., Bengaluru, for his stimulating guidance, continuous encouragement and motivation throughout the course of present work.

We also wish to extend our thanks to **Mrs. Sushma B A**, Department of Computer Science and Engineering, for their expert guidance and constructive suggestions to improve the quality of this work.

We would also like to thank all other teaching and technical staffs of Department of Information Science and Engineering, who have directly or indirectly helped us in the completion of this Project Work.

And lastly we would hereby acknowledge and thank our parents who have been a source of inspiration and also instrumental in the successful completion of this project.

Umme Saira Z (1SP22CS110)

Usha M M(1SP22CS112)

Varshith M(1SP22CS116)

Varun Kumar V(1SP22CS119)

ABSTRACT

This **Courier Management System** Project will have different modules. The login section will have login facility for the admin and for the user who will operate this system. While taking orders from its customers, it will take all the details of its customers who is placing the orders and all the details for the recipient such as its address, name, mobile number. Through the tracking id, customers or its recipient will able to track their products from any location using internet. It will provide status of the product after placing orders within 1 minute. The admin can manipulate the data through admin login page and add any new consignment if required. The profile section shows the data of the user and the pricing section of the project shows the price that will be charged for the consignment according to the weight categories.

Using the courier service person can easily send his/her parcel to other person in the particular destination within the time.

CONTENTS

CHAPTERS	TOPIC	PAGE NO
Chapter 1	Introduction	3-4
Chapter 2	Requirements	5
Chapter 3	Entity Relationship Diagram	6-8
Chapter 4	Schema Diagram	9-11
Chapter 5	Implementation	12-50
Chapter 6	Snapshots	51-57
	Conclusion	58
	References	59

CHAPTER 1

Introduction

This Courier Management System Project will have different modules. The login section will have login facility for the admin and for the user who will operate this system. While taking orders from its customers, it will take all the details of its customers who is placing the orders and all the details for the recipient such as its address, name, mobile number. During billing process system will generate a tracking id for their products. Through this tracking id, customers or its recipient will able to track their products from any location using internet. It will provide status of the product after placing orders within 1 minute.

The courier service is one of the solutions of these problems. It is used to send some things to any person in the world within time. The courier company has number of branches, which are spread over the country or the world. So that when person wants to send things then he has to contact at nearest courier service branch. The courier company creates the schedule & gives internal/external services. The courier service work as destination office or source office.

In modern age, as time increase, needs & requirements of the person are also increased. They want more facility & try to do their task quickly & within time. But they can not get all the things at nearest market or area, so they have to import the things from any place in the world.

Within the country, the things can be imported through post service. But it consumes the time & sometimes problem of damage or missing occur. Where as in the international market, the one way is shipping. But it also requires more time.

Motivation behind this project:

To gain maximum business region, customer demands good service. So to make more profit and gain maximum business region, their administration must also have a system to tackle all these problems on time. Its administration can take immediate orders and provide a receipt which will include all the details of the products along with appropriate price to their customers. Thus saving time and eliminating line making process.

Features of Purposed System:

These are the important features of the project Courier Management System:

- ☐ In computer system of the courier service computation of the rate is easily & quickly done.
- ☐ Computer system of the courier service provide fast access.
- ☐ Using this computerized system, bill issued procedure becomes fast.
- ☐ In computer system the person has to fill the various forms & number of copies of the forms can be easily generated at a time.
- ☐ In computer system, it is not necessary to create the Manifest but we can directly print it, which saves our time.
- ☐ It contain better storage capacity.
- ☐ Accuracy in work.
- ☐ Easy & fast retrieval of information.
- ☐ Well designed reports.
- ☐ Decrease the load of the person involve in existing manual system.
- ☐ Access of any information individually.
- Work becomes very speedy.
- Easy to update information.

CHAPTER 2

REQUIREMENTS

System Requirements:

Software Requirement:

- Apache Server 2.0
- PHP Version 5.3 or above
- MySQL Version 5.5 or above
- Latest browser : Chrome, Firefox, Safari etc
- Operating System : Any (Linux, Windows, Mac etc)

Hardware Requirements:

- Processor Pentium IV or higher version.
- Ram 128 MB or above
- Hard Disk 150 MB or above

CHAPTER 3

ENTITY RELATIONSHIP DIAGRAM

An **Entity–relationship model (ER model)** describes the structure of a database with the help of a diagram, which is known as **Entity Relationship Diagram (ER Diagram)**. An ER model is a design or blueprint of a database that can later be implemented as a database. The main components of E-R model are: entity set and relationship set.

What is an Entity Relationship Diagram (ER Diagram)?

An ER diagram shows the relationship among entity sets. An entity set is a group of similar entities and these entities can have attributes. In terms of DBMS, an entity is a table or attribute of a table in database, so by showing relationship among tables and their attributes, ER diagram shows the complete logical structure of a database.

The geometric shapes and their meaning in an E-R Diagram. We will discuss these terms in detail in the next section(Components of a ER Diagram) of this guide so don't worry too much about these terms now, just go through them once.

Rectangle: Represents Entity sets.

Ellipses: Attributes

Diamonds: Relationship Set


Lines: They link attributes to Entity Sets and Entity sets to Relationship Set

Double Ellipses: Multivalued Attributes


Dashed Ellipses: Derived Attributes

Double Rectangles: Weak Entity Sets

Double Lines: Total participation of an entity in a relationship set

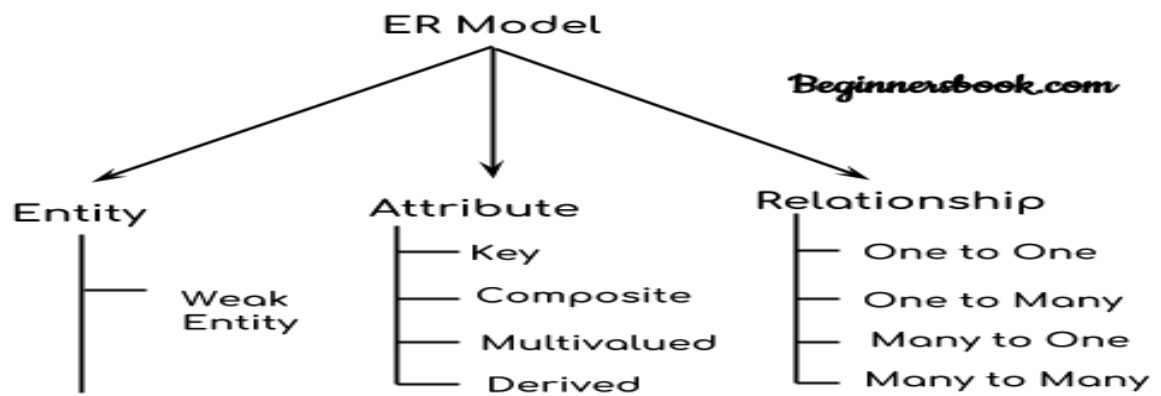

Components of ER Diagram

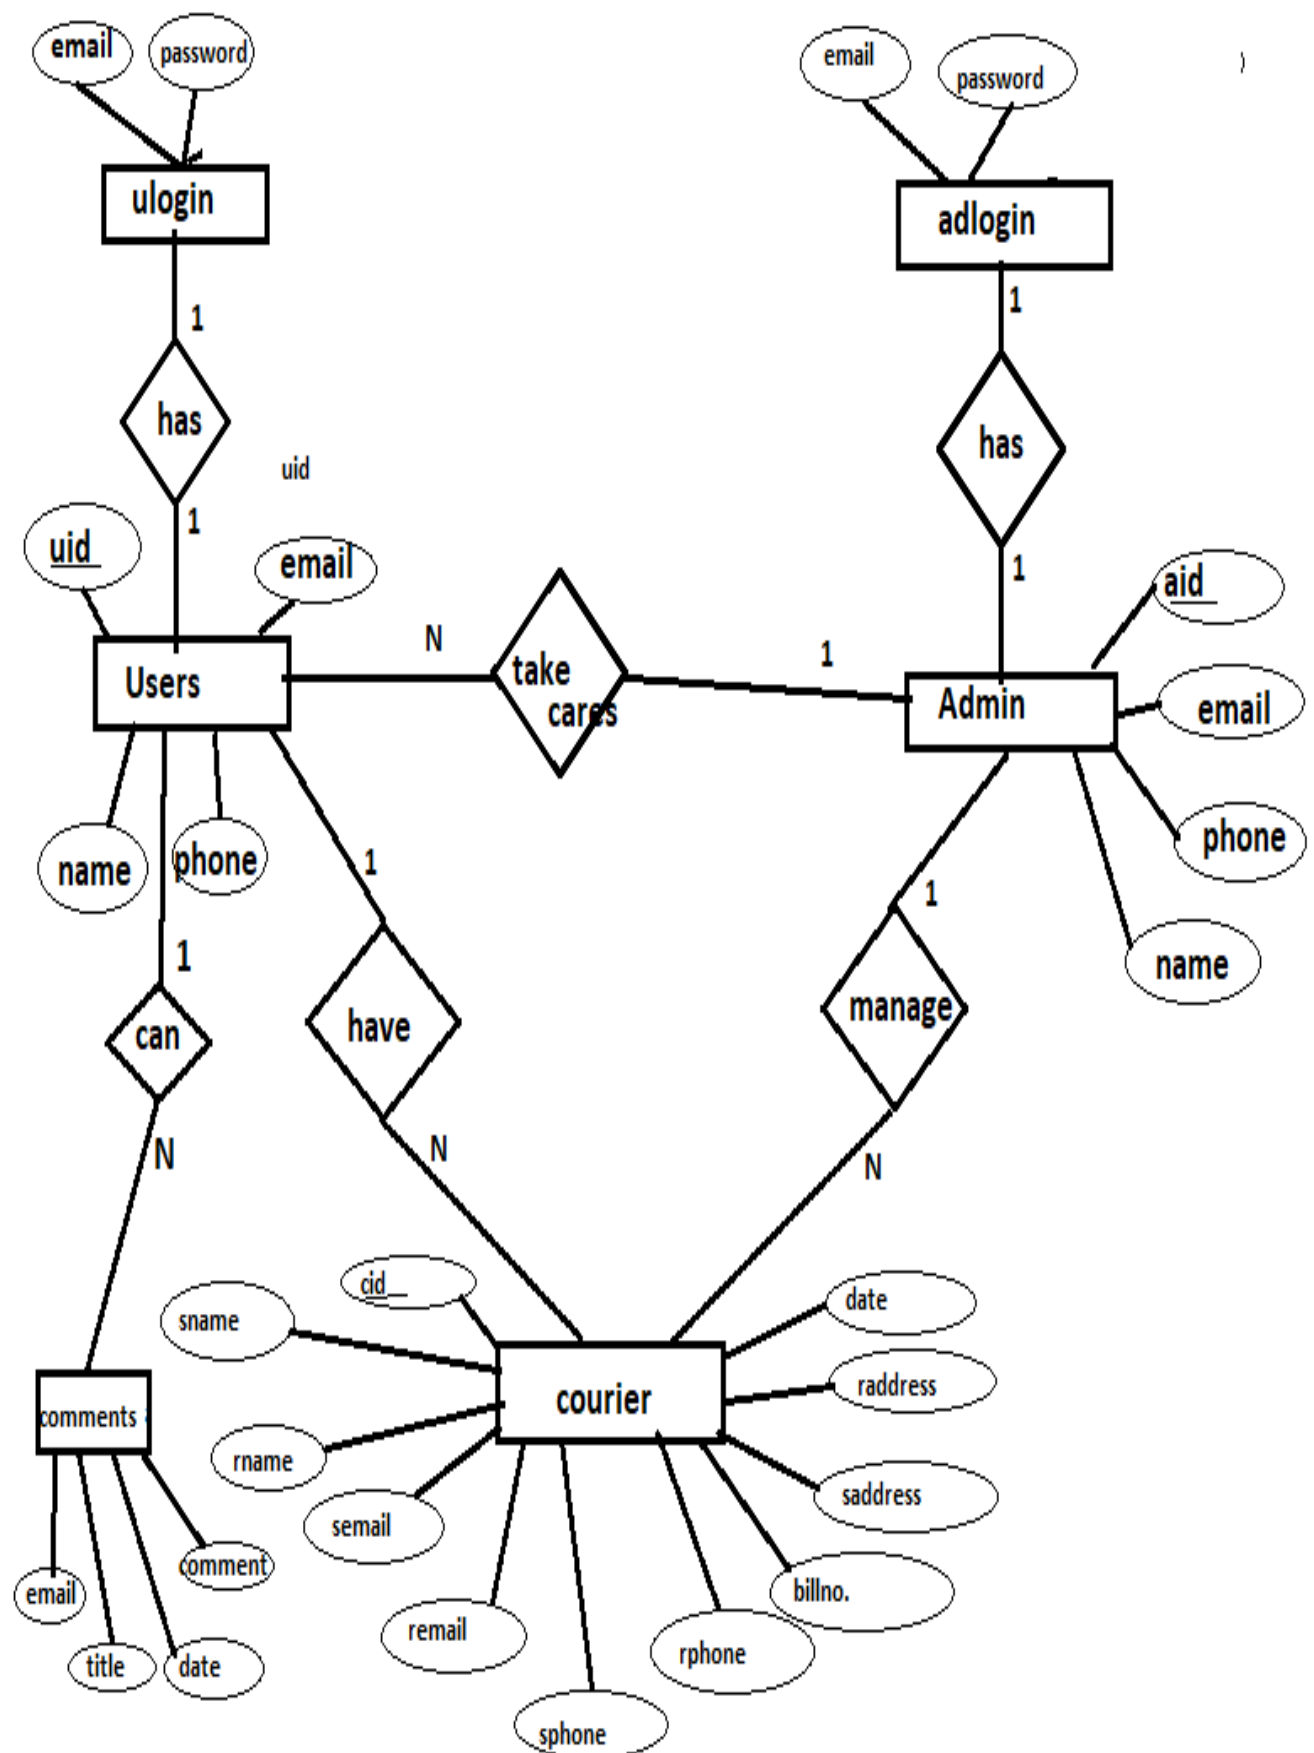

CHAPTER 4

ENTITY RELATIONSHIP SCHEMA DIAGRAM

A database schema is the skeleton structure that represents the logical view of the entire database. It defines how the data is organized and how the relations among them are associated. It formulates all the constraints that are to be applied on the data.

A database schema defines its entities and the relationship among them. It contains a descriptive detail of the database, which can be depicted by means of schema diagrams.

An Entity-Relationship Model (ERM) is an abstract and conceptual representation of data. Entity-relationship modeling is a database modeling method, used to produce a type of conceptual schema or semantic data model of a system, often a relational database, and its requirements in a top-down fashion.

In order to create an ER schema you must know three main concepts: entity, attribute and relationship.

Entity

Entity is the central concept of the Entity-Relationship model. An entity represents a description of the common features of set of objects of the real world. Examples of entities are Person, Car, Artist, and Album.

Attribute

An Attribute represents the properties of real world objects that are relevant for the application purposes. Attributes are associated with the concept of Entity, with the meaning that all the instances of the entity are characterized by the same set of attributes. In other words, the entity is a descriptor of the common properties of a set of objects, and such properties are expressed as attributes.

Relationship

A Relationship represents semantic connections between entities, like the association between an artist and his/her album, or between an artist and his/her reviews.

The possible values are one and many. Based on their maximum cardinality constraints, relationships are called

1. "one-to-one", if both relationships roles have maximum cardinality 1,
2. "one-to-many", if one relationship role has maximum cardinality 1 and the other role has maximum cardinality N,
3. "many-to-many", if both relationships roles have maximum cardinality N.

E-R Schema Normalization

E-R includes some concept that are not minimal but which can be specified through the usage of the three main concepts of the ER Schema. These concepts are:

- Multi value attributes.

Attributes of an object that can take a set of values represented by an entity and a relationship

- Composed attributes.

Attributes with an internal structure (i.e, an address can include different fields), represented by using an entity and a relationship


- N-ary relationships.

Represented by a central entity and two reports

- Relationships with attributes.

Relationships involving N entities

ER SCHEMA DIAGRAM FOR COURIER MANAGEMENT SYSTEM

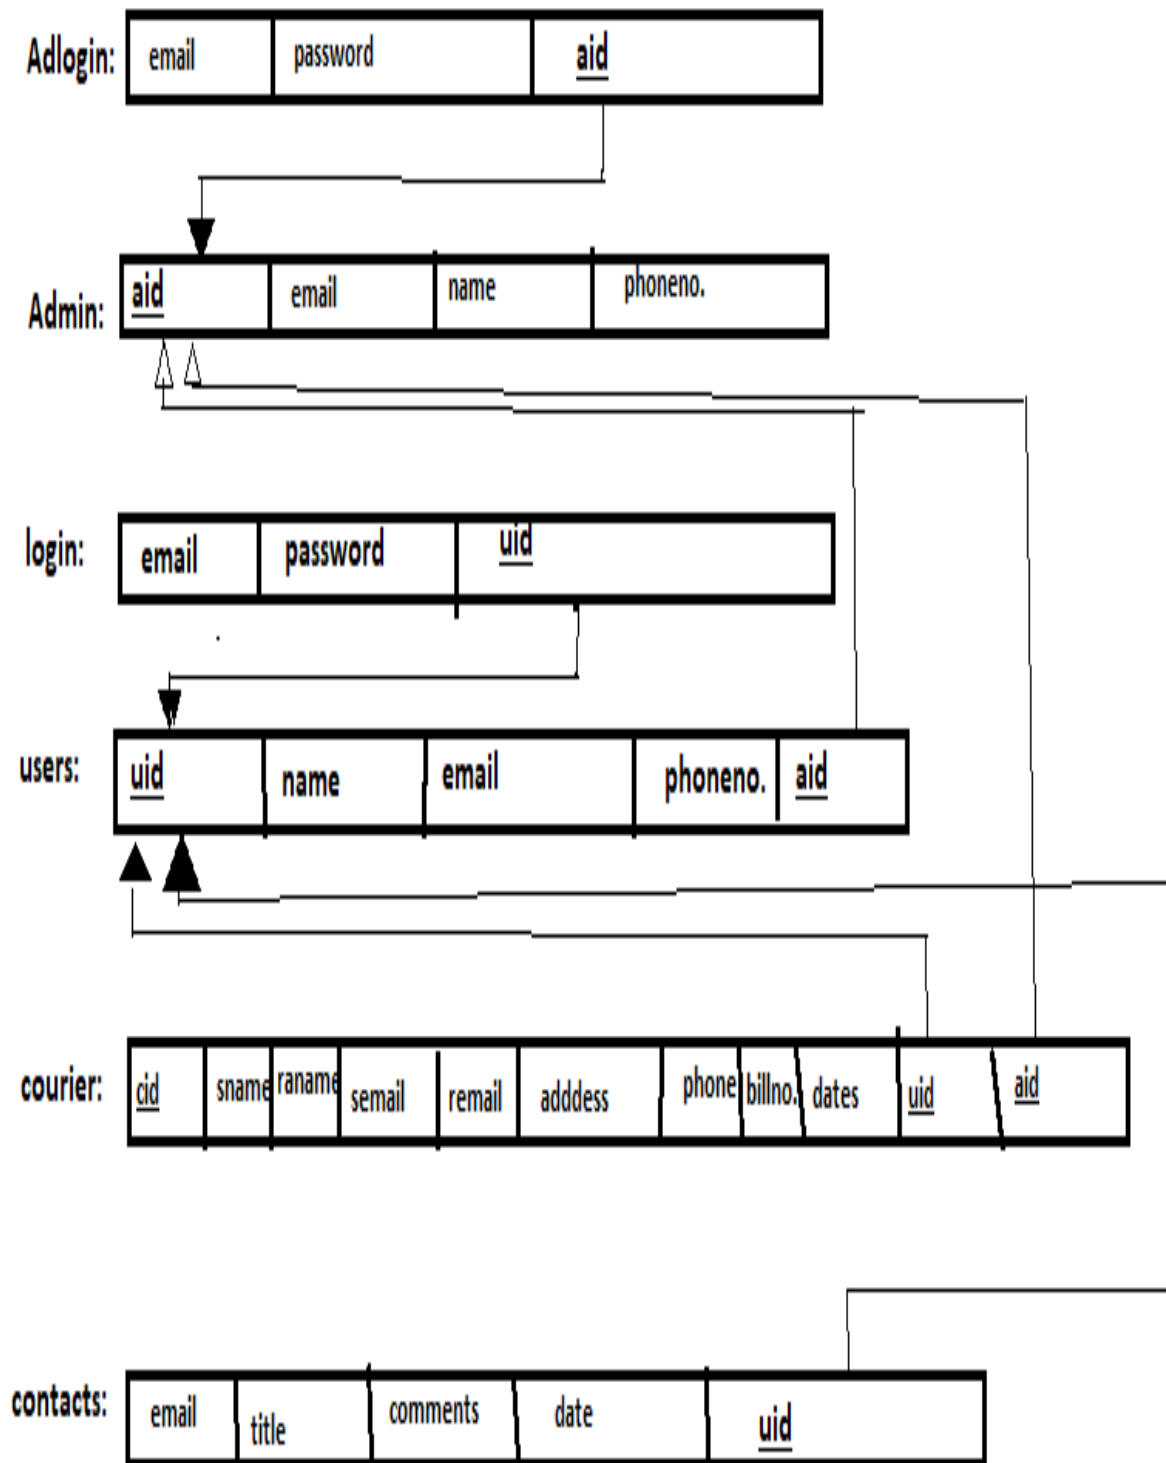

CHAPTER 5

IMPLEMENTATION

FRONTEND CODE

INDEX.PHP

```

<?php

require_once "dbconnection.php";
require_once "session.php";

if ($_SERVER["REQUEST_METHOD"] == "POST" && isset($_POST['submit'])) {

    $email = $_POST['email'];
    $password = $_POST['password'];

    $qry = "SELECT * FROM `login` WHERE `email`='$email' AND
`password`='$password'";
    $run = mysqli_query($dbcon, $qry);
    $row = mysqli_num_rows($run);
    if ($row < 1) {
?>
        <script>
            alert("Opps! plz Enter Your Username and Pswd again..");
            window.open('index.php', '_self');
        </script> <?php
        } else {
            $data = mysqli_fetch_assoc($run);
            $id = $data['u_id']; //fetch id value of user
            $email = $data['email'];
            $_SESSION['uid'] = $id; //now we can use it until session destroy
            $_SESSION['emm'] = $email;
            ?>
        <script>
            alert("SUCESSFULLY LOGGED IN");
            window.open('home/home.php', '_self');
            // changes made here
        </script> <?php

    }
}
?>

```

```

<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Login</title>
  <link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
  <style>
    body {
      background-image: url('images/10.jpg');
      background-repeat: no-repeat;
      background-size: cover;
    }
  </style>
</head>

<body>
  <h1 align='center' style="margin: 15px; color:seagreen;font-weight: bold;font-
family:'Times New Roman', Times, serif">TYPHOON COURIER SERVICE</h1>
  <hr />
  <P align='center' style="font-weight: bold;color:orange;font-family:'Times New Roman',
Times, serif">The Fastest Courier Service Ever</P>
  <div>
    <h5><a href="admin/adminlogin.php" style="float: right; margin-right:40px; color:blue;
margin-top:0px">AdminLogin</a></h5>
  </div>
  <div class="container" style="margin-top: 60px; width:50%;">
    <div class="row">
      <div class="col-md-12">
        <h2 style="color: #273c75;">Login</h2>
        <p style="color:#e84118;">Please Fill Your ⚡</p>
        <!-- <?php echo $error; ?> -->
        <form action="" method="post">
          <div class="form-group">
            <label>Email Address</label>
            <input type="email" name="email" class="form-control" placeholder="Enter
username/emailId" required />
          </div>
          <div class="form-group">
            <label>Password</label>
            <input type="password" name="password" class="form-control"
placeholder="Enter your password" required>
          </div>
          <div class="form-group">
            <input type="submit" name="submit" class="btn btn-primary" value="SignIn"
/>
            <button onclick="window.location.href='resetpswd.php'" class="btn btn-
danger" style="cursor:pointer">Reset Password</button>

```



```

</div>
        <p style="color: #e84118;">Don't have an account?▶▶ <a
href="register.php">Register here</a>.</p>

        </form>
    </div>
</div>
</div>
</body>

</html>

```

DBCONNECTION.PHP

```

<?php

$dbcon = mysqli_connect('localhost','root','','courierdb');

if($dbcon==false)
{
    echo "Database is not Connected!";
}

?>

```

REGISTER.PHP

```

<?php
require_once "dbconnection.php";
require_once "session.php";

if ($_SERVER["REQUEST_METHOD"] == "POST" && isset($_POST['submit'])) {

    $fullname = $_POST['name'];
    $phn = $_POST['ph'];
    $email = $_POST['email'];
    $password = $_POST['password'];
    $confirm_password = $_POST['confirm_password'];
    if($password==$confirm_password){

        $qry = "INSERT INTO `users` (`email`, `name`, `pnumber`) VALUES ('$email',
'$fullname', '$phn')";
        $run = mysqli_query($dbcon,$qry);

        if($run==true){

            $psqry = "INSERT INTO `login` (`email`, `password`, `u_id`) VALUES ('$email',
'$password',LAST_INSERT_ID() )";

```

```

$psrun = mysqli_query($dbcon,$psqry);
    ?> <script>
        alert('Registration Successfully :');
        window.open('index.php','_self');
    </script>
    <?php
}
}else{
    ?> <script>
        alert('Password mismatched!!');
    </script>
    <?php
}
}
?>
<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8">
        <meta name="viewport" content="width=device-width, initial-scale=1.0">
        <title>Sign Up</title>
        <link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
    </style>
    <body>
        {
        background-image:url('images/brr.png');
        background-repeat: no-repeat;
        background-size: cover;
        }
    </style>
</head>
<body><br>
    <div class="container">
        <div class="row">
            <div class="col-md-12">
                <h2 style="color:green">Register</h2>
                <p>Please fill this form to create an account.</p>
                <!-- <?php echo $success; ?>
                <?php echo $error; ?> -->
                <form action="" method="post">
                    <div class="form-group">
                        <label>Full Name</label>
                        <input type="text" name="name" class="form-control" required>
                    </div>
                    <div class="form-group">
                        <label>Phone Num.</label>
                        <input type="number" name="ph" class="form-control" required>
                    </div>

```

```

        <div class="form-group">
            <label>Email Address</label>
            <input type="email" name="email" class="form-control" required />
        </div>
        <div class="form-group">
            <label>Password</label>
            <input type="password" name="password" class="form-control" required>
        </div>
        <div class="form-group">
            <label>Confirm Password</label>
            <input type="password" name="confirm_password" class="form-control"
required>
        </div>
        <div class="form-group">
            <input type="submit" name="submit" class="btn btn-danger"
value="Register">
        </div>
        <p>Already have an account? <a href="index.php" style="color: red;">Login
here</a>.</p>
    </form>
</div>
</div>
<hr><p>Notice: If the email Id is registered before, it will not respond.</p>
<p>In this case, reset your password or register with different email Id....</p>
</div>
</body>
</html>

```

RESET.PHP

```

<?php

include('dbconnection.php');
session_start();
$gd = $_SESSION['gid'];

?>

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">

```

```

<title>Set Pswd</title>
<style>
  body {
    background-image: url('images/Reset.jpg');
    background-repeat: no-repeat;
    background-size: cover;
  }
</style>
</head>

<body>
  <form action="reset.php" method="POST">
    <table border="0px solid" style="margin-left: auto; margin-right:auto; margin-top:70px;
font-weight:bold;border-spacing: 50px 30px;">
      <th colspan="3" style="text-align: center;font-size:35px; width: 300px; height:
70px;font-weight:bold;">Enter your new Password th>
      <tr>
        <td colspan="2" style="font-size: 20px;font-weight:bold">New Password</td>
        <td><input type="password" name="pass" placeholder="enter new password"
style="font-size: 20px;font-weight:bold" required /></td>
      </tr>

      <tr>
        <td colspan="3" align="center">
          <input type="submit" name="submit" value="Update" style="background-color:
red; border-radius: 15px; width: 140px; height: 50px;" />
        </td>
      </tr>
    </table>

  </form>
</body>

</html>

<?php

```

```

if (isset($_POST['submit'])) {

    $password = $_POST['pass'];

    $qryd = "UPDATE `login` SET `password` = '$password' WHERE `u_id` = '$gd'";
    $run = mysqli_query($dbcon, $qryd);

    if ($run == true) {
        ?> <script>
            alert('Password Updated Successfully :');
            window.open('logout.php', '_self');
        </script>
        <?php
    }
}
?>

```

RESETPSWD.PHP

```

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
    <title>Conforming</title>
    <style>
        body
        {
            background-image:url('images/brr.png');
            background-repeat: no-repeat;
            background-size: cover;
        }
    </style>
</head>
<body>
    <h1 align='center' style="margin: 15px; color:green;font-weight: bold;font-family:'Times
New Roman', Times, serif">SUV COURIER</h1><hr/>
    <P align='center' style="font-weight: bold;color:yellow;font-family:'Times New Roman',
Times, serif">The Fastest Courier Service Ever</P>
    <div><h5 ><a href="index.php" style="float: right; margin-right:40px; color:blue; margin-
top:0px">SignIn</a></h5></div>
    <div class="container" style="margin-top: 60px; width:50%;">
        <div class="row">
            <div class="col-md-12">
                <h2 style="color: #273c75;">Verify The Following Details</h2>
                <p style="color:#e84118;">To Reset Your Passwprd 1 1</p>

```

```

<form action="resetpswd.php" method="get">
    <div class="form-group">
        <label>Email</label>
        <input type="email" name="email" class="form-control"
placeholder="Enter emailId" required>
    </div>
    <div class="form-group">
        <input type="submit" name="submit" class="btn btn-primary"
value="Verify" />
    </div>
    <p style="color: #e84118;">Don't have an account?▶▶ <a
href="register.php">Register here</a>.</p>

    </form>
</div>
</div>
</div>
</body>
</html>

```

```

<?php

require_once "dbconnection.php";
// require_once "session.php";

if (isset($_REQUEST['submit'])) {

    $email = $_REQUEST['email'];

    $qryy= "SELECT * FROM `login` WHERE `email`='$email'";
    $run= mysqli_query($dbcon,$qryy);
    $row= mysqli_num_rows($run);
    if($row<1){
        ?>
        <script>alert("Opps! Email not matched..Try again or Create New One");
        window.open('resetpswd.php','_self');
        </script> <?php
    }
    else{
        $data= mysqli_fetch_assoc($run);
        $id=$data['u_id'];
        session_start();
        $_SESSION['gid']=$id;

        ?> <script>

        window.open('reset.php','_self');
        </script>
        <?php

```

```

    }
}

?>

```

SESSION.PHP

```

<?php
// Start the session
session_start();

// if the user is already logged in then redirect user to welcome page
if (isset($_SESSION["uid"]) && $_SESSION["uid"] === true) {
    header("location: home/home.php");
    exit;
}

?>

```

HEAD.PHP

```

<!-- Admin header style for Admin pages -->

<!DOCTYPE html>
<html>
    <head>
        <title>Header Demo</title>
        <meta charset="UTF-8">
        <meta name="viewport" content="width=device-width,initial-scale=1.0">
        <style>
            *{
                margin: 0;
                padding: 0;

                background-repeat: no-repeat;
            }
            /* body {
                background-image: url('../images/plane.jpg');
                background-size: cover;
            } */
        .admintitle{
            position: relative;
            background-color: brown;
            color: #fff;
            height: 100px;
            line-height: 140px;

```

```

    }
  </style>
</head>
  <body bgcolor="#067d64">

```

ADMINLOGIN.PHP

```

<!-- admin logIn page and login logic -->
<?php

session_start();
if (isset($_SESSION['uid'])) {

    header('location: dashboard.php');
}
?>

<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Admin Login</title>
</head>

<body bgcolor="#067d64">
  <h5><a href="../index.php" style="float: right; margin-right:50px;
color:#00BCD4">BackToHome</a></h5><br>
  <h1 align='center' style="color: #00BCD4;font-size:60px">Admin Login</h1>
  <h6 align='center' style="color: #212121;font-weight: bold;font-size:15px">ONLY
ADMIN CAN LOGIN</h6>
  <form action="adminlogin.php" method="POST" style="margin: auto;">
    <table align="center">
      <tr>
        <td>Email_ID:</td>
        <td><input type="email" name="uname" require></td>
      </tr>
      <tr><td><br></td></tr>
      <tr>
        <td>Password:</td>
        <td><input type="password" name="pass" require></td>
      </tr>
      <tr>
        <td colspan="2">
          <hr>

```



```

</td>
</tr>
<tr>
  <td colspan="2" align="center"><input type="submit" name="login"
value="Login" style="cursor: pointer;"></td>
</tr>
</table>
</form>
</body>

</html>

```

```

<?php

include('../dbconnection.php');
if (isset($_POST['login'])) {
  $ademail = $_POST['uname'];
  $password = $_POST['pass'];
  $qry = "SELECT * FROM `adlogin` WHERE `email`='$ademail' AND
`password`='$password'";
  $run = mysqli_query($dbcon, $qry);
  $row = mysqli_num_rows($run);
  if ($row < 1) {
    ?>
    <script>
      alert("Only admin can login..");
      window.open('adminlogin.php', '_self');
    </script><?php
  }
  else {
    $data = mysqli_fetch_assoc($run);
    $id = $data['a_id'];
    $_SESSION['uid'] = $id;
    header('location:dashboard.php');
  }
}
?>

```

USERDELETED.PHP

<!-- this page will delete user & there courier when deleteUser link clicked in deleteusers.php by admin -->

```

<?php
include('../dbconnection.php');
$em= $_GET['emm'];

```

```
// $qrycr="DELETE FROM `courier` WHERE `semail`='$sem';
// $runcr = mysqli_query($dbcon,$qrycr);
// if($runcr==false){
//     echo "
// }

$qry = "DELETE FROM `users` WHERE `email`='$sem';
$run = mysqli_query($dbcon,$qry);

if($run==true){
?> <script>
    alert('User Removed Successfully :');
    window.open('deleteusers.php','_self');
</script>
<?php
}

?>
```

DASHBOARD.PHP

```
<!-- admin dashbord page with options for admin -->

<?php
session_start();
if(isset($_SESSION['uid'])){
    echo "";
}else{
    header('location: ../login.php');
}

?>

<?php
include('head.php');
?>

<style>
    body {
        background-image: url('../images/5.png');
        background-size: cover;
    }
</style>

<div class="admintitle">
    <div>
        <h5 ><a href="../index.php" style="float: left; margin-left:20px;
color:aliceblue;">LoginAsUser</a></h5>
```

```

<h5 ><a href="logout.php" style="float: right; margin-right:20px;
color:aliceblue;">LogOut</a></h5>
</div>
<h1 align='center' style="text-shadow: 0.1em 0.1em 0.15em #f9829b;">Welcome To
Admin Dashbord</h1>
</div>
<div align="center" style="margin-top:240px;">
<form style="position: center;color:lightblue;font-weight:bold;font-size:50px">

    <!-- <a href="insertdata.php">Insert Data</a><br><br> -->

    <!-- <a href="updatedata.php">Update Data</a><br><br> -->

    <a href="deletedata.php">Delete Data</a><br><br>

    <a href="deleteusers.php">Delete Users</a><br><br>
</form>

</div>
</body>
</html>

```

DELETEDATA.PHP

```

<!-- when admin click delete data link, page with filter options-->
<?php
session_start();
if(isset($_SESSION['uid'])){
    echo "";
}else{
    header('location: ../login.php');
}
?>

<?php
include('head.php');
?>

<div class="admintitle">
    <div>
        <h5 ><a href="dashboard.php" style="float: left; margin-left:20px;
color:aliceblue;">BackToDashboard</a></h5>
        <h5 ><a href="logout.php" style="float: right; margin-right:20px;
color:aliceblue;">LogOut</a></h5>
    </div>

```

```

<table width='80%' border="1px solid" style="margin-left: auto; margin-right:auto; margin-
top:30px; font-weight:bold;border-spacing: 5px 5px;">
  <tr style="background-color: indigo;">
    <th>No.</th>
    <th>Items Image</th>
    <th>Sender Name</th>
    <th>Receiver Name</th>
    <th>Sender Email</th>
    <th>Action</th>
  </tr>

  <?php
  include('../dbconnection.php');

  $qryd= "SELECT * FROM `courier`";
  $run= mysqli_query($dbcon,$qryd);

  if(mysqli_num_rows($run)<1){
    echo "<tr><td colspan='6'>No record found..</td></tr>";
  }
  else{
    $count=0;
    while($data=mysqli_fetch_assoc($run))
    {
      $count++;
      ?>
      <tr align="center">
        <td><?php echo $count; ?></td>
        <td> </td>
        <td><?php echo $data['sname']; ?></td>
        <td><?php echo $data['rname']; ?></td>
        <td><?php echo $data['semail']; ?></td>
        <td><a href="datadeleted.php?bb=<?php echo $data['billno']; ?>">Delete</a></td>
      </tr>
      <?php
    }
  }
  ?>
</table>
</div>

```

DELETEUSERS.PHP

```

<!-- when admin click delete user link, it displays all users with delete option -->
<?php
  session_start();
  if(isset($_SESSION['uid'])){

```

```

echo "";
}else{
    header('location: ../login.php');
}

?>

<?php
include('head.php');
?>

<div class="admintitle">
    <div>
        <h5 ><a href="dashboard.php" style="float: left; margin-left:20px;
color:aliceblue;">BackToDashboard</a></h5>
        <h5 ><a href="logout.php" style="float: right; margin-right:20px;
color:aliceblue;">LogOut</a></h5>
    </div>
    <h1 align='center' style="text-shadow: 0.1em 0.1em 0.15em #f9829b;">Showing All
Users</h1>
</div>
<div style="overflow-x:auto;">
<table width='80%' border="1px solid" style="margin-left: auto; margin-right:auto; margin-
top:30px; font-weight:bold;border-collapse: collapse;">
    <tr style="background-color: indigo;">
        <th>No.</th>
        <th>Users Name</th>
        <th>Email Id</th>
        <th>Action</th>
    </tr>
<?php

    include('../dbconnection.php');

    $qry= "SELECT * FROM `users`"; //AND `name` LIKE '%name%'
    $run= mysqli_query($dbcon,$qry);

    if(mysqli_num_rows($run)<1){
        echo "<tr><td colspan='6'>There is no Data in Database</td></tr>";
    }
    else{
        $count=0;
        while($data=mysqli_fetch_assoc($run))
        {
            $count++;
        }
        ?>
        <tr align="center">
            <td><?php echo $count; ?></td>
            <td><?php echo $data['name']; ?></td>
            <td><?php echo $data['email']; ?></td>

```

```

        <td><a href="usersdeleted.php?emm=<?php echo $data['email'];
?>">DeleteUser</a></td>
    </tr>
    <?php
    }
}

?>

</table>
</div>

```

DATADELETED.PHP

```

<!-- this page will delete data when deleted by admin -->

<?php
include('../dbconnection.php');
$billno= $_REQUEST['bb'];

$qry = "DELETE FROM `courier` WHERE `billno`='".$billno'";
$run = mysqli_query($dbcon,$qry);

if($run==true){
?> <script>
    alert('Courier Deleted Successfully :');
    window.open('deletedata.php','_self');//_self is used to open in same page
    //inside php after echo rem to put ";"
</script>
<?php
}
?>

```

DELETECOURIER.PHP

```

<!-- user will delete there courier themself when click delete link in track section-->
<?php
include('../dbconnection.php');
$billno= $_REQUEST['bb'];

$qry = "DELETE FROM `courier` WHERE `billno`='".$billno'";

```

```

$run = mysqli_query($dbcon,$qry);

if($run==true){
?> <script>
    alert('Courier Deleted Successfully :');
    window.open('trackMenu.php','_self');

    </script>
<?php
}
?>

```

EDITDATA.PHP

<!-- php code for updating new info to database, directed from updatationtable.php -->

```

<?php

if(isset($_POST['submit'])){

    include('../dbconnection.php');
    $idd = $_POST['idd'];

    $sname = $_POST['sname'];
    $rname = $_POST['rname'];
    $semail = $_POST['semail'];
    $remail = $_POST['remail'];
    $sphone = $_POST['sphone'];
    $rphone = $_POST['rphone'];
    $sadd = $_POST['saddress'];
    $radd = $_POST['raddress'];
    $wgt = $_POST['wgt'];
    $billn = $_POST['billno'];
    $originalDate = $_POST['date'];
    $newDate = date("Y-m-d", strtotime($originalDate));
    $imagenam = $_FILES['simg']['name'];
    $tempnam = $_FILES['simg']['tmp_name'];

    move_uploaded_file($tempnam,"../dbimages/$imagenam");

    $qry = "UPDATE `courier` SET
`sname`='$sname',`rname`='$rname',`semail`='$semail',`remail`='$remail',`sphone`='$sphone',
`rphone`='$rphone',`saddress`='$sadd',`raddress`='$radd',`weight`='$wgt',`billno`='$billn',`i
mage`='$imagenam',`date`='$newDate' WHERE `c_id`='$idd'";
    $run = mysqli_query($dbcon,$qry);

    if($run==true){

```

```

    ?> <script>
        alert('Data Updated Successfully :');
        window.open('home.php','_self');
    </script>
    <?php
}

}

?>

```

HEADER.PHP

```

<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
<title>Navbar with Logo Image</title>
<link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.2/css/bootstrap.min.css">

<style>
    .bs-example{
        margin: 0;
    }
</style>
</head>
<body>
<div class="bs-example">
    <nav class="navbar navbar-expand-md navbar-light bg-light">
        <a href="home.php" class="navbar-brand">
            
        </a>
        <button type="button" class="navbar-toggler" data-toggle="collapse" data-
target="#navbarCollapse">
            <span class="navbar-toggler-icon"></span>
        </button>

        <div class="collapse navbar-collapse" id="navbarCollapse">
            <div class="navbar-nav">
                <a href="home.php" class="nav-item nav-link active">Home</a>
                <a href="price.php" class="nav-item nav-link active">Price</a>
                <a href="courierMenu.php" class="nav-item nav-link">Courier</a>
                <a href="trackMenu.php" class="nav-item nav-link">Track</a>

                <a href="profile.php" class="nav-item nav-link">Profile</a>
            </div>
        </div>
    </nav>
</div>

```



```

<a href="contactUS.php" class="nav-item nav-link">ContactUs</a>
    <!-- mailto:sairaummesaira@gmail.com -->
</div>
<div class="navbar-nav ml-auto">
    <a href="../admin/logout.php" class="nav-item nav-link">AdminPage</a>
    <a href="../logout.php" class="nav-item nav-link">LogOut</a>
</div>
</div>
</nav>
</div>
</body>
</html>
<?php include('footer.php'); ?>

```

HEAD.PHP

```

<?php

session_start();
if(isset($_SESSION['uid'])){
    echo "";
}else{
    header('location: ../index.php');
}
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Home Page</title>
    <style>
        body
        {
            background-image:url('../images/1920_1080.jpg');
            background-repeat: no-repeat;
            background-size: cover;
        }
    </style>
</head>
<body>
    <?php include('header.php'); ?>
    <div align='center' style="font-weight: bold;font-family:'Times New Roman', Times,
serif"><br><br><br><br>
        <h2>SUV Courier Management Service</h2>
        <h4>The fastest courier service of India</h4><br><br>
    </div>

```

```

<h3>DBMS MINI PROJECT</h3>
    <h6>By Saira,Usha,Varshith,Varun</h6>
</div>
</body>
</html>

```

PRICE.PHP

```

<?php
session_start();
if(isset($_SESSION['uid'])){
    echo "";
}else{
    header('location: ../index.php');
}

?>
<?php
include('header.php');
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Pricing</title>
</head>
<body>
    <table width='30%' border="5px solid" style="margin-top:30px;margin-left:auto ;margin-
right:auto ;font-weight:bold;border-spacing: 5px 5px;border-collapse: collapse;">
        <tr style="background-color: green;font-size:30px">
            <th>Weight in Kg</th><th>Price</th>
        </tr>
        <tr>
            <td>0-1</td><td>120</td>
        </tr>
        <tr>
            <td>1-2</td><td>200</td>
        </tr>
        <tr>
            <td>2-4</td><td>250</td>
        </tr>
        <tr>
            <td>4-5</td><td>300</td>
        </tr>
    </table>

```

```

<tr>
  <td>5-7</td><td>400</td>
</tr>
<tr>
  <td>7-above</td><td>500</td>
</tr>
</table>
<h3 align="center" style="margin-top:20px;"> As per your courier's weight pay the
amount on:</h3>
<div style="margin-left:45% ;margin-right:auto ;font-weight:bold;">
<ol>
<li>UPI: abcd@sbi.com</li>
<li>GPay: 6362786223</li>
<li>PhnPay: 3565656555</li>
</ol>
</div>
</body>
</html>

```

TRACKMENU.PHP

```

<!-- when track menu is clicked it will show all courier placed by that User-->
<?php
session_start();
if(isset($_SESSION['uid'])){
  echo "";
}else{
  header('location: ../login.php');
}

?>
<?php include('header.php'); ?>

<div style="overflow-x:auto;">
<table width='80%' border="1px dash" style="margin-top:30px;margin-left:auto ;margin-
right:auto ;font-weight:bold;border-spacing: 5px 5px;border-collapse: collapse;">
  <tr style="background-color: green;font-size:30px">
    <th>No.</th>
    <th>Item's Image</th>
    <th>Sender Name</th>
    <th>Receiver Name</th>
    <th>Receiver Email</th>
    <th>Action</th>
  </tr>

  <?php
include('../dbconnection.php');

```

```

$email = $_SESSION['emm'];

$qryy= "SELECT * FROM `courier` WHERE `semail`='$email'";
$run= mysqli_query($dbcon,$qryy);

if(mysqli_num_rows($run)<1){
    echo "<tr><td colspan='6'>No record found..</td></tr>";
}
else{
    $count=0;
    while($data=mysqli_fetch_assoc($run))
    {
        $count++;
        ?>
        <tr align="center">
            <td><?php echo $count; ?></td>
            <td> </td>
            <td><?php echo $data['sname']; ?></td>
            <td><?php echo $data['rname']; ?></td>
            <td><?php echo $data['remail']; ?></td>
            <td>
                <a href="updationtable.php?sid=<?php echo $data['c_id']; ?>">Edit</a> ||
                <a href="deletecourier.php?bb=<?php echo $data['billno']; ?>">Delete</a>||
                <a href="status.php?sidd=<?php echo $data['c_id']; ?>">CheckStatus</a>
            </td>
        </tr>
        <?php
    }
    ?>
</table>
</div>

```

COURIERMENU.PHP

```

<!-- for 'courier' navbar, courier placing page -->
<?php
session_start();
if (isset($_SESSION['uid'])) {
    echo "";
} else {
    header('location: ../index.php');
}

?>
<?php

```

```

include('header.php');
$email = $_SESSION['emm'];
$uid = $_SESSION['uid'];
?>

<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Place Order</title>
  <style>
    body {
      background-image: url('../images/1920_1080.jpg');
      background-repeat: no-repeat;
      background-size: cover;
    }
  </style>
</head>

<body>
  <form action="courierMenu.php" method="POST" enctype="multipart/form-data">
    <div style="overflow-x:auto;">
      <table border="0px solid" style="margin: auto; font-weight:bold;border-spacing: 5px
15px;">
        <th colspan="4" style="text-align: center;background-color:#00FF00; width:
140px; height: 50px;">Fill The Details Of Sender & Receiver</th>
        <tr>
          <td colspan="4" style="text-align: center;">
            <hr>
          </td>
        </tr>
        <tr style="text-align: center;">
          <th colspan="2">SENDER</th>
          <th colspan="2">RECEIVER</th>
        </tr>
        <tr>
          <td colspan="4">
            <hr>
          </td>
        </tr>
        <tr>
          <th colspan="2"></th>
          <th colspan="2"></th>
        </tr>
        <tr>
          <td>Name:</td>
          <td><input type="text" name="sname" placeholder="Sender FullName"
required></td>

```

```

        <td>Name:</td>
        <td><input type="text" name="rname" placeholder="Sender FullName"
required></td>
    </tr>
    <tr>
        <td>Email:</td>
        <td><input type="text" name="semail" value="<?php echo $email; ?>"
readonly></td>

        <td>Email:</td>
        <td><input type="text" name="remail" placeholder="Receiver EmailId"
required></td>
    </tr>
    <tr>
        <td>PhoneNo.:</td>
        <td><input type="number" name="sphone" placeholder="sender number"
required></td>

        <td>PhoneNo.:</td>
        <td><input type="number" name="rphone" placeholder="receiver number"
required></td>
    </tr>
    <tr>
        <td>Address:</td>
        <td><input type="textfield" name="saddress" placeholder="sender address"
required></td>

        <td>Address:</td>
        <td><input type="textfield" name="raddress" placeholder="receiver address"
required></td>
    </tr>
    <tr>
        <td colspan="4">-----
-----</td>
    </tr>
    <tr>
        <td>Weight:</td>
        <td><input type="number" name="wgt" placeholder="weights in kg"
required></td>

        <td>Payment Id:</td>
        <td><input type="number" name="billno" placeholder="enter transition num"
required></td>
    </tr>
    <tr>
        <!-- <td>Date:</td><td><input type="date" name="date"></td> -->
        <td>Date:</td>

        <td><input type="date" name="date" value="<?php echo date('Y-m-d'); ?>" readonly
/></td>

```

```

<td>Items Image:</td>
    <td><input type="file" name="simg" ></td>
</tr>
<tr>
    <td colspan="4" align="center"><input type="submit" name="submit"
value="Place Order" style="background-color: orange; border-radius: 15px; width: 140px;
height: 50px;cursor:pointer;"></td>
</tr>
</table>
</div>
</form>
</body>

</html>

<?php

```

```

if (isset($_POST['submit'])) { //if we'll not give this,it will submit from with zero values.

```

```

    include('../dbconnection.php');

    $sname = $_POST['sname'];
    $rname = $_POST['rname'];
    $semail = $_POST['semail'];
    $remail = $_POST['remail'];
    $sphone = $_POST['sphone'];
    $rphone = $_POST['rphone'];
    $sadd = $_POST['saddress'];
    $radd = $_POST['raddress'];
    $wgt = $_POST['wgt'];
    $billn = $_POST['billno'];
    $originalDate = $_POST['date'];
    $newDate = date("Y-m-d", strtotime($originalDate));
    $imagenam = $_FILES['simg']['name'];
    $tempnam = $_FILES['simg']['tmp_name'];

    move_uploaded_file($tempnam, "../dbimages/$imagenam");

    $qry = "INSERT INTO `courier` (`sname`, `rname`, `semail`, `remail`, `sphone`, `rphone`,
`saddress`, `raddress`, `weight`, `billno`, `image`, `date`, `u_id`) VALUES ('$sname', '$rname',
'$semail', '$remail', '$sphone', '$rphone', '$sadd', '$radd', '$wgt', '$billn', '$imagenam',
'$newDate', '$uid');";
    $run = mysqli_query($dbcon, $qry);

    // $trackqry= "INSERT INTO `track` (`u_id`, `c_id`) VALUES ('$uid',
'LAST_INSERT_ID()');";

```

```

/$runtrack = mysqli_query($dbcon, $trackqry);

if ($run == true) {

    ?> <script>
        alert('Order Placed Successfully :');
        window.open('courierMenu.php', '_self');
    </script>
    <?php
    }
}

?>

```

STATUS.PHP

```

<?php
session_start();
if(isset($_SESSION['uid'])){
    echo "";
}else{
    header('location: ../login.php');
}

?>
<?php include('header.php');
include('../dbconnection.php');
$sidd = $_GET['sidd'];

$qryy= "SELECT * FROM `courier` WHERE `c_id`='$sidd'";
$run= mysqli_query($dbcon,$qryy);
$data=mysqli_fetch_assoc($run);
$stdate = $data['date'];
$tddate= date('Y-m-d');

if($stdate==$tddate){
    ?>
    <h1 style="margin: 100px;background-color:red;text-align:center">Status >> On The
Way...</h1>
    <br/><hr/>
    <div align='center'>

```



```

<button onclick="window.location.href='trackMenu.php'" style="background-
color:green;height:60px;width:130px;border-radius:15px;cursor:pointer">GoBack</button>
</div>
<?php
}
else{
?>
<h1 style="margin: 100px;background-color:red;text-align:center">Status >> Items
Delivered..<br /><p>HAVE A NICE DAY</p></h1>
<br/><hr/>
<div align='center'>
<button onclick="window.location.href='trackMenu.php'" style="background-
color:green;height:60px;width:130px;border-radius:15px;cursor:pointer">GoBack</button>
</div>
<?php
}
?>

```

PROFILE.PHP

```

<?php
session_start();
if(isset($_SESSION['uid'])){
    echo "";
}else{
    header('location: ../index.php');
}

?>
<?php
include('header.php');
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Profile</title>
    <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.css"
integrity="sha384-
TX8t27EcRE3e/ihU7zmQxVncDAy5uIKz4rEkgIXeMed4M0jlfIDPvg6uqKI2xXr2"
crossorigin="anonymous">
    <style>
        body {
            background-color: #f9f9fa

```

```

}

.padding {
padding: 3rem !important
}

.user-card-full {
overflow: hidden
}

.card {
border-radius: 5px;
-webkit-box-shadow: 0 1px 20px 0 rgba(69, 90, 100, 0.08);
box-shadow: 0 1px 20px 0 rgba(69, 90, 100, 0.08);
border: none;
margin-bottom: 30px
}

.m-r-0 {
margin-right: 0px
}

.m-l-0 {
margin-left: 0px
}

.user-card-full .user-profile {
border-radius: 5px 0 0 5px
}

.bg-c-lite-green {
background: -webkit-gradient(linear, left top, right top, from(#f29263), to(#ee5a6f));
background: linear-gradient(to right, #ee5a6f, #f29263)
}

.user-profile {
padding: 20px 0
}

.card-block {
padding: 1.25rem
}

.m-b-25 {
margin-bottom: 25px
}

.img-radius {
border-radius: 5px
}

```

```
h6 {
  font-size: 14px
}

.card .card-block p {
  line-height: 25px
}

@media only screen and (min-width: 1400px) {
  p {
    font-size: 14px
  }
}

.card-block {
  padding: 1.25rem
}

.b-b-default {
  border-bottom: 1px solid #e0e0e0
}

.m-b-20 {
  margin-bottom: 20px
}

.p-b-5 {
  padding-bottom: 5px !important
}

.card .card-block p {
  line-height: 25px
}

.m-b-10 {
  margin-bottom: 10px
}

.text-muted {
  color: #919aa3 !important
}

.b-b-default {
  border-bottom: 1px solid #e0e0e0
}

.f-w-600 {
  font-weight: 600
}
```

```

}

.m-b-20 {
margin-bottom: 20px
}

.m-t-40 {
margin-top: 20px
}

.p-b-5 {
padding-bottom: 5px !important
}

.m-b-10 {
margin-bottom: 10px
}

.m-t-40 {
margin-top: 20px
}

.user-card-full .social-link li {
display: inline-block
}

.user-card-full .social-link li a {
font-size: 20px;
margin: 0 10px 0 0;
-webkit-transition: all 0.3s ease-in-out;
transition: all 0.3s ease-in-out
}
</style>
</head>
<body>

<?php

include('../dbconnection.php');
$id= $_SESSION['uid'];
$qry= "SELECT * FROM `users` WHERE `u_id`='$id'";
$run= mysqli_query($dbcon,$qry);

$data = mysqli_fetch_assoc($run);

?>

```

```

<div class="page-content page-container" id="page-content">
  <div class="padding">
    <div class="row container d-flex justify-content-center">
      <div class="col-xl-6 col-md-12">
        <div class="card user-card-full">
          <div class="row m-l-0 m-r-0">
            <div class="col-sm-4 bg-c-lite-green user-profile">
              <div class="card-block text-center text-white">
                <div class="m-b-25">  </div>
                <h3 class="f-w-600"><?php echo $data['name']; ?></h3>
                <p>user</p> <i class=" mdi mdi-square-edit-outline feather icon-edit m-
t-10 f-16"></i>
              </div>
            </div>
            <div class="col-sm-8">
              <div class="card-block">
                <h6 class="m-b-20 p-b-5 b-b-default f-w-600">Information</h6>
                <div class="row">
                  <div class="col-sm-6">
                    <p class="m-b-10 f-w-600">Email</p>
                    <h6 class="text-muted f-w-400"><?php echo $data['email'];
?></h6>
                  </div>
                  <div class="col-sm-6">
                    <p class="m-b-10 f-w-600">Phone</p>
                    <h6 class="text-muted f-w-400"><?php echo $data['pnumber'];
?></h6>
                  </div>
                </div>
              </div>
              <div class="row">
                <hr><br><hr>
              </div>
              <ul class="social-link list-unstyled m-t-40 m-b-10">
                <h6>WE DID IT SUSHMA MAAM</h6>
              </ul>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
</body>
</html>

```

UPDATIONTABLE.PHP

```

<!-- when we click update any items, it gives table with prev info -->
<?php
session_start();
if(isset($_SESSION['uid'])){
    echo "";
}else{
    header('location: ../index.php');
}

?>

<?php
include('../dbconnection.php');

$id = $_GET['id'];
$query = "SELECT * FROM `courier` WHERE `c_id`='$id'";
$run = mysqli_query($dbcon,$query);
$data = mysqli_fetch_assoc($run);
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Place Order</title>

</head>
<body>
<form action="editdata.php" method="POST" enctype="multipart/form-data">
<div style="overflow-x:auto;">
    <table border="1px solid" style="margin-left: auto; margin-right:auto; margin-top:30px;
font-weight:bold;border-spacing: 5px 15px;">
        <th colspan="4" style="text-align: center;background-color:#00FF00; width: 140px;
height: 50px;">Update The Details As Required</th>
        <tr>
            <th colspan="2">SENDER</th><th colspan="2">RECEIVER</th>
        </tr>
        <tr>
            <th colspan="2"></th><th colspan="2"></th>
        </tr>
        <tr>
            <td>Name:</td><td><input type="text" name="sname" value="<?php echo
$data['sname'];?>" required></td>

```

```

<td>Name:</td><td><input type="text" name="rname" value="<?php echo
$data['rname'];?>" required></td>
</tr>
<tr>
<td>Email:</td><td><input type="text" name="semail" value="<?php echo
$data['semail'];?>" readonly></td>

<td>Email:</td><td><input type="text" name="remail" value="<?php echo
$data['remail'];?>" required></td>
</tr>
<tr>
<td>PhoneNo.:</td><td><input type="number" name="sphone" value="<?php echo
$data['sphone'];?>" required></td>

<td>PhoneNo.:</td><td><input type="number" name="rphone" value="<?php echo
$data['rphone'];?>" required></td>
</tr>
<tr>
<td>Address:</td><td><input type="textfield" name="saddress" value="<?php echo
$data['saddress'];?>" required></td>

<td>Address:</td><td><input type="textfield" name="raddress" value="<?php echo
$data['raddress'];?>" required></td>
</tr>
<tr><td colspan="4">-----
-----</td></tr>
<tr>
<td>Weight:</td><td><input type="number" name="wgt" value="<?php echo
$data['weight'];?>" required></td>

<td>ReceiptNo.:</td><td><input type="number" name="billno" value="<?php echo
$data['billno'];?>" required></td>
</tr>
<tr>
<td>Date:</td><td><input type="date" name="date" value="<?php echo date('Y-m-
d'); ?>" readonly /></td>
<td>Items Image:</td><td><input type="file" name="simg" value="<?php echo
$data['image'];?>" ></td>
</tr>
<tr>
<input type="hidden" name="idd" value="<?php echo $data['c_id']; ?>" />
<td colspan="4" align="center"><input type="submit" name="submit"
value="Update" style="background-color: orange; border-radius: 15px; width: 140px; height:
50px; cursor: pointer;"></td>
</tr>
</table>
</div>
</form>
</body>

```

BACKEND CODE

```
-- phpMyAdmin SQL Dump
-- version 5.0.3
-- https://www.phpmyadmin.net/
--
-- Host: 127.0.0.1
-- Generation Time: Dec 31, 2020 at 11:41 AM
-- Server version: 10.4.14-MariaDB
-- PHP Version: 7.4.11

SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
START TRANSACTION;
SET time_zone = "+00:00";

/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT
*/;
/*!40101 SET
@OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION
*/;
/*!40101 SET NAMES utf8mb4 */;

--
-- Database: `courierdb`
--

-- -----

--
-- Table structure for table `adlogin`
--

CREATE TABLE `adlogin` (
  `email` varchar(50) DEFAULT NULL,
  `password` varchar(50) DEFAULT NULL,
  `a_id` int(11) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;

--
-- Dumping data for table `adlogin`
--

INSERT INTO `adlogin` (`email`, `password`, `a_id`) VALUES
('premkumar1215225@gmail.com', '1215225', 1),
('himanshu.18is027@cambridge.edu.in', '1cd18is027', 2);

-- -----
```



```
-- Table structure for table `admin`
--
```

```
CREATE TABLE `admin` (
  `a_id` int(11) NOT NULL,
  `email` varchar(50) NOT NULL,
  `name` varchar(50) DEFAULT NULL,
  `pnumber` int(14) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--
-- Dumping data for table `admin`
--
```

```
INSERT INTO `admin` (`a_id`, `email`, `name`, `pnumber`) VALUES
(1, 'premkumar1215225@gmail.com', 'Prem', 63627862),
(2, 'himanshu.18is027@cambridge.edu.in', 'Himanshu Soni', 123456789);
```

```
-- -----
--
-- Table structure for table `contacts`
--
```

```
CREATE TABLE `contacts` (
  `id` int(11) NOT NULL,
  `email` varchar(50) NOT NULL,
  `subject` varchar(30) NOT NULL,
  `msg` varchar(300) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--
-- Dumping data for table `contacts`
--
```

```
INSERT INTO `contacts` (`id`, `email`, `subject`, `msg`) VALUES
(1, 'love@gmail.com', 'delay', 'I have courier 2 weeks ago but its not delivered yet..'),
(2, 'labh.18is033@cambridge.edu.in', 'Delay', 'gjndfjkgnhdfjkgn');
```

```
-- -----
--
-- Table structure for table `courier`
--
```

```
CREATE TABLE `courier` (
  `c_id` int(11) NOT NULL,
  `u_id` int(11) DEFAULT NULL,
  `semail` varchar(50) DEFAULT NULL,
  `remai` varchar(50) DEFAULT NULL,
```

```

`sname` varchar(50) DEFAULT NULL,
`rname` varchar(50) DEFAULT NULL,
`sphone` varchar(20) DEFAULT NULL,
`rphone` varchar(20) DEFAULT NULL,
`saddress` varchar(50) DEFAULT NULL,
`raddress` varchar(50) DEFAULT NULL,
`weight` int(11) DEFAULT NULL,
`billno` int(11) NOT NULL,
`image` text DEFAULT NULL,
`date` date NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;

--
-- Dumping data for table `courier`
--

INSERT INTO `courier` (`c_id`, `u_id`, `semail`, `remail`, `sname`, `rname`, `sphone`,
`rphone`, `saddress`, `raddress`, `weight`, `billno`, `image`, `date`) VALUES
(7, 4, 'love@gmail.com', 'himanshu@gmail.com', 'love', 'himanshu', '06362786223',
'6526652', 'KR puram,Bangalore,Karnataka', 'Boys hostel of Cambridge institute of
technology,j', 2, 22, 'cddd.jpeg', '2020-12-06'),
(8, 4, 'love@gmail.com', 'gyanshu@gmail.com', 'love', 'gyanshu', '06362786223',
'06362786223', 'KR puram,Bangalore,Karnataka', 'Boys hostel of Cambridge institute of
technology,j', 2, 3263, 'fc.png', '2020-12-06');

```

```

--
-- Table structure for table `login`
--

```

```

CREATE TABLE `login` (
  `email` varchar(50) DEFAULT NULL,
  `password` varchar(50) DEFAULT NULL,
  `u_id` int(11) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;

```

```

--
-- Dumping data for table `login`
--

```

```

INSERT INTO `login` (`email`, `password`, `u_id`) VALUES
('premkumar1215225@gmail.com', '12345', 1),
('love@gmail.com', '12345', 4);

```

```

--
-- Table structure for table `users`
--

```

```

CREATE TABLE `users` (
  `u_id` int(11) NOT NULL,
  `email` varchar(50) NOT NULL,
  `name` varchar(50) DEFAULT NULL,
  `pnumber` int(14) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;

--
-- Dumping data for table `users`
--

INSERT INTO `users` (`u_id`, `email`, `name`, `pnumber`) VALUES
(1, 'premkumar1215225@gmail.com', 'prem', 56665),
(4, 'pushpa@gmail.com', 'PushpaRaj', 2147483647);

--
-- Indexes for dumped tables
--

--
-- Indexes for table `adlogin`
--
ALTER TABLE `adlogin`
  ADD KEY `a_id` (`a_id`);

--
-- Indexes for table `admin`
--
ALTER TABLE `admin`
  ADD PRIMARY KEY (`a_id`),
  ADD UNIQUE KEY `email` (`email`);

--
-- Indexes for table `contacts`
--
ALTER TABLE `contacts`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `courier`
--
ALTER TABLE `courier`
  ADD PRIMARY KEY (`c_id`),
  ADD UNIQUE KEY `billno` (`billno`),
  ADD KEY `u_id` (`u_id`);

--
-- Indexes for table `login`

```

```

--
ALTER TABLE `login`
  ADD KEY `u_id` (`u_id`);

--
-- Indexes for table `users`
--
ALTER TABLE `users`
  ADD PRIMARY KEY (`u_id`),
  ADD UNIQUE KEY `email` (`email`);

--
-- AUTO_INCREMENT for dumped tables
--

--
-- AUTO_INCREMENT for table `admin`
--
ALTER TABLE `admin`
  MODIFY `a_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=3;

--
-- AUTO_INCREMENT for table `contacts`
--
ALTER TABLE `contacts`
  MODIFY `id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=3;

--
-- AUTO_INCREMENT for table `courier`
--
ALTER TABLE `courier`
  MODIFY `c_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=10;

--
-- AUTO_INCREMENT for table `users`
--
ALTER TABLE `users`
  MODIFY `u_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=5;

--
-- Constraints for dumped tables
--

--
-- Constraints for table `adlogin`
--
ALTER TABLE `adlogin`

```

```
ADD CONSTRAINT `adlogin_ibfk_1` FOREIGN KEY (`a_id`) REFERENCES `admin`
(`a_id`);

--
-- Constraints for table `courier`
--
ALTER TABLE `courier`
  ADD CONSTRAINT `courier_ibfk_1` FOREIGN KEY (`u_id`) REFERENCES `users`
(`u_id`) ON DELETE CASCADE;

--
-- Constraints for table `login`
--
ALTER TABLE `login`
  ADD CONSTRAINT `login_ibfk_1` FOREIGN KEY (`u_id`) REFERENCES `users`
(`u_id`) ON DELETE CASCADE;
COMMIT;

/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```

END OF IMPLEMENTATION CODE OF THE PROJECT


CHAPTER 6

SNAPSHOTS


1.USER LOGIN PAGE




2. HOME PAGE

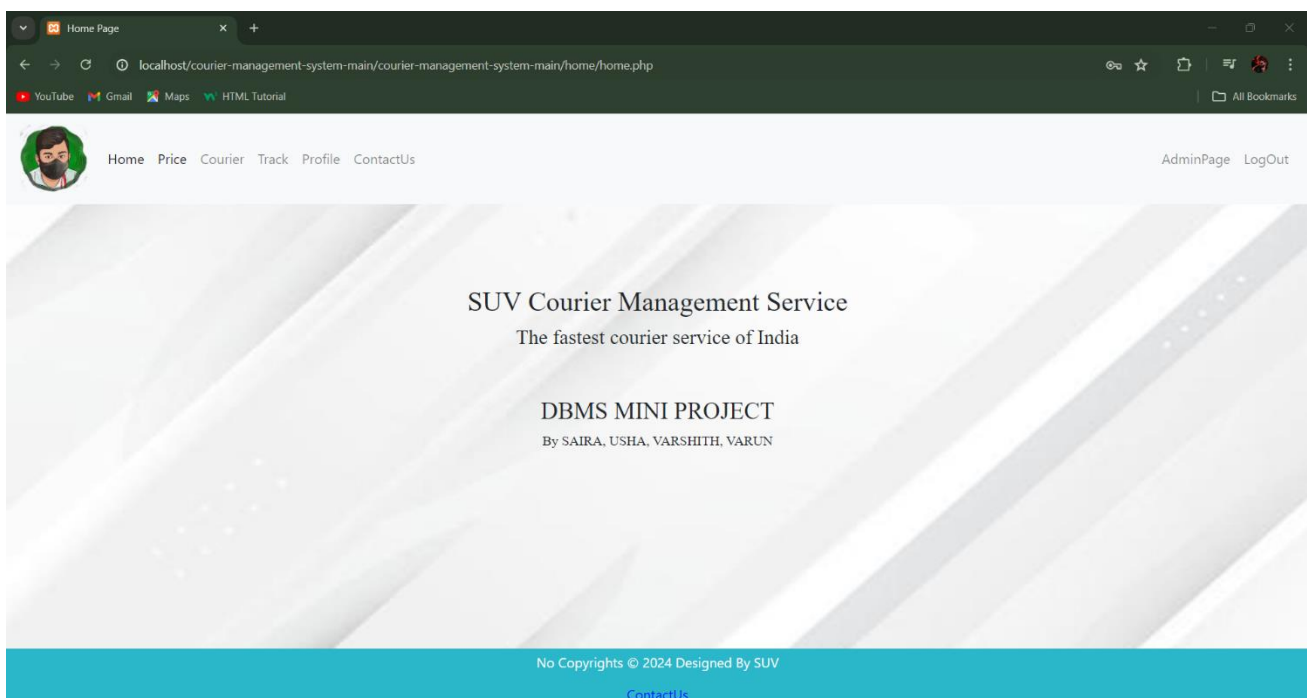

5. TRACK STATUS OF PARCEL

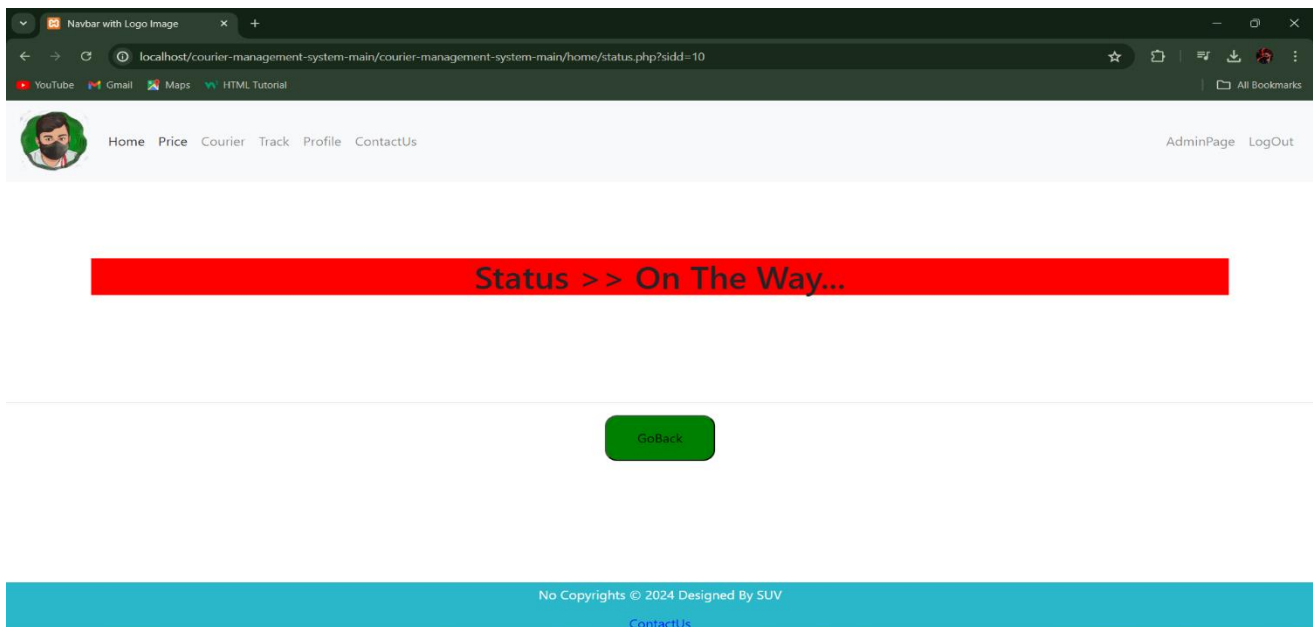

5. PROFILE VIEW SECTION

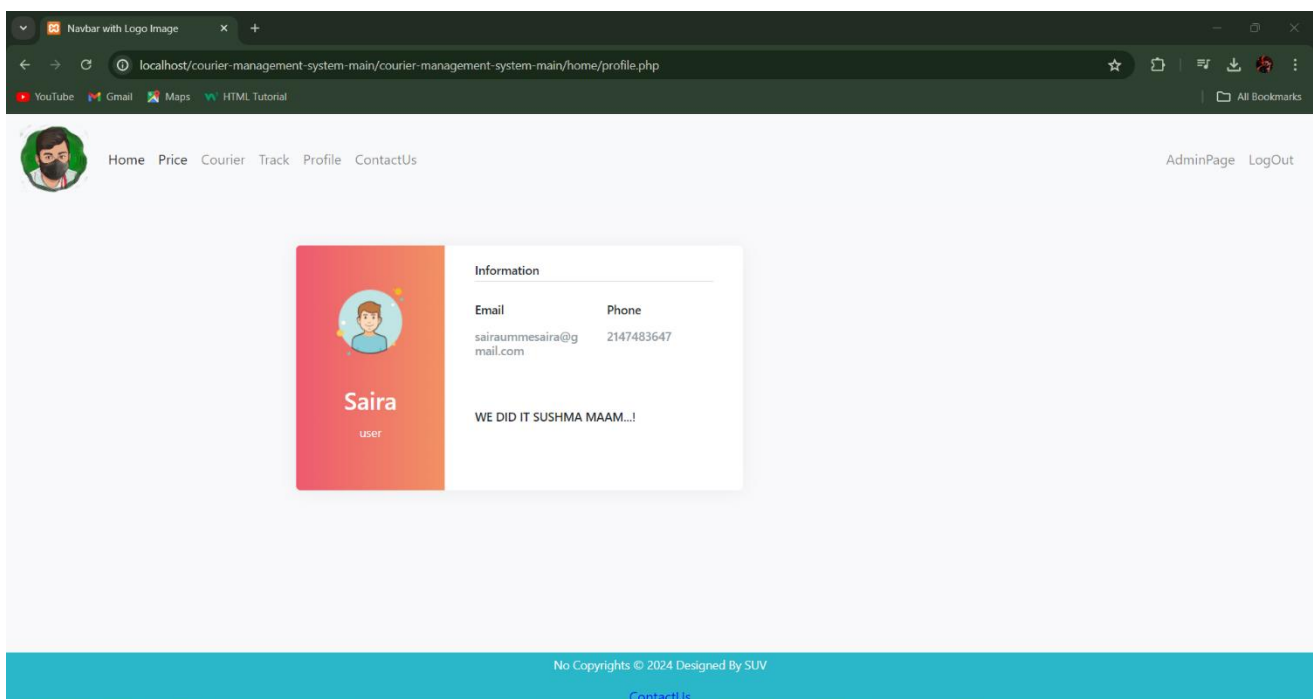

6. CONTACT US SECTION

localhost/courier-management-system-main/courier-management-system-main/home/contactUS.php

Home Price Courier Track Profile ContactUs AdminPage LogOut

Drop a message

We are waiting for your response..

email Id

Subject

Compose your message..

Send

No Copyrights © 2024 Designed By SUV

ContactUs

7. REGISTER NEW USERS PAGE

localhost/courier-management-system-main/courier-management-system-main/register.php

Register

Please fill this form to create an account.

Full Name

Phone Num.

Email Address

Password


Confirm Password

Register

Already have an account? [Login here.](#)

Notice: If the email Id is registered before, it will not respond.
In this case, reset your password or register with different email Id...

8. ADMIN LOGIN PAGE

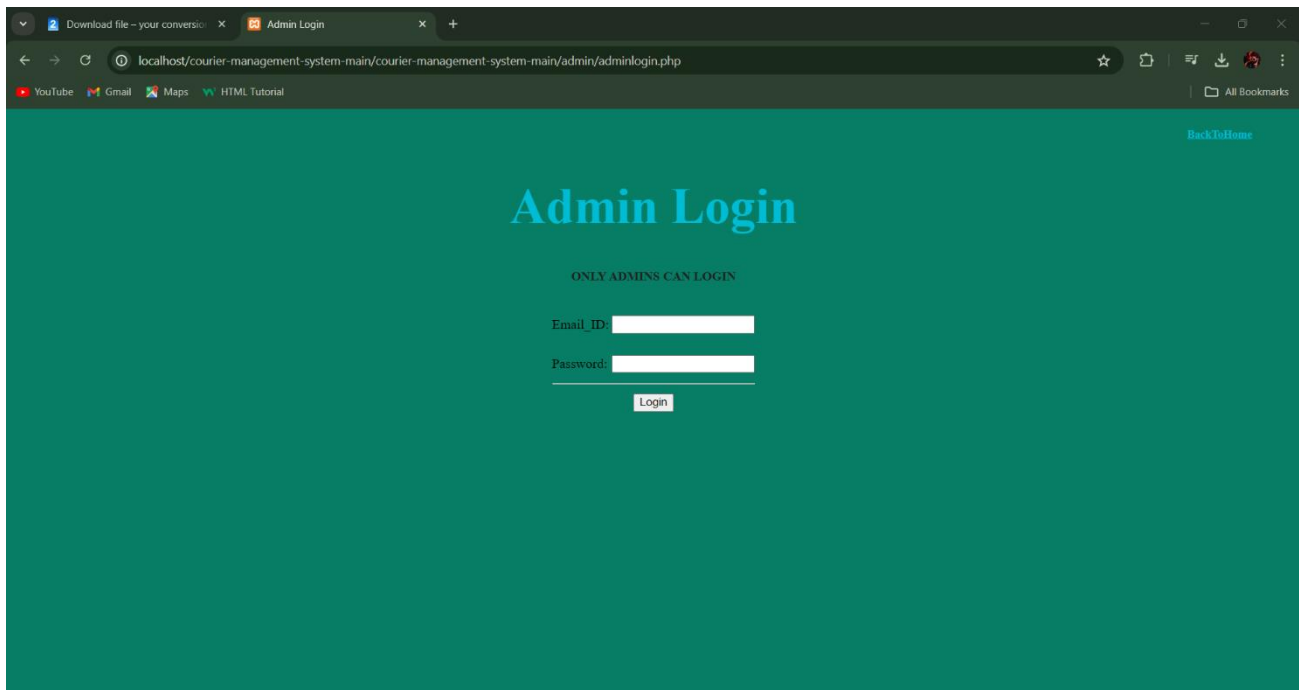


The screenshot shows a web browser window with the address bar displaying `localhost/courier-management-system-main/courier-management-system-main/admin/adminlogin.php`. The page has a dark teal background. At the top right, there is a link labeled [BackToHome](#). The main heading is

Admin Login


 in a light blue font. Below the heading, the text **ONLY ADMINS CAN LOGIN** is displayed. There are two input fields: **Email_ID:** and **Password:**, both with white text boxes. Below the password field is a **Login** button. The browser's address bar also shows several tabs: 'Download file - your conversio...', 'Admin Login', and '+'. The browser's bookmark bar includes links to YouTube, Gmail, Maps, and HTML Tutorial.

9. ADMIN PAGE

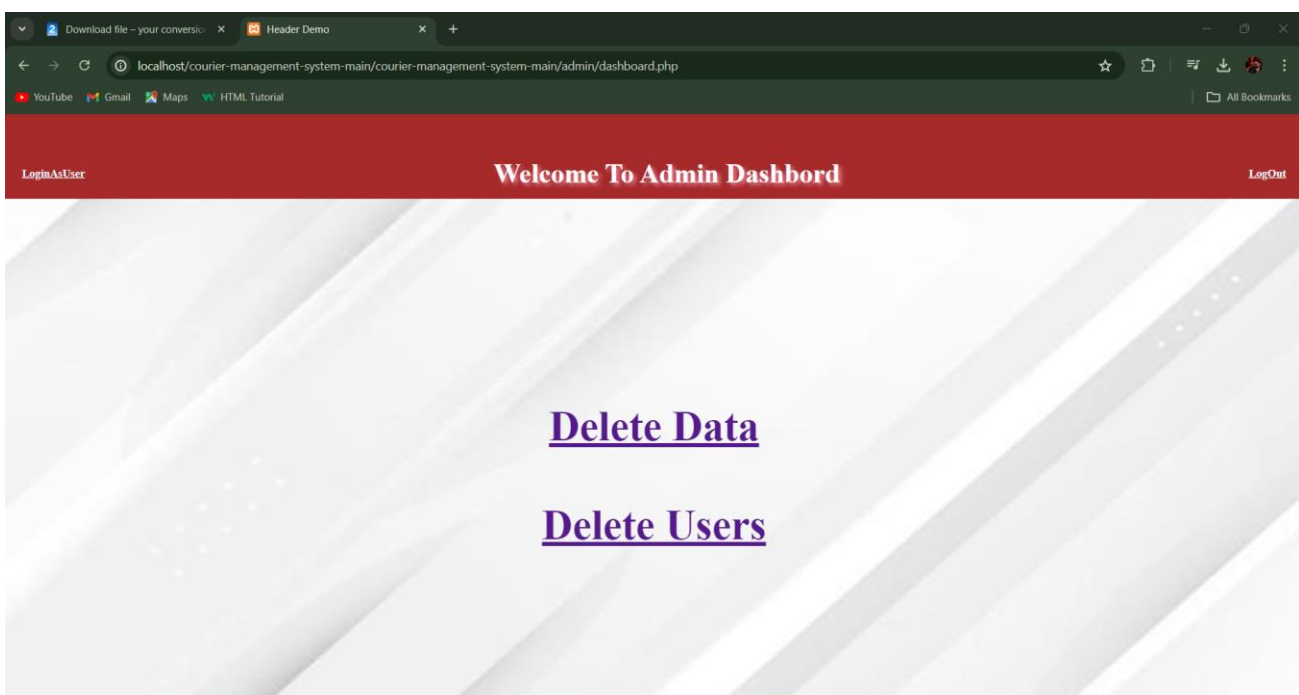

The screenshot shows a web browser window with the address bar displaying `localhost/courier-management-system-main/courier-management-system-main/admin/dashboard.php`. The page has a dark red header bar. On the left side of the header, there is a link labeled [LoginAsUser](#). In the center of the header, the text **Welcome To Admin Dashbord** is displayed. On the right side of the header, there is a link labeled [LogOut](#). The main content area has a light gray background with a subtle pattern of white dots. It contains two links: [Delete Data](#) and [Delete Users](#), both in a purple font and underlined. The browser's address bar also shows several tabs: 'Download file - your conversio...', 'Header Demo', and '+'. The browser's bookmark bar includes links to YouTube, Gmail, Maps, and HTML Tutorial.


10. ADMIN'S DELETE DATA PAGE

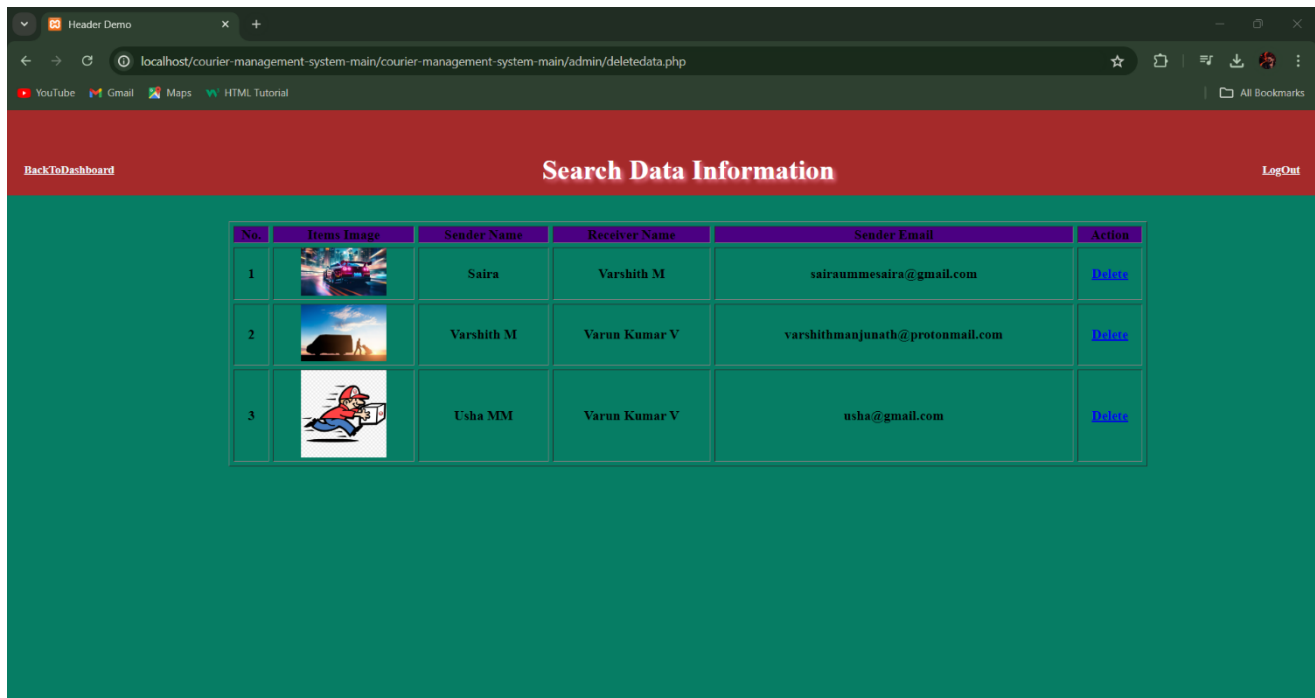

The screenshot shows a web browser window with the URL `localhost/courier-management-system-main/courier-management-system-main/admin/deletedata.php`. The page has a red header bar with the text "Search Data Information" in the center, a "BackToDashboard" link on the left, and a "LogOut" link on the right. Below the header is a table with three rows of data. Each row contains an item number, an item image, the sender's name, the receiver's name, the sender's email, and a "Delete" link.

No.	Items Image	Sender Name	Receiver Name	Sender Email	Action
1		Saira	Varshith M	sairaummesaira@gmail.com	Delete
2		Varshith M	Varun Kumar V	varshithmanjunath@protonmail.com	Delete
3		Usha MM	Varun Kumar V	usha@gmail.com	Delete

11. ALL THE USER DETAILS PAGE

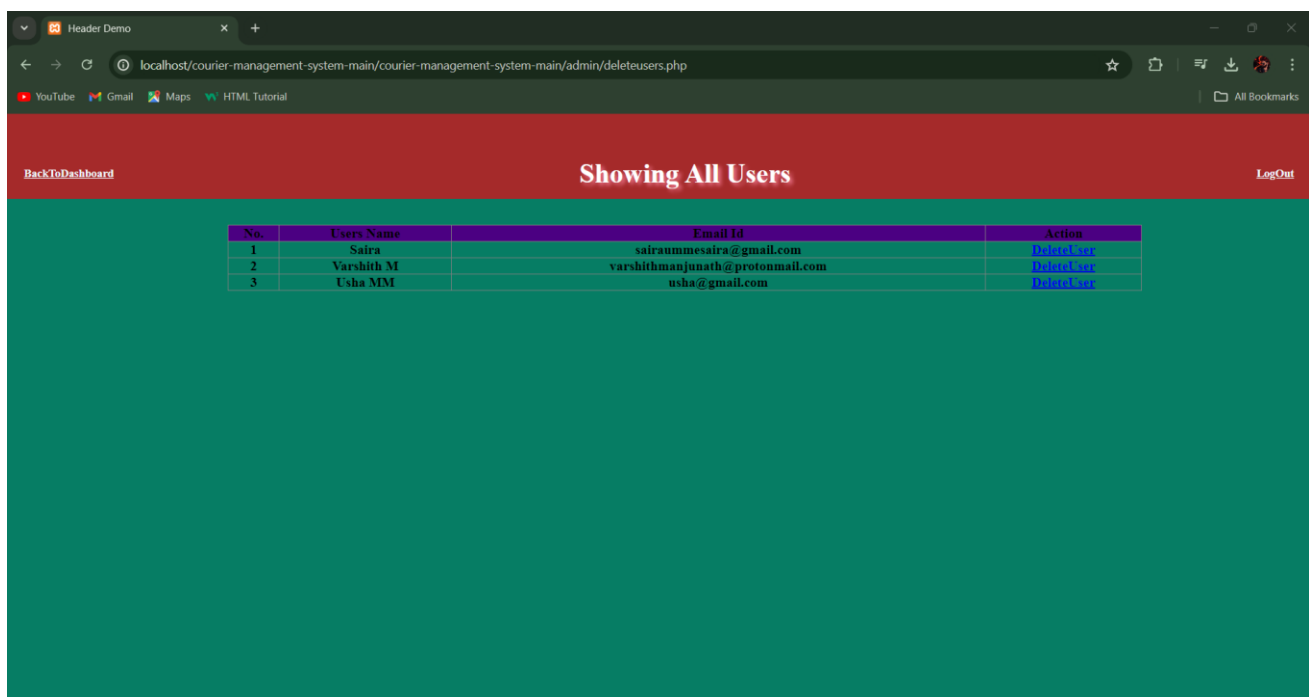

The screenshot shows a web browser window with the URL `localhost/courier-management-system-main/courier-management-system-main/admin/deleteusers.php`. The page has a red header bar with the text "Showing All Users" in the center, a "BackToDashboard" link on the left, and a "LogOut" link on the right. Below the header is a table with three rows of data. Each row contains a user number, the user's name, the user's email ID, and a "Delete User" link.

No.	Users Name	Email Id	Action
1	Saira	sairaummesaira@gmail.com	Delete User
2	Varshith M	varshithmanjunath@protonmail.com	Delete User
3	Usha MM	usha@gmail.com	Delete User

12. UPDATE COURIER DETAILS PAGE.

Update The Details As Required

SENDER		RECEIVER	
Name:	Saira	Name:	Varshith M
Email:	sairaummesaira@gmail.com	Email:	varshithmanjunath@gmail.com
PhoneNo.:	61661684541	PhoneNo.:	87416847
Address:	sqjhebfvwydcg	Address:	sbdhcvbu

Weight: **ReceiptNo.:**

Date: **Items Image:** No file chosen

13. LIST OF ALL THE TABLES IN PROJECT

Server: 127.0.0.1 » Database: courierdb

Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking More

Filters

Containing the word:

Table	Action	Rows	Type	Collation	Size	Overhead
☐ adlogin		2	InnoDB	utf8mb4_general_ci	32.0 K B	-
☐ admin		2	InnoDB	utf8mb4_general_ci	32.0 K B	-
☐ contacts		2	InnoDB	utf8mb4_general_ci	16.0 K B	-
☐ courier		1	InnoDB	utf8mb4_general_ci	48.0 K B	-
☐ login		2	InnoDB	utf8mb4_general_ci	32.0 K B	-
☐ users		2	InnoDB	utf8mb4_general_ci	32.0 K B	-
6 tables	Sum	11	InnoDB	utf8mb4_general_ci	192.0 K B	0 B

☐ Check all With selected:

CONCLUSION

System development is also considered as a process backed by engineering approach. We have tried to incorporate & develop new particles for our education particles have been followed not during the but coding but also during the analysis, design phases & in documentation.

Courier agency is considered as an expansion of business relations. It contributes a lot by providing quick & fast services of sending documents letters (formal & informal both) to business as it enables any business to flourish

Following modification or upgrades can be done in system.

- 1) More than one company can be integrated through this software.
- 2) Web services can be used to know exact delivery status of packets.
- 3) Client can check the repacked delivery status online.
- 4) Distributed database approach in place of centralized approach

References and Bibliography:

- <http://www.bluedart.com/>
- <http://www.xamppserver.com/en/>
- <http://www.php.net/>
<http://youtube.com/>
- <http://www.tutorialspoint.com/mysql/>
<https://apache.org/docs/2.0/misc/tutorials.html>