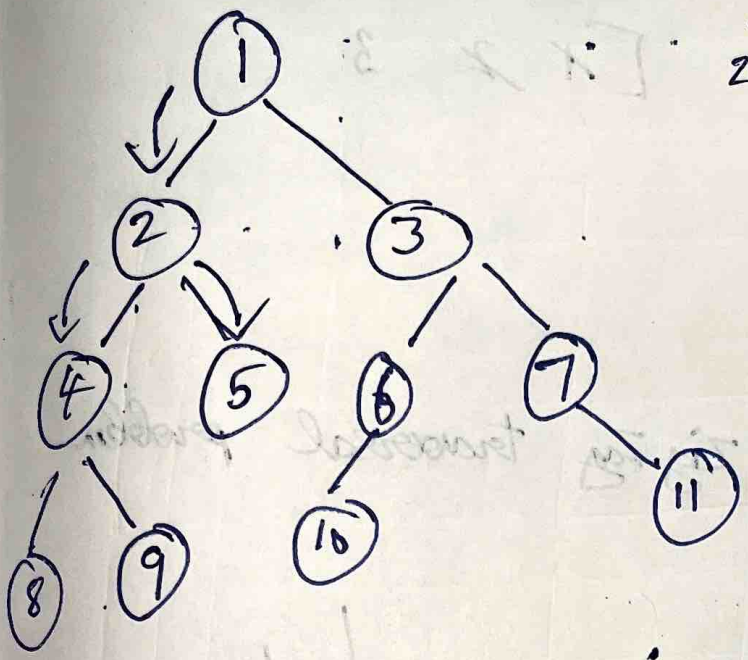


root = 1

root.left = 2

root.right = 3


from 4 & 5 how will i go to 6 & 7

output :-

[1], [2,3], [4,5,6,7], [8,9,10,11]


level-order-traversal for that we need to use BFS (Breadth-First-search). For BFS we need to use queues FIFO

[1, 2, 3

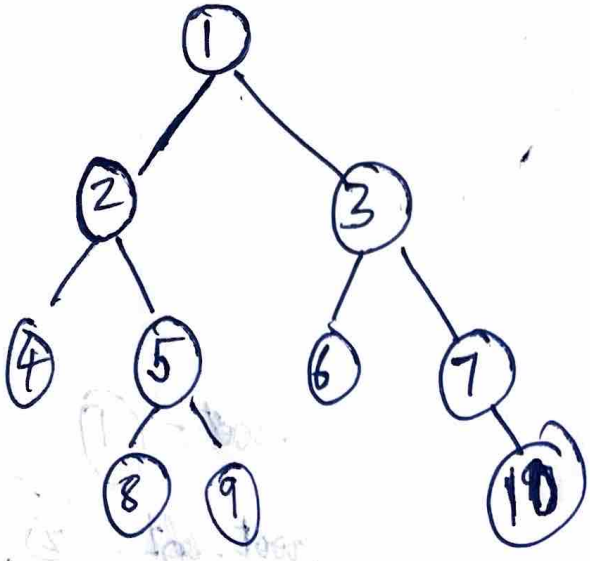

[1 2 3

Zig Zag traversal problem

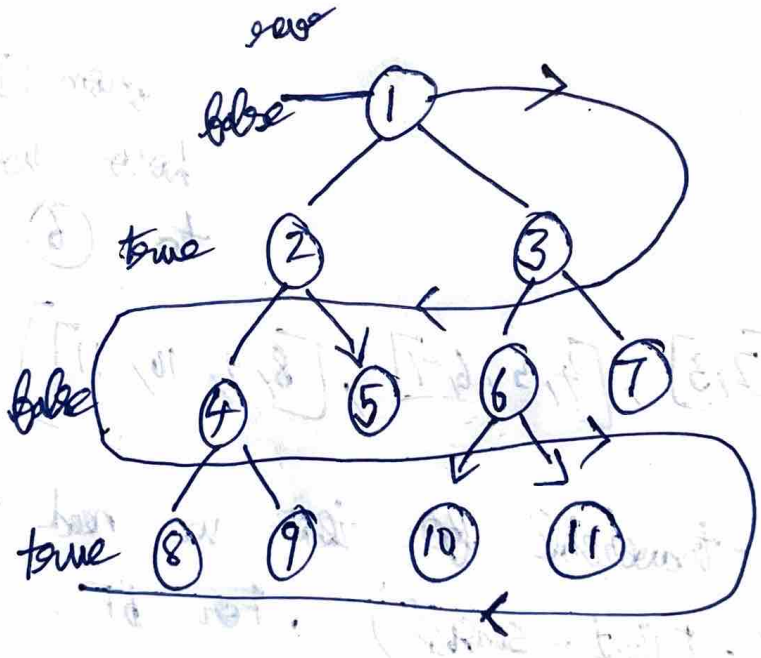

1

3, 2

4, 5, 6, 7

11, 10, 9, 8

1

3 2

[1 2 3

remove from last and add it's child at the front

4 5 6 7 8

move it is in normal order

5 6 7 8 9 10 11

remove from last and add

★ normal order :-

→ remove from front

→ add in back


★ rev order :-

remove back

add in front

deque or dequeue

add and remove from either sides

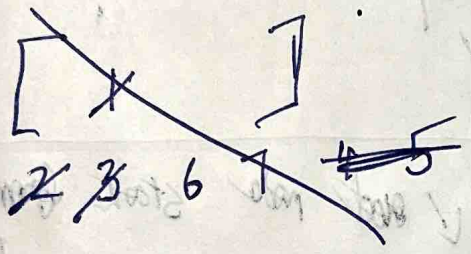


[x 2 3 ,] 6, 7 ✗ cannot remove 2

[6, 7, x, 3] ↑ if i add (6) and (7) at last means remove from last makes remove node (7) but we need (2) to be removed is remove (7) means it goes to root level it is not level order traversal

[4, 5, 6, 7, x, 3]

[4, 5, 6, x, 8, 9, 10, 11]

8, 9, 10, 11 ← need to be removed

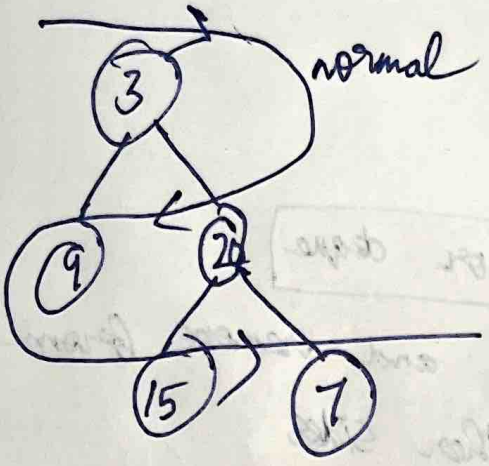

normal

3

20, 9


15, 7

[~~3~~ 9 ~~20~~]

15 7 ~~9~~

15, 7

Populating next right pointers

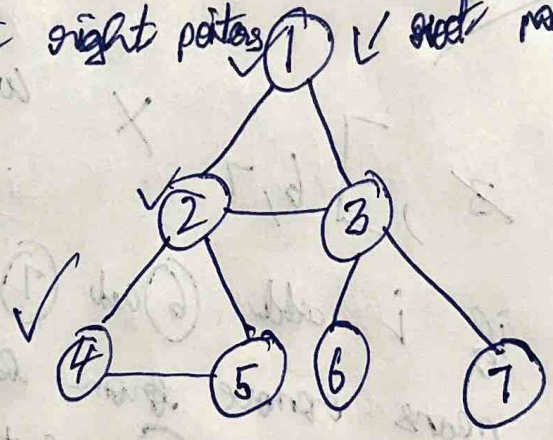

root node

store from hoe

leftmost node	current node
1	1
2	2
	3

curr.left.next = right;

curr.right.next = curr.next.left;